

## Features and Benefits

Solid state sensor  
High reliability  
Low cost, small size  
On chip temperature sensor


## Applications

Non-Contact Temperature Sensing  
Differential Temperature Sensing  
Climate Control  
Ear, Temple Thermometers  
Household and Commercial Appliances

## Ordering Information

Part No.	Description
MLX90247C	Thermopile with 100K NTC Thermistor

## Functional Diagram

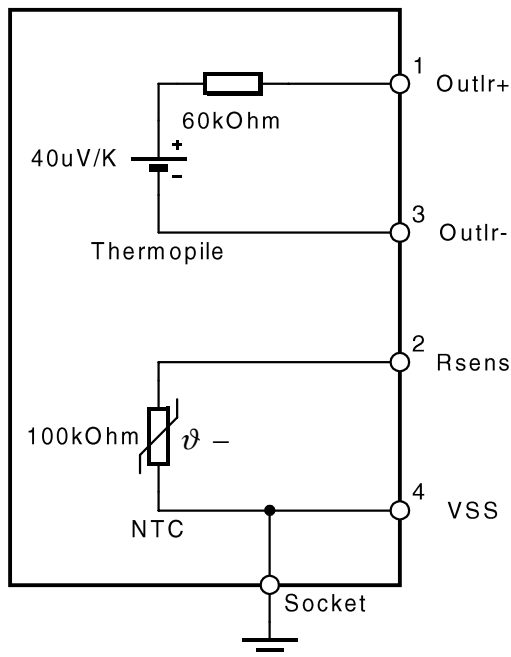

## Description

The MLX90247C is a thermopile sensor IC which detects very small amounts of heat radiation. The sensor consists of a membrane with a thermopile on top of it.

The hot junctions of the thermopile are positioned near the center of the membrane, the cold junctions above the bulk silicon edge.

Due to the low thermal conductivity of the membrane, absorbed heat will cause the temperature to increase more at the center of the membrane than at the edge above the bulk. This temperature difference is converted to an electric potential by the thermo-electric effect in the thermopile junctions. No supply voltage is needed.

The sensor IC is packaged together with a NTC chip thermistor for cold junction reference. The thermopile and thermistor are separate components, mounted in close proximity. The NTC thermistors have higher sensitivity at low temperatures than the standard PTC thermistors in the B and D models.

The sensor and thermistor can be used independent of each other if desired, as the thermopile potential is floating.


## MLX90247C Electrical Specifications

DC Operating Parameters  $T_A = -40^{\circ}\text{C}$  to  $150^{\circ}\text{C}$ , (unless otherwise specified)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Thermopile Resistance	Rtp	@298K	44	59.5	75	kΩ
Sensitivity	S	sensor @298K black body @299K	29	42	55	μV/K
TC of Sensitivity	TCs	@298K		0.1		%/K
Time constant	T				30	ms
Thermistor Value	Rntc	@298K	95	100	105	kΩ
Thermal Coefficient NTC <sup>(1)</sup>	βntc	0-50°C <sup>(1)</sup>	4120	4140	4161	K

(1) Tolerance given between 15°C and 35°C. Typical value corresponds to a relative resistance change of  $-4.68\%/^{\circ}\text{C}$ . Definition of  $\beta$  is  $\Delta \ln R / \Delta(1/T)$  with T in K. (Napierian logarithm).

Note: when measuring resistances with an ohm meter, please take care that the internal protection diodes, as indicated in the functional diagram below, are always reverse biased.

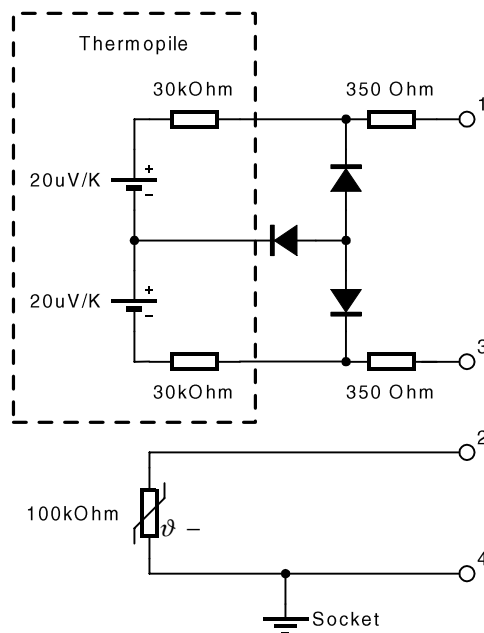


## MLX90247C Absolute Maximum Ratings

Parameter	Value	Unit	Comment
Operating temperature	-40 ~ 150	°C	Keep diode leakage in mind at high temperatures
Storage temperature	-40 ~ 150	°C	
Soldering temperature	<220	°C	t<5sec

### MLX90247C Pinout

Pin	Symbol	Description
1	Outlr+	Infrared Thermopile positive output
2	Rsens	Thermistor for sensor ambient temperature measurement
3	Outlr-	Infrared Thermopile negative output
4	Vss	Thermistor ground / case potential

TO-39 package - connections

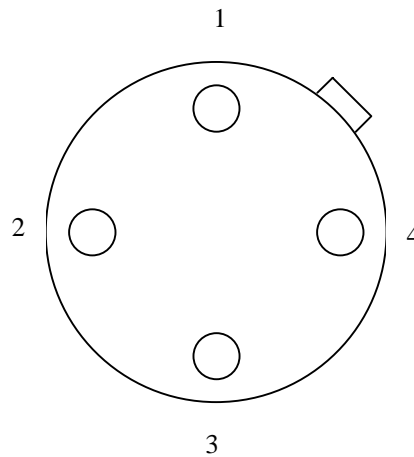

Top view = pins down


### ML90247C Mechanical Specifications

Parameter	Value	Unit	Comment
TO-39 specifications			
Metal cap			Welded
Filling gas			Nitrogen
Filter specifications			
Transmission	>75	%	$7.5\mu < \lambda < 13.5\mu$
Transmission	<0.5	%	$0 < \lambda < 5\mu$
Sensor window			
FOV	100	°	Full opening angle: Determined by aperture
Aperture diameter	3.5	mm	Default

**ESD Precautions** Electronic semiconductor products are sensitive to Electro Static Discharge (ESD). Always observe ESD control procedures whenever handling semiconductor devices.

**Disclaimer** Melexis reserves the right to periodically make modifications to product specifications. The information included herein is believed to be accurate and reliable. However, Melexis assumes no responsibility for its use; nor for any infringements of patents or other rights of third parties which may result from its use.

## RA (TO-39) Package Outline

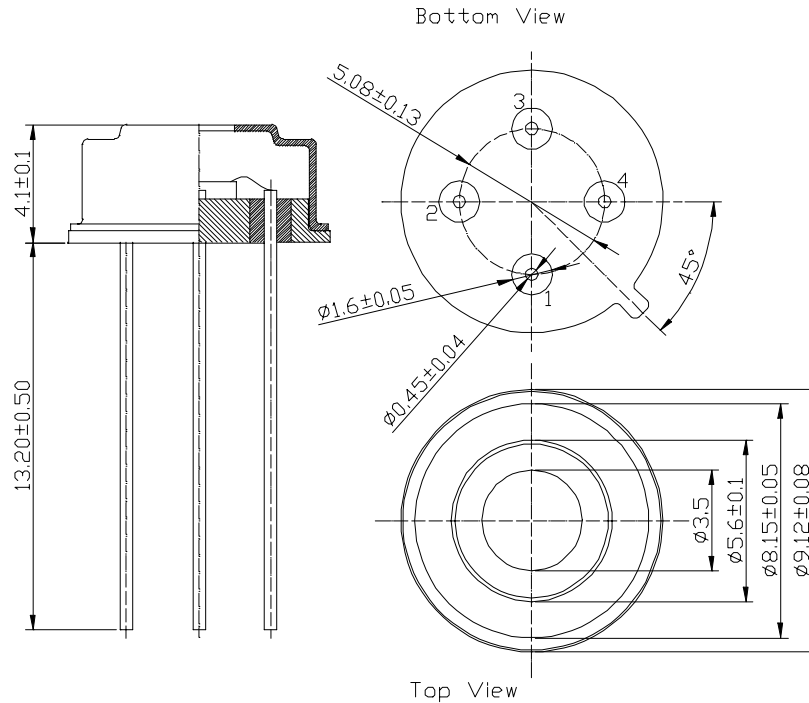

For the latest version of this document,  
Go to our website at:  
**www.melexis.com**  
Or for additional information  
contact Melexis Direct:

**USA**  
Melexis Inc.  
41 Locke Road, Concord, NH 03301  
Phone: +1 603 223 2362 Fax: +1 603 223 9614  
E-mail: sales\_usa@melexis.com

**United Kingdom**  
Silicon Concepts  
PCB Lynchborough Road, Hampshire GU30 7SB, United Kingdom  
Phone: +44 1428 751 617 Fax: +44 1428 751 603  
E-mail: sales\_uk@melexis.com

**Germany**  
Schliess-strasse 55, 40549 Düsseldorf, Germany  
Phone: +49 211 5360212 Fax: +49 211 5360250  
E-mail: sales\_de@melexis.com

**France**  
Melexis France  
Tour Arago, 5 rue Bellini, 92806 Puteaux-La-Défense, France.  
Phone: +33 1 47 78 11 34 Fax: +33 1 47 78 06 35  
E-mail: sales\_france@melexis.com

**Italy**  
Dimacred IRL  
Via Papa Giovanni XXIII no. 25, 20046 Biassono, Italy  
Phone: +39 039 249 4856 Fax: +39 039 491773  
E-mail: sales\_italy@melexis.com

**Japan**  
Thermopile Japan Co., LTD  
3-48-10 Ogikubo, Suginami-ku, Tokyo  
Phone: +81 3 3392 6961 Fax: +81 3 3392 6901  
E-mail: sales@thermopile.co.jp

**Taiwan**  
Beechwood Int'l Taiwan Co.  
Room 8, 17F, No. 189, Taipei, Taiwan  
Phone: +886 2 2739 3322 Fax: +886 2 2739 3090  
E-mail: sales\_taiwan@melexis.com