As can be seen, this system requires the careful application of strictly subjective judgments, and can be expected to result in conservative estimates. Keep in mind, however, **that the system is offered only as an aid in estimating and not as a rigid set of rules.**

On the other hand, if tire life on a given job is considered less than satisfactory, an analysis of these factors may point to conditions which can be improved to the betterment of tire life.

Replacement tire prices should always be obtained from local tire company sources.

Since tires are considered a wear item in this method of estimating owning and operating costs, total tire replacement cost is deducted from machine delivered price to arrive at a net figure for depreciation purposes. Outlay for tires is then included as an item in operating costs:

$$\text{Hourly Tire Cost} = \frac{\text{Replacement Cost of Tires}}{\text{Estimating Tire Life in Hours}}$$

Recapping can sometimes lower hourly tire cost. Considerations are availability of molds, local recapping costs, and experience with recap life.

10b UNDERCARRIAGE

(Line Item 10b)

Undercarriage expense can be a major portion of the operating costs for track-type machines, and these costs can vary *independently* of basic machine costs. That is, the undercarriage can be employed in an extremely abrasive, high-wear environment while the basic machine may be in an essentially easy application, and vice-versa. For that reason, it is recommended that the hourly cost of undercarriage be calculated separately as a wear item rather than being included in the repair costs for the basic machine.

Three primary conditions affect probable life-expectancy of track-type undercarriage:

1. **Impact.** The most measurable effect of impact is structural – that is bending, chipping, cracking, spalling, roll-over, etc., and problems with hardware and pin and bushing retention.

   Impact ratings:

   High – Non-penetrable hard surfaces with 150 mm (6") or higher bumps.

   Moderate – Partially penetrable surfaces and bumps of 75-150 mm (3-6") height.

   Low – Completely penetrable surfaces (which provide full shoe plate support) with few bumps.

2. **Abrasiveness.** The tendency of the underfoot materials to grind away the wear surfaces of track components.

   Abrasiveness ratings:

   High – Saturated wet soils containing a high proportion of hard, angular or sharp sand or rock particles.

   Moderate – Slightly or intermittently damp soils containing a low proportion of hard, angular or sharp particles.

   Low – Dry soils or rock containing a low proportion of hard, angular or sharp sand or rock chip particles.

   Impact and abrasiveness in combination can accelerate wear rates beyond their individual effects when considered alone, thus further reducing component life. This should be taken into account in determining impact and abrasiveness ratings or, if preferred, the combination can be included in selecting the "Z" factor.

3. **"Z" factor.** Represents the combined effect on component life of the many intangible environmental, operational and maintenance considerations on a given job.

   Environment and Terrain. Earth which may not be abrasive itself can pack in sprocket teeth, causing mis-match and high stress as the teeth engage the bushings. Corrosive chemicals in the materials being moved or in the natural soil can affect wear rates, while moisture and temperature can exaggerate the effect. Temperature alone can play its own role – hot slag and hard-frozen soils being but the extremes. Constant sidehill work can increase wear on the sides of components.

Operation. Some operator practices tend to increase track wear and cost if not controlled on the job. Such practices include high-speed operation, particularly in reverse; tight turns or constant corrections in direction; and stalling the tractor under load forcing the tracks to slip.

Maintenance. Good maintenance – proper track tension, daily cleaning when working in sticky materials, etc. – combined with periodic wear measurement and timely attention to recommended services (CTS) can extend component life and lower costs by minimizing the effects of these and other adverse conditions.

While impact and abrasion should not be too difficult to judge, selection of the proper "Z" factor will require careful analysis of job conditions such as weather, tendency for soil packing, side-hill loading, corrosive environment, etc.; operational factors such as high-speed reverse, amount of travel, tight turns, track slippage under overload, etc.; and maintenance considerations such as proper tensioning, use of Custom Track Service, etc.

Selection of the "Z" multiplier is strictly a matter of judgement and common sense, but its effect on cost can be the difference between profit on a controlled job and heavy loss where control is allowed to slip. To assist in arriving at an appropriate value for the "Z" factor, consider that proper maintenance – or the lack thereof – will represent about 50% of its effect, environment and terrain 30%, and operator practices 20%. For large excavators the amount of travel is the critical part of the "Z" factor. A good operator working under good field conditions can be counterbalanced by poor maintenance practices to yield a fairly high "Z" factor. On the other hand, close attention to maintenance, tension and alignment can more than offset a bad underfoot condition resulting in severe sprocket packing, and lead to selection of a moderate to low "Z" factor. Obviously, flexibility in selection of a "Z" factor has been built into the system, and use of this flexibility is encouraged. Further, a considerable measure of control can be maintained over the "Z" factor, and any reduction of its effects is money in the bank. Your Cat dealer CTS man can be invaluable in this endeavor as well as helping you establish a comprehensive undercarriage cost control program.

Estimating Undercarriage Cost

The guide below gives a basic factor for the various track-type machines and a series of conditions multipliers to modify the basic cost according to the anticipated impact, abrasive and miscellaneous ("Z") conditions under which the unit will be operating.

Step 1. Select machine and its corresponding basic factor.
Step 2. Determine range for impact, abrasiveness and "Z" conditions.
Step 3. *Add* selected conditions multipliers and apply sum to basic factor.

The result will be the estimated hourly cost for undercarriage in that application.

Undercarriage Basic Factors			
Model			**Basic Factor**
5230B			28.2
D11T			26.1
5130B			20.4
D10T2			16.2
5110B			13.6
D9T			10.9
D8T			9.6
973D, 587T, 589, D7R LGP, D7E LGP			11.2
D7R, 963D, 583T, D6T LGP, D7R XR, D7E			9.1
385C, 5090B			7.2
D6T, 953D, 572R, 527			7.0
365C			6.8
345D			5.9
D6N XL, 517			5.6
336D			5.0
D3K (All), D4K (All), D5K (All), 939C, PL61			4.1
329D			3.9
314D, 315D, 319D, 323D			3.4
320D			2.9
307D, 308D, 311D, 312D			2.4
Conditions Multipliers			
	Impact	**Abrasiveness**	**"Z"**
High	0.3	1.0	1.0
Moderate	0.2	0.5	0.5
Low	0.1	0.1	0.2

Example: D10T2 in high impact, non-abrasive material with a moderate "Z" factor.

D10T2 Basic Factor = 16.2
Multipliers: I = 0.3
A = 0.1
Z = 0.5

U.C. cost = 16.2 (0.3 + 0.1 + 0.5) = **$14.58/hour**

NOTE: 1. Conditions Multipliers may be selected in any combination. Thus, a multiplier of 0.4 (all low-range multipliers) represents the best of the best, while 1.7 (all high range multipliers) would be the worst of the worst conditions.

2. The hourly undercarriage cost estimate resulting from this method will be made up of *approximately* 70% parts cost and 30% labor charges. The cost of undercarriage components is based on published U.S. Consumers List Prices and may be adjusted as needed for import duties, exchange rates, etc. outside the United States. Labor has been figured at $60.00 (U.S.) per shop hour.

3. For further information and guidance, refer to the current issue of the Caterpillar Custom Track Service Handbook.

4. This formula for estimating undercarriage cost should not be used for tractors working in stockpile coal handling applications. Undercarriage costs are nominal in stockpile coal handling, and using this formula will result in estimating cost substantially above actual costs.

11 REPAIR COSTS

(Line Item 11)

Repair cost per hour should be developed by the Cat dealer, with customer input for the specific machine application and requirements.

As with PM cost per hour, repair costs are significantly affected by the specific application and situation. Several important variables must be provided by the customer and the local Cat dealer. This will enable a calculated cost per hour that is specific to the machine conditions and customer needs.

Machine applications, operating conditions, ownership periods, component life, and maintenance attention determine repair costs. In any specific application, actual cost experience on similar machines and applications provides the best basis for establishing the hourly repair cost.


Repairs and component lives are normally the largest single item in operating costs and include all parts and direct labor (except operator's wages) chargeable to the machine. Shop overhead can be absorbed in general overhead or charged to machines as a percent of direct labor cost, whichever is the owner's normal practice.


Hourly repair costs for a single machine normally follow an upward stairstep pattern since major outlays for repairs usually come in spurts. However, when broad averages are considered, the stairstep becomes a smooth, upward curve. Since this hourly repair cost curve starts low and gradually rises over time, hourly operating costs must be adjusted upward as the unit ages. Alternatively an average repair cost can be used which provides a straight line graph. Most owners prefer the average method, and it is the one suggested here.

Since repair costs are low initially and rise gradually, averaging them produces extra funds at first which are reserved to cover future higher costs.

Your Cat dealer has the ability to make more accurate repair cost estimates and we suggest you use their experience and expertise if you need help in estimating operating costs.

As stated, repair costs are affected by application, operating conditions, ownership period, maintenance, and age of the equipment. The most significant effects on cost will be those factors affecting major component life. A second significant factor is whether the repair is performed before or after catastrophic failure. Repair before a major component fails can be one-third of an after failure repair with only a moderate sacrifice in life (see graphs). Oil analysis and other diagnostic tools, maintenance inspections and indicators, and operator notes are vital to determine the optimum repair point and thereby achieving lower hourly repair costs. Maintenance practices are significant because they affect component longevity and the percentage of scheduled, before failure repairs.

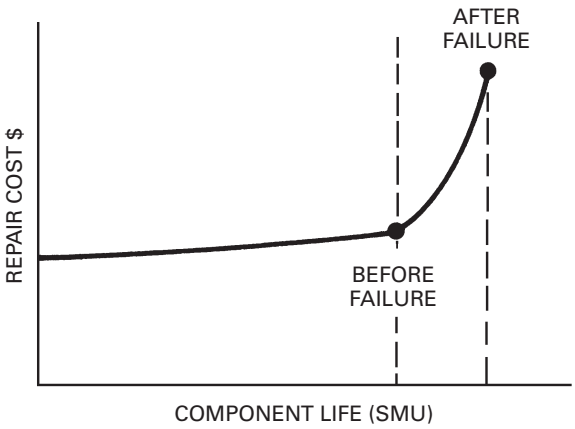

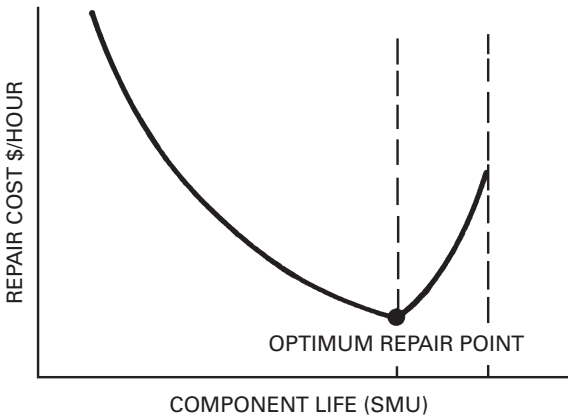

(12) SPECIAL WEAR ITEMS

(Line Item 12 and Subsection 12A)

All costs for high-wear items such as cutting edges, ripper tips, bucket teeth, body liners, router bits, etc., and welding costs on booms and sticks should be included here. These costs will vary widely depending on applications, materials and operating techniques. Consult your Cat dealer Parts Department for estimated life under your job conditions.

(15) OPERATOR'S HOURLY WAGE

(Line Item 15)

This item should be based on local wage scales and should include the hourly cost of fringe benefits.

EXAMPLES OF FIGURING OWNING AND OPERATING COSTS

(The following two examples are for illustrative purposes only. The intent is to show how the worksheets could be filled out. The PM and Repair costs should be developed by your local Cat dealer.)

Example I: ESTIMATING HOURLY OWNING AND OPERATING COSTS OF A TRACK-TYPE TRACTOR

Assume a power shift track-type tractor with straight bulldozer, hydraulic control, tilt cylinder and three-shank ripper, is purchased by a contractor for $135,000, delivered price at job site.

Application will be production dozing of bank gravel. Minimal ripping will be required to loosen material.

In the following calculations, refer as necessary to the source material already reviewed.

OWNING COSTS —

To Determine Residual Value at Replacement

Enter delivered price, $135,000, in space (A). (See example form at end of this discussion.) Since the machine being considered is a track-type tractor, no tires are involved. This particular owner's experience is that at trade-in time, the tractor will be worth approximately 35% of its original value. This $47,250 trade-in value is entered in space (B) leaving a net of $87,750 to be recovered through work.

Enter the net value to be recovered through work in space (C).

Indicated ownership period is 7 years with annual usage of 1200 hours per year or 8400 hours of total ownership usage.

Divide the Net Value from space (C), $87,750, by Ownership Usage, 8400 hours, and enter result $10.45 in space (D).

Interest, Insurance, Taxes

In this example, local rates are assumed as follows:

Interest	16%
Insurance	1%
Taxes	1%
	18%

Using the following formula:

N = 7:

$$\frac{\left[\frac{135{,}000\ (7+1) + 47{,}250\ (7-1)}{2 \times 7}\right] \times 0.16}{1200} = 12.99$$

Enter $12.99 in space (E).

Insurance and property taxes can also be calculated using the same formula as shown for the interest cost, and entering them on lines 5 and 6.

Items 3b, 4, 5 and 6 can now be added and the result, $25.06 entered in space (H) Total Hourly Owning Costs.

OPERATING COSTS —

Fuel

Assume that the estimated fuel consumption based on field data is 17 liter/hr (4.5 U.S. gal/hr.). Cost of fuel in this locality is $0.34/liter ($1.25/U.S. gal.).

Consumption		Unit Cost		Total
17 liter/hr	×	$0.34 liter	=	$5.78
4.5 gal/hr	×	$1.25 gal.	=	$5.63

Enter this figure in space (I).

Planned Maintenance (PM) Cost per Hour

Use PM cost per hour estimate developed by your local Cat dealer. (For this example assume cost per hour is $2.30) Enter this figure in space (J) on line 9.

Tires

Since this example considers a track-type tractor, space (K) is left blank.

Undercarriage

Our estimating reference gives an undercarriage cost Basic Factor of 6.6 for this tractor. It is anticipated that with some ripping on the job, impact loading of track components will be medium, indicating an "I" multiplier of 0.2. The gravel-sand mix in the bank, being dry, should be only moderately abrasive for an "A" multiplier of 0.2. In analyzing the miscellaneous conditions: there is enough clay in the bank to produce some packing of the sprockets; the operator is careful, but is forced into some tight turns because of space limitations; there is good drainage in the pit; track tension is checked weekly; and all track-type equipment on the job is enrolled in the Custom Track Service program. Accordingly, the "Z" multiplier is judged to be somewhat greater than low level — 0.3 in this case.

It should be noted that in applying particularly the "Z" factor, rather wide flexibility is provided and was used in the above example. Such flexibility is intended and its use encouraged.

Then:

Cost per hour = Basic Factor × (I + A + Z)
Basic Factor = 6.6
Conditions Multipliers: I = 0.2
A = 0.2
Z = 0.3

Cost per hour 6.6 (0.2 + 0.2 + 0.3) = $4.62 which is entered in space (L).

Repair Cost per Hour

Use the Repair cost per hour estimate developed by your local Cat dealer. (For this example assume cost per hour is $6.12) Enter this figure in space (M) on line 11.

Special Items

Assuming the tractor is equipped with a three-shank ripper and an "S" dozer, allowance must be made for ripper tips, shank protectors, and dozer cutting edges.

Assume your knowledge of the operation indicates the ripper will be used only about 20% of total tractor operating time. Estimated tip life while in use is 30 hours. Therefore, tips will be replaced:

$$\frac{30 \text{ Hours}}{0.20} = \text{each 150 hours of tractor operation}$$

Shank protector life is estimated at three times tip life or 450 hours of tractor operation.

Cutting edge life is estimated to be 500 hours.

Using local prices for these items, hourly costs are estimated as follows:

$$\text{Tips: } \frac{3 \text{ @ } \$35.00 \text{ ea.}}{150 \text{ hr.}} = \$0.70 \text{ per hour}$$

$$\text{Shank Protectors: } \frac{3 \text{ @ } \$55.00 \text{ ea.}}{450 \text{ hr.}} = \$0.37 \text{ per hour}$$

$$\text{Cutting Edges: } \frac{\$125 \text{ per set}}{500 \text{ hr.}} = \$0.25 \text{ per hour}$$

The total of these, $1.32; is entered in space (N).

Items 8, 9, 10b, 11 and 12 can now be added and the result, $19.99, is entered in space (O), Total Hourly Operating Costs.

Operator's Hourly Wage

Assume this is $25.00 including fringe benefits. This figure is entered in space (P).

Total Owning Costs, Total Operating Costs and Operator's Hourly Wage are now added together and the result, $67.01, is entered in space (Q). The itemized estimate of Hourly Owning and Operating Costs is now complete.

Example II: ESTIMATING HOURLY OWNING AND OPERATING COSTS OF A WHEELED VEHICLE

With only a few simple changes, owning and operating costs for a wheeled vehicle are calculated using the same format as that used for the Track-Type Tractor. Only the differences will be explained as we look at example calculations for a wheel loader.

OWNING COSTS —

To Determine Residual Value at Replacement

Enter delivered price in space (A). The cost of tires is deducted since they will be treated as a wear item. For purposes of illustration, the Wheel Loader is estimated to have a potential 48% trade-in value (B) at the end of the 5 year/7500 hour ownership usage, leaving a net value to be recovered through work of $34,320 (C).

Interest, Insurance, Taxes

Refer to the formulas using the same rates as before and 1500 operating hours per year. The result $4.22 is applied to the interest cost (E).

Insurance and property taxes can also be calculated using the same formula as shown for the interest cost.

The sum of lines 3b, 4, 5 and 6 gives the total hourly owning cost, line 7.

OPERATING COSTS —

Fuel

Estimate fuel consumption and apply the actual cost of purchasing fuel in the project area (I).

Planned Maintenance (PM) Cost per Hour

Use PM cost per hour estimate developed by your local Cat dealer. (For this example assume cost per hour is $2.10.) Enter this figure in space (J) on line 9.

Tires

Use the tire replacement cost and the best estimate of tire life based on experience and anticipated job conditions.

Repair Cost per Hour

Use the Repair cost per hour estimate developed by your local Cat dealer. (For this example assume cost per hour is $3.39.) Enter this figure in space (M) on line 11.

Special Items

Ground engaging tools, welding, etc. are covered here. Use current costs for cutting edges and similar items. Use your best estimate of the hours of life which can be expected from them based on previous experience in like materials. Enter the total on line 12.

The total of lines 8 through 13 represents hourly operating costs.

Operator's Hourly Wage

To give a true picture of operator cost, include fringe benefits as well as direct hourly wages (line 15).

TOTAL O&O

The total of lines 7, 13 and 15 is the total hourly owning and operating cost of the machine. Keep in mind that this is an estimate and can change radically from project to project. For the greatest accuracy, the hourly cost reflected in actual on-the-job cost records should be used.

HOURLY OWNING AND OPERATING COST ESTIMATE

DATE _____

		Estimate #1		Estimate #2
A–Machine Designation		Track-type Tractor		Wheel Loader
B–Estimated Ownership Period (Years)		7		5
C–Estimated Usage (Hours/Year)		1200		1500
D–Ownership Usage (Total Hours)(B × C)		8400		7500
OWNING COSTS		(1)		(2)
1. a. Delivered Price (P), to the Customer (including attachments)		135,000 (A)		70,000
b. Less Tire Replacement Cost if desired		N/A		4000
c. Delivered Price Less Tires		135,000		66,000
2. Less Residual Value at Replacement (S) (See subsection 2A on back)	(35%)	47,250 (B)	(48%)	31,680
3. a. Net Value to be recovered through work (line 1c less line 2)		87,750 (C)		34,320
b. Cost Per Hour: Net Value / Total Hours (1) 87,750 / 8400 (2) 34,320 / 7500		10.45 (D)		4.58
4. Interest Costs N = No. Yrs. $\frac{\frac{P(N+1)+S(N-1)}{2N} \times \text{Simple Int. \% Rate}}{\text{Hours/Year}}$ =				
(1) $\frac{[135{,}000\,(7+1)] + \frac{[47{,}250\,(7-1)]}{2\times 7} \times 0.16}{1200 \text{ Hours/Yr.}}$ =		12.99 (E)		5.58
(2) $\frac{[66{,}000\,(5+1)] + \frac{[31{,}680\,(5-1)]}{2\times 5} \times 0.16}{1500 \text{ Hours/Yr.}}$ =				
5. Insurance N = No. Yrs. $\frac{\frac{P(N+1)+S(N-1)}{2N} \times \text{Insurance \% Rate}}{\text{Hours/Year}}$ =				
(1) $\frac{[135{,}000\,(7+1)] + \frac{[47{,}250\,(7-1)]}{2\times 7} \times 0.01}{1200 \text{ Hours/Yr.}}$ =		0.81 (F)		0.35
(2) $\frac{[66{,}000\,(5+1)] + \frac{[31{,}680\,(5-1)]}{2\times 5} \times 0.01}{1500 \text{ Hours/Yr.}}$ =				

(Optional method when Insurance cost per year is known)

Ins. $ _____ Per Yr. ÷ _____ Hours/Yr. =

Estimating form continues next page

	Estimate #1	Estimate #2
6. Property Tax $\frac{P(N+1)+S(N-1)}{2N} \times$ Tax Rate % $\div$ Hours/Year =		
(1) $\frac{[135{,}000\ (7+1)]+[47{,}250\ (7-1)]}{2 \times 7} \times 0.01 \div 1200$ Hours/Yr. =	0.81 (G)	0.35
(2) $\frac{[66{,}000\ (5+1)]+[31{,}680\ (5-1)]}{2 \times 5} \times 0.01 \div 1500$ Hours/Yr. =		
(Optional method when Property Tax cost per year is known)		
Property Tax $ _____ Per Yr. ÷ _____ Hours/Yr. =		
7. TOTAL HOURLY OWNING COST (add lines 3b, 4, 5 and 6)	25.06 (H)	10.86
OPERATING COSTS		
8. Fuel: Unit Price × Consumption		
(1) 1.25 × 4.50 =	5.63 (I)	2.50
(2) 1.25 × 2 =		
9. Planned Maintenance (PM)-Lube Oils, Filters, Grease, Labor: (contact your local Cat dealer)	2.30 (J)	2.10
10. a. Tires: Replacement Cost ÷ Life in Hours		
Cost / Life (1) N/A (2) 4000 / 3500	(K)	1.14
b. Undercarriage (Impact + Abrasiveness + Z Factor) × Basic Factor		
(1) (0.2 + 0.2 + 0.3) = 0.7 (Total) × 6.6 (Factor) =	4.62 (L)	
(2) (_____ + _____ + _____) = _____ (Total) × _____ (Factor) =		
11. Repair Cost (Per Hour) (contact your local Cat dealer)	6.12 (M)	3.39
12. Special Wear Items: Cost ÷ Life (See subsection 12A on back)	1.32 (N)	0.60
13. TOTAL OPERATING COSTS (add lines 8, 9, 10a (or 10b), 11 and 12)	19.99 (O)	9.73
14. MACHINE OWNING PLUS OPERATING (add lines 7 and 13)	45.05	20.59
15. OPERATOR'S HOURLY WAGE (include fringes)	25.00 (P)	25.00
16. TOTAL OWNING AND OPERATING COST	70.05(Q)	45.59

SUBSECTION 2A: Residual Value at Replacement

Gross Selling Price	(est. #1) (___%)	_____	(est. #2) (___%)	_____
Less: a. Commission		_____		_____
b. Make-ready costs		_____		_____
c. Inflation during ownership period*		_____		_____
Net Residual Value (Enter on line 2)		47,250 (35 %)		31,680 (48 %) of original delivered price

*When used equipment auction prices are used to estimate residual value, the effect of inflation during the ownership period should be removed to show in constant value what part of the asset must be recovered through work.

SUBSECTION 12A: Special Items
(cutting edges, ground engaging tools, bucket teeth, etc.)

	(1) Cost		Life		Cost/Hour		(2)				
1.	105	÷	150	=	0.70		1.	120	÷	200	= 0.60
2.	165	÷	450	=	0.37		2.		÷		=
3.	125	÷	500	=	0.25		3.		÷		=
4.		÷		=			4.		÷		=
5.		÷		=			5.		÷		=
6.		÷		=			6.		÷		=
			Total	(1)	1.32		(2)	0.60			

(Enter total on line 12)

FORMER MODELS

NOTE: This list stopped being updated since PHB49.



TRACK-TYPE TRACTORS

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Trans-mission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph) 1st	2nd	3rd	4th	5th	6th
D2	4U	47-58	43/38	3258	1.02	2.74	DD	3609	2588	2061	1634	1067	
				(7175)	**(3'4")**	**(9'0")**		**(7950)**	**(5700)**	**(4540)**	**(3600)**	**(2350)**	
					1.42	1.57		2.9	4.4	5.2	6.3	8.9	
					(4'8")	**(5'2")**		**(1.8)**	**(2.7)**	**(3.2)**	**(3.9)**	**(5.5)**	
D2	4U	47-58	42/35	3258	1.02	2.74	DD	3609	2588	2061	1634	1067	
				(7175)	**(3'4")**	**(9'0")**		**(7950)**	**(5700)**	**(4540)**	**(3600)**	**(2350)**	
					1.57	1.57		2.7	4.0	4.8	5.8	8.2	
					(5'2")	**(5'2")**		**(1.7)**	**(2.5)**	**(3.0)**	**(3.6)**	**(5.1)**	
D2	5U	57-58	38/32	3119	1.27	2.74	DD	3033	2483	2007	1703	1035	
				(5870)	**(4'2")**	**(9'0")**		**(6680)**	**(5420)**	**(4420)**	**(3570)**	**(2280)**	
					1.42	1.57		2.7	4.0	4.8	5.8	8.2	
					(4'8")	**(5'2")**		**(1.7)**	**(2.5)**	**(3.0)**	**(3.6)**	**(5.1)**	
D2	5U	57-58	43/38	3373	1.27	2.74	DD	3609	2588	2061	1634	1067	
				(7430)	**(4'2")**	**(9'0")**		**(7950)**	**(5700)**	**(4540)**	**(3600)**	**(2250)**	
					1.67	1.57		2.9	4.4	5.2	6.3	8.9	
					(5'6")	**(5'2")**		**(1.8)**	**(2.7)**	**(3.2)**	**(3.9)**	**(5.5)**	
D3	79U	72-79	62/—	4812	1.42	2.77	PS						
				(10,610)	**(4'8")**	**(9'1")**							
					1.78	1.70		3.1	5.6	11.3			
					(5'10")	**(5'7")**		**(1.9)**	**(3.5)**	**(7.0)**			
D3 LGP	6N	72-79	62/—	5410	1.65	2.97	PS						
				(11,925)	**(5'5")**	**(9'10")**							
					2.29	1.70		3.1	5.6	11.3			
					(7'6")	**(5'7")**		**(1.9)**	**(3.5)**	**(7.0)**			
D3B	23Y	79-87	65	6719	1.42	2.77	PS						
				(14,812)	**(4'8")**	**(9'1")**							
					1.78	2.67		3.1	5.6	11.4			
					(5'10")	**(8'9")**		**(1.9)**	**(3.5)**	**(7.1)**			
D3B	27Y	79-87	65	6877	1.42	2.77	PS						
				(15,160)	**(4'8")**	**(9'1")**							
					1.78	2.67		3.1	5.9	10.6			
					(5'10")	**(8'9")**		**(1.9)**	**(3.7)**	**(6.6)**			
D3B LGP	24Y	79-87	65	7479	1.65	2.99	PS						
				(16,488)	**(5'5")**	**(9'10")**							
					2.29	2.67		3.1	5.6	11.4			
					(7'6")	**(8'9")**		**(1.9)**	**(3.5)**	**(7.1)**			
D3B LGP	28Y	79-87	65	7637	1.65	2.99	PS						
				(16,836)	**(5'5")**	**(9'10")**							
					2.29	2.67		3.1	5.9	10.7			
					(7'6")	**(8'9")**		**(1.9)**	**(3.7)**	**(6.7)**			
D3B	3YC	85-87	65	6719	1.42	2.77	DD	5593	3993	2694	1830	1326	
				(14,812)	**(4'8")**	**(9'1")**		**(12,330)**	**(8802)**	**(5940)**	**(4034)**	**(2925)**	
					1.78	2.67		2.48	3.40	4.68	6.45	8.27	
					(5'10")	**(8'9")**		**(1.5)**	**(2.1)**	**(2.9)**	**(4.0)**	**(5.1)**	
D3B LGP	5MC	85-87	65	7479	1.65	2.99	DD	5595	3993	2694	1830	1326	
				(16,488)	**(5'5")**	**(9'10")**		**(12,330)**	**(8802)**	**(5940)**	**(4034)**	**(2925)**	
					2.29	2.67		2.48	3.40	4.68	6.45	8.27	
					(7'6")	**(8'9")**		**(1.5)**	**(2.1)**	**(2.9)**	**(4.0)**	**(5.1)**	

NOTE: Power Shift models show speeds only, not drawbar pull.
NOTE: Track-Type Tractor weights do not include blades until 1967.

Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Trans-mission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph) 1st	2nd	3rd	4th	5th	6th
D3C	5KG	87-90	67	7084	1.42	2.8	PS						
				(15,618)	**(4'8")**	**(9'4")**							
					1.79	2.66		3.1	5.9	10.8			
					(5'10.6")	**(8'8.9")**		**(1.9)**	**(3.7)**	**(6.7)**			
D3C Series II		90-93	70	7001	1.42		PS						
				(15,435)	**(4'8")**								
					1.79			3.1	5.9	10.8			
					(5'11")			**(1.9)**	**(3.7)**	**(6.7)**			
D3C Series III		93-01	70	7110	1.45	3.98							
				(15,650)	**(4'9")**	**(13'1")**	HYS						
					1.85	2.73			0-9.0				
					(6'1")	**(8'11")**			**(0-5.6)**				
D3C XL Series II		91-93	70	7242	1.42		PS						
				(15,965)	**(4'8")**								
					1.83			3.1	5.9	10.8			
					(6'0")			**(1.9)**	**(3.7)**	**(6.7)**			
D3C XL Series III		93-01	70	7304	1.45	3.98							
				(16,100)	**(4'9")**	**(13'1")**	HYS						
					1.85	2.73			0-9.0				
					(6'1")	**(8'11")**			**(0-5.6)**				
D3G XL	CFC	01-03	70	7314	1.45	4.02	HYS						
				(16,125)	**(4'9")**	**(13'2")**							
					1.85	2.72			0-9.0				
					(6'1")	**(8'11")**			**(0-5.6)**				
D3G XL*	JMH	03-07	70	7345	1.45	4.02	HYS						
				(16,193)	**(4'9")**	**(13'2")**							
					1.85	2.72			0-9.0				
					(6'1")	**(8'11")**			**(0-5.6)**				
D3C LGP	1PJ	87-90	67	7788	1.65	3.0	PS						
				(17,170)	**(5'4")**	**(9'10.1")**							
					2.29	2.66		3.1	5.9	10.8			
					(7'6")	**(8'8.9")**		**(1.9)**	**(3.7)**	**(6.7)**			
D3C LGP Series II		90-93	70	7788	1.65		PS						
				(17,170)	**(5'5")**								
					2.29			3.1	5.9	10.8			
					(7'6")			**(1.9)**	**(3.7)**	**(6.7)**			
D3C LGP Series III		93-01	70	7710	1.68	3.95							
				(17,000)	**(5'6")**	**(13'0")**	HYS						
					2.31	2.73			0-9.0				
					(7'7")	**(8'11")**			**(0-5.6)**				
D3G LGP	CFF	01-03	70	7723	1.68	4.02	HYS						
				(17,026)	**(5'6")**	**(13'2")**							
					2.31	2.72			0-9.0				
					(7'7")	**(8'11")**			**(0-5.6)**				
D3G LGP*	BYR	03-07	70	7768	1.68	4.02	HYS						
				(17,126)	**(5'6")**	**(13'2")**							
					2.31	2.72			0-9.0				
					(7'7")	**(8'11")**			**(0-5.6)**				

*Emits equivalent to U.S. EPA Tier 2/EU Stage II/Japan 2001 (Tier 2).
NOTE: Power Shift models show speeds only, not drawbar pull.
NOTE: Track-Type Tractor weights do not include blades until 1967.

Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Trans-mission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph) 1st	2nd	3rd	4th	5th	6th
D4	6U	47-59	48/43	4629	1.12	3.07	DD	4531	3496	2656	2089	1339	
				(10,195)	**(3'8")**	**(11'0")**		**(9980)**	**(7700)**	**(5850)**	**(4600)**	**(2950)**	
					1.58	1.54		2.7	4.2	4.8	6.0	8.7	
					(5'2")	**(5'1")**		**(1.7)**	**(2.4)**	**(3.0)**	**(3.7)**	**(5.4)**	
D4	6U	47-59	60/48	4847	1.12	3.16	DD	4858	3496	2724	2093	1326	
				(10,675)	**(3'8")**	**(10'5")**		**(10,700)**	**(7700)**	**(6000)**	**(4610)**	**(2920)**	
					1.58	1.54		3.1	4.3	5.5	6.8	9.8	
					(5'2")	**(5'1")**		**(1.9)**	**(2.7)**	**(3.4)**	**(4.2)**	**(6.1)**	
D4	6U	47-59	63/50	4844	1.12	3.18	DD	4858	3528	2724	2093	1326	
				(10,675)	**(3'8")**	**(10'5")**		**(10,700)**	**(7770)**	**(6000)**	**(4610)**	**(2920)**	
					1.58	1.76		3.1	4.3	5.5	6.8	9.8	
					(5'2")	**(5'10")**		**(1.9)**	**(2.7)**	**(3.4)**	**(4.2)**	**(6.1)**	
D4	7U	47-59	63/50	5067	1.52	3.16	DD	4858	3528	2724	2093	1326	
				(10,970)	**(5'0")**	**(10'5")**		**(10,700)**	**(7770)**	**(6000)**	**(4610)**	**(2920)**	
					1.98	1.76		3.1	4.3	5.5	6.8	9.8	
					(6'6")	**(5'10")**		**(1.9)**	**(2.7)**	**(3.4)**	**(4.2)**	**(6.1)**	
D4B	2XF	87	75	7450	1.42	2.78	PS						
				(16,420)	**(4'8")**	**(9'1")**							
					1.78	2.67		3.2	6.0	11.1			
					(5'10")	**(8'9")**		**(2.0)**	**(3.7)**	**(6.9)**			
D4B LGP	1SG	87	75	7800	1.65	2.99	PS						
				(17,200)	**(5'5")**	**(9'10")**							
					2.29	2.67		3.2	6.0	11.1			
					(7'6")	**(8'9")**		**(2.0)**	**(3.7)**	**(6.9)**			
D4C	39A	59-63	65/52	5064	1.12	3.05	DD	4858	3528	2724	2093	1321	
				(11,155)	**(3'8")**	**(10'1")**		**(10,700)**	**(7770)**	**(6000)**	**(4610)**	**(2910)**	
					1.58	1.76		3.1	4.3	5.5	6.8	9.8	
					(5'2")	**(5'10")**		**(1.9)**	**(2.7)**	**(3.4)**	**(4.2)**	**(6.1)**	
D4C	40A	59-63	65/52	4881	1.52	3.05	DD	4858	3528	2724	2093	1321	
				(10,750)	**(5'0")**	**(10'1")**		**(10,700)**	**(7770)**	**(6000)**	**(4610)**	**(2910)**	
					1.98	1.76		3.1	4.3	5.5	6.8	9.8	
					(6'6")	**(5'10")**		**(1.9)**	**(2.7)**	**(3.4)**	**(4.2)**	**(6.1)**	
D4C	1RJ	87-90	78	7581	1.42	3.00	PS						
				(16,714)	**(4'7")**	**(9'10.1")**							
					1.83	2.66		3.1	5.9	11.1			
					(6'0")	**(8'8.9")**		**(1.9)**	**(3.7)**	**(6.9)**			
D4C Series II		90-93	80	7557	1.42		PS						
				(16,660)	**(4'8")**								
					1.83			3.2	5.9	11.1			
					(6'5")			**(2.0)**	**(3.7)**	**(6.9)**			
D4C Series III		93-01	80	7330	1.50	3.99							
				(16,150)	**(4'11")**	**(13'1")**	HYS						
					1.91	2.73			0-9.0				
					(6'3")	**(8'11")**			**(0-5.6)**				
D4C XL Series III		93-01	80	7520	1.50	3.99							
				(16,570)	**(4'11")**	**(13'1")**	HYS						
					1.96	2.73			0-9.0				
					(6'5")	**(8'11")**			**(0-5.6)**				

NOTE: Power Shift models show speeds only, not drawbar pull.
NOTE: Track-Type Tractor weights do not include blades until 1967.

Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Trans-mission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph) 1st	2nd	3rd	4th	5th	6th
D4C LGP	2CJ	87-90	78	7905	1.65	3.00	PS						
				(17,427)	**(5'4")**	**(9'10.1")**							
					2.29	2.66							
					(7'6")	**(8'8.9")**							
D4C LGP		90-93	80	7905	1.65		PS						
Series II				**(17,427)**	**(5'5")**								
					2.29			3.2	5.9	11.1			
					(7'6")			**(2.0)**	**(3.7)**	**(6.9)**			
D4C LGP		93-01	80	7790	1.68	3.99							
Series III				**(17,160)**	**(5'6")**	**(13'1")**	HYS						
					2.31	2.73			0-9.0				
					(7'6")	**(8'11")**			**(0-5.6)**				
D4D	78A	63-68	65/52	5900	1.52	3.35	DD	5300	3700	2560	1880	1350	
				(13,000)	**(5'0")**	**(11'0")**		**(11,690)**	**(8160)**	**(5640)**	**(4150)**	**(2980)**	
					1.98	2.41		2.7	3.9	5.5	7.1	9.3	
					(6'6")	**(7'11")**		**(1.7)**	**(2.4)**	**(3.4)**	**(4.4)**	**(5.8)**	
D4D	22C	67-68	65/—	5900	1.52	3.38	PS						
				(13,100)	**(5'0")**	**(11'1")**							
					1.98	2.41		3.2	5.8	9.3			
					(6'6")	**(7'11")**		**(2.0)**	**(3.6)**	**(5.8)**			
D4D	82J	63	—/65	7910	1.52	3.38	DD	6150	4150	2820	2030	1420	
				(17,440)	**(5'0")**	**(11'1")**		**(13,550)**	**(9140)**	**(6210)**	**(4480)**	**(3120)**	
					1.98	2.67		2.7	4.0	5.4	7.2	9.4	
					(6'6")	**(8'9")**		**(1.7)**	**(2.5)**	**(3.4)**	**(4.5)**	**(5.9)**	
D4D	83J	67-71	—/65	8270	1.52	3.38	PS						
				(18,240)	**(5'0")**	**(11'1")**							
					1.98	2.67		3.2	5.7	9.3			
					(6'6")	**(8'9")**		**(2.0)**	**(3.6)**	**(5.8)**			
D4D	83J	72-77	—/75	5900	1.52	3.38	DD	6150	4150	2820	2030	1420	
				(13,100)	**(5'0")**	**(11'1")**		**(13,550)**	**(9140)**	**(6210)**	**(4480)**	**(3120)**	
					1.98	2.67		2.7	4.0	5.4	7.2	9.4	
					(6'6")	**(8'9")**		**(1.7)**	**(2.5)**	**(3.4)**	**(4.5)**	**(5.9)**	
D4E	27X	77-84	80/—	9013	1.52	3.86	DD	6495	4425	3018	2172	1509	
				(19,820)	**(5'0")**	**(12'8")**		**(14,320)**	**(9756)**	**(6654)**	**(4788)**	**(3327)**	
					2.44	2.72		2.8	4.0	5.5	7.2	9.5	
					(8'0")	**(8'11")**		**(1.7)**	**(2.5)**	**(3.4)**	**(4.5)**	**(5.9)**	
D4E	28X	77-84	80/—	9090	1.52	3.86	PS						
				(20,040)	**(5'0")**	**(12'8")**							
					2.44	2.72		3.3	5.9	9.5			
					(8'0")	**(8'11")**		**(2.1)**	**(3.7)**	**(5.9)**			
D4G XL	CFN	01-03	80	7761	1.50	4.04	HYS						
				(17,110)	**(4'11")**	**(13'3")**							
					1.96	2.72			0-9.0				
					(6'5")	**(8'11")**			**(0-5.6)**				
D4G XL*	HYD	03-07	80	7800	1.50	4.04	HYS						
				(17,196)	**(4'11")**	**(13'3")**							
					1.96	2.72			0-9.0				
					(6'5")	**(8'11")**			**(0-5.6)**				

*Emits equivalent to Tier 2/Stage II/Japan 2001 (Tier 2).
NOTE: Power Shift models show speeds only, not drawbar pull.
NOTE: Track-Type Tractor weights do not include blades until 1967.

Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Trans-mission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph) 1st	2nd	3rd	4th	5th	6th
D4G LGP	FDC	01-03	80	8109	1.68	4.04	HYS						
				(17,877)	**(5'6")**	**(13'3")**							
					2.31	2.72			0-9.0				
					(7'7")	**(8'11")**			**(0-5.6)**				
D4G LGP**	TLX	03-07	80	8143	1.68	4.04	HYS						
				(17,952)	**(5'6")**	**(13'3")**							
					2.31	2.72			0-9.0				
					(7'7")	**(8'11")**			**(0-5.6)**				
D4H (JPN)	8PB*	85-89	90/—	9975	1.67	3.422	PS						
				(21,991)	**(5'6")**	**(11'3")**							
					2.13	2.933		3.5	6.2	10.2			
					(7'0")	**(9'8")**		**(2.2)**	**(3.9)**	**(6.3)**			
D4H (JPN)	2AC*	85-89	90/—	10 111	1.67	3.422	DD	7618	5843	4333	3207	2335	1640
				(22,291)	**(5'6")**	**(11'3")**		**(16,798)**	**(12,884)**	**(9554)**	**(7071)**	**(5149)**	**(3617)**
					2.13	2.933		2.5	3.2	4.3	5.5	7.2	9.5
					(7'0")	**(9'8")**		**(1.6)**	**(2.0)**	**(2.6)**	**(3.4)**	**(4.4)**	**(5.9)**
D4H (JPN)	8PB*	89-90	95/—	10 105	1.67	3.422	PS						
				(22,277)	**(5'6")**	**(11'3")**							
					2.13	2.933		3.5	6.2	10.2			
					(7'0")	**(9'8")**		**(2.2)**	**(3.9)**	**(6.3)**			
D4H (JPN)	8PB	91-96	95/—	11 019	1.67	3.44	PS						
				(24,242)	**(5'6")**	**(11'3")**							
					2.13	2.939		3.5	6.2	10.2			
					(7'0")	**(9'8")**		**(2.2)**	**(3.9)**	**(6.3)**			
D4H (JPN)	2AC*	89-90	95/—	10 231	1.67	3.422	DD	7454	5715	4235	3132	2277	1597
				(22,555)	**(5'6")**	**(11'3")**		**(16,434)**	**(12,599)**	**(9336)**	**(6904)**	**(5020)**	**(3520)**
					2.13	2.933		2.5	3.2	4.3	5.5	7.2	9.5
					(7'0")	**(9'8")**		**(1.6)**	**(2.0)**	**(2.6)**	**(3.4)**	**(4.4)**	**(5.9)**
D4H (JPN)	2AC	91-96	95/—	11 019	1.67	3.44	DD	7454	5715	4235	3132	2227	1597
				(24,242)	**(5'6")**	**(11'3")**		**(16,434)**	**(12,599)**	**(9336)**	**(6904)**	**(5020)**	**(3520)**
					2.13	2.939		2.5	3.2	4.3	5.5	7.2	9.5
					(7'0")	**(9'8")**		**(1.6)**	**(2.0)**	**(2.6)**	**(3.4)**	**(4.4)**	**(5.9)**
D4H LGP (JPN)	9DB*	85-89	90/—	11 245	2.00	3.693	PS						
				(24,790)	**(6'7")**	**(10'4")**							
					2.76	2.986		3.5	6.2	10.2			
					(9'1")	**(9'10")**		**(2.2)**	**(3.9)**	**(6.3)**			
D4H LGP (JPN)	3AC*	85-89	90/—	11 381	2.00	3.693	DD	7618	5843	4333	3207	2335	1640
				(25,090)	**(6'7")**	**(10'4")**		**(16,798)**	**(12,884)**	**(9554)**	**(7071)**	**(5149)**	**(3617)**
					2.76	2.986		2.5	3.2	4.3	5.5	7.2	9.5
					(9'1")	**(9'10")**		**(1.6)**	**(2.0)**	**(2.6)**	**(3.4)**	**(4.4)**	**(5.9)**
D4H LGP (JPN)	9DB*	89-90	95/—	11 350	2.00	3.693	PS						
				(25,022)	**(6'7")**	**(10'4")**							
					2.76	2.986		3.5	6.2	10.2			
					(9'1")	**(9'10")**		**(2.2)**	**(3.9)**	**(6.3)**			
D4H LGP (JPN)	9DB	91-96	105/—	12 440	2.00	3.718	PS						
				(27,368)	**(6'7")**	**(12'2")**							
					2.76	3.04		3.4	6.0	10.2			
					(9'1")	**(10'0")**		**(2.1)**	**(3.7)**	**(6.4)**			

*D4H models prior to Series II. Product identification number prefix still in use for current product.
**Emits equivalent to Tier 2/Stage II/Japan 2001 (Tier 2).
NOTE: Power Shift models show speeds only, not drawbar pull.
NOTE: Track-Type Tractor weights do not include blades until 1967.

Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Trans-mission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph) 1st	2nd	3rd	4th	5th	6th
D4H LGP (JPN)	3AC*	89-90	95/—	11 476 **(25,300)**	2.00 **(6'7")**	3.693 **(10'4")**	DD	7454 **(16,434)**	5715 **(12,599)**	4235 **(9336)**	3132 **(6904)**	2277 **(5020)**	1597 **(3520)**
					2.76 **(9'1")**	2.986 **(9'10")**		2.5 **(1.6)**	3.2 **(2.0)**	4.3 **(2.6)**	5.5 **(3.4)**	7.2 **(4.4)**	9.5 **(5.9)**
D4H LGP (JPN)	9GJ	92-96	105/—	12 440 **(27,368)**	2.00 **(6'7")**	3.718 **(12'2")**	PS						
					2.76 **(9'1")**	3.04 **(10'0")**		3.4 **(2.1)**	6.0 **(3.7)**	10.2 **(6.4)**			
D4H XL (JPN)	8PS	92-96	105/—	11 786 **(25,929)**	1.77 **(5'10")**	3.446 **(11'4")**	PS						
					2.28 **(7'6")**	2.99 **(9'10")**		3.4 **(2.1)**	6.0 **(3.7)**	10.2 **(6.4)**			
D5	81H	67-67	93/75	8300 **(18,200)**	1.52 **(5'0")**	3.89 **(12'9")**	DD	7870 **(17,330)**	4910 **(10,820)**	3330 **(7320)**	2230 **(4920)**	1440 **(3170)**	
					2.02 **(6'8")**	2.00 **(8'7")**		3.8 **(2.3)**	4.7 **(2.9)**	5.8 **(3.6)**	7.1 **(4.4)**	8.9 **(5.5)**	
D5	82H	67-67	93/75	8400 **(18,600)**	1.88 **(6'2")**	3.89 **(12'9")**	DD	7870 **(17,330)**	4910 **(10,820)**	3330 **(7320)**	2230 **(4920)**	1440 **(3170)**	
					2.38 **(7'10")**	2.00 **(8'7")**		2.7 **(1.7)**	4.2 **(2.6)**	5.8 **(3.6)**	8.0 **(5.0)**	11.1 **(6.9)**	
D5	83H	67-67	93/—	8500 **(18,800)**	1.52 **(5'0")**	3.89 **(12'9")**	PS						
					2.02 **(6'8")**	2.64 **(8'8")**		2.7 **(1.7)**	4.2 **(2.6)**	5.8 **(3.6)**	8.0 **(5.0)**	11.1 **(6.9)**	
D5	84H	67-67	93/—	8700 **(19,200)**	1.88 **(6'2")**	3.89 **(12'9")**	PS						
					2.38 **(7'10")**	2.64 **(8'8")**		3.6 **(2.2)**	6.1 **(3.8)**	10.1 **(6.3)**			
D5	98J	67-77	105	11 290 **(24,400)**	1.52 **(5'0")**	3.89 **(12'9")**	DD	8770 **(19,340)**	5500 **(12,130)**	3750 **(8270)**	2540 **(5610)**	1660 **(3660)**	
					2.02 **(6'8")**	2.74 **(9'0")**		4.0 **(2.5)**	4.8 **(3.0)**	5.6 **(3.5)**	6.4 **(4.0)**	7.4 **(4.6)**	9.0 **(5.6)**
D5	93J	67-77	105	11 290 **(24,400)**	1.52 **(5'0")**	3.89 **(12'9")**	DD	8770 **(19,340)**	5500 **(12,130)**	3750 **(8270)**	2540 **(5610)**	1660 **(3660)**	
					2.02 **(6'8")**	2.74 **(9'0")**		2.7 **(1.7)**	4.2 **(2.6)**	5.8 **(3.6)**	8.0 **(5.0)**	11.1 **(6.9)**	
D5	94J	66-77	105	11 390 **(25,100)**	1.88 **(6'2")**	3.89 **(12'9")**	DD	8770 **(19,340)**	5500 **(12,130)**	3750 **(8270)**	2540 **(5610)**	1660 **(3660)**	
					2.38 **(7'10")**	2.74 **(9'0")**		2.7 **(1.7)**	4.2 **(2.6)**	5.8 **(3.6)**	8.0 **(5.0)**	11.1 **(6.9)**	
D5	95J	66-77	105	11 290 **(24,900)**	1.52 **(5'0")**	3.89 **(12'9")**	PS						
					2.02 **(6'8")**	2.74 **(9'0")**							
D5	96J	66-77	105	11 600 **(25,600)**	1.88 **(6'2")**	3.89 **(12'9")**	PS						
					2.38 **(7'10")**	2.74 **(9'0")**							

*D4H models prior to Series II. Product identification number prefix still in use for current product.
NOTE: Power Shift models show speeds only, not drawbar pull.
NOTE: Track-Type Tractor weights do not include blades until 1967.

Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Trans-mission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph) 1st	2nd	3rd	4th	5th	6th
D5B	25X	77-84	105/—	11 619 **(25,615)**	1.88 **(6'2")**	4.60 **(15'1")**	PS						
					3.15 **(10'4")**	2.77 **(9'1")**		3.5 **(2.2)**	6.1 **(3.8)**	10.1 **(6.3)**			
D5B	23X	77-82	105/—	11 283 **(24,875)**	1.88 **(6'2")**	4.60 **(15'1")**	DD	8060 **(17,770)**	5030 **(11,100)**	3410 **(7520)**	2290 **(5060)**	1480 **(3260)**	
					3.15 **(10'4")**	2.77 **(9'1")**		2.7 **(1.7)**	4.2 **(2.6)**	5.8 **(3.6)**	8.0 **(5.0)**	11.1 **(6.9)**	
D5C		91-93	90	8460 **(18,650)**	1.54 **(5'1")**		PS						
					2.01 **(6'7")**			3.5 **(2.2)**	6.3 **(3.9)**	10.0 **(6.2)**			
D5C Series III		93-01	90	8490 **(18,710)**	1.55 **(5'1")**	4.07 **(13'4")**	HYS						
					2.00 **(6'7")**	2.74 **(9'0")**			0-9.0 **(0-5.6)**				
D5C XL Series III		93-01	90	8820 **(19,450)**	1.55 **(5'1")**	4.32 **(14'2")**	HYS						
					2.06 **(6'9")**	2.74 **(9'0")**			0-9.0 **(0-5.6)**				
D5C LGP		91-93	90	8987 **(19,800)**	1.72 **(5'8")**		PS						
					2.38 **(7'10")**			3.5 **(2.2)**	6.3 **(3.9)**	10.0 **(6.2)**			
D5C LGP Series III		93-01	90	8970 **(19,780)**	1.73 **(5'8")**	4.07 **(13'4")**	HYS						
					2.39 **(7'10")**	2.74 **(9'0")**			0-9.0 **(0-5.6)**				
D5E		-99	105	11 700 **(25,800)**	1.52 **(5'0")**	3.88 **(12'8")**	DD	8770 **(19,340)**	5500 **(12,130)**	3750 **(8270)**	2450 **(5600)**	1660 **(3660)**	
D5G XL	FDH	01-03	90	8863 **(19,540)**	1.55 **(5'1")**	4.34 **(14'3")**	HYS						
					2.06 **(6'9")**	2.73 **(8'11")**			0-9.0 **(0-5.6)**				
D5G XL*	WGB	03-07	90	8919 **(19,662)**	1.55 **(5'1")**	4.34 **(14'3")**	HYS						
					2.06 **(6'9")**	2.73 **(8'11")**			0-9.0 **(0-5.6)**				
D5G LGP	FDW	01-03	90	9207 **(20,298)**	1.73 **(5'8")**	4.25 **(13'11")**	HYS						
					2.39 **(7'10")**	2.73 **(8'11")**			0-9.0 **(0-5.6)**				
D5G LGP*	RKG	03-07	90	9269 **(20,434)**	1.73 **(5'8")**	4.25 **(13'11")**	HYS						
					2.39 **(7'10")**	2.73 **(8'11")**			0-9.0 **(0-5.6)**				

*Emits equivalent to Tier 2/Stage II/Japan 2001 (Tier 2).
NOTE: Power Shift models show speeds only, not drawbar pull.
NOTE: Track-Type Tractor weights do not include blades until 1967.

Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Trans-mission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph) 1st	2nd	3rd	4th	5th	6th
D5H (FR)	8RC*	85-90	120/—	12 144	1.8	3.6	PS						
				(26,772)	**(5'11")**	**(11'10")**		—	—	—			
					2.21	2.93		3.3	5.9	10.0			
					(7'3")	**(9'7")**		**(2.1)**	**(3.7)**	**(6.2)**			
D5H (FR)	8RC	91-96	120/—	13 250	1.8	3.6	DD						
				(29,200)	**(5'11")**	**(11'10")**							
					2.31	3.0		3.3	5.9	10.0			
					(7'7")	**(9'10")**		**(2.1)**	**(3.7)**	**(6.2)**			
D5H (FR)	7NC*	85-90	120/—	12 212	1.8	3.6	DD	9140	7005	5190	3835	2785	1950
				(26,922)	**(5'11")**	**(11'10")**		**(20,150)**	**(15,440)**	**(11,440)**	**(8450)**	**(6140)**	**(4300)**
					2.21	2.93		2.7	3.4	4.5	5.8	7.6	10.0
					(7'3")	**(9'7")**		**(1.7)**	**(2.1)**	**(2.8)**	**(3.6)**	**(4.7)**	**(6.2)**
D5H (FR)	7NC	91-96	120/—	13 250	1.8	3.6	DD	9140	7005	5190	3835	2785	1950
				(29,200)	**(5'11")**	**(11'10")**		**(20,150)**	**(15,440)**	**(11,440)**	**(8450)**	**(6140)**	**(4300)**
					2.31	3.0		2.7	3.4	4.5	5.8	7.6	10.0
					(7'7")	**(9'10")**		**(1.7)**	**(2.1)**	**(2.8)**	**(3.6)**	**(4.7)**	**(6.2)**
D5H LGP (FR)	1DD*	86-90	120/—	14 685	2.16	4.129	PS						
				(32,380)	**(7'1")**	**(13'7")**							
					3.02	3.069		3.3	5.9	10.0			
					(9'11")	**(10'1")**		**(2.1)**	**(3.7)**	**(6.2)**			
D5H LGP (FR)	1DD	91-96	130/—	16 200	2.16	4.133	PS						
				(35,700)	**(7'1")**	**(13'7")**							
					3.02	3.135		3.3	5.9	10.0			
					(9'11")	**(10'3")**		**(2.1)**	**(3.7)**	**(6.2)**			
D5H LGP (FR)	9HC*	85-90	120/—	14 878	2.16	4.129	DD	9140	7005	5190	3835	2785	1950
				(32,800)	**(7'1")**	**(13'7")**		**(20,150)**	**(15,440)**	**(11,440)**	**(8450)**	**(6140)**	**(4300)**
					3.02	3.069		2.7	3.4	4.5	5.8	7.6	10.0
					(9'11")	**(10'1")**		**(1.7)**	**(2.1)**	**(2.8)**	**(3.6)**	**(4.7)**	**(6.2)**
D5H LGP (FR)	9HC	91-96	130/—	16 200	2.16	4.133	DD	10 061	7725	5738	4256	3109	2195
				(35,700)	**(7'1")**	**(13'7")**		**(22,181)**	**(17,031)**	**(12,650)**	**(9384)**	**(6855)**	**(4840)**
					3.02	3.135		2.6	3.4	4.5	5.8	7.5	9.9
					(9'11")	**(10'3")**		**(1.6)**	**(2.1)**	**(2.7)**	**(3.6)**	**(4.7)**	**(6.2)**
D5H (JPN)	3MD*	86-90	120/—	12 144	1.8	3.6	PS						
				(26,772)	**(5'11")**	**(11'10")**							
					2.21	2.93		3.3	5.9	10.0			
					(7'3")	**(9'7")**		**(2.1)**	**(3.7)**	**(6.2)**			
D5H (JPN)	3MD	91-96	120/—	13 250	1.8	3.6	PS						
				(29,200)	**(5'11")**	**(11'10")**							
					2.31	3.0		3.3	5.9	10.0			
					(7'7")	**(9'10")**		**(2.1)**	**(3.7)**	**(6.2)**			
D5H (JPN)	1YD*	86-90	120/—	12 212	1.8	3.6	DD	9140	7005	5190	3835	2785	1950
				(26,922)	**(5'11")**	**(11'10")**		**(20,150)**	**(15,440)**	**(11,440)**	**(8450)**	**(6140)**	**(4300)**
					2.21	2.93		2.7	3.4	4.5	5.8	7.6	10.0
					(7'3")	**(9'7")**		**(1.7)**	**(2.1)**	**(2.8)**	**(3.6)**	**(4.7)**	**(6.2)**

*D5H models prior to Series II. Product identification number prefix still in use for current product.
NOTE: Power Shift models show speeds only, not drawbar pull.
NOTE: Track-Type Tractor weights do not include blades until 1967.

Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Trans-mission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph) 1st	2nd	3rd	4th	5th	6th
D5H (JPN)	1YD*	91-96	120/—	13 250	1.8	3.6	DD	9140	7005	5190	3835	2785	1950
				(29,200)	**(5'11")**	**(11'10")**		**(20,150)**	**(15,440)**	**(11,440)**	**(8450)**	**(6140)**	**(4300)**
					2.31	3.0		2.7	3.4	4.5	5.8	7.6	10.0
					(7'7")	**(9'10")**		**(1.7)**	**(2.1)**	**(2.8)**	**(3.6)**	**(4.7)**	**(6.2)**
D5H LGP (JPN)	4KD*	86-90	120/—	14 685	2.16	4.129	PS						
				(32,380)	**(7'1")**	**(13'7")**							
					3.02	3.069		3.3	5.9	10.0			
					(9'11")	**(10'1")**		**(2.1)**	**(3.6)**	**(6.2)**			
D5H LGP (JPN)	4KD	91-96	130/—	16 200	2.16	4.133	PS						
				(35,700)	**(7'1")**	**(13'7")**							
					3.02	3.135		3.3	5.9	10.0			
					(9'11")	**(10'3")**		**(2.1)**	**(3.7)**	**(6.2)**			
D5H LGP (JPN)	2SD*	86-90	120/—	14 878	2.16	4.129	DD	9140	7005	5190	3835	2785	1950
				(32,800)	**(7'1")**	**(13'7")**		**(20,150)**	**(15,440)**	**(11,440)**	**(8450)**	**(6140)**	**(4300)**
					3.02	3.069		2.7	3.4	4.5	5.8	7.6	10.0
					(9'11")	**(10'1")**		**(1.7)**	**(2.1)**	**(2.8)**	**(3.6)**	**(4.7)**	**(6.2)**
D5H LGP (JPN)	2SD	91-96	130/—	16 200	2.16	4.133	DD	10 061	7725	5738	4256	3109	2195
				(35,700)	**(7'1")**	**(13'7")**		**(22,181)**	**(17,031)**	**(12,650)**	**(9384)**	**(6855)**	**(4840)**
					3.02	3.135		2.6	3.4	4.5	5.8	7.5	9.9
					(9'11")	**(10'3")**		**(1.6)**	**(2.1)**	**(2.7)**	**(3.6)**	**(4.7)**	**(6.2)**
D5H XL (FR)	8RJ	92-96	130/—	13 900	1.89	3.606	PS						
				(30,600)	**(6'2")**	**(11'10")**							
					2.49	3.08		3.3	5.9	10.0			
					(8'2")	**(9'11")**		**(2.1)**	**(3.7)**	**(6.2)**			
D5M XL (FR)	4BR	96-02	82/110	12 250	1.77	3.544	PS	22 347	12 166	6745			
				(27,006)	**(5'10")**	**(11'8")**		**(49,264)**	**(26,821)**	**(14,870)**			
					2.33**	3.002***		3.27	5.81	9.93			
					(7'8")**	**(9'10")*****		**(2.03)**	**(3.61)**	**(6.17)**			
D5M XL (FR)	6GN	96-02	82/110	12 250	1.77	3.544	PS	22 347	12 166	6745			
				(27,006)	**(5'10")**	**(11'8")**		**(49,264)**	**(26,821)**	**(14,870)**			
					2.33**	3.002***		3.27	5.81	9.93			
					(7'8")**	**(9'10")*****		**(2.03)**	**(3.61)**	**(6.17)**			
D5M LGP (FR)	3DR	96-02	82/110	13 100	2.00	3.72	PS	22 347	12 166	6745			
				(28,880)	**(6'7")**	**(12'2")**		**(49,264)**	**(26,821)**	**(14,870)**			
					2.76**	3.046***		3.27	5.81	9.93			
					(9'1")**	**(10'0")*****		**(2.03)**	**(3.61)**	**(6.17)**			
D5M LGP (FR)	3CR	96-02	82/110	13 100	2.00	3.72	PS	22 347	12 166	6745			
				(28,880)	**(6'7")**	**(12'2")**		**(49,264)**	**(26,821)**	**(14,870)**			
					2.76**	3.046***		3.27	5.81	9.93			
					(9'1")**	**(10'0")*****		**(2.03)**	**(3.61)**	**(6.17)**			

*D5H models prior to Series II. Product identification number prefix still in use for current product.
**Width without blade and with standard shoes.
***Height with ROPS cab.
NOTE: Power Shift models show speeds only, not drawbar pull.
NOTE: Track-Type Tractor weights do not include blades until 1967.

Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Trans-mission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph) 1st	2nd	3rd	4th	5th	6th
D6	4R	47-59	85	8042	1.88	3.75	DD	8618	5534	3837	2617	1842	
				(17,730)	**(6'2")**	**(12'4")**		**(19,000)**	**(12,200)**	**(8460)**	**(5770)**	**(4060)**	
					1.52	1.91		2.7	4.2	5.8	8.0	10.6	
					(5'0")	**(6'3")**		**(1.7)**	**(2.6)**	**(3.6)**	**(5.0)**	**(6.6)**	
D6	9U	47-59	93/75	8153	1.88	3.75	DD	8618	5534	3837	2617	1842	
				(17,975)	**(6'2")**	**(12'4")**		**(19,000)**	**(12,200)**	**(8460)**	**(5770)**	**(4060)**	
					1.52	1.91		2.7	4.2	5.8	8.0	10.6	
					(5'0")	**(6'3")**		**(1.7)**	**(2.6)**	**(3.6)**	**(5.0)**	**(6.6)**	
D6B	37A	59-67	93/75	8130	1.52	3.85	DD						
				(17,930)	**(5'0")**	**(12'9")**							
					2.02	1.91							
					(6'8")	**(6'3")**							
D6B	44A	59-67	93/75	8300	1.88	3.85	DD	7820	4940	3220	2120	1450	
				(18,300)	**(6'2")**	**(12'9")**		**(16,240)**	**(10,900)**	**(7090)**	**(4670)**	**(3190)**	
					2.38	1.91		2.7	4.2	6.0	8.4	10.9	
					(7'10")	**(6'3")**		**(1.7)**	**(2.6)**	**(3.7)**	**(5.2)**	**(6.8)**	
D6C	74A	63-67	120	10 400	1.88	3.95	DD	12 050	8020	5300	3360	2030	
				(23,000)	**(6'2")**	**(13'0")**		**(26,540)**	**(17,670)**	**(11,690)**	**(7400)**	**(4470)**	
					2.38	1.92		2.4	3.4	4.8	6.8	9.5	
					(7'9")	**(6'4")**		**(1.5)**	**(2.1)**	**(3.0)**	**(4.2)**	**(5.9)**	
D6C	76A	63-67	120	10 700	1.88	3.95	PS						
				(23,500)	**(6'2")**	**(13'0")**							
					2.38	1.92							
					(7'9")	**(6'4")**							
D6C	10K	67-76	140	13 880	1.88	3.73	PS						
				(30,600)	**(6'2")**	**(12'3")**							
					2.38	2.87		4.0	6.9	10.8			
					(7'9")	**(9'5")**		**(2.5)**	**(4.3)**	**(6.7)**			
D6 LGP	69U	72-77	140	17 010	2.11	3.94	PS						
				(37,500)	**(6'11")**	**(12'11")**							
					3.02	2.97							
					(9'11")	**(9'9")**							
D6C	99J	67-76	140	14 243	1.88	3.73	DD	11 500	7750	5180	3350	2090	
				(31,400)	**(6'2")**	**(12'3")**		**(25,360)**	**(17,090)**	**(11,420)**	**(7380)**	**(4610)**	
					2.38	2.87		2.7	4.0	5.6	7.9	11.1	
					(7'9")	**(9'5")**		**(1.7)**	**(2.5)**	**(3.5)**	**(4.9)**	**(6.9)**	
D6C LGP	69U	72-77	140	13 835	2.11	2.97	PS						
				(30,500)	**(6'11")**	**(9'9")**							
					3.02	3.94							
					(9'11")	**(12'11")**							

NOTE: Power Shift models show speeds only, not drawbar pull.
NOTE: Track-Type Tractor weights do not include blades until 1967.

Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Trans-mission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph) 1st	2nd	3rd	4th	5th	6th
D6D	3X	77-86	140	14 290 **(31,500)**	1.88 **(6'2")**	3.73 **(12'3")**	DD	11 500 **(25,360)**	7750 **(17,090)**	5180 **(11,420)**	3350 **(7380)**	2090 **(4610)**	
					2.36 **(7'9")**	3.06 **(10'0")**		1.7 **(2.7)**	4.0 **(2.5)**	5.6 **(3.5)**	7.9 **(4.9)**	11.1 **(6.9)**	
D6D	4X	77-86	140	14 290 **(31,500)**	1.88 **(6'2")**	3.73 **(12'3")**	PS	4.0 **(2.5)**	6.9 **(4.3)**	10.8 **(6.7)**			
D6D LGP	6X	77-86	140	17 370 **(38,300)**	2.1 **(6'11")**	3.94 **(12'1")**	PS						
					3.02 **(9'11")**	3.06 **(10'0")**		4.0 **(2.5)**	6.9 **(4.3)**	10.8 **(6.7)**			
D6H	4RC*	85-90	165/—	16 950 **(37,367)**	1.88 **(6'2")**	4.069 **(13'4")**	PS						
					2.64 **(8'8")**	3.114 **(10'3")**		3.8 **(2.4)**	6.5 **(4.0)**	11.3 **(7.0)**			
D6H	8KB	85-88	165/—	16 954 **(37,377)**	1.88 **(6'2")**	4.069 **(13'4")**	DD	12 500 **(27,560)**	9520 **(20,990)**	7140 **(15,740)**	5440 **(11,990)**	4010 **(8840)**	2820 **(6220)**
					2.64 **(8'8")**	3.114 **(10'3")**		2.7 **(1.7)**	3.5 **(2.2)**	4.6 **(2.9)**	5.8 **(3.6)**	7.6 **(4.7)**	10.0 **(6.2)**
D6H	3ZF*	88-90	165/—	17 055 **(37,599)**	1.88 **(6'2")**	4.069 **(13'4")**	PS/DS						
					2.64 **(8'8")**	3.114 **(10'3")**		3.8 **(2.4)**	6.5 **(4.0)**	11.3 **(7.0)**			
D6H LGP	6FC*	87-90	165/—	19 555 **(43,111)**	2.225 **(7'4")**	4.493 **(14'9")**	PS						
					3.43 **(11'3")**	3.164 **(10'5")**		3.8 **(2.4)**	6.5 **(4.0)**	11.3 **(7.0)**			
D6H LGP	3YG*	88-90	165/—	19 527 **(43,049)**	2.225 **(7'4")**	4.493 **(14'9")**	PS/DS						
					3.43 **(11'3")**	3.164 **(10'5")**		3.8 **(2.4)**	6.5 **(4.0)**	11.3 **(7.0)**			
D6H (JPN)	2KD*	86-90	165/—	16 950 **(37,367)**	1.88 **(6'2")**	4.069 **(13'4")**	PS						
					2.64 **(8'8")**	3.114 **(10'3")**		3.8 **(2.4)**	6.5 **(4.0)**	11.3 **(7.0)**			
D6H (DS)	32F (E. Peoria) 4YF (Sagami) 6CF (Grenoble)	92-96	123/165	18 111 **(39,928)**	1.88 **(6'2")**	4.07 **(13'4")**	PS						
					3.36 **(11'0")**	3.12 **(10'3")**		3.8 **(2.3)**	6.6 **(4.1)**	11.4 **(7.1)**			

*D6H models prior to Series II. Product identification number prefix still in use for current product.
NOTE: Power Shift models show speeds only, not drawbar pull.
NOTE: Track-Type Tractor weights do not include blades until 1967.

Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Trans-mission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph) 1st	2nd	3rd	4th	5th	6th
D6H (CB)	4RC	92-96	123/165	17 997	1.88	4.07	PS						
	(E. Peoria)			**(39,676)**	**(6'2")**	**(13'4")**							
	2KD				3.36	3.12		3.8	6.6	11.4			
	(Sagami)				**(11'0")**	**(10'3")**		**(2.3)**	**(4.1)**	**(7.1)**			
	4LG												
	(Grenoble)												
D6H XL (DS)	9KJ	92-96	130/175	19 080	1.88	4.07	PS						
	(E. Peoria)			**(42,063)**	**(6'2")**	**(13'4")**							
	8SK				3.36	3.12		3.8	6.6	11.4			
	(Sagami)				**(11'0")**	**(10'3")**		**(2.3)**	**(4.1)**	**(7.1)**			
	9LK												
	(Grenoble)												
D6H XL (CB)	8ZJ	92-96	130/175	18 966	1.88	4.07	PS						
	(E. Peoria)			**(41,811)**	**(6'2")**	**(13'4")**							
	9RK				3.36	3.12		3.8	6.6	11.4			
	(Sagami)				**(11'0")**	**(10'3")**		**(2.3)**	**(4.1)**	**(7.1)**			
	8KK												
	(Grenoble)												
D6H XR (DS)	6CK	92-96	130/175	18 799	1.88	4.22	PS						
	(E. Peoria)			**(41,444)**	**(6'2")**	**(13'10")**							
	2TL				3.36	3.12		3.8	6.6	11.4			
	(Sagami)				**(11'0")**	**(10'3")**		**(2.3)**	**(4.1)**	**(7.1)**			
	1YL												
	(Grenoble)												
D6H XR (CB)	5KK	92-96	130/175	18 799	1.88	4.22	PS						
	(E. Peoria)			**(41,444)**	**(6'2")**	**(13'10")**							
	7ZK				3.36	3.12		3.8	6.6	11.4			
	(Sagami)				**(11'0")**	**(10'3")**		**(2.3)**	**(4.1)**	**(7.1)**			
	2BL												
	(Grenoble)												
D6H LGP (DS)	3YG	92-96	134/180	20 486	2.24	4.49	PS						
	(E. Peoria)			**(45,163)**	**(7'3")**	**(14'9")**							
	4GG				4.0	3.17		3.8	6.6	11.4			
	(Sagami)				**(13'1")**	**(10'5")**		**(2.3)**	**(4.1)**	**(7.1)**			
	5HF												
	(Grenoble)												
D6H LGP (CB)	6FC	92-96	134/180	20 486	2.24	4.49	PS						
	(E. Peoria)			**(45,163)**	**(7'3")**	**(14'9")**							
	1KD				4.0	3.17		3.8	6.6	11.4			
	(Sagami)				**(13'1")**	**(10'5")**		**(2.3)**	**(4.1)**	**(7.1)**			
	2TG												
	(Grenoble)												
D6H (JPN)	3ED*	86-92	165/—	16 954	1.88	4.069	DD	12 500	9520	7140	5440	4010	2820
				(37,377)	**(6'2")**	**(13'4")**		**(27,560)**	**(20,990)**	**(15,740)**	**(11,990)**	**(8840)**	**(6220)**
					2.64	3.114		2.7	3.5	4.6	5.8	7.6	10.0
					(8'8")	**(10'3")**		**(1.7)**	**(2.2)**	**(2.9)**	**(3.6)**	**(4.7)**	**(6.2)**
D6H (JPN)	4YF*	88-90	165/—	17 055	1.88	4.069	PS/DS						
				(37,599)	**(6'2")**	**(13'4")**							
					2.64	3.114		3.8	6.5	11.3			
					(8'8")	**(10'3")**		**(2.4)**	**(4.0)**	**(7.0)**			

*D6H models prior to Series II. Product identification number prefix still in use for current product.
NOTE: Power Shift models show speeds only, not drawbar pull.
NOTE: Track-Type Tractor weights do not include blades until 1967.

Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Trans-mission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph) 1st	2nd	3rd	4th	5th	6th
D6H LGP (JPN)	1KD*	86-90	165/—	19 555 **(43,111)**	2.225 **(7'4")**	4.493 **(14'9")**	PS						
					3.43 **(11'3")**	3.164 **(10'5")**		3.8 **(2.4)**	6.5 **(4.0)**	11.3 **(7.0)**			
D6H LGP (JPN)	8FC*	86-90	165/—	19 676 **(43,380)**	2.225 **(7'4")**	4.485 **(14'9")**	DD	12 500 **(27,560)**	9520 **(20,990)**	7140 **(15,740)**	5440 **(11,990)**	4010 **(8840)**	2820 **(6220)**
					3.43 **(11'3")**	3.164 **(10'5")**		2.7 **(1.7)**	3.5 **(2.2)**	4.6 **(2.9)**	5.8 **(3.6)**	7.6 **(4.7)**	10.0 **(6.2)**
D6H LGP (JPN)	4GG*	88-90	165/—	19 527 **(43,049)**	2.225 **(7'4")**	4.493 **(14'9")**	PS/DS						
					3.43 **(11'3")**	3.164 **(10'5")**		3.8 **(2.4)**	6.5 **(4.0)**	11.3 **(7.0)**			
D6H (FR)	4LG*	87-90	165/—	16 950 **(37,367)**	1.88 **(6'2")**	4.069 **(13'4")**	PS						
					2.64 **(8'8")**	3.114 **(10'3")**		3.8 **(2.4)**	6.5 **(4.0)**	11.3 **(7.0)**			
D6H (FR)	1FJ*	88-90	165/—	16 954 **(37,377)**	1.88 **(6'2")**	4.069 **(13'4")**	DD	12 500 **(27,560)**	9520 **(20,990)**	7140 **(15,740)**	5440 **(11,990)**	4010 **(8840)**	2820 **(6220)**
					2.64 **(8'8")**	3.114 **(10'3")**		2.7 **(1.7)**	3.5 **(2.2)**	4.6 **(2.9)**	5.8 **(3.6)**	7.6 **(4.7)**	10.0 **(6.2)**
D6H (FR)	6CF*	88-90	165/—	17 055 **(37,599)**	1.88 **(6'2")**	4.069 **(13'4")**	PS/DS						
					2.64 **(8'8")**	3.114 **(10'3")**		3.8 **(2.4)**	6.5 **(4.0)**	11.3 **(7.0)**			
D6H LGP (FR)	2TG*	87-90	165/—	19 555 **(43,111)**	2.225 **(7'4")**	4.493 **(14'9")**	PS						
					3.43 **(11'3")**	3.164 **(10'5")**		3.8 **(2.4)**	6.5 **(4.0)**	11.3 **(7.0)**			
D6H LGP (FR)	5HF*	88-90	165/—	19 527 **(43,049)**	2.225 **(7'4")**	4.493 **(14'9")**	PS/DS						
					3.43 **(11'3")**	3.164 **(10'5")**		3.8 **(2.4)**	6.5 **(4.0)**	11.3 **(7.0)**			
D6H (SCOT)	7PC	86-87	165/—	16 950 **(37,367)**	1.88 **(6'2")**	4.069 **(13'4")**	PS						
					2.64 **(8'8")**	3.114 **(10'3")**		3.8 **(2.4)**	6.5 **(4.0)**	11.3 **(7.0)**			
D6H LGP (SCOT)	8YC	86-87	165/—	19 555 **(43,111)**	2.225 **(7'4")**	4.493 **(14'9")**	PS						
					3.43 **(11'3")**	3.164 **(10'5")**		3.8 **(2.4)**	6.5 **(4.0)**	11.3 **(7.0)**			
D6K XL	FBH	05-14	125	12 886 **(28,409)**	1.77 **(5'10")**	2.65 **(8'8")**	Hystat						
					2.33 **(7'8")**	2.91 **(9'7")**							
D6K LGP	DHA	05-13	125	13 467 **(29,690)**	2 **(6'7")**	2.65 **(8'8")**	Hystat						
					2.76 **(9'1")**	2.91 **(9'7")**							

*D6H models prior to Series II. Product identification number prefix still in use for current product.
NOTE: Power Shift models show speeds only, not drawbar pull.
NOTE: Track-Type Tractor weights do not include blades until 1967.

Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Trans-mission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph) 1st	2nd	3rd	4th	5th	6th
D6R STD CB (US)	2YN	95-02	165/—	18 100 **(40,000)**	1.88 **(6'2")**	4.08 **(13'4")**	PS						
					2.64 **(8'8")**	3.20 **(10'6")**		4.0 **(2.5)**	7.1 **(4.4)**	12.4 **(7.7)**			
D6R STD CB (BRAZIL)	9ZS	97-02	165/—	18 100 **(40,000)**	1.88 **(6'2")**	4.08 **(13'4")**	PS						
					2.64 **(8'8")**	3.20 **(10'6")**		4.0 **(2.5)**	7.1 **(4.4)**	12.4 **(7.7)**			
D6R STD CB (FRANCE)	2HM	96-01	165/—	18 100 **(40,000)**	1.88 **(6'2")**	4.08 **(13'4")**	PS						
					2.64 **(8'8")**	3.20 **(10'6")**		4.0 **(2.5)**	7.1 **(4.4)**	12.4 **(7.7)**			
D6R STD CB (JAPAN)	6FR	96-02	165/—	18 100 **(40,000)**	1.88 **(6'2")**	4.08 **(13'4")**	PS						
					2.64 **(8'8")**	3.20 **(10'6")**		4.0 **(2.5)**	7.1 **(4.4)**	12.4 **(7.7)**			
D6R STD DS (US)	3ZN	95-02	165/—	18 300 **(40,400)**	1.88 **(6'2")**	4.08 **(13'4")**	PS						
					2.64 **(8'8")**	3.20 **(10'6")**		3.9 **(2.4)**	6.8 **(4.2)**	11.9 **(7.6)**			
D6R STD DS (BRAZIL)	1RW	97-02	165/—	18 300 **(40,400)**	1.88 **(6'2")**	4.08 **(13'4")**	PS						
					2.64 **(8'8")**	3.20 **(10'6")**		3.9 **(2.4)**	6.8 **(4.2)**	11.9 **(7.6)**			
D6R STD DS (FRANCE)	4FM	96-01	165/—	18 300 **(40,400)**	1.88 **(6'2")**	4.08 **(13'4")**	PS						
					2.64 **(8'8")**	3.20 **(10'6")**		3.9 **(2.4)**	6.8 **(4.2)**	11.9 **(7.6)**			
D6R STD DS (JAPAN)	5PR	97-02	165/—	18 300 **(40,400)**	1.88 **(6'2")**	4.08 **(13'4")**	PS						
					2.64 **(8'8")**	3.20 **(10'6")**		3.9 **(2.4)**	6.8 **(4.2)**	11.9 **(7.6)**			
D6R XL CB (US)	4MN	96-02	175/—	19 000 **(41,900)**	1.88 **(6'2")**	4.08 **(13'4")**	PS						
					2.64 **(8'8")**	3.20 **(10'6")**		4.0 **(2.5)**	7.1 **(4.4)**	12.4 **(7.7)**			
D6R XL CB (BRAZIL)	6MR	97-02	175/—	19 000 **(41,900)**	1.88 **(6'2")**	4.08 **(13'4")**	PS						
					2.64 **(8'8")**	3.20 **(10'6")**		4.0 **(2.5)**	7.1 **(4.4)**	12.4 **(7.7)**			
D6R XL CB (FRANCE)	4JR	96-01	175/—	19 000 **(41,900)**	1.88 **(6'2")**	4.08 **(13'4")**	PS						
					2.64 **(8'8")**	3.20 **(10'6")**		4.0 **(2.5)**	7.1 **(4.4)**	12.4 **(7.7)**			
D6R XL CB (JAPAN)	4WR	97-02	175/—	19 000 **(41,900)**	1.88 **(6'2")**	4.08 **(13'4")**	PS						
					2.64 **(8'8")**	3.20 **(10'6")**		4.0 **(2.5)**	7.1 **(4.4)**	12.4 **(7.7)**			

NOTE: Power Shift models show speeds only, not drawbar pull.
NOTE: Track-Type Tractor weights do not include blades until 1967.