
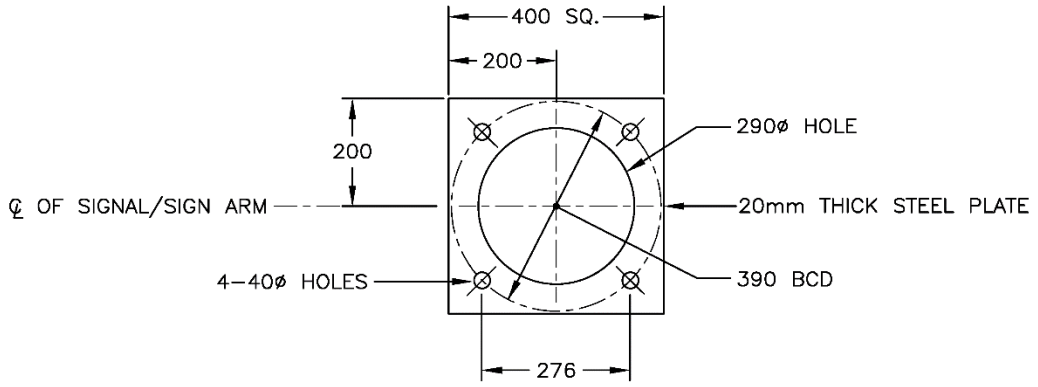


TOP AND BOTTOM PLATES

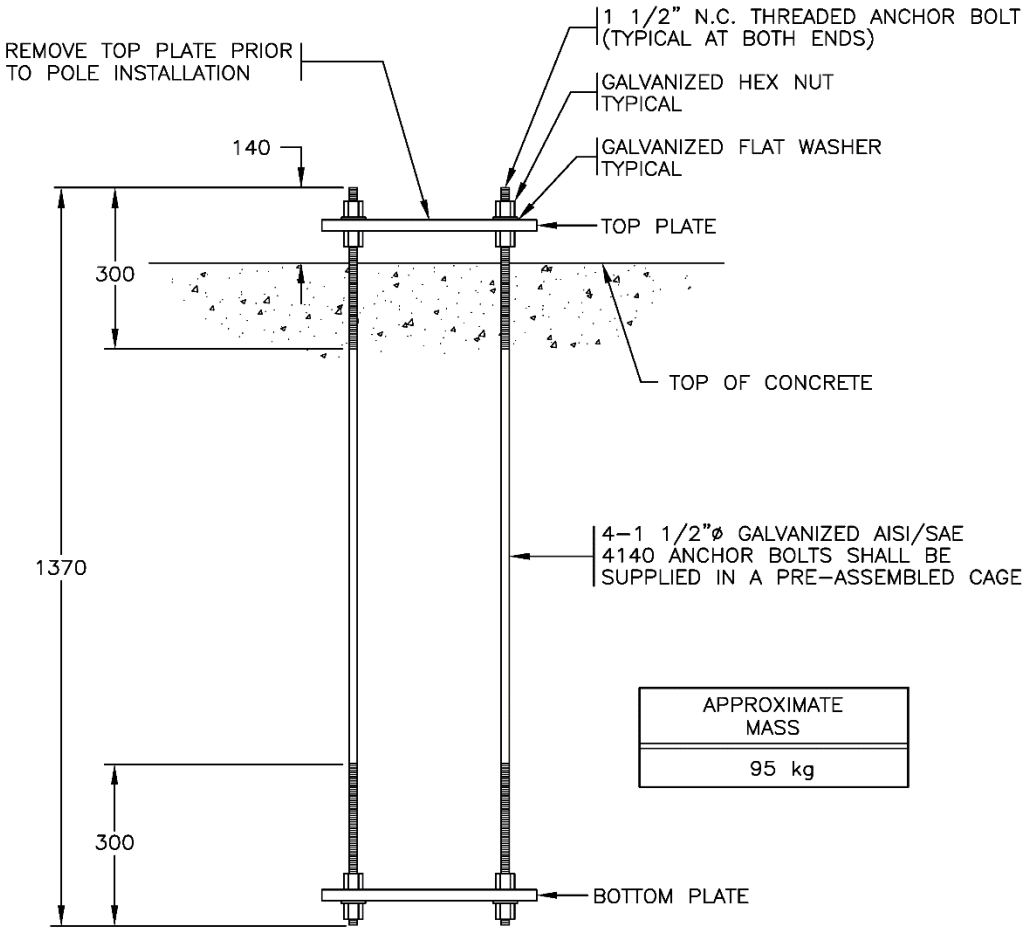

APPROXIMATE MASS
95 kg

ANCHOR BOLT CAGE

SEE DRAWINGS SP635–1.1.11, 1.1.14 AND 1.1.16 FOR NOTES AND ADDITIONAL DETAILS

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D	GENERAL REVISIONS	APR 17
C	TOP PLATE NOTE REVISED	OCT 03
B	HOLE SIZE IN PLATE REVISED	AUG 95
A	GENERAL REVISIONS	AUG 94

ANCHOR BOLT CAGE FOR TYPE L POLES


Date Approved

30/09/93 E.L. **(Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.1.19

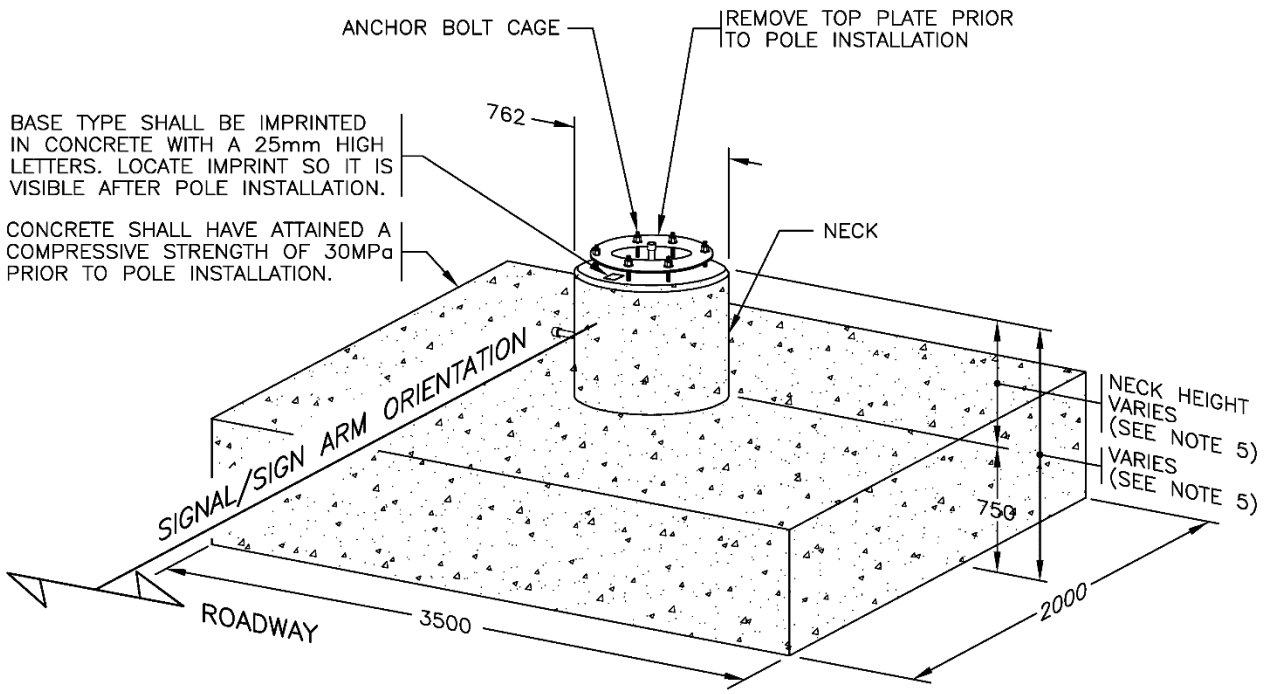

CONCRETE SPREAD FOOTING

BASE TYPE	POLE TYPE	VOLUME OF CONCRETE	MASS OF REBAR	FORMWORK	APPROXIMATE MASS
M1	TYPE M POLES	5.90 m^3 *	540 kg *	11.6 m^2 *	14400 kg *

(*) BASED ON SPREAD FOOTING WITH 1400 HIGH NECK

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. SEE PLANS FOR SIGNAL/SIGN ARM ORIENTATION.
3. SEE DRAWINGS SP635–1.1.21, 1.1.22 & 1.4.5 FOR ADDITIONAL DETAILS.
4. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.
5. NECK HEIGHT MAY VARY FROM 750 to 2000. SEE DRAWING SP635–1.4.5 FOR MORE INFORMATION.

BASE DESIGNED FOR SOILS WITH A MINIMUM BEARING PRESSURE OF 100KPa

NOT TO SCALE

Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E	TITLE UPDATED	APR 20
D	GENERAL REVISIONS	APR 17
C	NECK HEIGHT REVISED	AUG 96
B	NECK HEIGHT REVISED & REBAR ADDED	AUG 95
A	GENERAL REVISIONS	AUG 94

TYPE M1 CONCRETE SPREAD FOOTING (CAST IN PLACE)


Date Approved

30/09/93 E.L. (Signature on File)

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.1.20

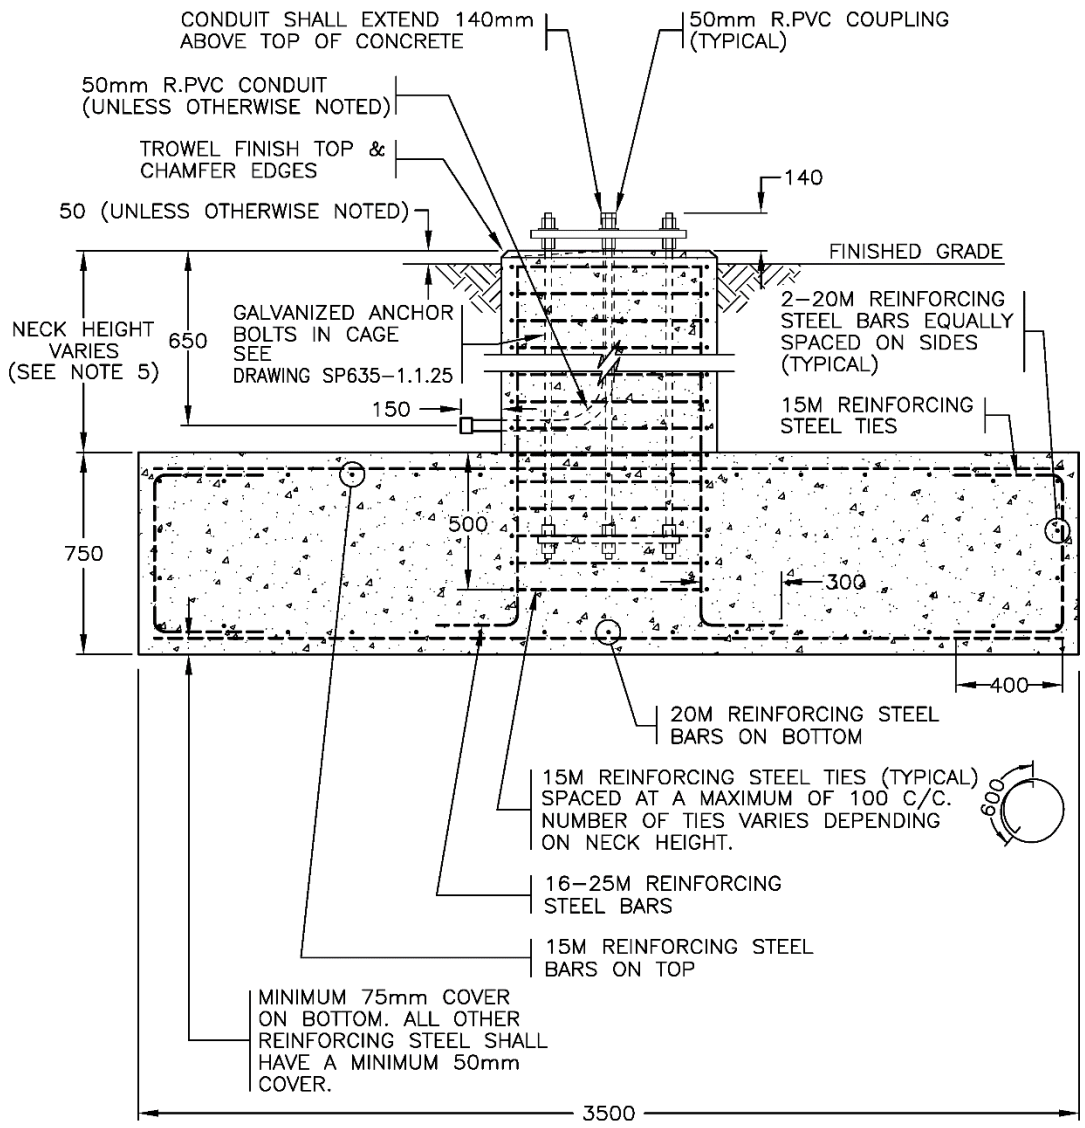

ELEVATION

SEE DRAWING SP635-1.1.20 FOR NOTES AND ADDITIONAL DETAILS

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E	TITLE UPDATED	APR 20
D	GENERAL REVISIONS	APR 17
C	REBAR IN NECK & BASE ELEVATION REVISED	AUG 96
B	NECK HEIGHT REVISED & REBAR ADDED	AUG 95
A	GENERAL REVISIONS	AUG 94

TYPE M1 CONCRETE SPREAD FOOTING (CAST IN PLACE)


Date Approved

30/09/93 E.L. **(Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635-1.1.21

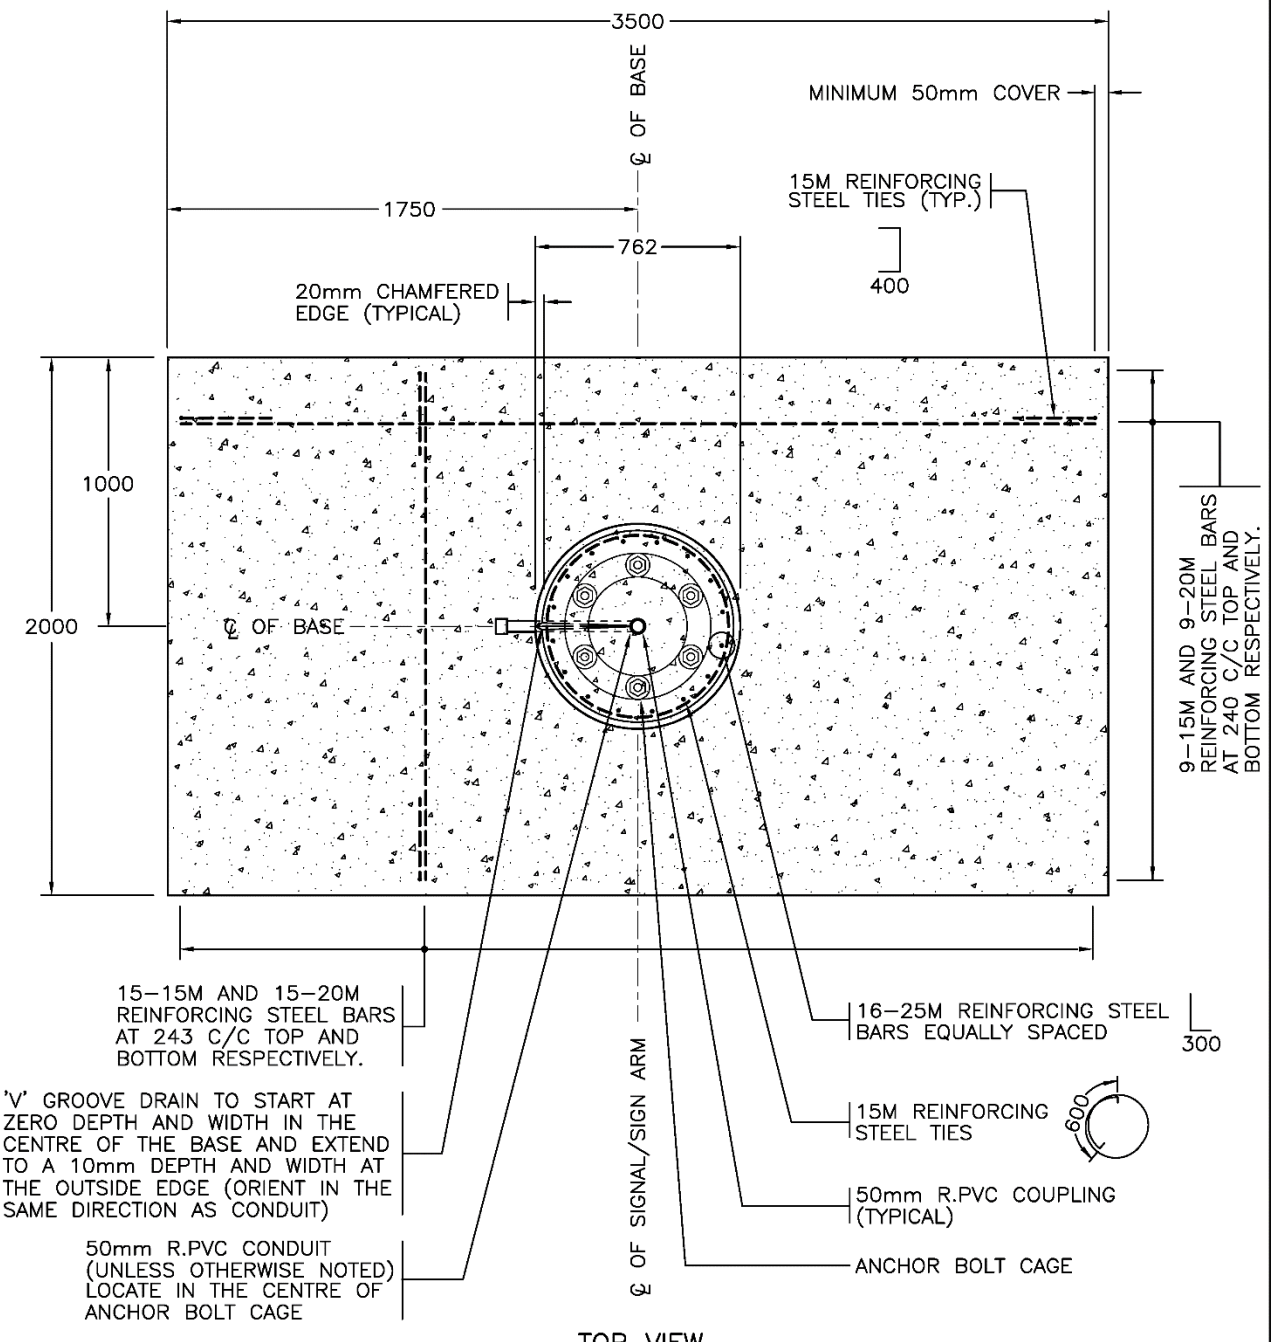

TOP VIEW

SEE DRAWING SP635–1.1.20 FOR NOTES AND ADDITIONAL DETAILS

NOT TO SCALE

BRITISH COLUMBIA Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D	TITLE UPDATED	APR 17
C	GENERAL REVISIONS	APR 17
B	LENGTH REVISED & REBAR ADDED	AUG 95
A	GENERAL REVISIONS	AUG 94

TYPE M1 CONCRETE SPREAD FOOTING (CAST IN PLACE)


Date Approved

30/09/93 E.L. (Signature on File)

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.1.22

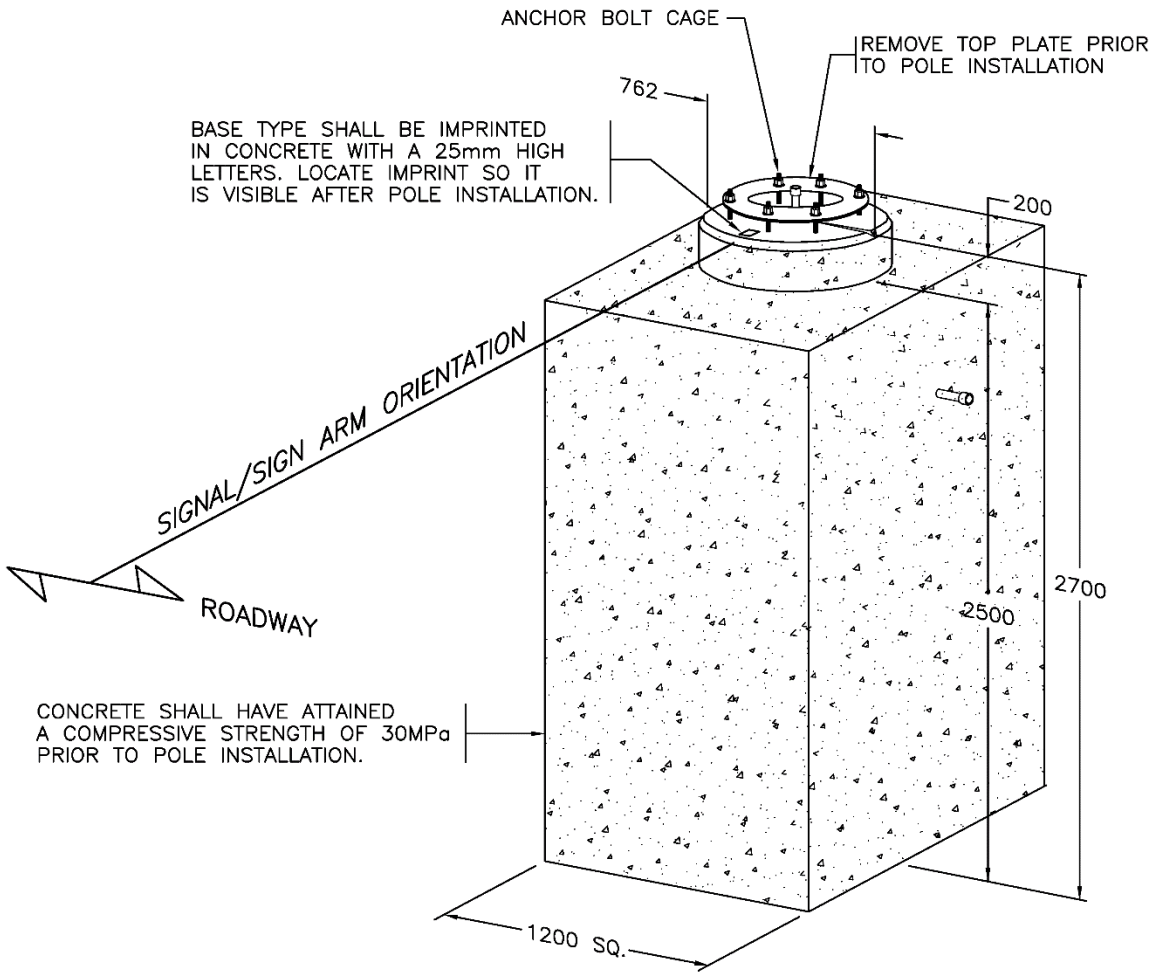

CONCRETE BASE

BASE TYPE	POLE TYPE	VOLUME OF CONCRETE	MASS OF REBAR	FORMWORK	APPROXIMATE MASS
M2	TYPE M POLES	3.7 m^3	100 kg	12.5 m^2	8935 kg

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. SEE PLANS FOR SIGNAL/SIGN ARM ORIENTATION.
3. SEE DRAWINGS SP635–1.1.24 & 1.4.1 to 1.4.4 FOR ADDITIONAL DETAILS.
4. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.
5. SEE DRAWINGS SP635–1.4.1 TO 1.4.4 FOR BACKFILL REQUIREMENTS.

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

NOT TO SCALE

No.	Revision	Date
F		
E	TITLE UPDATED	APR 20
D	GENERAL REVISIONS	APR 17
C	NOTE 4 REVISED	AUG 96
B	NOTE 4 REVISED	AUG 95
A	GENERAL REVISIONS	AUG 94

TYPE M2 CONCRETE BASE (CAST IN PLACE)


Date Approved

30/09/93 E.L. (Signature on File)

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.1.23

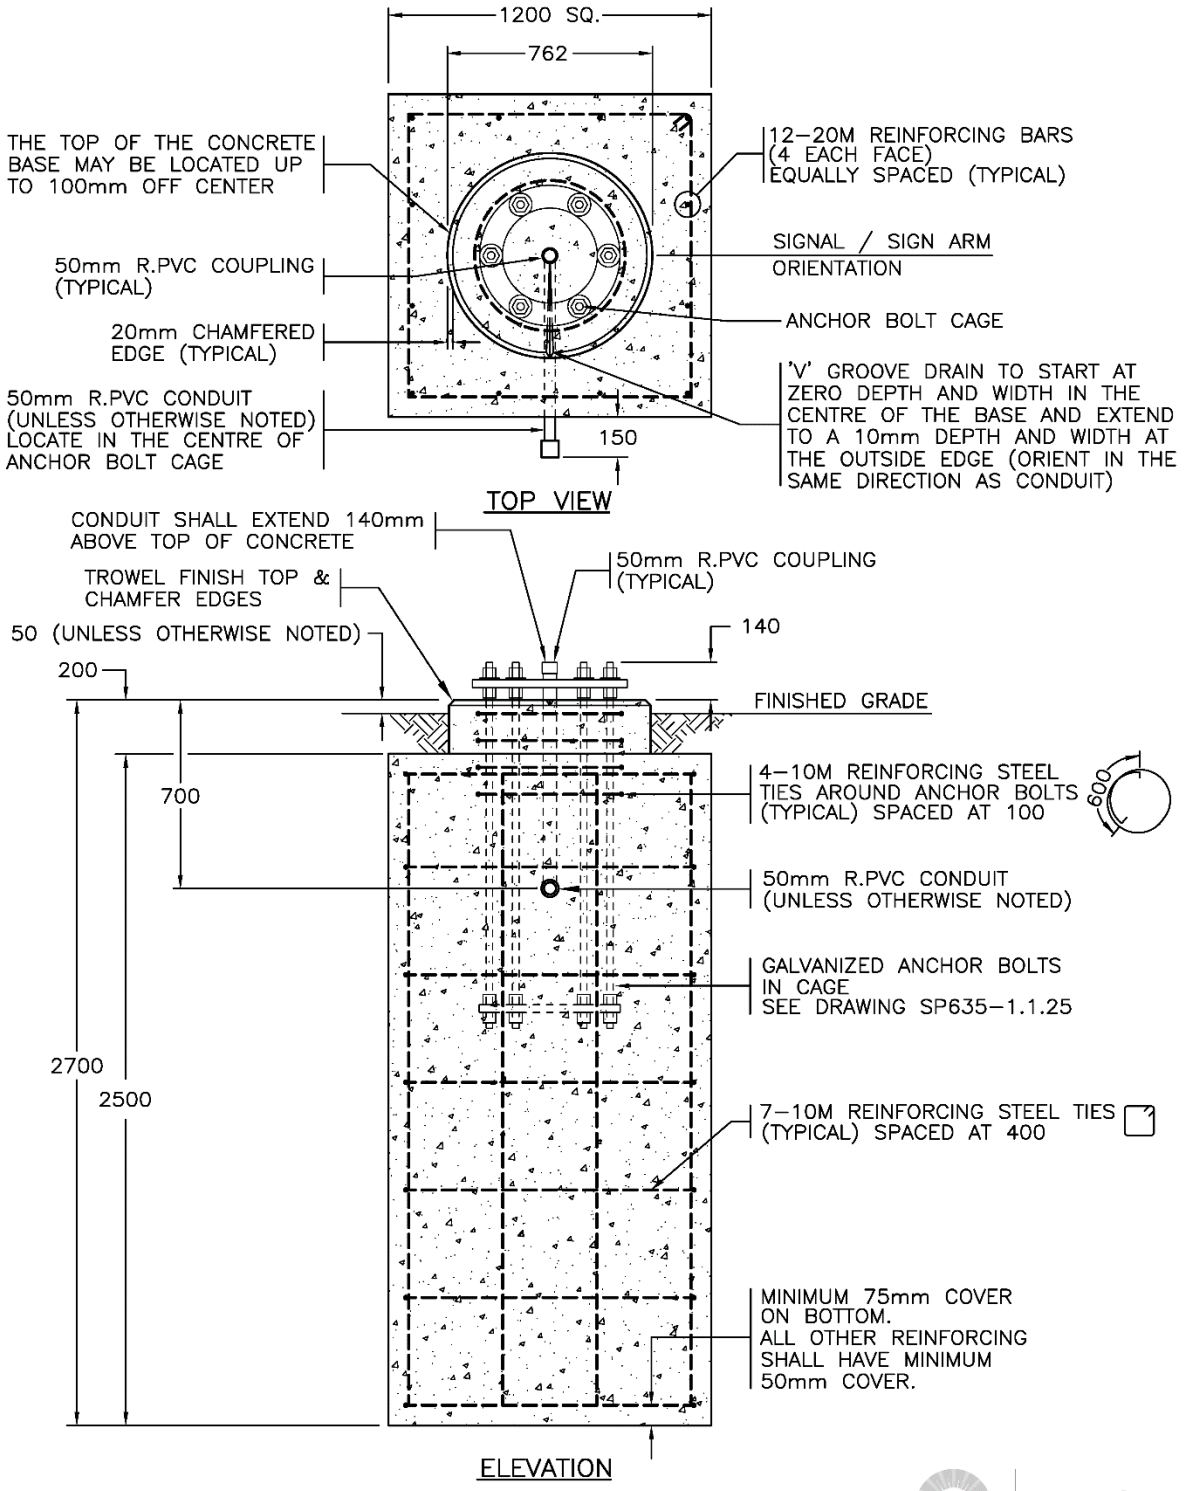

SEE DRAWING SP635–1.1.23 FOR NOTES AND ADDITIONAL DETAILS

NOT TO SCALE

BRITISH COLUMBIA — Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E	TITLE UPDATED	APR 20
D	GENERAL REVISIONS	APR 17
C	ELEVATION OF BASE TO FINISHED GRADE REVISED	AUG 96
B	DRAWING REFERENCE CHANGED	AUG 95
A	GENERAL REVISIONS	AUG 94

TYPE M2 CONCRETE BASE (PRECAST OR CAST IN PLACE)


Date Approved

30/09/93 E.L. **(Signature on File)**


Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.1.24

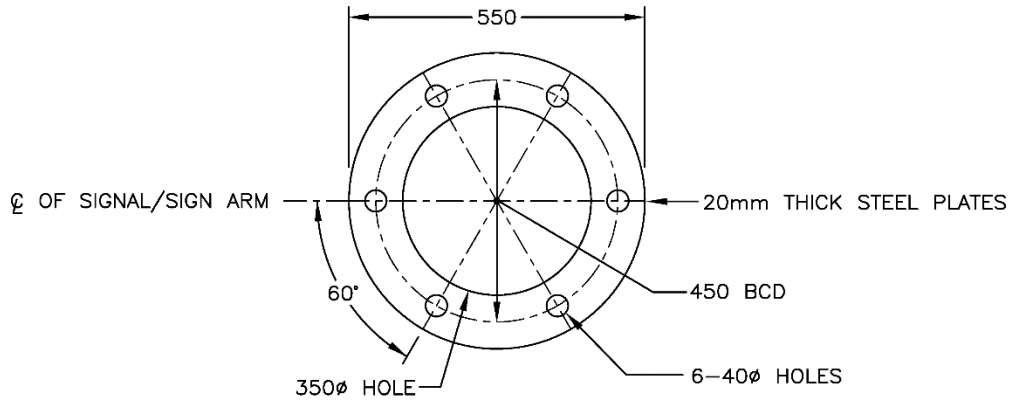

TOP AND BOTTOM PLATES

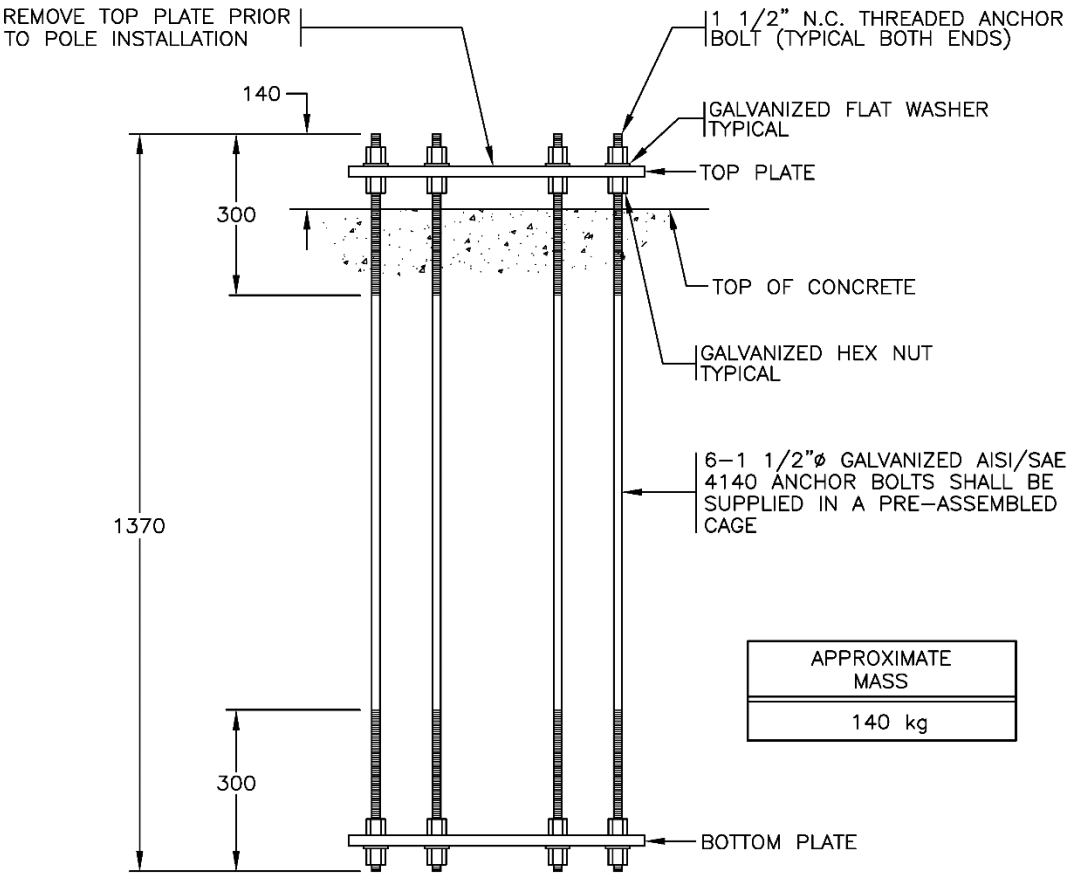

ANCHOR BOLT CAGE

SEE DRAWINGS SP635–1.1.20 AND 1.1.23 FOR NOTES AND ADDITIONAL DETAILS

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D	GENERAL REVISIONS	APR 17
C	TOP PLATE NOTE REVISED	OCT 03
B	HOLE SIZE IN PLATE REVISED	AUG 95
A	GENERAL REVISIONS	AUG 94

ANCHOR BOLT CAGE FOR TYPE M POLES


Date Approved

30/09/93 E.L. **(Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.1.25

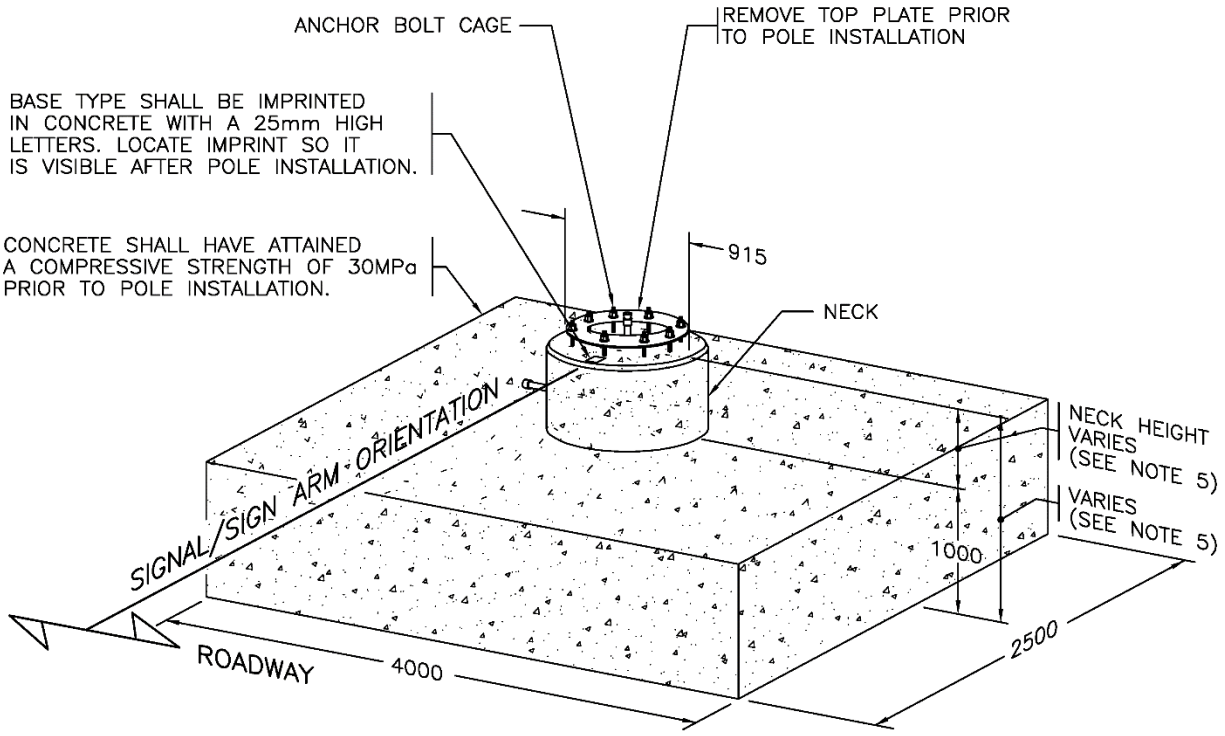

CONCRETE SPREAD FOOTING

BASE TYPE	POLE TYPE	VOLUME OF CONCRETE	MASS OF REBAR	FORMWORK	APPROXIMATE MASS
H1	TYPE H POLES	10.9 m^3 *	760 kg *	17.0 m^2*	26700 kg*

(*) BASED ON SPREAD FOOTING WITH 1400 HIGH NECK

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. SEE PLANS FOR SIGN ARM ORIENTATION.
3. SEE DRAWINGS SP635–1.1.27, 1.1.28 & 1.4.5 FOR ADDITIONAL DETAILS.
4. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.
5. NECK HEIGHT MAY VARY FROM 750 to 2500. SEE DRAWING SP635–1.4.5 FOR MORE INFORMATION.

BASE DESIGNED FOR SOILS WITH A MINIMUM BEARING PRESSURE OF 100KPa

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

NOT TO SCALE

No.	Revision	Date
F		
E	TITLE UPDATED	APR 20
D	GENERAL REVISIONS	APR 17
C	NECK HEIGHT REVISED	AUG 96
B	NECK HEIGHT REVISED & REBAR ADDED	AUG 95
A	GENERAL REVISIONS	AUG 94

TYPE H1 CONCRETE SPREAD FOOTING (CAST IN PLACE)


Date Approved

30/09/93 E.L. **(Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.1.26

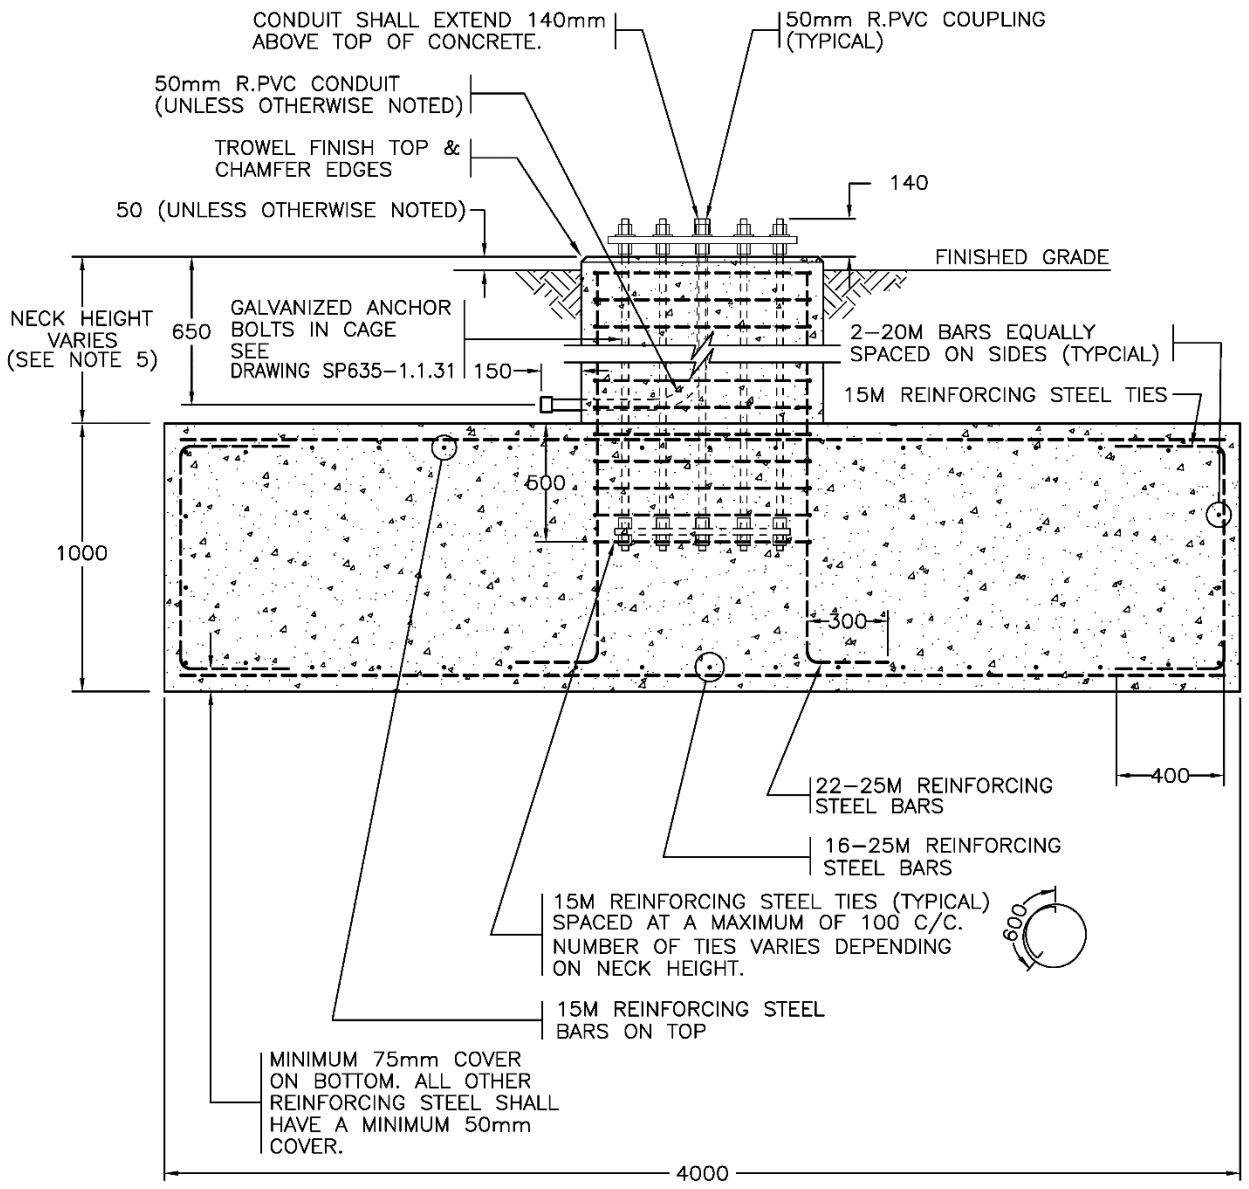

SIDE VIEW

SEE DRAWING SP635-1.1.26 FOR NOTES AND ADDITIONAL DETAILS

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F	TITLE UPDATED	APR 20
E	GENERAL REVISIONS	APR 17
D	BOTTOM REBAR REVISED	FEB 12
C	REBAR IN NECK & BASE ELEVATION REVISED	AUG 96
B	NECK HEIGHT REVISED & REBAR ADDED	AUG 95
A	GENERAL REVISIONS	AUG 94

TYPE H1 CONCRETE SPREAD FOOTING (POURED IN PLACE)


Date Approved

30/09/93 E.L. (Signature on File)

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635-1.1.27

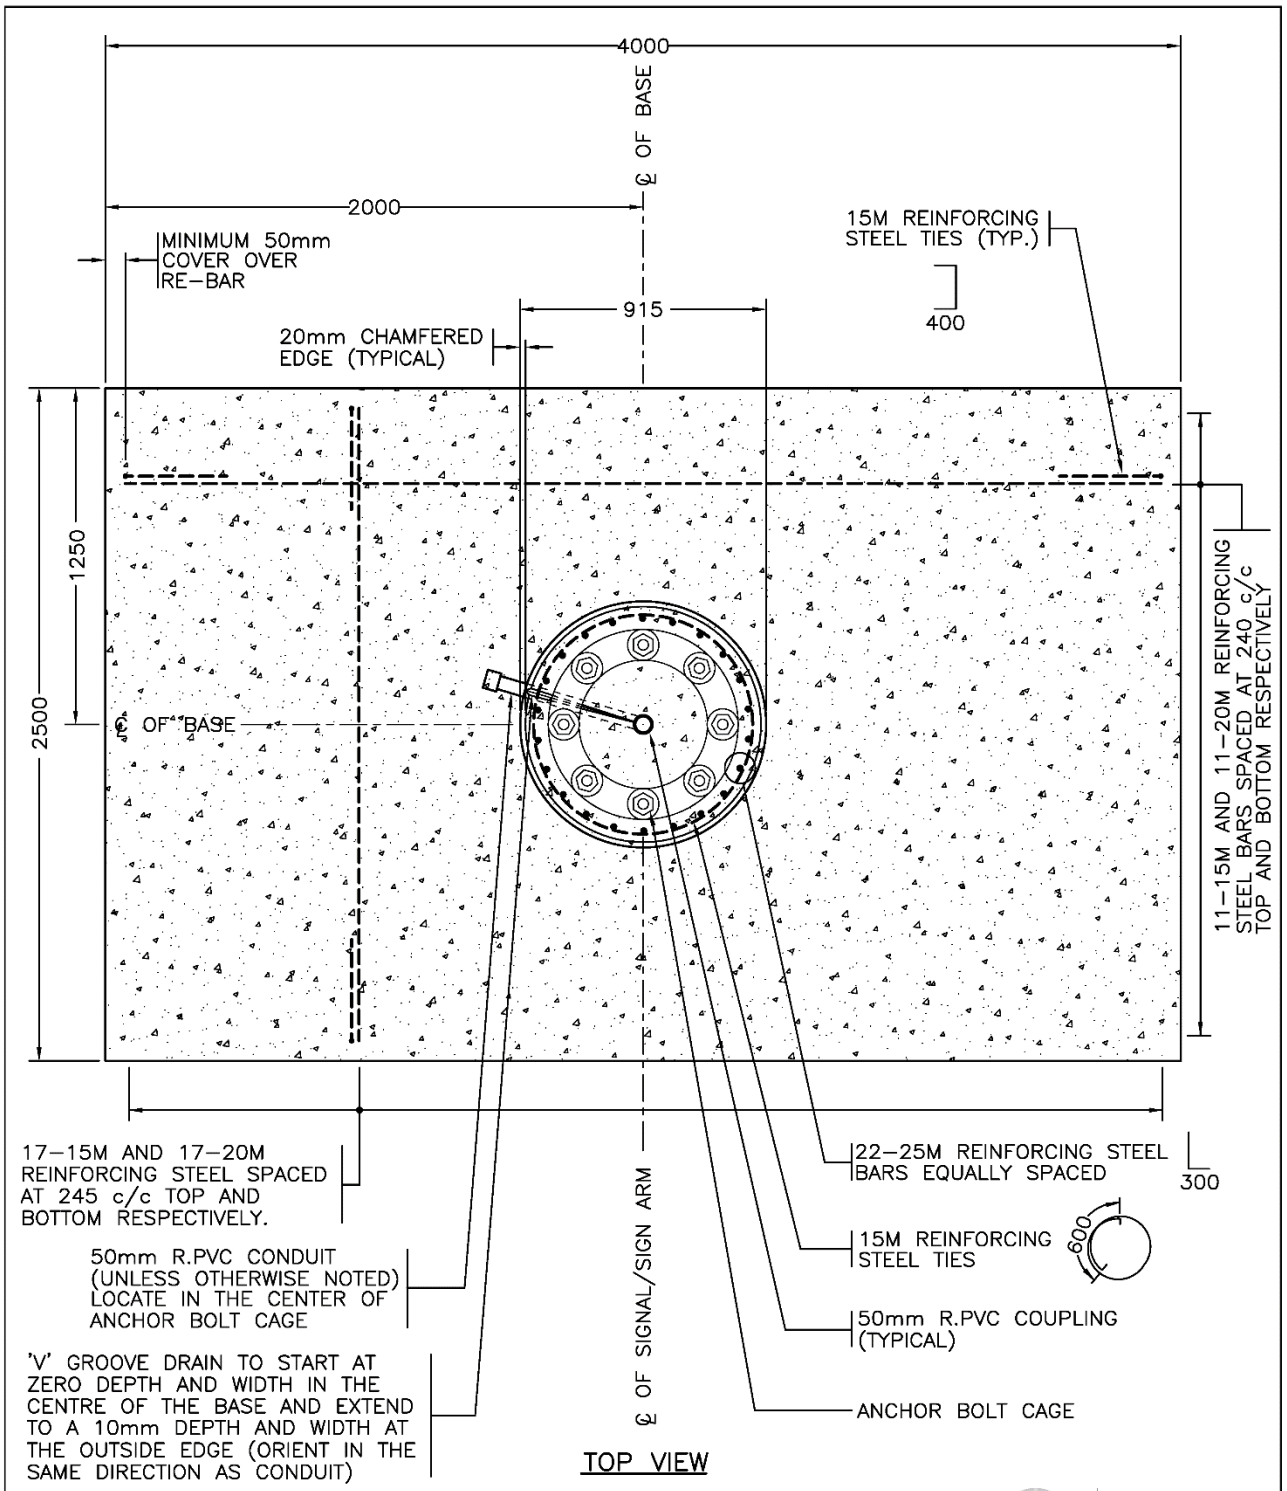

TOP VIEW

SEE DRAWING SP635-1.1.26 FOR NOTES AND ADDITIONAL DETAILS

NOT TO SCALE

Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D	TITLE UPDATED	APR 20
C	GENERAL REVISIONS	APR 17
B	REBAR ADDED	AUG 95
A	GENERAL REVISIONS	AUG 94

TYPE H1 CONCRETE SPREAD FOOTING (CAST IN PLACE)


Date Approved

30/09/93 E.L. **(Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635-1.1.28

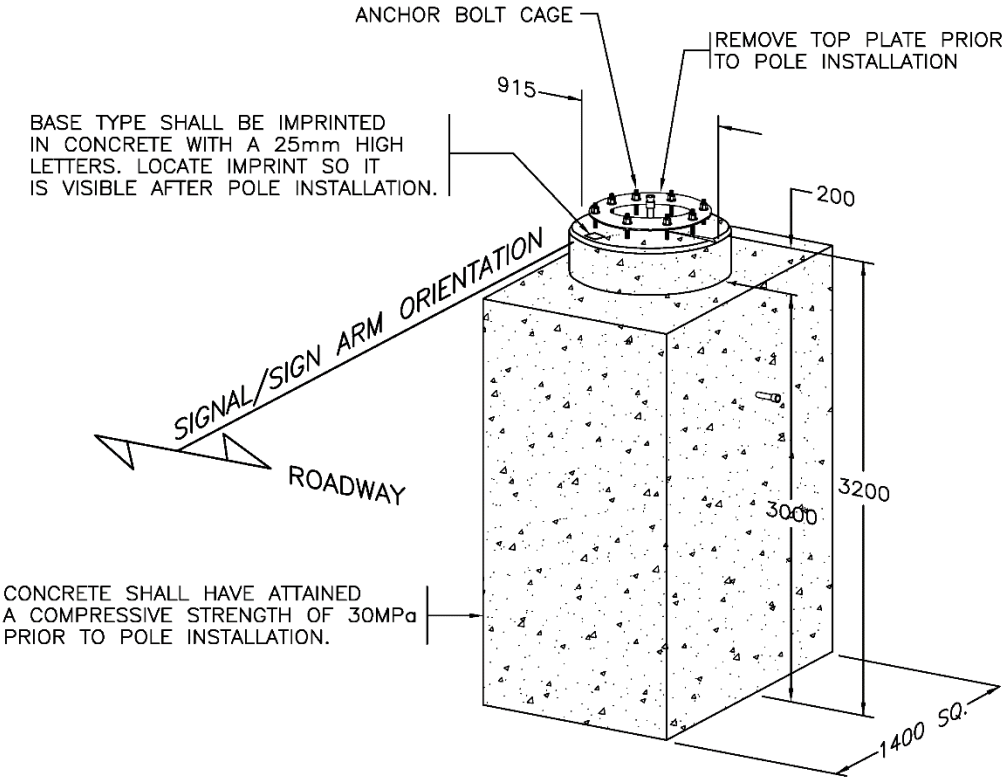

CONCRETE BASE

BASE TYPE	POLE TYPE	VOLUME OF CONCRETE	MASS OF REBAR	FORMWORK	APPROXIMATE MASS
H2	TYPE H POLES	6.0 m^3	155 kg	17.4 m^2	14445 kg

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. SEE PLANS FOR SIGN ARM ORIENTATION.
3. SEE DRAWINGS SP635–1.1.30 & 1.4.1 to 1.4.3 FOR ADDITIONAL DETAILS.
4. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.
5. SEE DRAWINGS SP635–1.4.1 TO 1.4.4 FOR BACKFILL REQUIREMENTS.

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure


NOT TO SCALE

No.	Revision	Date
F		
E	TITLE UPDATED	APR 20
D	GENERAL REVISIONS	APR 17
C	NOTE 4 REVISED	AUG 96
B	NOTE 4 REVISED	AUG 95
A	GENERAL REVISIONS	AUG 94

TYPE H2 CONCRETE BASE
(PRECAST OR CAST IN PLACE)

Date Approved
30/09/93 E.L. (Signature on File)
Chief Highway Engineer

SPECIFICATION DRAWING No.
SP635–1.1.29

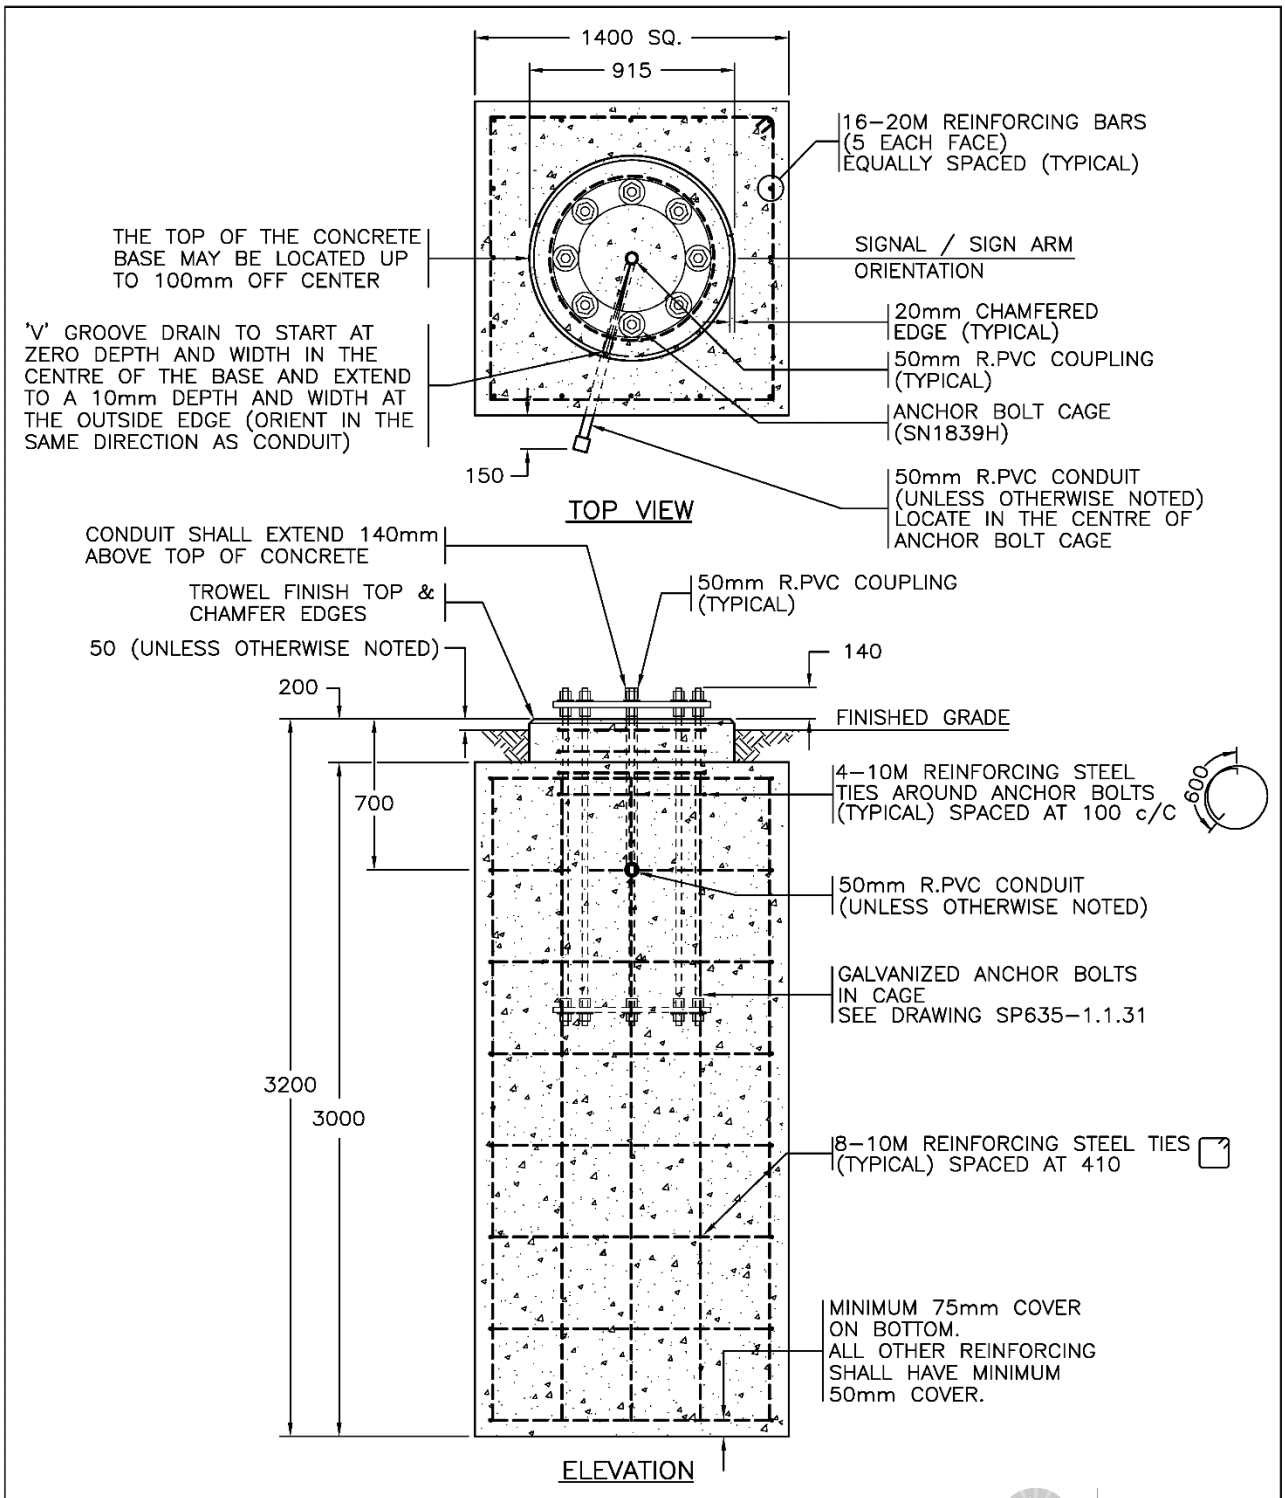

SEE DRAWING SP635–1.1.29 FOR NOTES AND ADDITIONAL DETAILS

NOT TO SCALE

BRITISH COLUMBIA Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E	TITLE UPDATED	APR 20
D	GENERAL REVISIONS	APR 17
C	ELEVATION OF BASE TO FINISHED GRADE REVISED	AUG 96
B	DRAWING REFERENCE CHANGED	AUG 95
A	GENERAL REVISIONS	AUG 94

TYPE H2 CONCRETE BASE (CAST IN PLACE)


Date Approved

30/09/93 E.L. **(Signature on File)**


Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.1.30

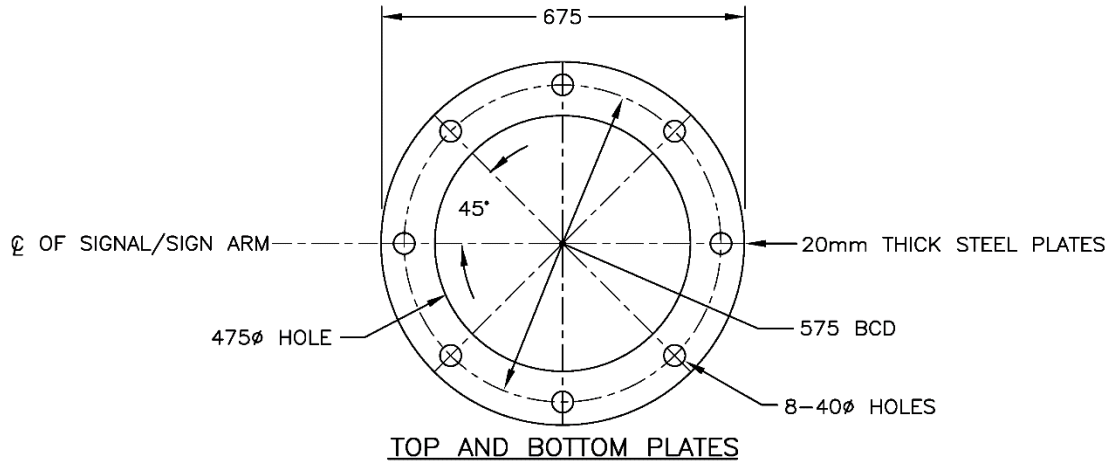

TOP AND BOTTOM PLATES

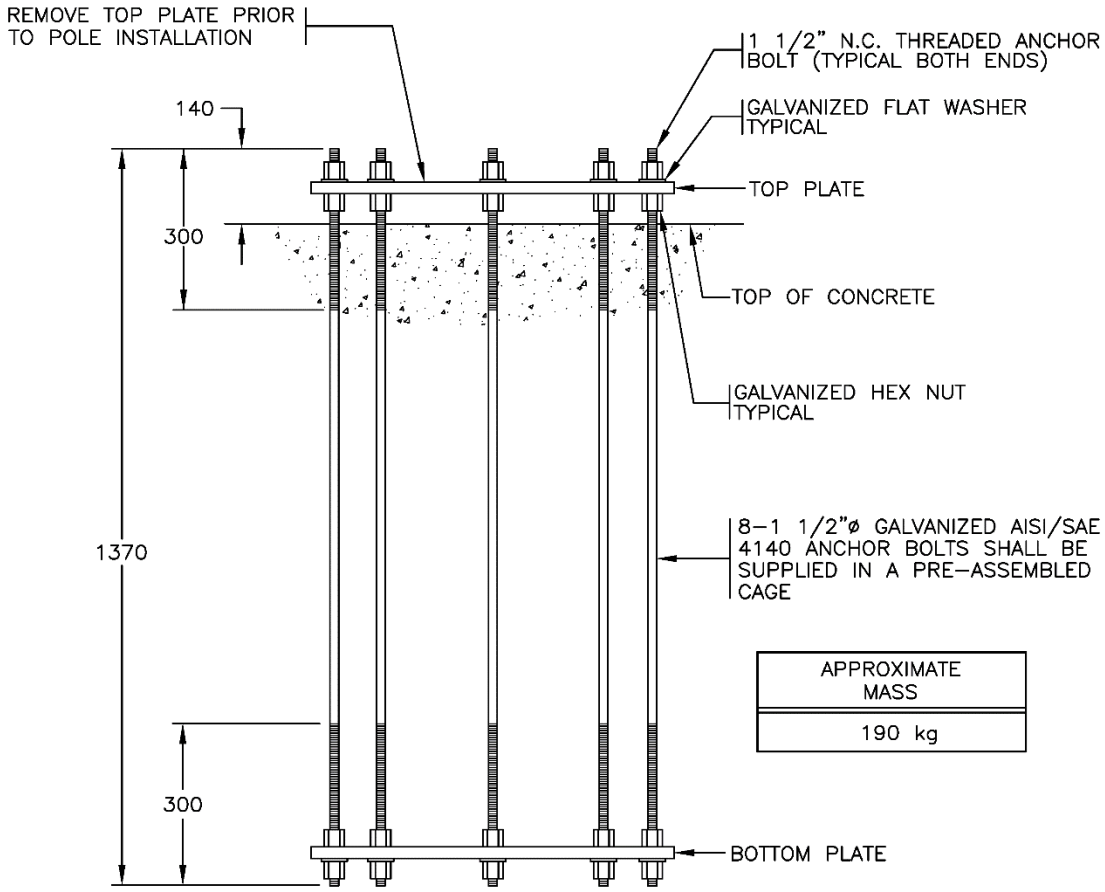

APPROXIMATE MASS
190 kg

ANCHOR BOLT CAGE

SEE DRAWINGS SP635–1.1.26 AND –1.1.29 FOR NOTES AND ADDITIONAL DETAILS

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D	GENERAL REVISIONS	APR 17
C	TOP PLATE NOTE REVISED	OCT 03
B	HOLE SIZE IN PLATE REVISED	AUG 95
A	GENERAL REVISIONS	AUG 94

ANCHOR BOLT CAGE FOR TYPE H POLES


Date Approved

30/09/93 E.L. (Signature on File)

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.1.31

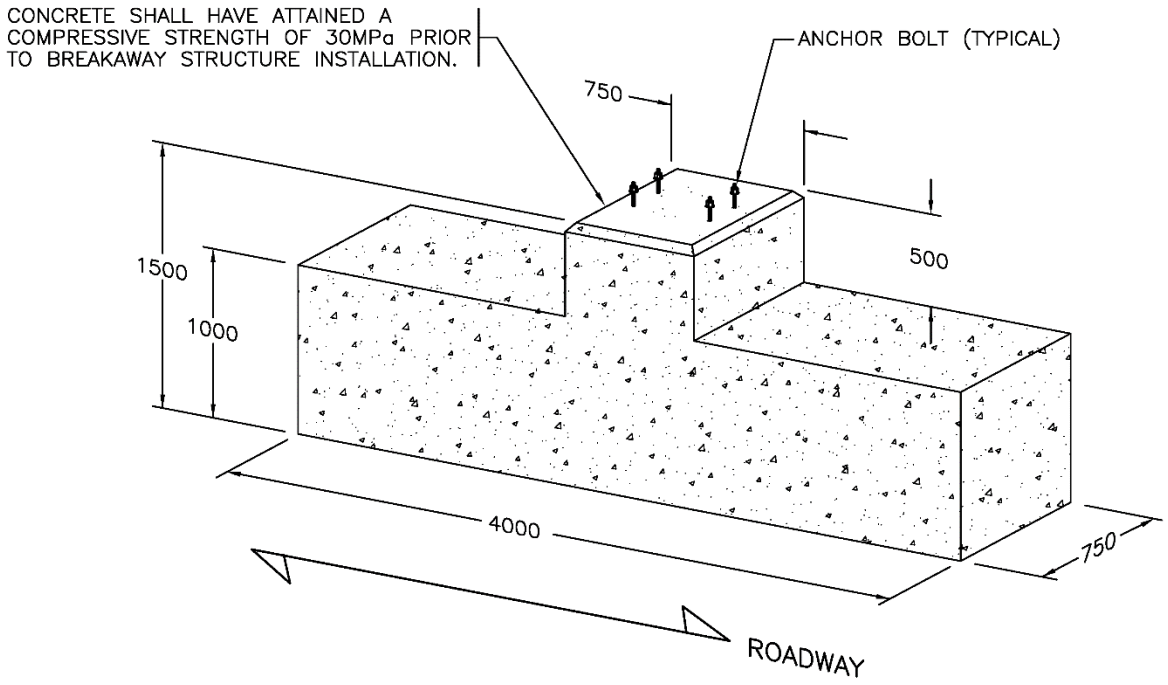

CONCRETE SPREAD FOOTING

BASE DESIGNED FOR SOILS WITH A MINIMUM BEARING PRESSURE OF 75KPa

APPROXIMATE MASS
8000 kg

VOLUME OF CONCRETE
3.28 m^3

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. MINIMUM 2 BASES REQUIRED PER BREAKAWAY SIGN INSTALLATION.
3. SEE DRAWINGS SP635–1.1.33 AND 1.1.34 FOR ADDITIONAL DETAILS.
4. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE

BRITISH COLUMBIA Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D	TITLE UPDATED	APR 20
C	GENERAL REVISIONS	APR 17
B	DRAWING TITLE & NUMBER CHANGED	AUG 95
A	GENERAL REVISIONS	AUG 94

CONCRETE SPREAD FOOTING FOR BREAKAWAY SIGN STRUCTURE (CAST IN PLACE)


Date Approved

30/09/93 E.L. (Signature on File)

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.1.32

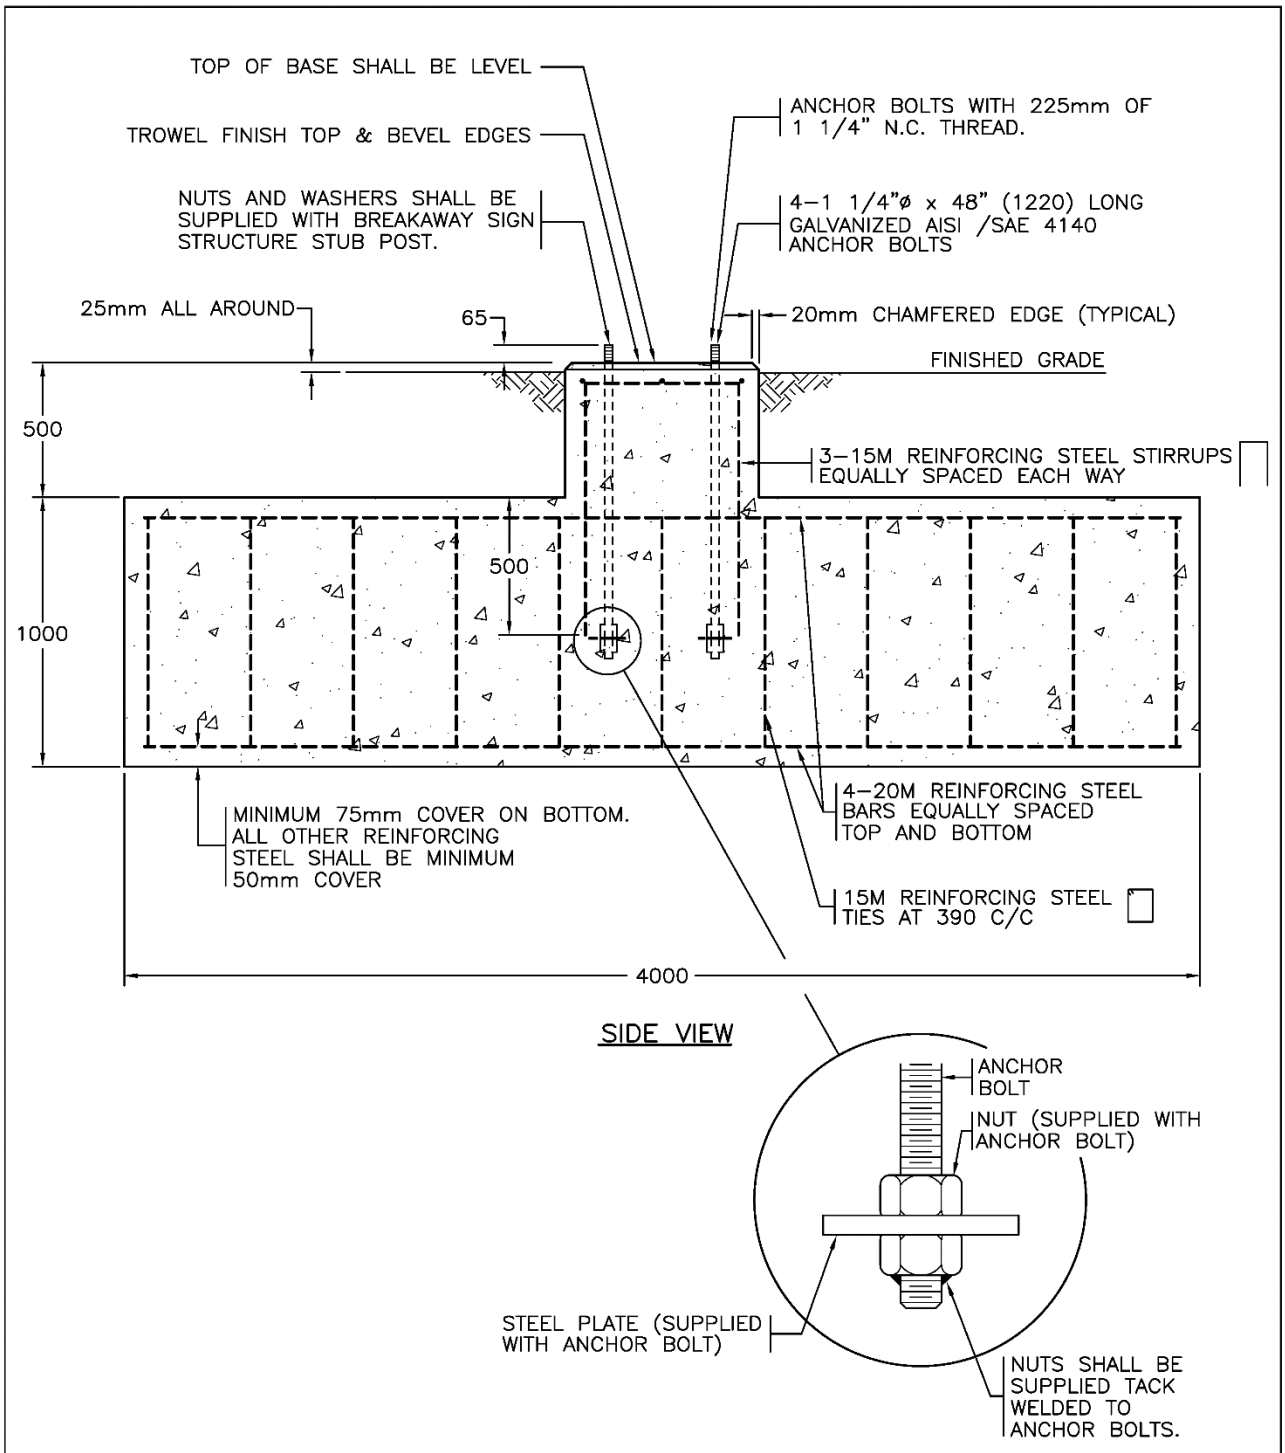

SEE DRAWING SP635–1.1.32 FOR NOTES AND ADDITIONAL DETAILS

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D	TITLE UPDATED	APR 20
C	GENERAL REVISIONS	APR 17
B	DRAWING TITLE & NUMBER CHANGED	AUG 95
A	GENERAL REVISIONS	AUG 94

CONCRETE SPREAD FOOTING FOR BREAKAWAY SIGN STRUCTURE (CAST IN PLACE)


Date Approved

30/09/93 E.L. (Signature on File)

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.1.33

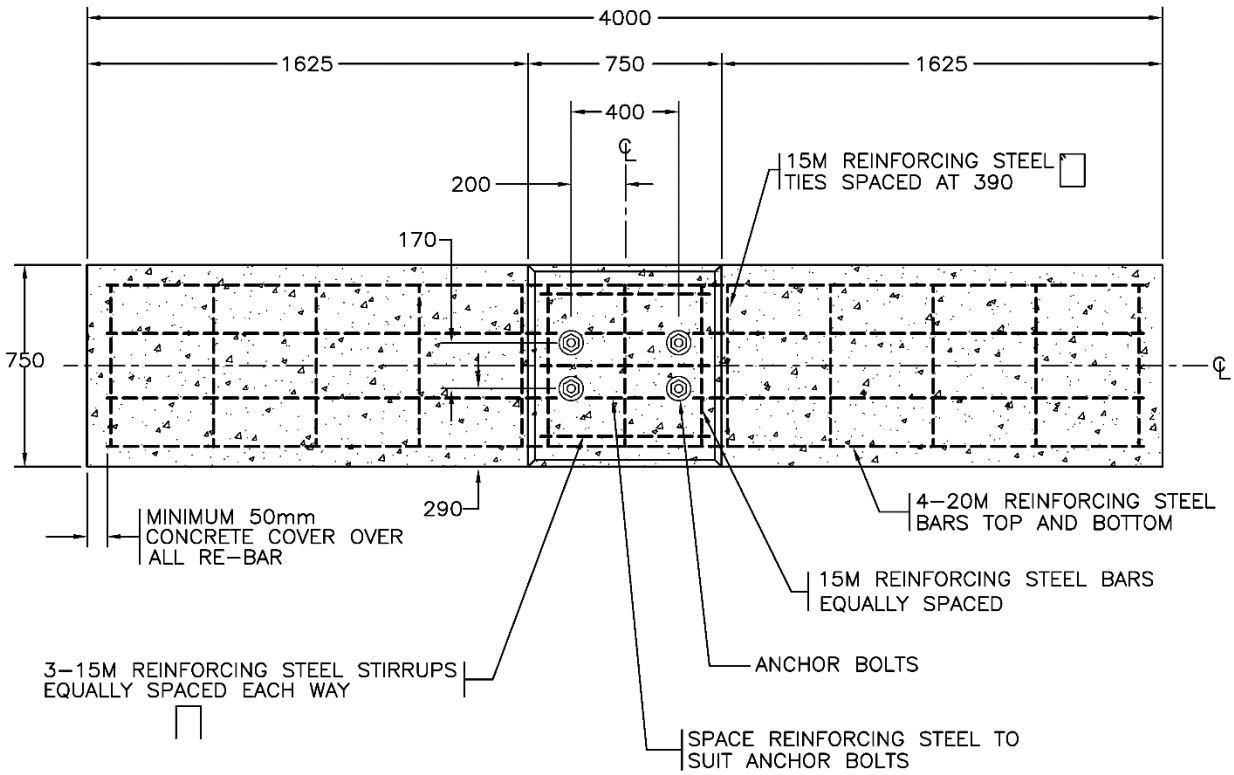

TOP VIEW

SEE DRAWING SP635-1.1.32 FOR NOTES AND ADDITIONAL DETAILS

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D	TITLE UPDATED	APR 20
C	GENERAL REVISIONS	APR 17
B	DRAWING TITLE & NUMBER CHANGED	AUG 95
A	GENERAL REVISIONS	AUG 94

CONCRETE SPREAD FOOTING FOR BREAKAWAY SIGN STRUCTURE (CAST IN PLACE)


Date Approved

30/09/93 E.L. (Signature on File)


Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635-1.1.34

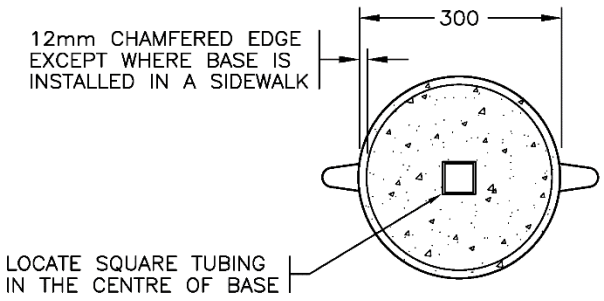

TOP VIEW

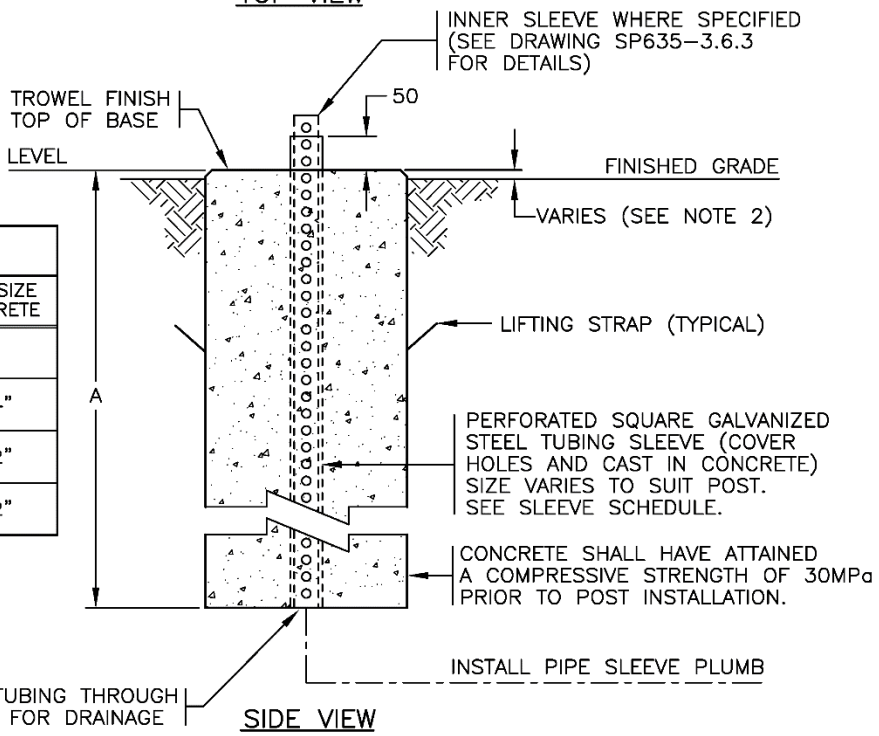

SIDE VIEW

SLEEVE SCHEDULE		
POST O.D.	INNER SLEEVE	SLEEVE SIZE IN CONCRETE
1 1/2"	YES	2"
1 3/4"	YES	2 1/4"
2"	YES	2 1/2"
2 1/4"	NO	2 1/2"

BASE TYPE	APPLICATION	APPROXIMATE MASS	VOLUME OF CONCRETE	A
1	SINGLE POST SIGNS IN PAVED ISLANDS OR CONCRETE SIDEWALKS	100 kg	0.04 m^3	600
2	SINGLE OR TWO POST SIGNS IN GRAVEL SHOULDER	147 kg	0.06 m^3	800

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. BASE SHALL BE INSTALLED 25mm ABOVE FINISHED GRADE EXCEPT WHERE INSTALLED IN SIDEWALK IT SHALL BE FLUSH WITH TOP OF SIDEWALK WITH NO CHAMFERED EDGE.
3. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

SEE SPECIAL PROVISIONS FOR ALTERNATIVE BASES FOR SINGLE POST SIGNS

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

NOT TO SCALE

No.	Revision	Date
H	GENERAL REVISIONS	APR 20
G	GENERAL REVISIONS	APR 17
F	REVISED NOTE	JUN 08
E	GENERAL REVISIONS	APR 05
D	NOTE IN BOX ADDED	NOV 98
C	DRAWING NUMBER CHANGED	AUG 95

ROUND CONCRETE BASES FOR PERFORATED SQUARE STEEL SIGN POSTS (PRECAST OR CAST IN PLACE)


Date Approved

MAR 94 E.L. (Signature on File)


Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635-1.1.35

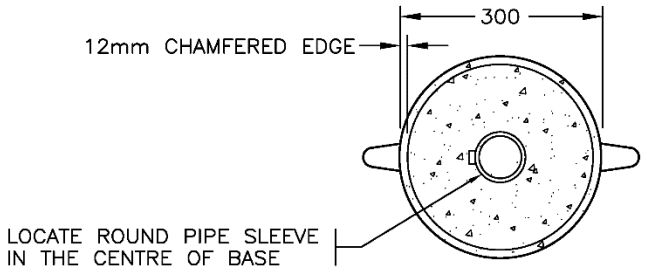

TOP VIEW

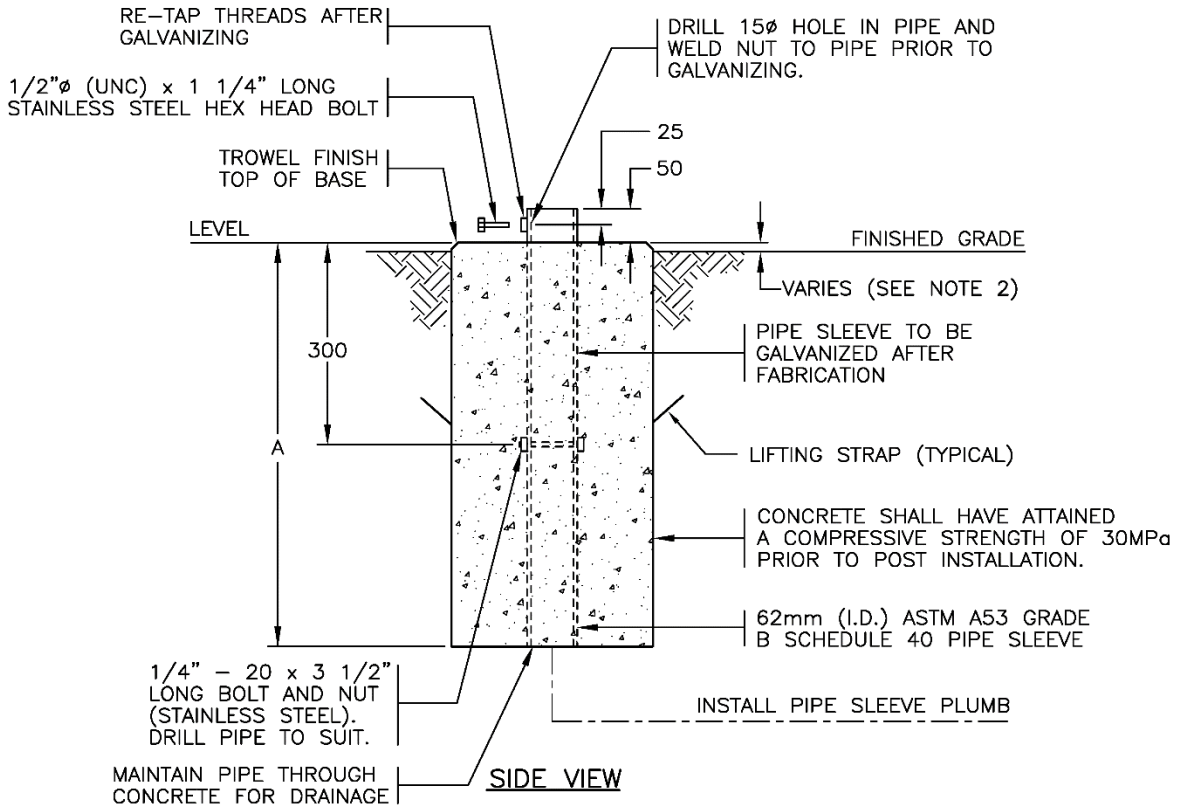

SIDE VIEW

BASE TYPE	APPLICATION	APPROXIMATE MASS	VOLUME OF CONCRETE	A
1	SINGLE POST SIGNS IN PAVED ISLANDS OR CONCRETE SIDEWALKS	100 kg	0.04 m^3	600
2	SINGLE OR TWO POST SIGNS IN GRAVEL SHOULDER	147 kg	0.06 m^3	800

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. BASE SHALL BE INSTALLED 25mm ABOVE FINISHED GRADE EXCEPT WHERE INSTALLED IN SIDEWALK IT SHALL BE FLUSH WITH TOP OF SIDEWALK WITH NO CHAMFERED EDGE.
3. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

SEE SPECIAL PROVISIONS FOR ALTERNATIVE BASES FOR SINGLE POST SIGNS

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

NOT TO SCALE

No.	Revision	Date
G	TITLE UPDATED	APR 20
F	GENERAL REVISIONS	APR 17
E	REVISED NOTE	JUN 08
D	GENERAL REVISIONS	APR 05
C	NOTE IN BOX ADDED	NOV 98
B	DRAWING NUMBER CHANGED	AUG 95

ROUND CONCRETE BASES FOR ROUND STEEL SIGN POSTS (PRECAST OR CAST IN PLACE)


Date Approved

30/09/93 E.L. (Signature on File)

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.1.36

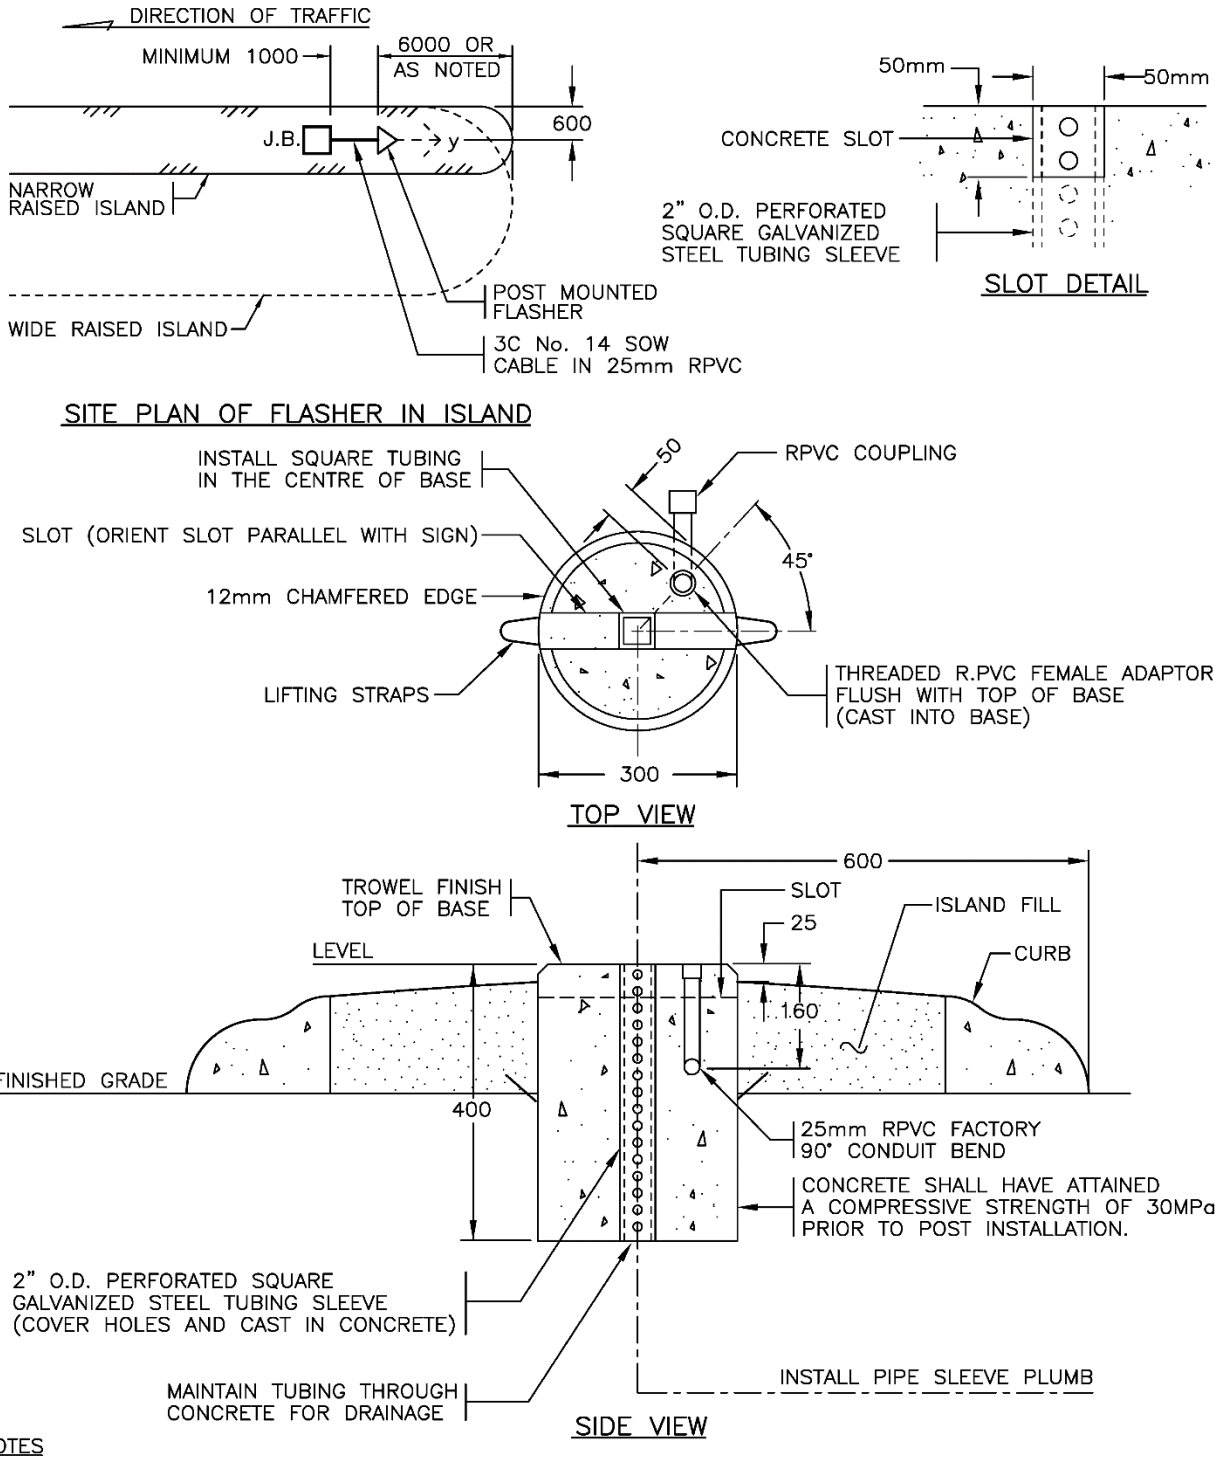

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.

NOT TO SCALE

BRITISH COLUMBIA Ministry of Transportation and Infrastructure

No.	Revision	Date
H	GENERAL REVISIONS	APR 20
G	GENERAL REVISIONS	APR 17
F	GENERAL REVISIONS	APR 05
E	LOCATION IN ISLAND REVISED	SEP 00
D	DIM'N FROM SIDE OF ISLAND ADDED	NOV 99
C	NOTE 3 DELETED	AUG 96

ROUND POST MOUNTED FLASHER CONCRETE BASE (PRECAST OR CAST IN PLACE)


Date Approved

MAR 94 E.L. **(Signature on File)**


Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.1.37

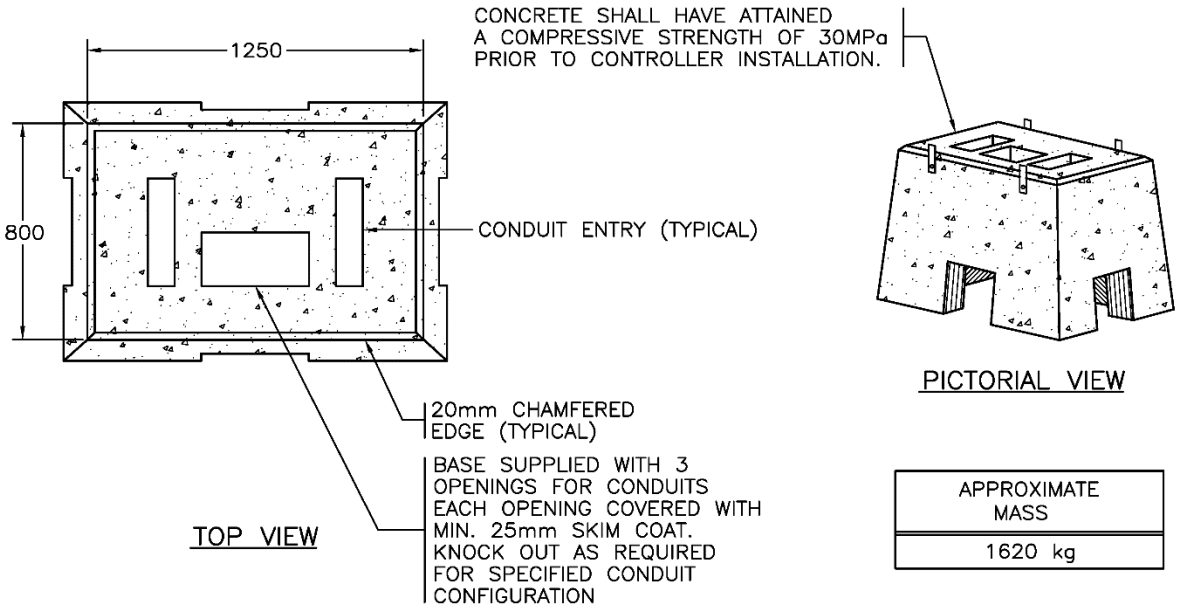

APPROXIMATE MASS
1620 kg

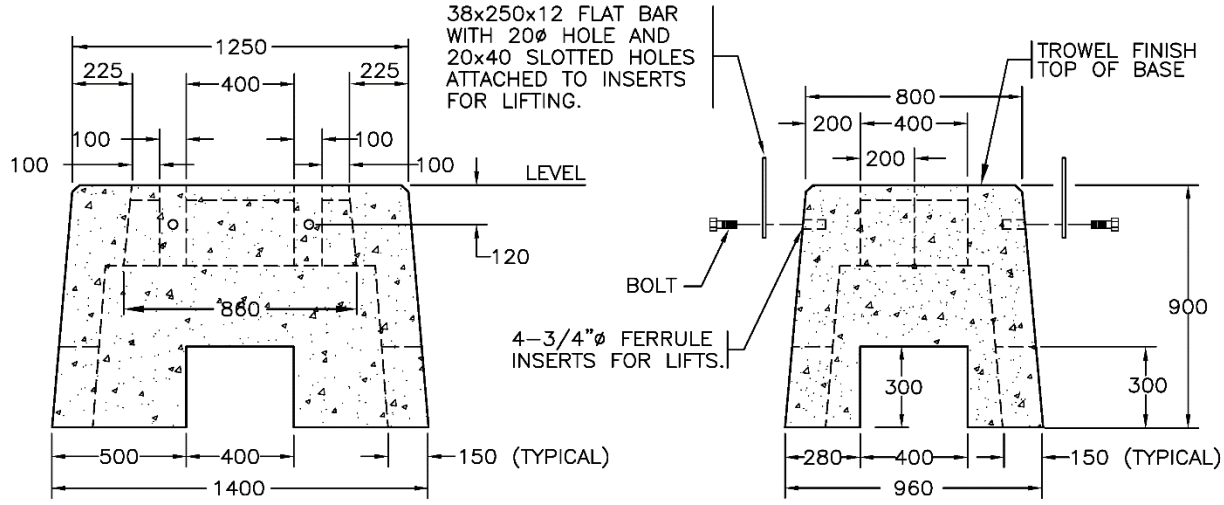

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. SEE DRAWING SP635–1.1.39 FOR REBAR DETAILS, AND DRAWINGS SP635–1.1.40, 1.1.41 AND 1.1.42 FOR INSTALLATION DETAILS.
3. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure


NOT TO SCALE

No.	Revision	Date
F		
E		
D	GENERAL REVISIONS	FEB 16
C	DRAWING REFERENCE NUMBERS REVISED	AUG 96
B	DRAWING NUMBER CHANGED	AUG 95
A	GENERAL REVISIONS	AUG 94


CONCRETE CONTROLLER BASE DETAILS (PRECAST)

Date: 05/02/16 Approved: D.N. (Signature on File)
Chief Highway Engineer


SPECIFICATION DRAWING No.
SP635–1.1.38

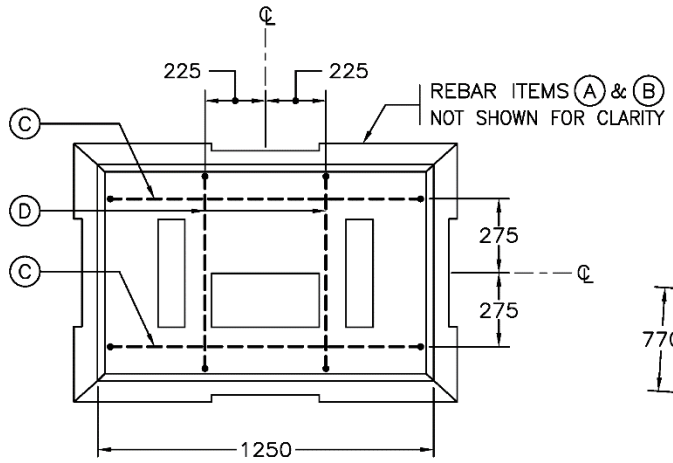


TOP VIEW

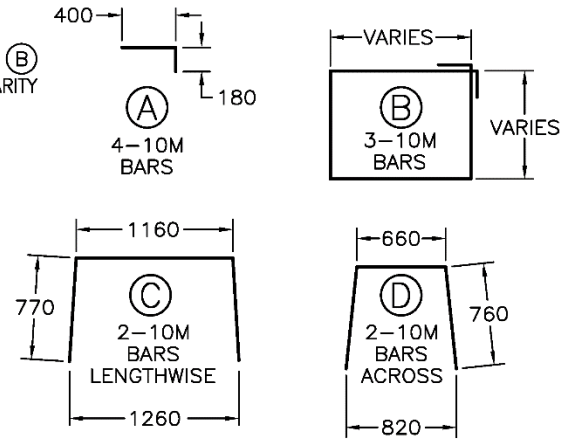

REINFORCEMENT DETAILS

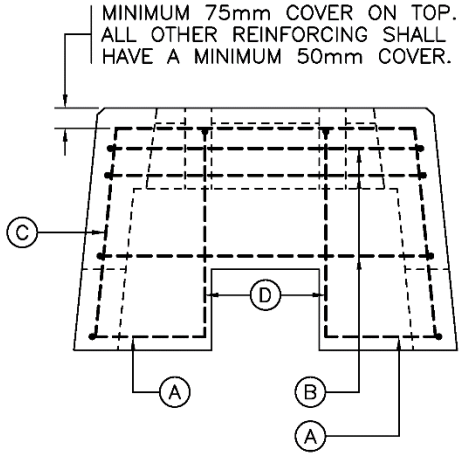

FRONT VIEW

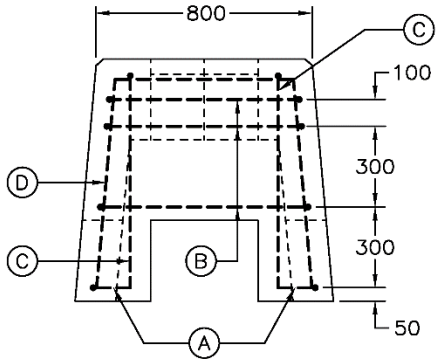

SIDE VIEW

NOTES

1. CONDUITS AND ROUTING MAY VARY. EXACT CONDUIT ROUTING SHALL BE AS INDICATED ON THE TRAFFIC SIGNAL DESIGN DRAWINGS. UTILIZE 75mm SIGNAL CONDUIT FOR SIGNAL CABLE APPLICATIONS.

SEE DRAWING SP635–1.1.38 FOR NOTES AND DETAILS

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D		
C	GENERAL REVISIONS	FEB 16
B	DRAWING NUMBER CHANGED	AUG 95
A	GENERAL REVISIONS	AUG 94

CONCRETE CONTROLLER BASE REBAR DETAILS (PRECAST)


Date Approved

05/02/16 D.N. (Signature on File)


Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.1.39

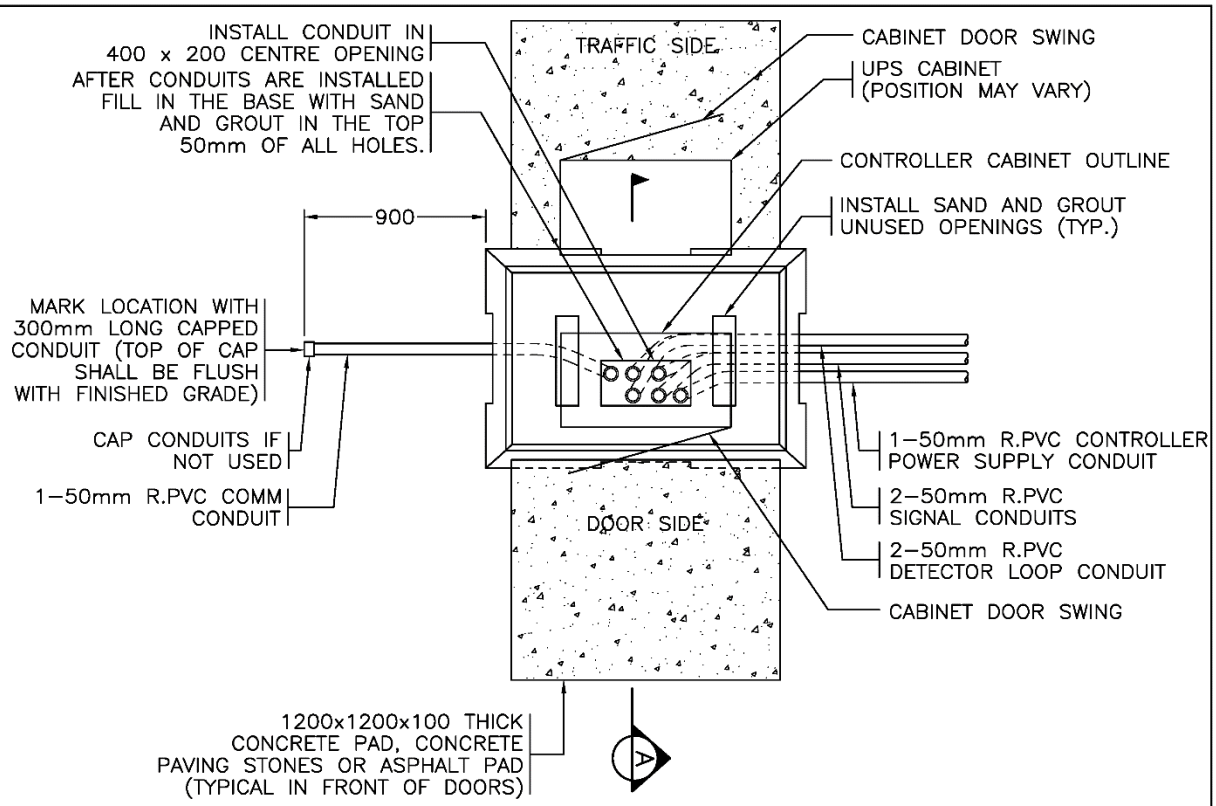

CONDUIT FIELD INSTALLATION

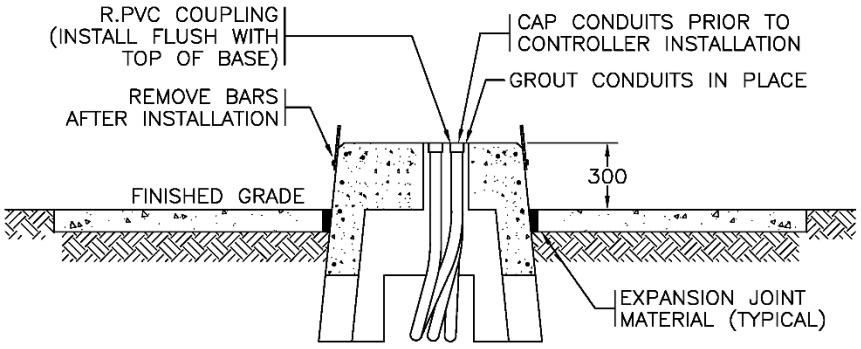

SECTION (A)

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. INSTALL CONDUITS AND GROUT PRIOR TO CONTROLLER INSTALLATION.
3. CONDUITS AND ROUTING MAY VARY. EXACT CONDUIT ROUTING SHALL BE AS INDICATED ON THE TRAFFIC SIGNAL DESIGN DRAWINGS. UTILIZE 75mm SIGNAL CONDUIT FOR SIGNAL CABLE APPLICATIONS.
4. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE

BRITISH COLUMBIA Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D	UPS CABINET ADDED	APR 17
C	GENERAL REVISIONS	FEB 16
B	MARKER ADDED TO LOCATE CONDUIT STUBS	AUG 95
A	GENERAL REVISIONS	AUG 94

CONTROLLER BASE INSTALLATION DETAILS (FOR TYPE M CABINET)


Date Approved

05/02/16 D.N. (Signature on File)


Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.1.40

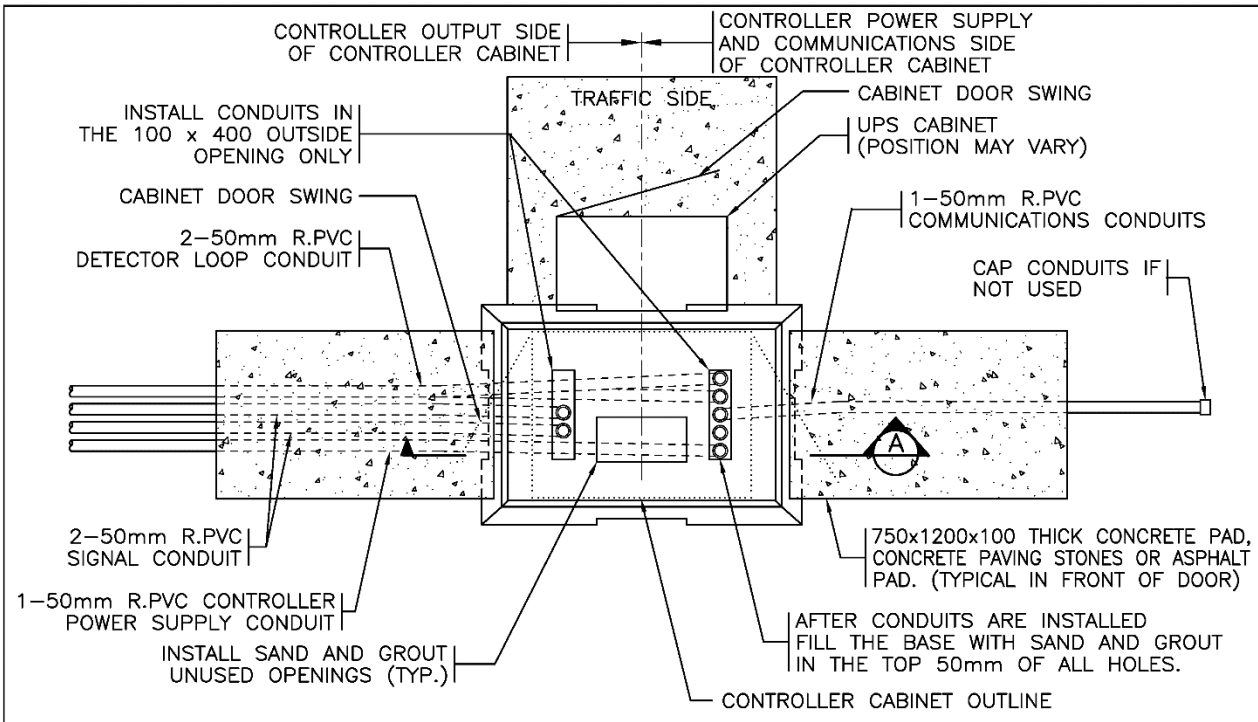

CONDUIT FIELD INSTALLATION

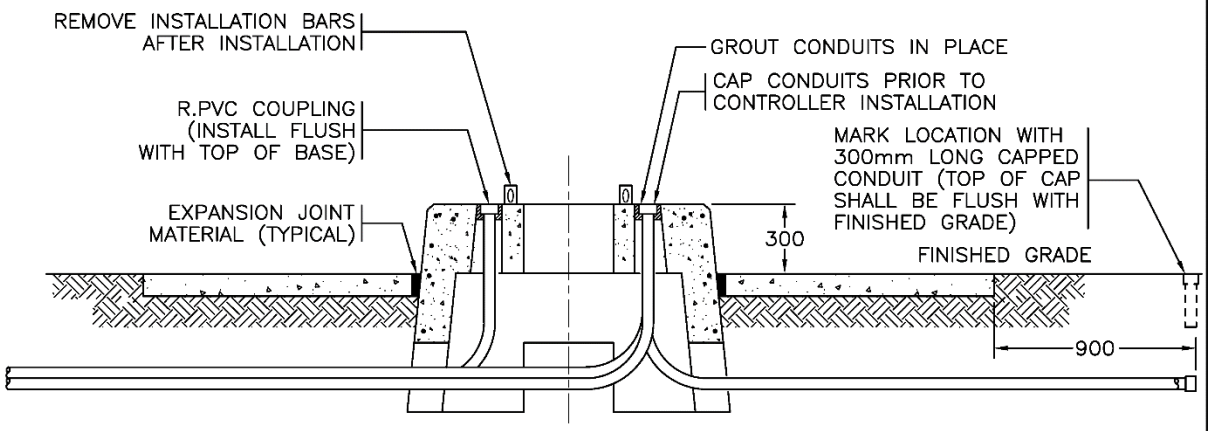

SECTION (A)

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. INSTALL CONDUITS AND GROUT PRIOR TO CONTROLLER INSTALLATION.
3. CONDUITS AND ROUTING MAY VARY. EXACT CONDUIT ROUTING SHALL BE AS INDICATED ON THE TRAFFIC SIGNAL DESIGN DRAWINGS. UTILIZE 75mm SIGNAL CONDUIT FOR SIGNAL CABLE APPLICATIONS.
4. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D	UPS CABINET ADDED	APR 17
C	GENERAL REVISIONS	FEB 16
B	MARKER ADDED TO LOCATE CONDUIT STUBS	AUG 95
A	GENERAL REVISIONS	AUG 94

CONTROLLER BASE INSTALLATION DETAILS (FOR TYPE S CABINET)


Date Approved

05/02/16 D.N. (Signature on File)


Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.1.41

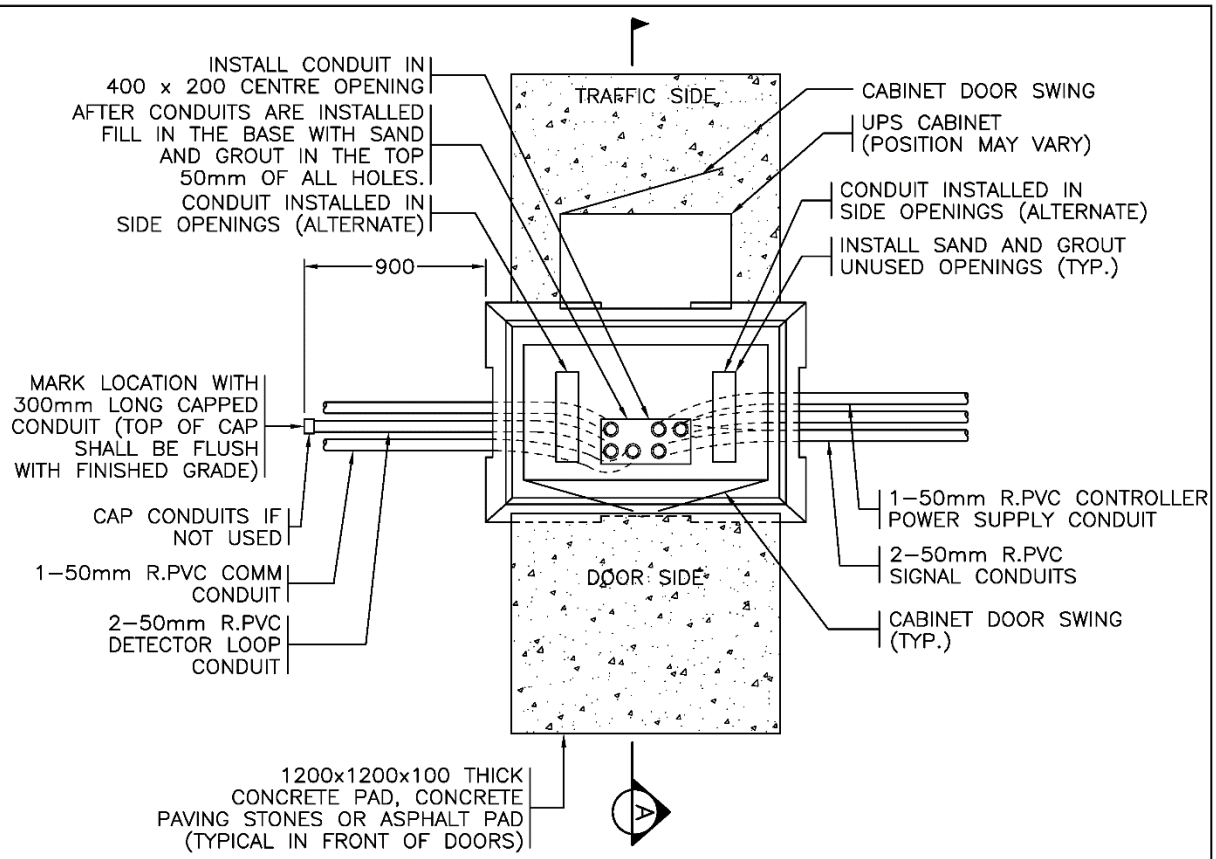

CONDUIT FIELD INSTALLATION

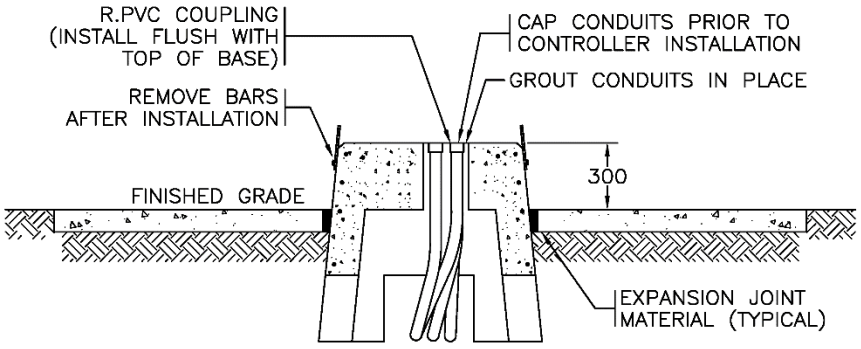

SECTION (A)

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. INSTALL CONDUITS AND GROUT PRIOR TO CONTROLLER INSTALLATION.
3. CONDUITS AND ROUTING MAY VARY. EXACT CONDUIT ROUTING SHALL BE AS INDICATED ON THE TRAFFIC SIGNAL DESIGN DRAWINGS. UTILIZE 75mm SIGNAL CONDUIT FOR SIGNAL CABLE APPLICATIONS.
4. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
E		
D		
C		
B		
A	NEW DRAWING – PREVIOUS DRAWING 1.1.42 RENUMBERED TO 1.1.43	FEB 16

CONTROLLER BASE INSTALLATION DETAILS (FOR TYPE P6 CABINET)

Date Approved

05/02/16 D.N. (Signature on File)

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.1.42

ANCHOR BOLT REPAIR PROCEDURES

1.0 GENERAL

ANCHOR BOLT DAMAGE IS CLASSED AS THE BENDING OR STRETCHING OF THE BOLTS TO THE POINT THAT A POLE CAN NOT BE REMOVED OR INSTALLED.

2.0 REPAIR PROCEDURE

REPAIR OF ANCHOR BOLTS SHALL BE AS DETAILED ON DRAWING SP635–1.1.44.

WHERE AN ANCHOR BOLT REQUIRES REPAIR, THE BOLT SHALL BE CUT OFF AND A COUPLER INSTALLED. ANCHOR BOLT COUPLERS SHALL BE USED AS FOLLOWS:

A) 4 ANCHOR BOLT BASE – MAXIMUM 1 COUPLER PER BASE
B) 6 TO 8 ANCHOR BOLT BASE – MAXIMUM 2 COUPLERS PER BASE
C) 10 TO 12 ANCHOR BOLT BASE – MAXIMUM 3 COUPLERS PER BASE

WHERE THE NUMBER OF COUPLERS REQUIRED PER BASE EXCEEDS THE NUMBER ALLOWED, THE BASE MUST BE REPLACED.

ANY DEVIATIONS FROM THESE PROCEDURES MUST BE APPROVED BY THE "MINISTRY ELECTRICAL REPRESENTATIVE" PRIOR TO CONSTRUCTION.

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D		
C	NEW DRAWING NUMBER – PREVIOUSLY NUMBERED 1.1.42	FEB 16
B	REFERENCE CHANGED TO "MINISTRY ELECTRICAL REPRESENTATIVE"	OCT 03
A	DRAWING NUMBER CHANGED	AUG 95

ANCHOR BOLT REPAIR PROCEDURES

Date Approved
05/02/16 D.N. (Signature on File)
Chief Highway Engineer

SPECIFICATION DRAWING No.
SP635–1.1.43