
TRUCK TANK SAMPLING VALVE	SP952–01

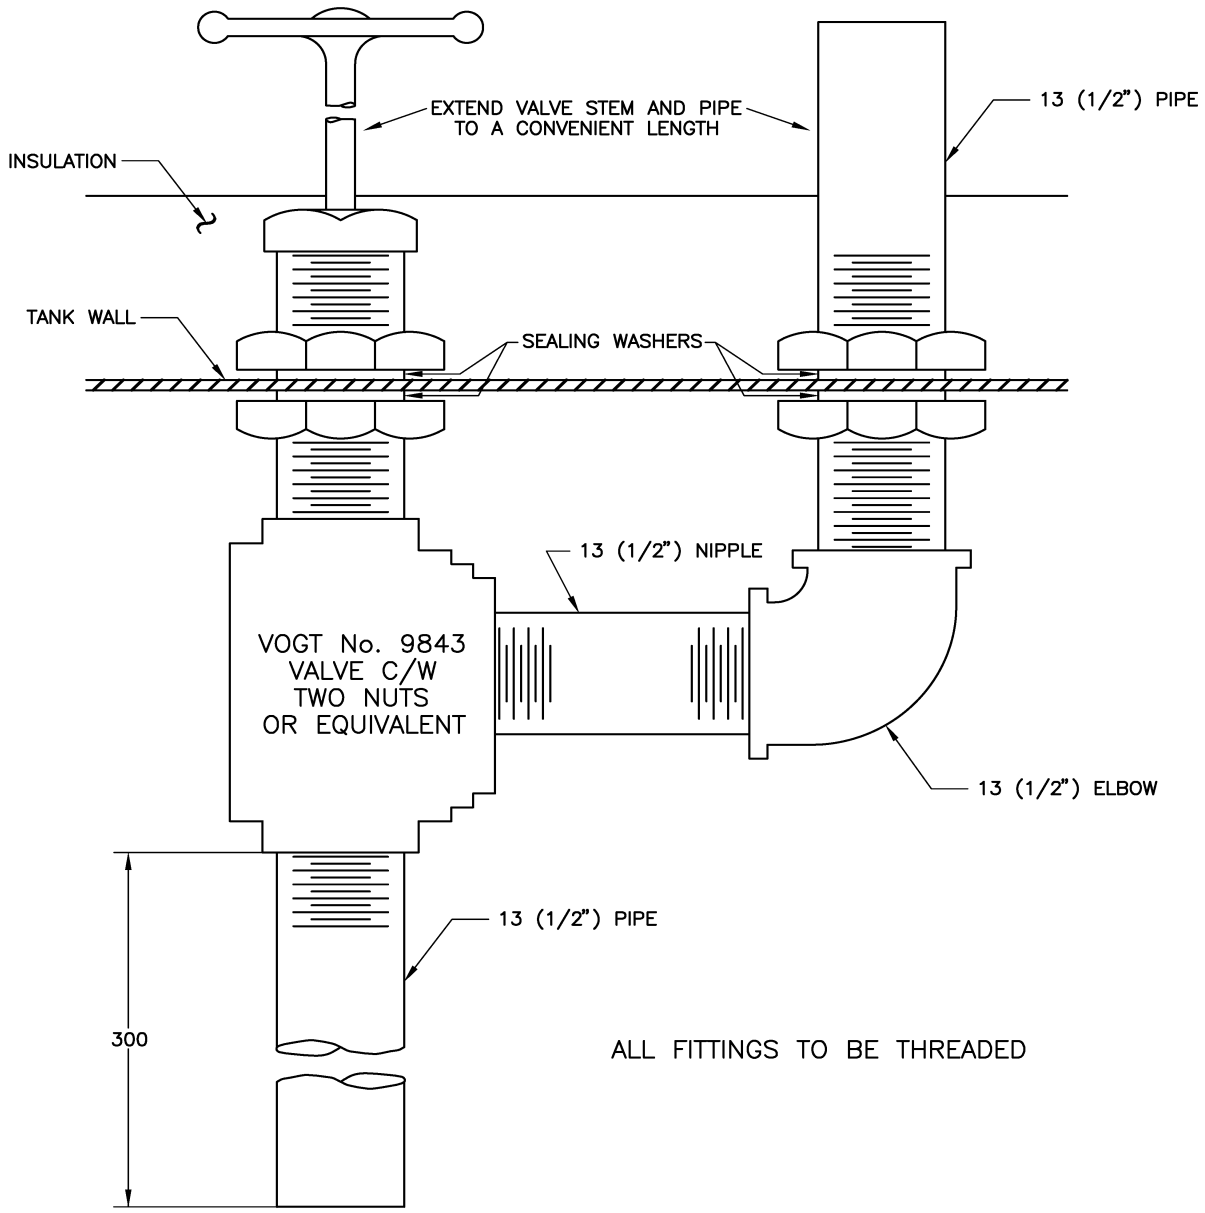


NOT TO SCALE

ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED

VISCOSITY REQUIREMENTS FOR DISTILLATION RESIDUES FROM HIGH FLOAT EMULSIFIED ASPHALT, HF–100S & HF–150S


SP952–02

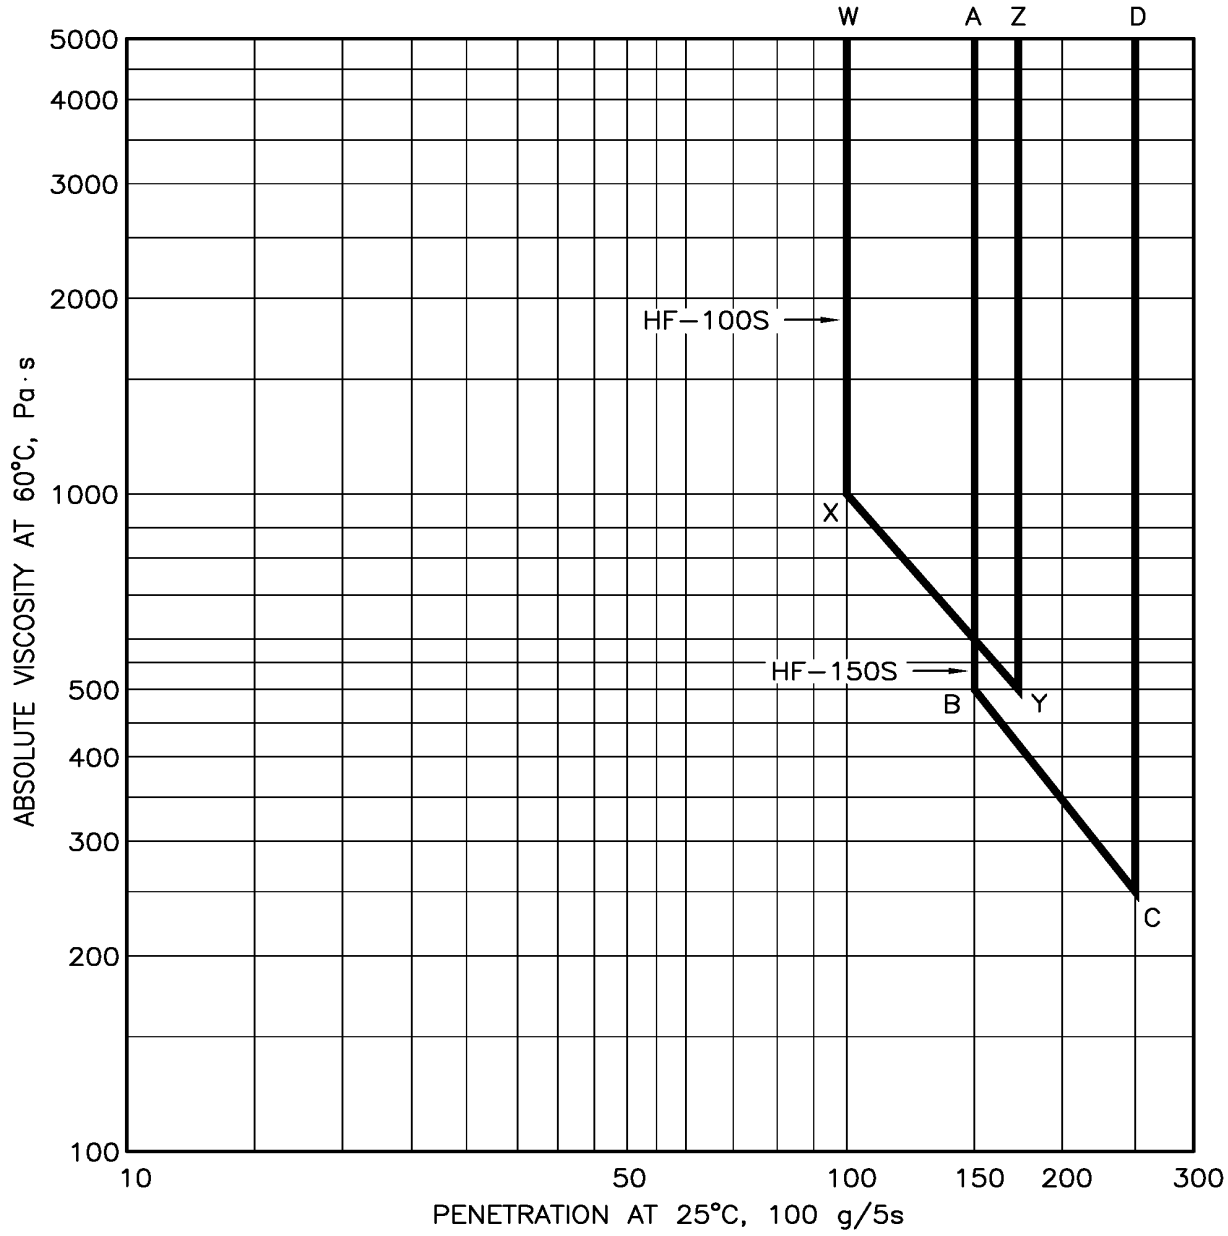

NOTE:
VISCOSITY SHALL BE WITHIN GRAPHIC REGIONS DESCRIBED BY THE LETTER CO–ORDINATES:

	PENETRATION RANGES
W, X, Y, Z	HF–100S–100–170
A, B, C, D	HF–150S–150–250

GRADATION OF HIGH FLOAT EMULSIFIED ASPHALT	SP952–03

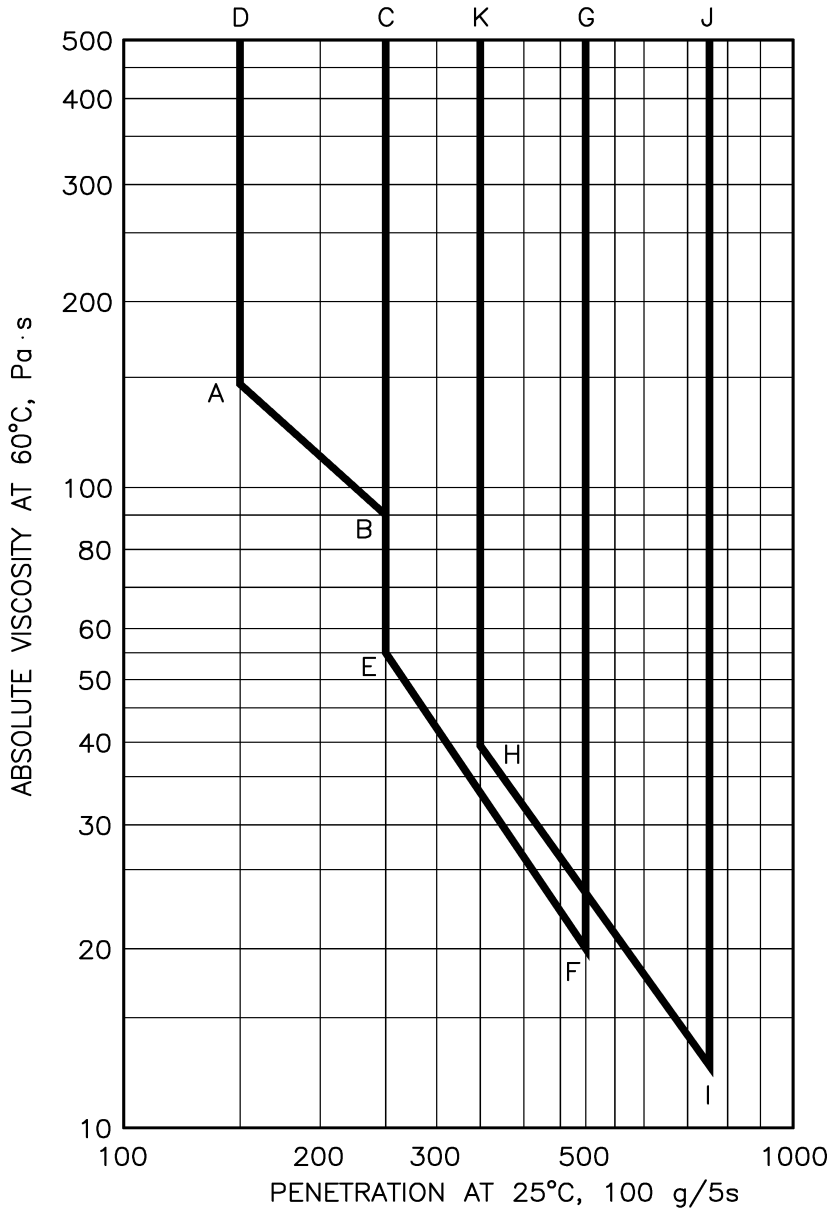


GRADATION OF HIGH FLOAT EMULSIFIED ASPHALT	HF – 150S	HF – 250S	HF – 350S
VISCOSITY AND PENETRATION SHALL BE WITHIN GRAPHIC REGIONS DESCRIBED BY THE LETTER CO–ORDINATES	A, B, C, D	E, F, G, C	H, I, J, K

SP952-04

INTENTIONALLY DELETED.

VISCOSITY REQUIREMENTS FOR DISTILLATION RESIDUES FROM HIGH FLOAT EMULSIFIED ASPHALT, HF100P & HF150P

SP952–05

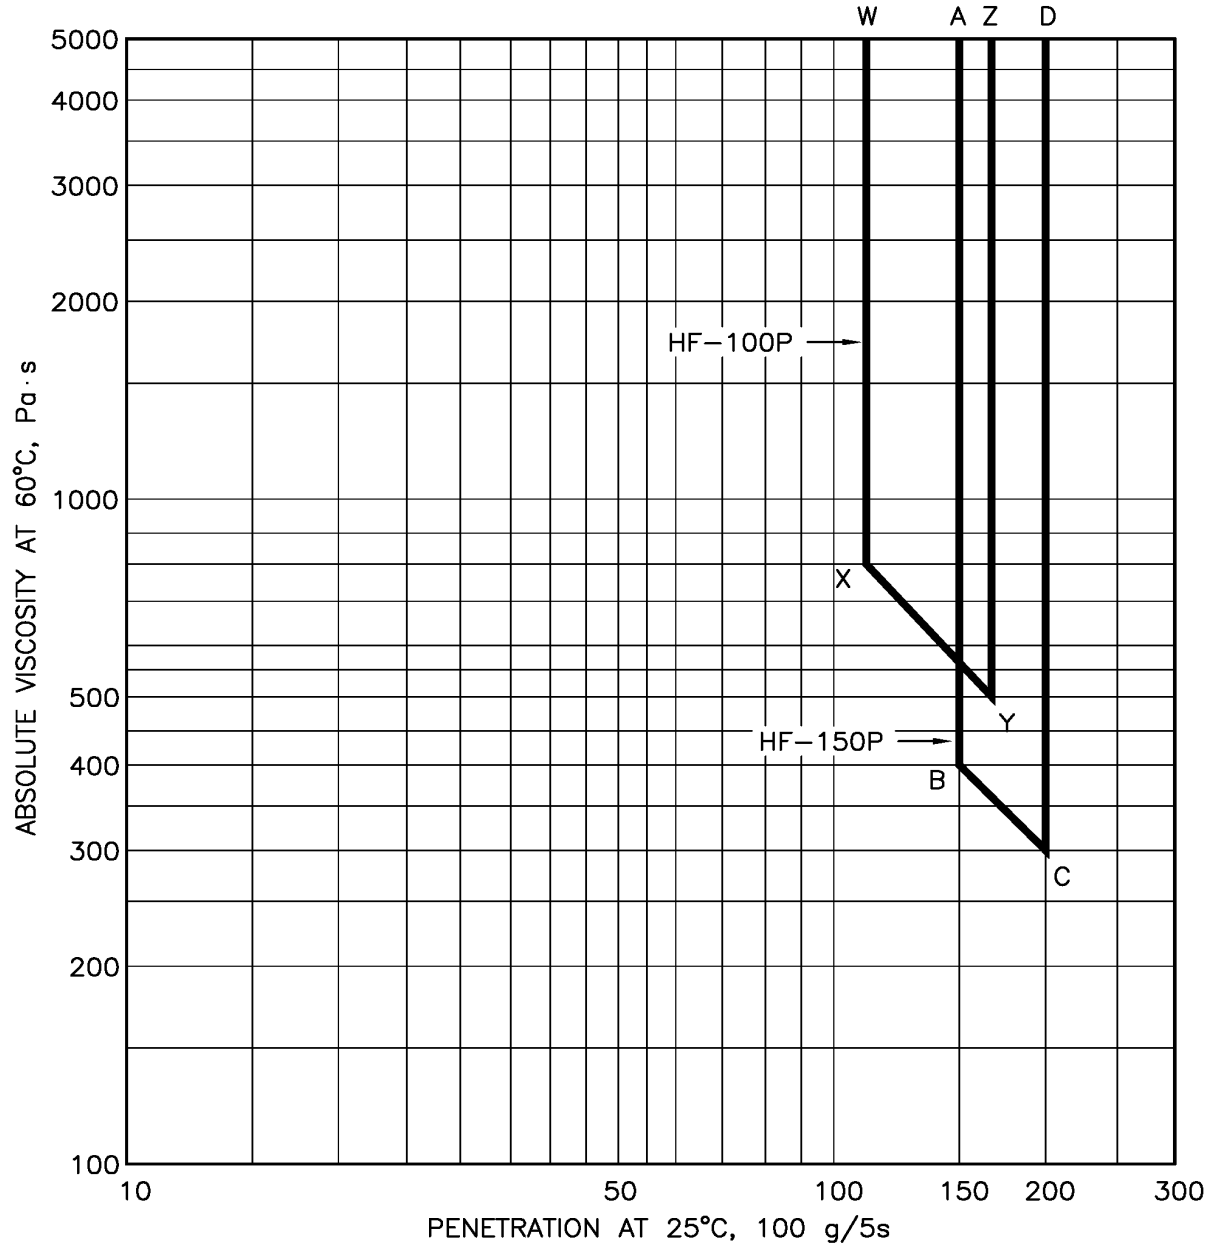

NOTE:
VISCOSITY SHALL BE WITHIN GRAPHIC REGIONS DESCRIBED BY THE LETTER CO–ORDINATES: W, X, Y, Z; A, B, C, D

PENETRATION RANGES

HF–100P–120–170
HF–150P–150–200

SECTION 991

CALCIUM CHLORIDE AND SODIUM CHLORIDE

991.01 Calcium Chloride – Calcium chloride, for highway purposes, shall conform to ASTM D98. It shall be supplied as:

(a) Type I Regular (77%) bulk (flake) or sacked; or

(b) a liquid at 35% solution concentration,

as specified in the Contract or purchase order.

991.02 Sodium Chloride – Sodium chloride, for highway purposes, shall conform to ASTM D632 but it shall be supplied within the gradation shown in Table 991-A.

991.03 Chemical Contamination of Road Salt – When applied as specified, the de-icing chemicals shall not contain substances that exceed the current environmental guidelines, Provincial or Federal, and shall not cause harm to flora and fauna.

Note: *ASTM specifications are available through:* https://www.astm.org/Standard/standards-and-publications.html

Table 991-A: Gradation for Sodium Chloride

Screen Size (mm)	% Passing
12.0 (1/2”)	100
9.00 (3/8”)	90 – 100
4.75 (#4)	35 – 85
2.40 (#8)	15 – 55
1.20 (#16)	5 – 30
0.600 (#30)	0 – 10