
ACCESS · INDIGENOUS SKILLS 4 SUCCESS

People, tools and safe work

Volume 2 · B2, B3, B4, B5, B6, B7, B8, B9, B10

Classroom development edition · 30 October 2026

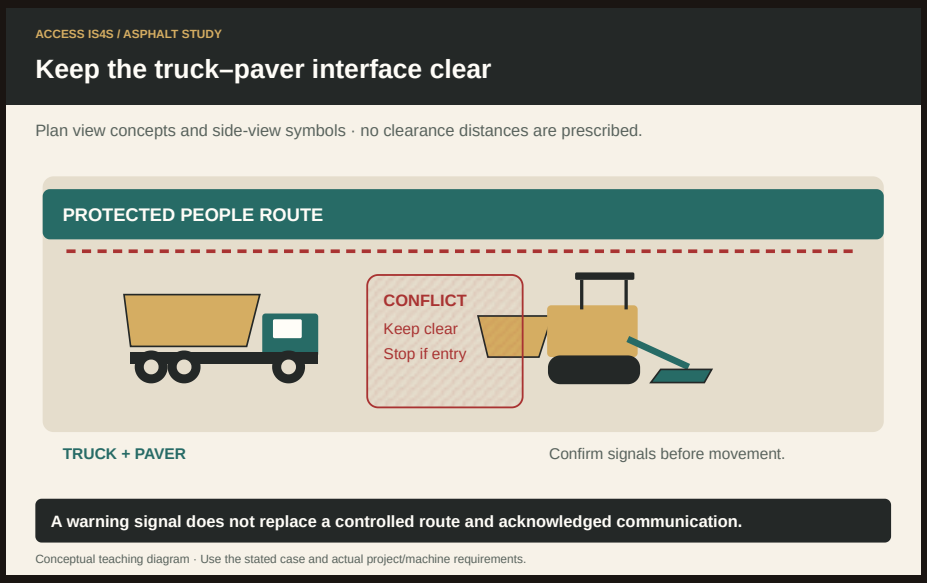

ACCESS IS4S. (2026). Keep the truck–paver interface clear [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.

In this volume

1. How to use the volume and key terms
2. Working safely around haul trucks
3. Safety working around and operating power brooms
4. Safety working around and operating air hammers
5. Safety working around and operating propane tanks
6. Weather effects and precautions
7. Safety and traffic control procedures
8. Plant site and gravel pit safety
9. Light vehicle transporting procedures
10. Complete fatigue awareness training
11. Prepare a clear work-zone briefing

Use this volume

This volume provides complete classroom readings, worked examples, named practice tasks and answer guidance for people, tools and safe work. Follow the learning route in each chapter, study the labelled figures and explain your reasoning. The separate answer book contains the worked keys and observation records.

Care for people, place and the next person using the work runs through the cases. Local First Nations, Métis and Inuit learners and partners bring distinct knowledge and priorities. Participation does not require sharing personal stories or cultural teachings, and no diagram claims to represent a Nation's protocol.

> Classroom authoring is complete for the listed competencies. Qualified technical review, actual fleet/site matching, a local teaching pilot and observed practical qualification are separate requirements. The practical records are ready for an instructor to configure and use; they do not certify unobserved work.

Read the picture, then test the idea

1. Identify the object, process or quantity shown.
2. Read labels, units and the figure's stated limits.
3. Connect the image to the chapter explanation.
4. Try the exercise and check against evidence.
5. Explain the result to another person and revise if needed.

Use AI as a checked working tool

Claude and ChatGPT can help explain provided documents and create supported files. Claude Code, Cowork and Codex can help with permitted multi-file tasks and repeatable workflows when their tools are available. Give a clear purpose, named sources, output formats, limits and checks. Ask for a findings table with page/cell evidence; verify it against the source. Reopen DOCX, XLSX, HTML or PDF outputs. For study audio/video, verify the script, captions, diagrams and actual playback. A generated result is not a technical approval.

Keep the term with its meaning

AGGREGATE
Mineral particles forming the solid skeleton of the mixture or granular layer.

BINDER
The asphalt material that coats and binds the aggregate in the specified mixture.

COMPACTED THICKNESS

Layer thickness after the required compaction process; distinct from loose depth behind the screed.

DENSITY REFERENCE
The specified comparison value used as the denominator of a percent-density calculation.

GRADATION
Distribution of aggregate particle sizes, commonly expressed as cumulative percent passing specified sieves.

HEAD OF MATERIAL
The quantity/distribution of mix immediately in front of the screed.

JOB MIX FORMULA (JMF)
The accepted mixture proportions and properties under the applicable quality/contract process.

LOCKOUT
Isolation, securing and verification of hazardous energy for work requiring protection.

LOT / SUB-LOT
Defined portions of work used for sampling, testing and acceptance under the contract.

OMM
Operation and maintenance manual matched to the actual machine, serial range and configuration.

RAP
Reclaimed asphalt pavement: recovered material containing aggregate and aged binder.

SDS
Safety data sheet for the actual product; read with its label and workplace procedure.

SCREED
The paver assembly that forms the mat; its response depends on setup, material and movement.

STATION / OFFSET
Location along an alignment / distance and direction from a defined reference.

TCP
Traffic control person with the required training and assigned role.

TRACEABILITY
A record connecting material, location, time, sample, result and authorized decision.

SVG
Scalable vector graphics: useful for clear diagrams whose labels and geometry must be checked.

DOCX / XLSX
Editable document / spreadsheet workbook; verify actual content and formulas after creation.

PDF / HTML
Page-based reading copy / browser document; inspect completeness, access and linked resources.

MP3 / MP4 / VTT

Audio file / video container / timed web captions; test playback and retain a transcript.

Study chapter · Outline B2

Working safely around haul trucks

A haul truck brings material into a place where people and machines already have work to do. The transfer becomes a coordinated operation: truck, paver, ground worker and traffic control each need a shared understanding. **Blind area** means a space the operator cannot see from the operating position. **Pinch point** means a place where a person can be caught between moving or closing surfaces. Neither disappears because a worker is wearing high-visibility clothing.

At Cedar Learning Access, a delivery may arrive while someone needs the community entrance. The crew must protect both the delivery path and the public route. The task is to keep people out of the interaction between truck and paver while the approved delivery arrangement is followed.

Consequences of lapses in communication

Equipment specific hazards


LEARNING STEP 1

Consequences of lapses in communication

Communication fails when a message is unheard, misunderstood or directed at the wrong person. Agree the signalling arrangement before the approach: the designated person, the signals or radio channel, the acknowledged stop instruction and the response to lost contact. Use the established site procedure, precise messages and confirmation. A driver looking toward a worker is not proof that the worker's intention was understood. Eye contact supports communication, but it does not replace a confirmed message or a safe position.

The ground worker identifies themselves and remains in the planned visible position with an escape route, away from the truck's swept path and reversing space. If visual or radio contact is lost, the movement must stop under the agreed procedure; the worker does not approach a moving vehicle to restore contact. Restart only after the people involved have re-established the arrangement. Record a recurring communication failure so the system can be improved.

Keep the truck–paver interface clear

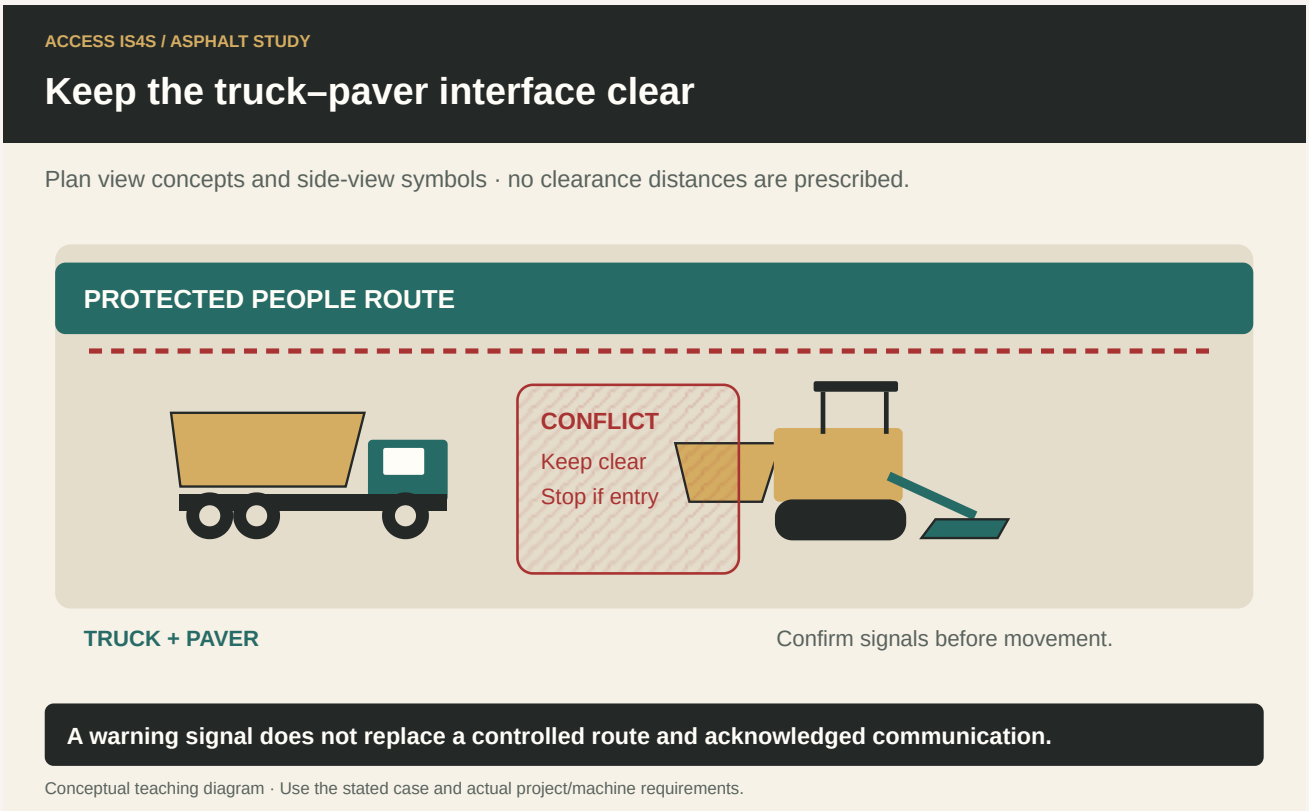

Note. ACCESS IS4S. (2026). Keep the truck–paver interface clear [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.


LEARNING STEP 2

Equipment specific hazards

Study the whole movement envelope, not only the tyre tracks. A turning truck has a swept path; the body, rear overhang and attachments can move through different areas. A reversing truck creates a changing space between itself and the paver. That space stays clear of people and loose equipment. A raised body changes height and stability; overhead utilities, structures and ground condition must be addressed before the delivery operation.

Clean mirrors, windows, cameras and lights help the operator see, but visibility aids have limits and require inspection. Spilled material, a dirty access step or a contaminated walking surface adds slip and housekeeping risks. A person should never infer the safe location from an illustration’s scale. The actual truck configuration, manufacturer instructions, assessment and traffic arrangement determine the controlled area. A pre-delivery check connects these physical conditions to the agreed communication.

Two main sections of the paver

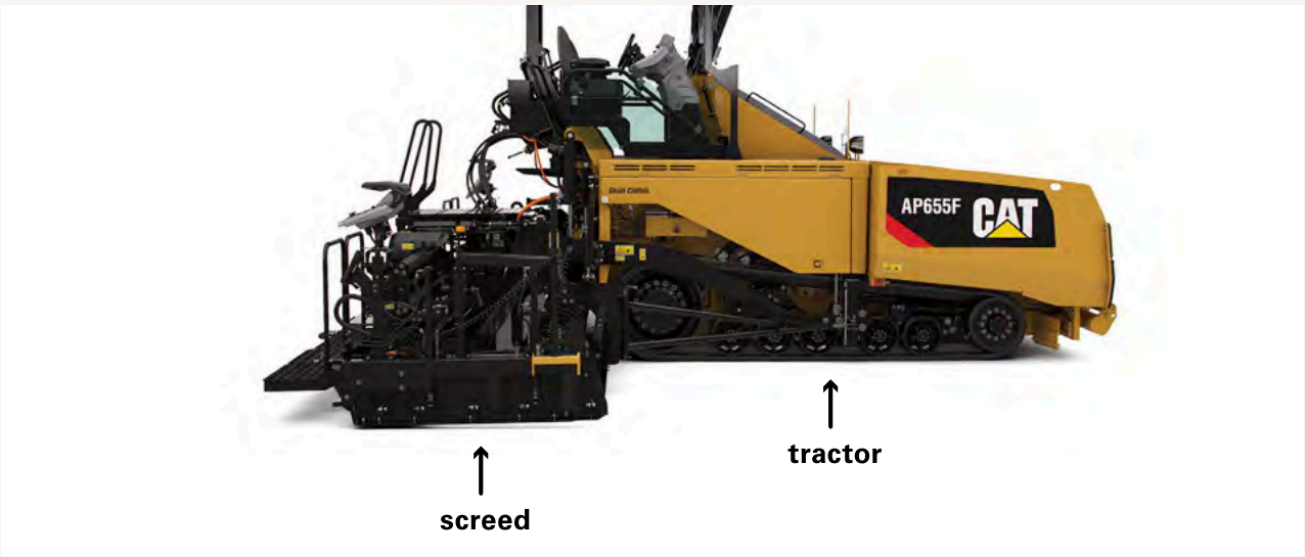

Note. Caterpillar. (2016). Guide to Asphalt Paving (QEBQ1888, source PDF p. 63). Faithful crop; original labels retained. Conceptual paver example in the 2016 application guide; this picture does not identify a specific machine serial number. Full source context.

Worked example · A missed acknowledgement

Fictional sequence: 08:10 the ground worker calls the truck identifier; 08:11 an unrelated driver replies; 08:12 the assigned driver begins backing. The assigned driver has not acknowledged the direction. A pedestrian also approaches the facility entrance.

Think it through.

The sequence contains no confirmed instruction between the assigned people. Stop the movement through the agreed procedure, protect the pedestrian route and re-establish the identified driver/signaller exchange. The three timestamps show order, not proof of a safe movement. The handover should record the wrong-driver reply and the access conflict; simply repeating the original call leaves the cause unresolved.

Try it and explain your thinking

Explain and apply the idea

Annotate the truck/paver interaction diagram with blind-area, pinch-point, swept-path and overhead-hazard questions. Describe the location a ground worker must avoid and what must be confirmed before choosing a signalling position.

Skills you use: Reading, Problem solving, Communication.

Calculate and check the result

Rewrite the three radio messages in the worked case so the intended driver and acknowledgement are unambiguous. Rehearse a lost-contact event with spoken classroom roles only.

Skills you use: Writing, Communication, Collaboration.

Create and save a one-page delivery brief for the fictional site

Create and save a one-page delivery brief for the fictional site. A partner adds a blocked entrance and dirty camera. Revise the brief, reopen the saved version and identify your change.

Skills you use: Digital, Adaptability, Creativity and innovation.

Show the skill in supervised practice

Machine/model/serial or classroom case: _____ · Manual/procedure and revision: _____ · Date/location: _____ · Learner/observer: _____

Record each criterion as 0—not yet demonstrated, 1—with task-solving support, or 2—independently under the stated conditions. Mark unobserved criteria separately; do not convert missing opportunity into a zero. The assessor determines the required repeat practice and applicable qualification requirements. A critical failure means hold, correction and reassessment regardless of the numerical result. Use safe simulations for classroom reasoning; actual operation requires the selected equipment, approved conditions and competent supervision.

What the observer checks	Result	Evidence
Critical: Safe access, surroundings and communication maintained.	Pass / hold	Observation: _____
Critical: Required energy, heat, movement and public-access controls maintained for the actual task.	Pass / hold	Observation: _____
In a controlled, authorized exercise, the instructor checks the learner's visible safe position and escape route against the actual plan.	0 / 1 / 2	Evidence/help: _____
Observe correct communication, loss-of-contact response and keeping the truck/paver gap clear; stop if the arrangement fails.	0 / 1 / 2	Evidence/help: _____
Record the machine, site conditions, supervision, observed actions and repeat attempt. Classroom role-play alone does not demonstrate vehicle-side competence.	0 / 1 / 2	Evidence/help: _____

Actual conditions and support: _____

Feedback, next practice and authorized release/status: _____

Sources and further reading

- SkilledTradesBC. (2016). *Asphalt Paving/Laydown Technician program outline*, B2, printed p. 28; source PDF pp. 30–30.
- WorkSafeBC. (Web snapshot: October 30, 2026). OHS Regulation, Part 16: Mobile Equipment. Open publication.
- WorkSafeBC. (Web snapshot: October 30, 2026). OHS Regulation, Part 18: Traffic Control. Open publication.
- Caterpillar. (2016). Guide to Asphalt Paving (QEBQ1888). Asphalt paving process, tractor, screed, material delivery and handwork; model examples vary. Open publication.

Figure-specific pages, editions and original contributors are credited beside each image. Current project requirements and the matching machine instructions determine practical use.

Study chapter · Outline B3

Safety working around and operating power brooms

A power broom prepares a surface by moving unwanted loose material. Its brush also moves air, dust and debris. A clean-looking surface may still have an uncontrolled airborne exposure, and a clear brush path may cross a pedestrian route. Read the machine as a combination of **travel**, **brush movement** and **dust control**.

The Rosco RB50 example in this chapter is the manufacturer's Operations, Service and Parts Manual 1017258-03, Rev. B, for serial 255027 and above. Its component and warning pages are a real model study. Match a different training machine to its own manual before practical instruction.

Effects of noise and dust

Dangers associated with vehicle movement

Dangers associated with moving parts


LEARNING STEP 1

Effects of noise and dust

Noise can damage hearing and mask a spoken warning. Dust can irritate or contain hazardous constituents, including respirable silica where the material produces it. Identify the material and exposure conditions; visible dust is not a measurement of the respirable fraction. Controls may include the machine's appropriate dust-suppression system, a suitable method and access separation, with exposure assessment and required respiratory/hearing programs.

PPE is chosen after the hazard assessment. High visibility addresses conspicuity; it does not control inhalation. Respiratory protection must match the contaminant, exposure and required fit/program conditions. Inspect the actual water system or other fitted dust-control equipment under the manual, and respond if its performance changes. Do not assume every RB50 has every optional system shown in a product picture.

Follow the broom’s working systems

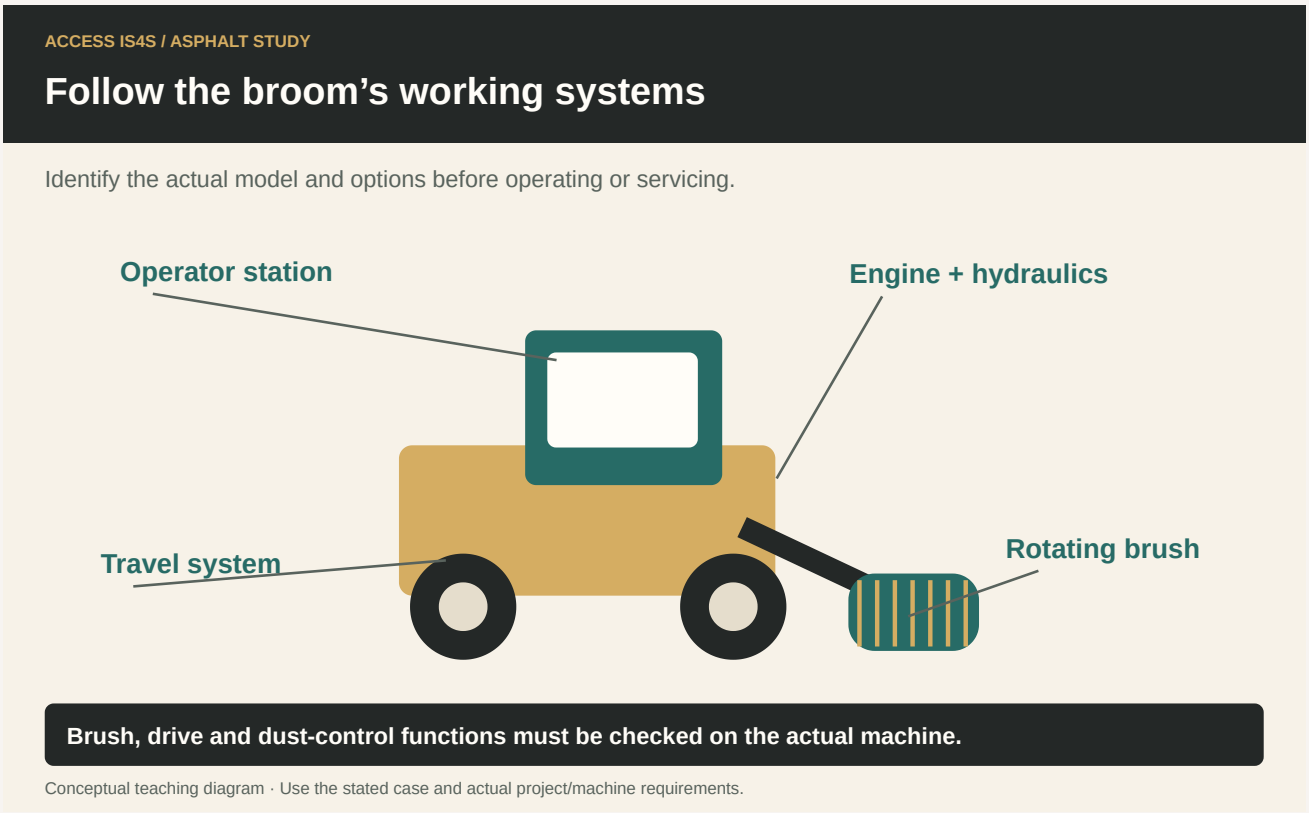

Note. ACCESS IS4S. (2026). Follow the broom’s working systems [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.

LEARNING STEP 2

Dangers associated with vehicle movement

Travel and steering can create a collision even when the brush is disengaged. Establish the working route, speed/movement controls, pedestrian separation, traffic coordination and operator visibility before sweeping. Broom swing and attachments can extend beyond the tyre path. A person at the edge of the travel lane may still be within the moving assembly’s envelope.

The operator checks access and the surroundings from the intended operating position and follows the machine’s travel and sweeping instructions. The ground crew remains in the planned safe area. A new parked vehicle, visitor or traffic queue changes the route; the operator stops and the arrangement is reassessed. A warning horn tells people something is happening but does not give the machine a clear route.

LEARNING STEP 3

Dangers associated with moving parts

The rotating brush, drive mechanism, hydraulic connections and moving linkages can entangle, strike or pinch. Guarding and exclusion protect people during use; inspection, cleaning and adjustment require the applicable shutdown and hazardous-energy control. A stopped brush may still be supported by hydraulics

or connected to stored energy.

Trace the component picture from brush core and bristles to support/linkage and machine. Identify which parts rotate, swing or raise. Loose clothing, hands or tools must not enter the moving mechanism. A jam or wound material is reported and dealt with under the actual isolation procedure. Reaching in for a quick pull while someone holds a control is not isolation.

Rosco RB50 machine overview and component key

MACHINE OVERVIEW

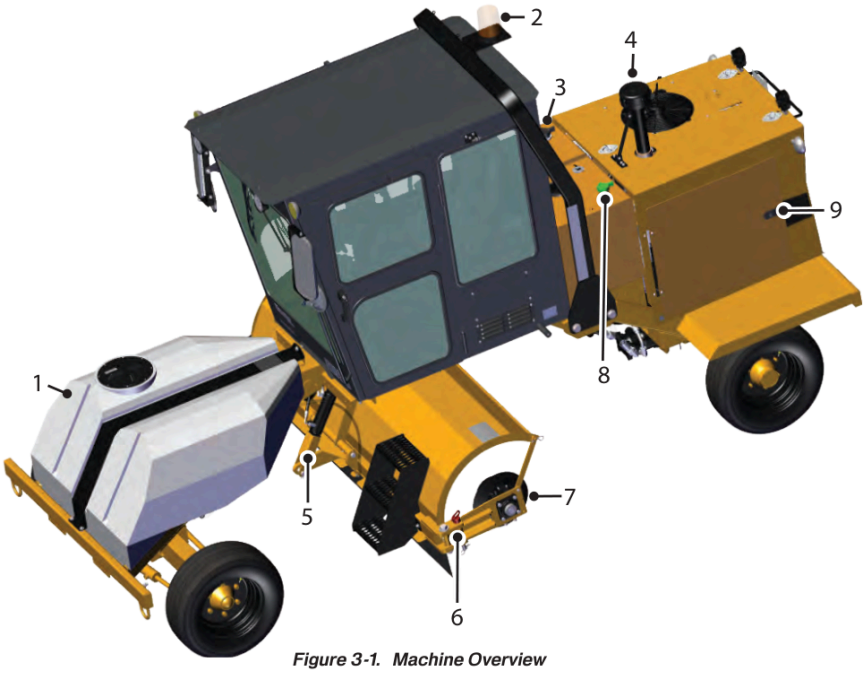


Figure 3-1. Machine Overview

ITEM NO.	COMPONENT NAME	FUNCTION
1	Water Tank (Option)	Water tank mounted on front of machine if equipped with optional Dust Suppression System. Holds 150 gallons.
2	Beacon Light	Flashing beacon light for added safety to alert traffic of broom operation. The beacon light is removable.
3	Hydraulic Oil Filler Cap	Hydraulic oil filler cap contains strainer to prevent debris from entering system when filling hydraulic tank.
4	Air Intake Stack	Rotary pre-cleaner.
5	Brush Lock Arm	Manual lock arm for locking brush into place (position shown) during travel and transport.
6	Brush Core Lock/Release	Lock pin releases and locks brush core into place when changing brush. No tools are required to change brush.
7	Brush	Angles 45 degrees right or left. 32-inch steel brush tube with many different bristle options.
8	Fuel Filler Cap	Fill using only ULSD (Ultra-Low Sulfur Diesel) fuel.
9	Engine Access Panel	Locking panel to access engine (on each side of the machine).

Note. Rosco / LeeBoy. (n.d.). RB50 Broom: Operations, service and parts manual (1017258-03, Rev. B, Fig. 3-1, p. 3-5; PDF p. 43). Serial 255027 and above. Full source context.

Worked example · The clean strip and the dusty doorway

Fictional observation: a broom produces a visibly clean 80 m strip, but dust travels toward an occupied doorway and its fitted water system has stopped spraying. The operator proposes finishing the last 20 m first.

Think it through.

The achieved 80 m does not validate the exposure control. The planned run is 100 m; 20% remains, but that arithmetic is irrelevant to accepting an uncontrolled hazard. Stop the affected work under the procedure, protect the doorway and have the dust-control fault assessed. Resume when the task controls are established, not when the inconvenience feels small.

Try it and explain your thinking

Explain and apply the idea

Identify brush, supports, operator position and any dust-control components visible in the RB50 manual image. Separate visible features from optional equipment that must be checked.

Skills you use: Reading, Communication.

Calculate and check the result

Check the worked-case percentage and write a defect/exposure report that distinguishes work completed from safe conditions.

Skills you use: Numeracy, Writing, Problem solving.

Use a device to locate the manual's component, safety and sweeping sections

Use a device to locate the manual's component, safety and sweeping sections. Save three page references, then redesign your brief when the route crosses a public entrance.

Skills you use: Digital, Adaptability, Creativity and innovation, Collaboration.

Show the skill in supervised practice

Machine/model/serial or classroom case: _____ · Manual/procedure and revision: _____ · Date/location: _____ · Learner/observer: _____

Record each criterion as 0—not yet demonstrated, 1—with task-solving support, or 2—independently under the stated conditions. Mark unobserved criteria separately; do not convert missing opportunity into a zero. The assessor determines the required repeat practice and applicable qualification requirements. A critical failure means hold, correction and reassessment regardless of the numerical result. Use safe simulations for classroom reasoning; actual operation requires the selected equipment, approved conditions and competent supervision.

What the observer checks	Result	Evidence
Critical: Safe access, surroundings and communication maintained.	Pass / hold	Observation: _____
Critical: Required energy, heat, movement and public-access controls maintained for the actual task.	Pass / hold	Observation: _____
Match the broom, serial range and fitted options before demonstration.	0 / 1 / 2	Evidence/help: _____
Observe inspection and use of selected PPE, route awareness and safe ground-worker positioning during an authorized sweeping exercise.	0 / 1 / 2	Evidence/help: _____
Observe response to a simulated dust-control fault with the machine safely controlled; assess isolation knowledge separately from operating skills.	0 / 1 / 2	Evidence/help: _____

Actual conditions and support: _____

Feedback, next practice and authorized release/status: _____

Sources and further reading

- SkilledTradesBC. (2016). *Asphalt Paving/Laydown Technician program outline*, B3, printed p. 29; source PDF pp. 31–31.
- WorkSafeBC. (Web snapshot: October 30, 2026). OHS Regulation, Part 6: Substance Specific Requirements. Open publication.
- WorkSafeBC. (Web snapshot: October 30, 2026). OHS Regulation, Part 7: Noise, Vibration, Radiation and Temperature. Open publication.
- WorkSafeBC. (Web snapshot: October 30, 2026). OHS Regulation, Part 12: Tools, Machinery and Equipment. Open publication.
- WorkSafeBC. (Web snapshot: October 30, 2026). OHS Regulation, Part 16: Mobile Equipment. Open publication.

- WorkSafeBC. (Web snapshot: October 30, 2026). OHS Regulation, Part 18: Traffic Control. Open publication.
- Rosco / LeeBoy. (n.d.). RB50 Broom: Operations, service and parts manual (1017258-03, Rev. B). Serial 255027 and above. Open publication.

Figure-specific pages, editions and original contributors are credited beside each image. Current project requirements and the matching machine instructions determine practical use.

Study chapter · Outline B4

Safety working around and operating air hammers

An air hammer converts compressed-air energy into repeated impacts at its working tool. **Air hose**, **coupling**, **retainer**, **handle**, **trigger/control** and **tool steel** are parts to identify before learning the task. The energy that makes breaking possible can also create noise, vibration, flying material, hose movement and physical strain. Preparation therefore includes the air supply and connections as well as the hammer itself.

Noise and vibration hazards

Hazards of flying debris

Ergonomics and safe equipment handling


LEARNING STEP 1

Noise and vibration hazards

Repeated impact produces substantial noise and hand-arm vibration. Exposure depends on the actual tool, maintenance, material, use time and working conditions. A rating in a brochure is not an individual's measured daily exposure. Use the assessed controls: appropriate equipment, maintenance, exposure organization and correctly selected hearing/PPE arrangements. Report unusual vibration, looseness, numbness or other concerns through the workplace process.

The CP1210/1230/1240 family manual provides actual pneumatic-tool safety and component information; the applicable model and configuration still matter. A lower-vibration model may improve control but does not eliminate the need to assess the job. For a training record, distinguish trigger time from total time spent in the work area.

Air power has a path—and stored energy

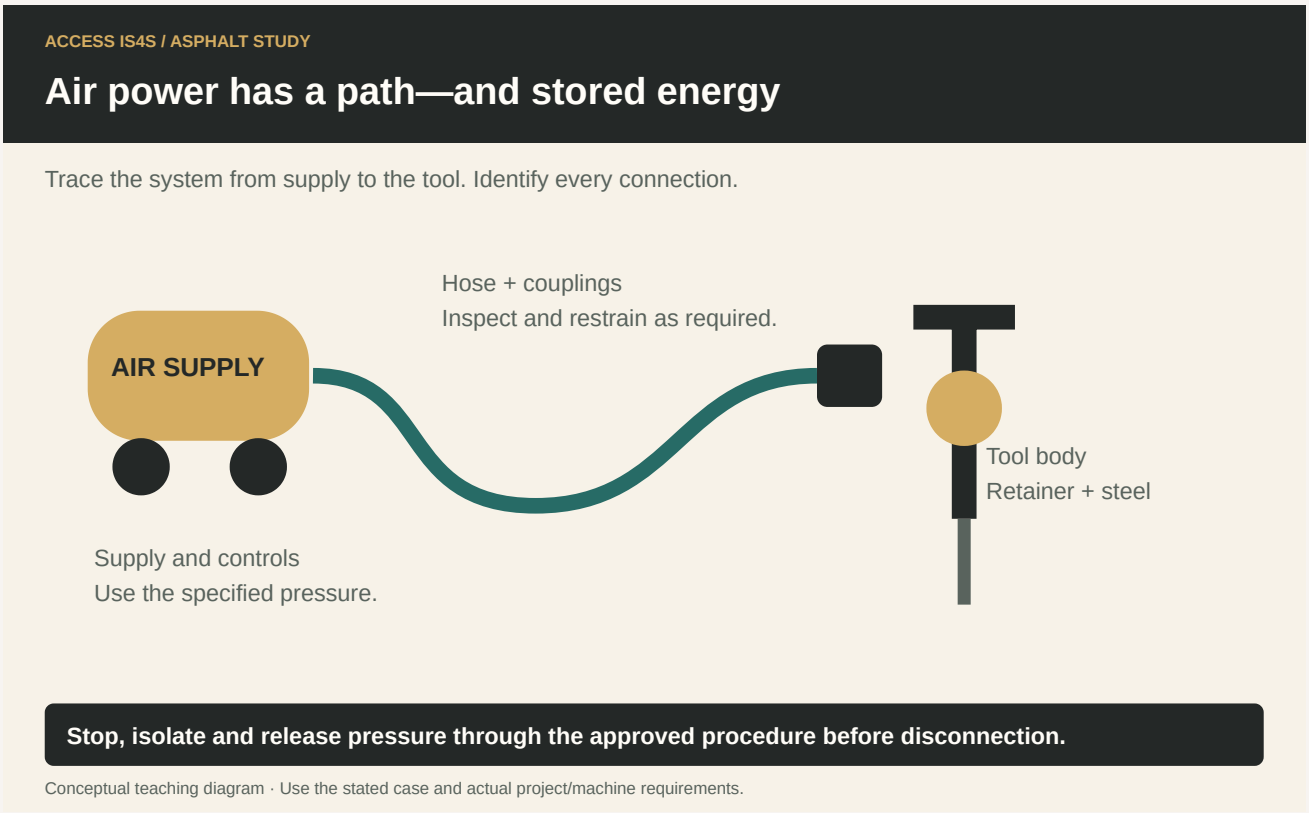

Note. ACCESS IS4S. (2026). Air power has a path—and stored energy [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.

LEARNING STEP 2

Hazards of flying debris

Impact breaks material into fragments that can strike the operator or others. Assess the material, access and nearby work; establish the required controlled area and suitable protection. Eye/face protection must match the hazard, while dust controls address the airborne material. Positioning a bystander just outside a sketch's boundary is insufficient without the actual assessment.

Inspect the tool retention and hose/coupling arrangement under the manual. A loose connection can become an uncontrolled hose, and an unsecured tool can be ejected. Before disconnecting or changing a tool, isolate the supply and release stored pressure using the specified procedure. Never test for a leak with a hand or direct compressed air at a person.

LEARNING STEP 3


Ergonomics and safe equipment handling

A heavy tool can strain the body while carrying, starting, working or stowing. Plan access and the working position before lifting it into place. Choose the appropriate tool/support and approved handling method; avoid twisting with the load or using the body to force an unsuitable tool. Hoses should be routed to reduce tripping, dragging and damage while allowing the intended controlled movement.


Maintenance affects effort: damaged or unsuitable tool steel can increase the force and time a person applies. The operator recognizes a change and reports it instead of compensating with more force. Stowing means controlling the energy, placing the tool securely, organizing the hose and protecting others from a falling tool or protruding steel.

CP breaker main parts and letter key

Main parts

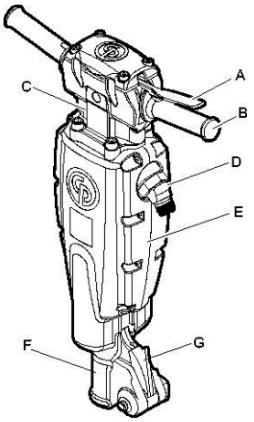

CP 1210



CP 1230 and 1240

A. Trigger (start/stop device)
B. Handle
C. Back head
D. Air intake
E. Muffler
F. Front head
G. Latch

Note. Atlas Copco Construction Tools / Chicago Pneumatic. (2010). CP 1210, CP 1230, CP 1240: Safety and operating instructions (9800 0608 90d, p. 12). Full source context.

Worked example · Count exposure honestly

Fictional log: 09:00–09:20 setup; 09:20–09:35 tool in use; 09:35–09:45 pause; 09:45–10:05 tool in use. The worker reports “65 minutes of hammer operation.”

Think it through.

Elapsed time is 65 minutes, while recorded tool-use intervals total 15 + 20 = 35 minutes. The remaining 30 minutes are setup/pause. Keep both values because different exposures may continue during non-trigger time. The log does not calculate a permissible vibration dose; actual assessment needs the relevant exposure data and method.

Try it and explain your thinking

Label the supply-to-tool diagram, including hose, coupling, retainer and tool

Label the supply-to-tool diagram, including hose, coupling, retainer and tool. Explain where stored energy remains after a trigger is released.

Skills you use: Reading, Problem solving.

Calculate and check the result

Recalculate the worked log and propose two columns that prevent elapsed-time and trigger-time confusion.

Skills you use: Numeracy, Writing.

Create a short illustrated handling/stowing brief

Create a short illustrated handling/stowing brief. A partner introduces a damaged coupling; revise the brief and save the corrected record.

Skills you use: Digital, Collaboration, Communication, Adaptability, Creativity and innovation.

Show the skill in supervised practice

Machine/model/serial or classroom case: _____ · Manual/procedure and revision: _____ · Date/location: _____ · Learner/observer: _____

Record each criterion as 0—not yet demonstrated, 1—with task-solving support, or 2—independently under the stated conditions. Mark unobserved criteria separately; do not convert missing opportunity into a zero. The assessor determines the required repeat practice and applicable qualification requirements. A critical failure means hold, correction and reassessment regardless of the numerical result. Use safe simulations for classroom reasoning; actual operation requires the selected equipment, approved conditions and competent supervision.

What the observer checks	Result	Evidence
Critical: Safe access, surroundings and communication maintained.	Pass / hold	Observation: _____
Critical: Required energy, heat, movement and public-access controls maintained for the actual task.	Pass / hold	Observation: _____
Use the actual tool manual and assessed material, air supply and exposure controls.	0 / 1 / 2	Evidence/help: _____
Observe safe handling, PPE, people separation, controlled use and shutdown/stowing under qualified supervision.	0 / 1 / 2	Evidence/help: _____
Require the learner to identify a defect and stop; do not create a live hose failure for a demonstration.	0 / 1 / 2	Evidence/help: _____

Actual conditions and support: _____

Feedback, next practice and authorized release/status: _____

Sources and further reading

- SkilledTradesBC. (2016). *Asphalt Paving/Laydown Technician program outline*, B4, printed p. 30; source PDF pp. 32–32.
- Atlas Copco Construction Tools / Chicago Pneumatic. (February 2010; 9800 0608 90d). CP 1210, CP 1230 and CP 1240: Safety and Operating Instructions. Open publication.
- Chicago Pneumatic. (September 2005; 9800 0530 01). CP 1230 Demolition Tool: Spare Parts List. Open publication.
- Canadian Centre for Occupational Health and Safety. (retrieved October 30, 2026). Powered Hand Tools: Pneumatic Tools, Basic Safety. Open publication.
- WorkSafeBC. (Web snapshot: October 30, 2026). OHS Regulation, Part 7: Noise, Vibration, Radiation and Temperature. Open publication.
- WorkSafeBC. (Web snapshot: October 30, 2026). OHS Regulation, Part 12: Tools, Machinery and Equipment. Open publication.

Figure-specific pages, editions and original contributors are credited beside each image. Current project requirements and the matching machine instructions determine practical use.

Study chapter · Outline B5

Safety working around and operating propane tanks

Propane equipment is an assembly: cylinder, valve, connector, regulator where required, hose and appliance must be compatible. A familiar-looking fitting is not enough to establish compatibility. Identify each part and the pressure/function it serves before preparing the task. The acquired Fairview Tiger Torch instructions and the actual appliance markings are useful examples; they do not authorize mixing arbitrary components.

- Potential fire hazards while working around propane tanks
- Proper storage and handling
- Proper connection procedures and check for leaks


LEARNING STEP 1

Potential fire hazards while working around propane tanks

Propane is stored under pressure and can form a flammable mixture with air when released. Escaping liquid can cause cold injury; a leak can also create an oxygen-displacement concern in an unsuitable space. Ignition sources include flames, hot surfaces, sparks and some equipment operations. Adequate ventilation, separation and the correct assembly therefore belong in the task plan.

A cylinder must be suitable, identified and within the applicable inspection/requalification requirements. Inspect its condition and the connected equipment through the prescribed pre-use checks. Odour may indicate a release, but smell is not a complete leak or concentration test. An unexpected leak, damaged connection or uncertain assembly is a reason to stop and use the emergency/isolation procedure, not to experiment with ignition.

Match every part of the fuel system

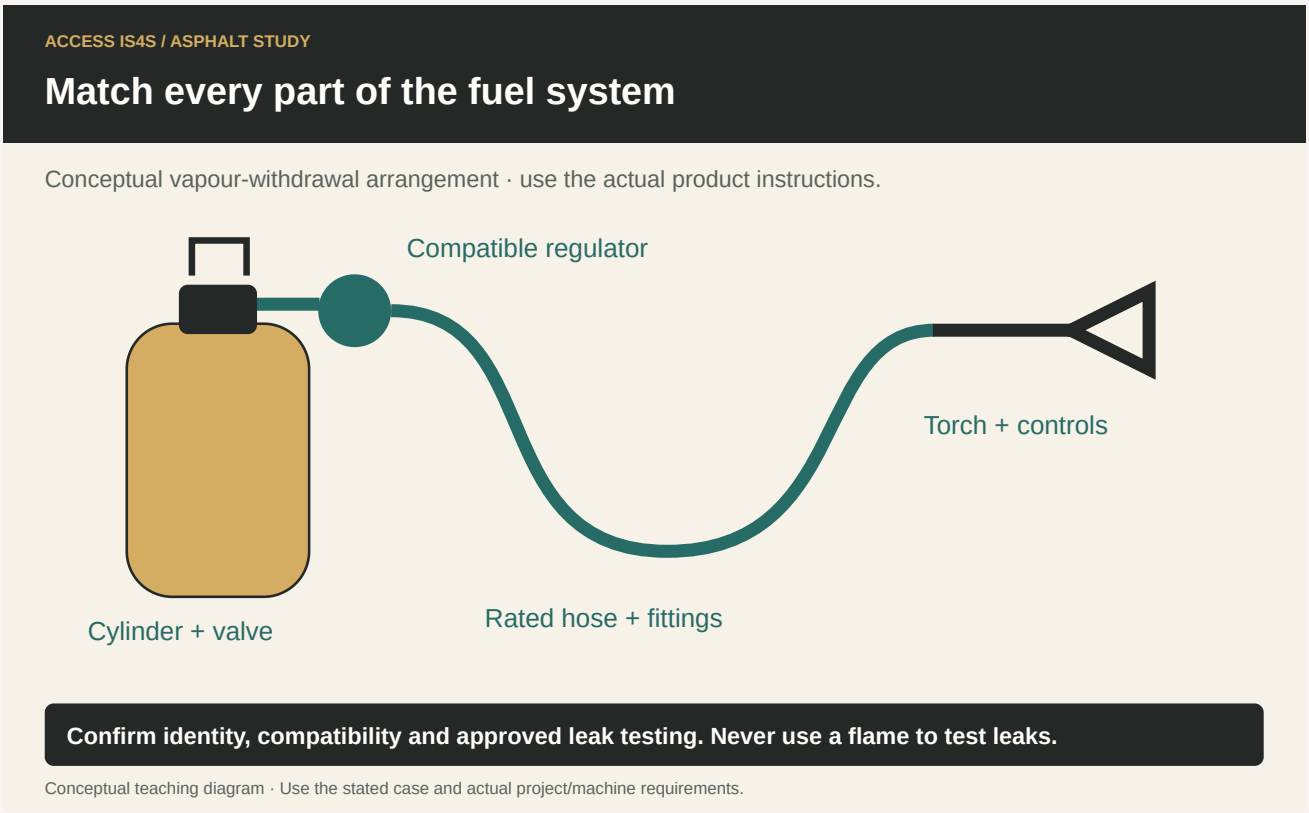

Note. ACCESS IS4S. (2026). Match every part of the fuel system [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.

LEARNING STEP 2

Proper storage and handling

Storage and transport are different contexts. Secure the cylinder against unintended movement in the required orientation, protect the valve and keep it in the permitted ventilated location away from prohibited heat/ignition exposures. Follow the supplier, workplace and transport requirements for the actual quantity and vehicle. The stowed torch and hose should be protected from damage; closing a valve alone does not make loose equipment adequately secured.

Identify whether the task involves use, temporary placement, storage or transport. Each can have different requirements. Keep the product SDS and relevant instruction accessible, and know the site's spill/fire/emergency arrangements. Do not place a cylinder in a vehicle space merely because it fits there.

LEARNING STEP 3

Proper connection procedures and check for leaks

Connection is a supervised procedural skill. Confirm the cylinder/appliance identity and the specified connector type, inspect sealing surfaces and the complete hose/regulator assembly, and use the manufacturer's connection method. Some fittings have different thread directions or sealing arrangements;

an improvised adapter, force or an unspecified sealant can create a hazard. The actual instructions determine the connection and tightening method.

Use the manufacturer-approved leak-test solution and test procedure; a flame is never a leak detector. Observe the specified connection locations and response to bubbles or another leak indication. If the assembly leaks, take it out of operation and follow the prescribed isolation/repair route. Rechecking after a repair is part of the applicable procedure. An instructor assesses the actual connection and leak check with approved equipment, not a learner's confidence alone.

Tiger Torch 95-B and 445 instruction sheet

TIGER TORCH

GAS-FLO by Fairview

Tiger Torch Ltd.
Operating Instruction and Safety Procedures
Tiger Torch Models 95-B and 445

CERTIFICATIONS

- CSA Approved Certificate #MC188901
- BTU rating 208,000
- 0-30 PSI operating pressure

ASSEMBLY INSTRUCTIONS TO PROPANE SOURCE

- The torch is equipped with a #53 orifice to operate using propane vapor fuel only.
- Not to be used on liquid feed propane source.
- Recommended proper assembly of the torch to the propane tank or source requires connecting the POL tank fittings to a 0-30 PSI regulator, GAS-FLO® Model GR-330. Connect the feed hose from the regulator to the torch valve. Hose and fittings that are ULC or CSA approved with maximum pressure rating of 350 PSIG should be used.
- Once assembled to tank, open tank valve and test assembly for leaks using a water spray.

OPERATION AND SAFETY PROCEDURES

- Ensure torch valve is closed and open valve on propane tank.
- Holding igniter in front of torch head, open torch valve until ignited.
- Open torch valve to desired heat source and adjust the regulator until torch burns with a clean blue-red flame.
- To shut down, close torch valve until flame is extinguished. When not in use, close propane tank valve.
- Torch should be held by handle grip only.
- Keep torch head away from hands or any flammable materials, as it is extremely hot during operation and for a period after shutdown. Do not lay torch on ice or snow when hot, as it may cause cracking of the head.
- Ensure torch head is adequately cooled prior to storage.
- If stored still connected to a propane source, ensure valve on torch and propane tank are both closed tightly
- Designed for outdoor use but can be used indoors if adequate air for combustion and ventilation is available.

Fairview www.Fairviewfittings.com

TIGER TORCH

GAS-FLO by Fairview

Tiger Torch Ltd.
Mode d'emploi et procédures de sécurité
Tiger Torch modèles 95-B et 445

CERTIFICATIONS

- CSA certifié - certificat #MC188901
- Débit thermique 208,000 BTU
- Pression de fonctionnement de 0-30 PSI

INSTRUCTIONS DE MONTAGE AVEC SOURCE DE GAZ PROPANE

- La torche est équipée d'un orifice #53 permettant l'usage de la torche avec les vapeurs de gaz propane seulement.
- Ne pas utiliser avec une source d'alimentation de propane liquide.
- Recommande' l'assemblage de la torche au gaz propane ou autre source nécessite les raccords du réservoir POL à un régulateur de 0 à 30 lb/po2, modèle GR-330 par GAS-FLO®. Connecter le tuyau d'alimentation du régulateur à la valve de la torche. Tuyaux et raccords doivent être certifiés ULC ou CSA s et indiquer un taux de pression maximale de 350 lb/po2 de résistance.
- Une fois assemblé au réservoir, ouvrez la soupape de propane et faire un test à l'aide d'un jet pour détecter s'il y a une fuite.

PROCÉDURES D'UTILISATION ET DE SÉCURITÉ

- Assurez-vous que la valve de la torche est fermée et ouvrir le robinet sur le réservoir de propane.
- Tenez l'allumeur en face de la tête du chalumeau, ouvrir le robinet de la torche jusqu'au moment de l'ignition de la flamme
- Ouvrir le robinet du chalumeau à la source de chaleur désirée et régler le gradateur jusqu'à ce que la flamme brûle avec une flamme propre bleu-rouge.
- Pour arrêter, fermez le robinet du chalumeau jusqu'à ce que la flamme s'éteigne. Fermez le robinet du réservoir de gaz propane lors que la torche n'est pas utilisée.
- En tout temps, assurez-vous de tenir la torche par la poignée seulement.
- Garder la tête de la torche éloignée des mains et de tout matériau inflammable, durant et après son utilisation. Ne pas mettre la tête de la torche sur la glace ou la neige lorsqu'elle est chaude, car cela peut causer des fissures à la tête.
- Assurez-vous que la tête de la torche est complêtement refroidie avant de la ranger.
- Si le réservoir est encore branché à une source de propane lorsque rangée, assurez-vous que les robinets de la torche et du réservoir de propane sont bien fermés
- Conçu pour une utilisation extérieure, mais peut être utilisé à l'intérieur à la condition que la ventilation et le débit d'air soient adéquats pour la combustion.

Fairview www.Fairviewfittings.com

Note. Tiger Torch Ltd. (n.d.). Operating instruction and safety procedures: Models 95-B and 445 [Bilingual instruction sheet, Fairview-hosted]. Full source context.

Worked example · The assembly register

Fictional teaching sample: the cylinder and torch are identified, but the hose rating is unreadable and the regulator model cannot be matched to the appliance. A learner proposes connecting them because the threads fit.

Think it through.

The assembly has two unresolved compatibility/condition questions. Matching threads does not establish pressure suitability or the correct sealing design. Keep the assembly out of operation; obtain the appropriate component identification and manufacturer instructions, then have the supervised setup and leak test completed. Record the unknown components rather than replacing unknown values with guesses.

Try it and explain your thinking

Trace the labelled propane assembly and state the function of each part

Trace the labelled propane assembly and state the function of each part. Identify which parts must be matched to the actual appliance.

Skills you use: Reading, Communication.

Write a connection-and-leak-check preparation record for the worked case

Write a connection-and-leak-check preparation record for the worked case. State the rejection conditions and the records required before use.

Skills you use: Writing, Problem solving.