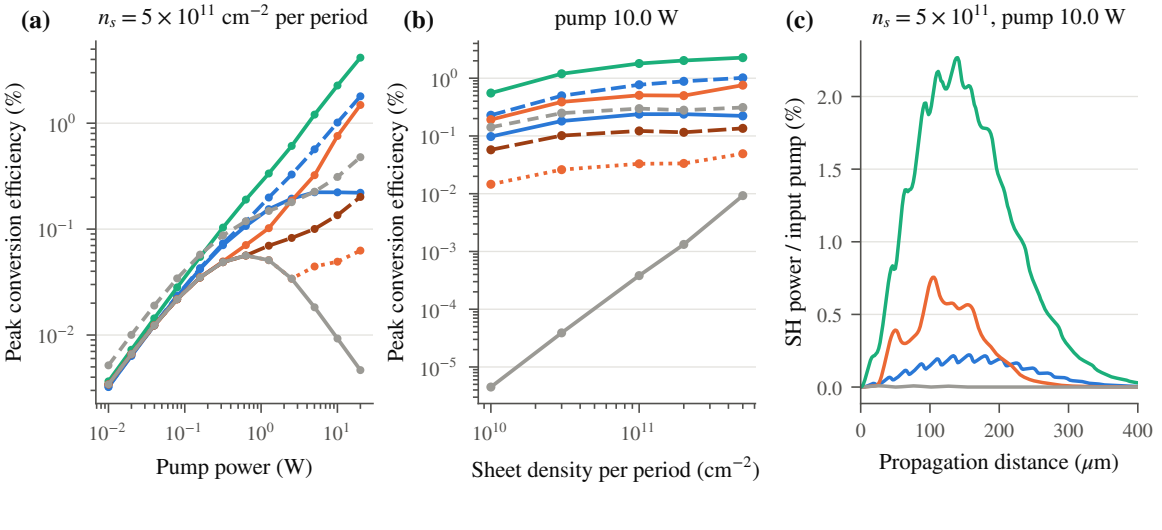
(a)
$n_s = 5 \times 10^{11}$ cm^{-2} per period
Peak conversion efficiency (%)
Pump power (W)
(b)
pump 10.0 W
Peak conversion efficiency (%)
Sheet density per period (cm^{-2})
(c)
$n_s = 5 \times 10^{11}$, pump 10.0 W
SH power / input pump (%)
Propagation distance (μm)
Triple well, sign reversal, 55 kV/cm
Triple well, sign reversal, bias optimized
ADQW, bipolar $\pm F$ (bias optimized)
ADQW, 0 V / optimized off field
ADQW, on/off QPM, on-state loss throughout
ADQW, ideal growth-defined orientation reversal
ADQW, perfect phase matching (bound)
ADQW, no QPM