


product:
various oatmeal: 0,28 - 0,5 kg/l

throughput: 3,5 t/h

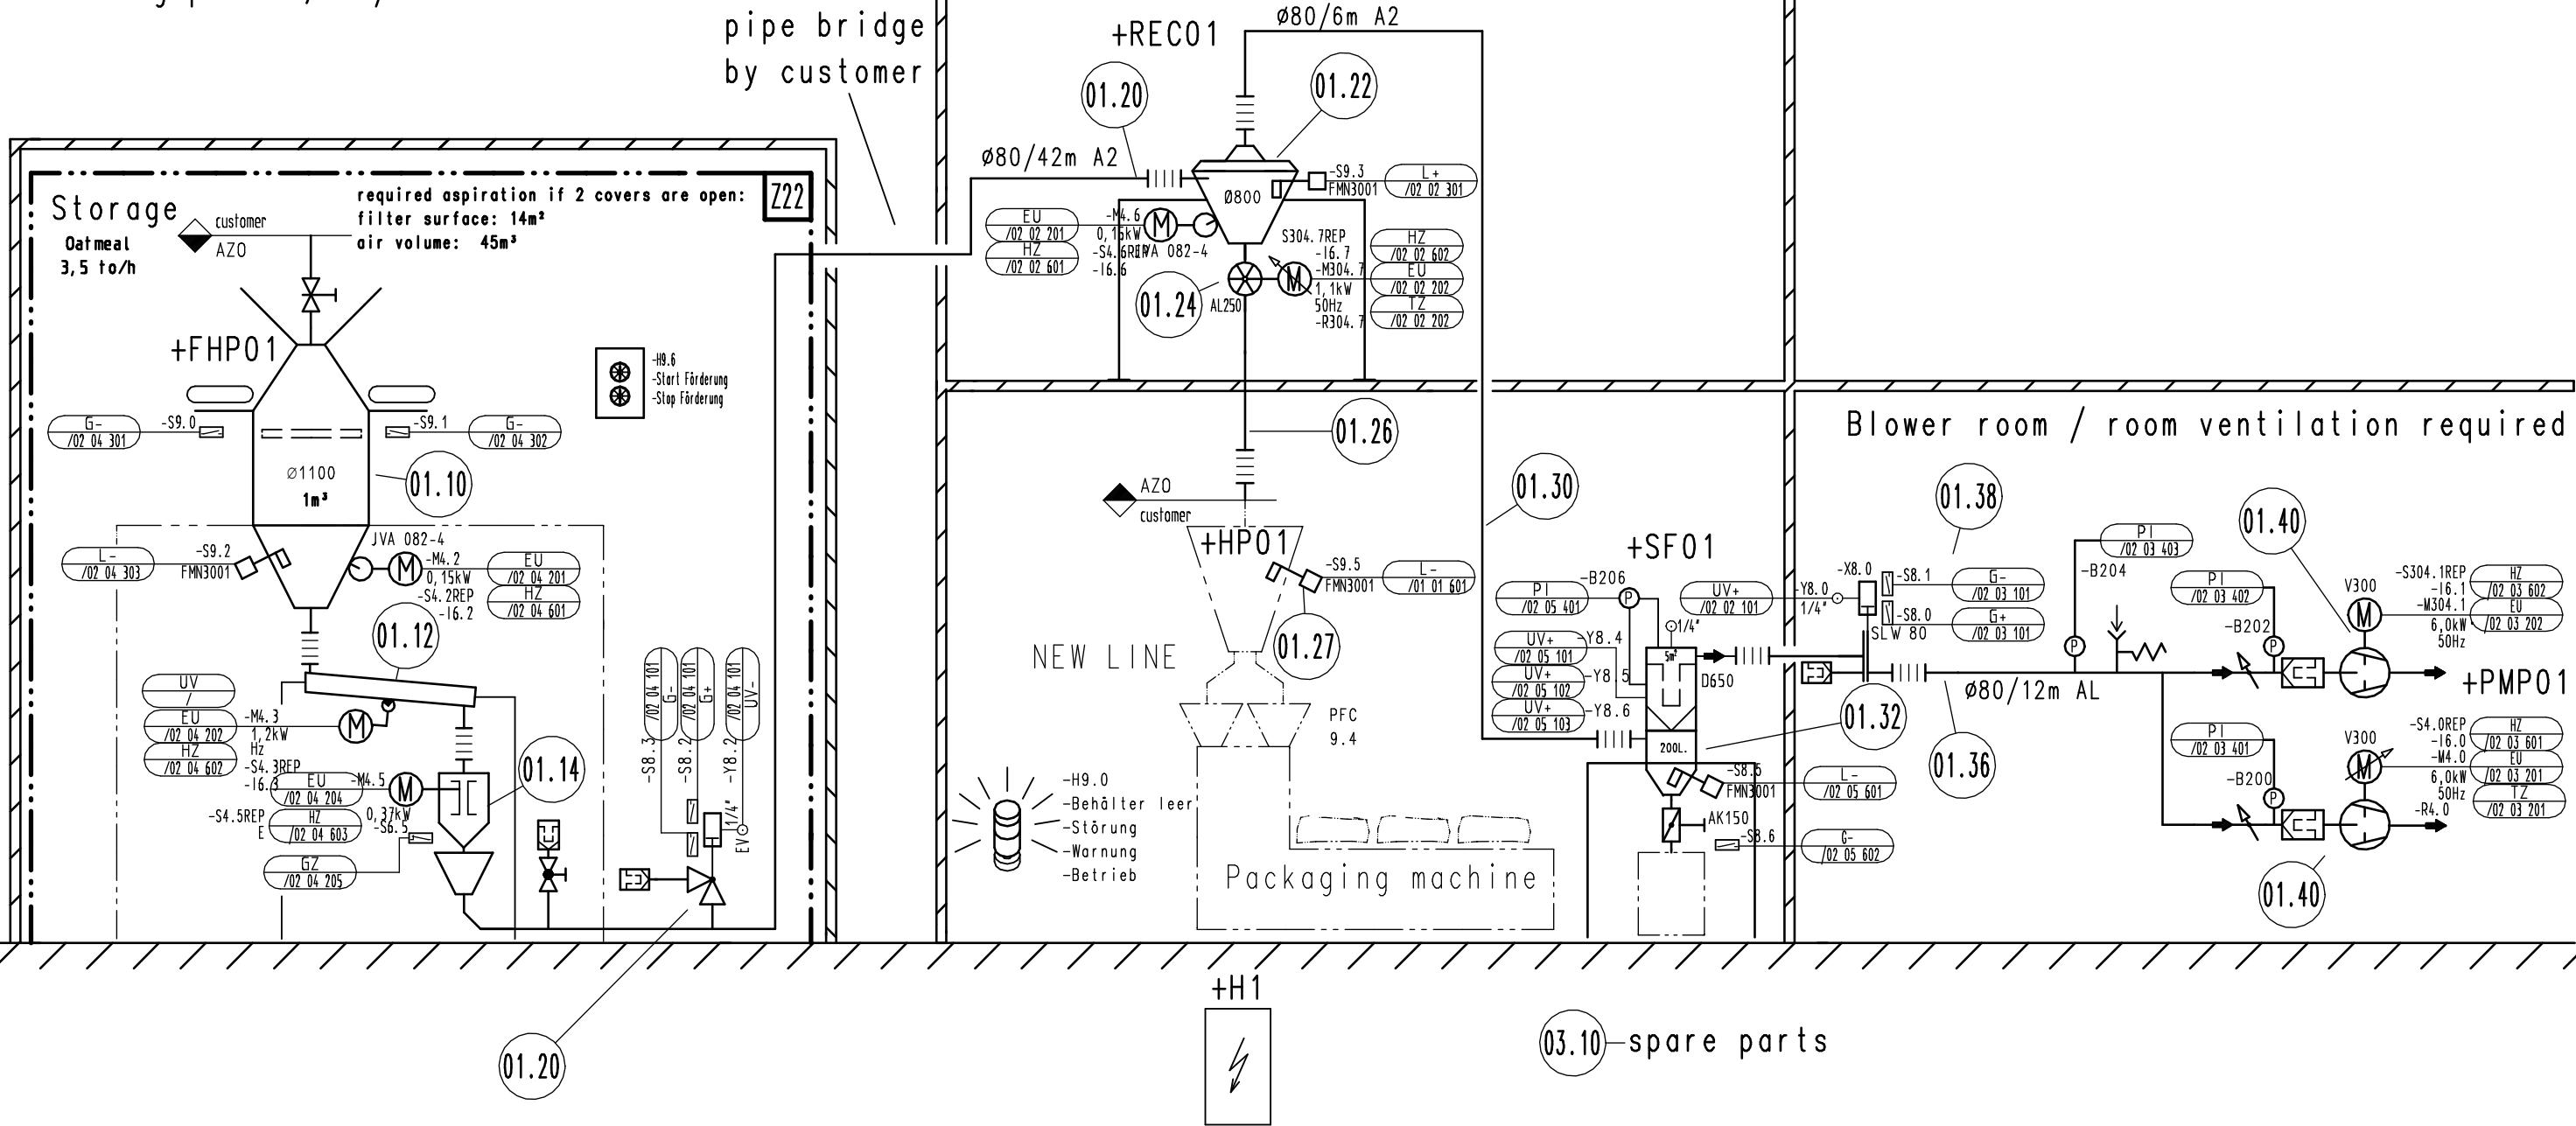

COMPRESSED AIR SUPPLY:
Necessary air pressure: min. 5 bar max. 6 bar over pressure.
Necessary air amount: 0,2 Nm³/Min.

If the connection line to the valve is not larger than 2 m, the diameter for the tube could be like the connection diameter of the valve. At a longer connection line the diameter of the line should be designed bigger in accordance to the sub - supply line.

Purity classes standardized in ISO 8573-1: 2001

DETAILS ON VOLTAGE SUPPLY FOR THE AZO-SYSTEM:

protection class :IP54 VDE
operation voltage :220/400 Volt; 50Hz
control voltage :24 VDC
max. connected load :15 kW
running at the same time :15 kW

DEPICTION REFERENCE:

— AZO supply
--- provided by customer
--- later extension
○ items see in offer

Ex-Bereich

Z22 = ZONE 22

NAME	DATE	PROTECTION MARK ISO 16016	AZO.	
DRAWN BY	JAD	09.08.2018		
STATUS	AYE	17.10.2018	In Bearbeitung	
Diagramm feeding packaging machine PJSC Russisches Produkt;			3-119663-00-0-001	
DIS 50681988			PROJECT:	119663-00
VERSION 02			FORMAT:	

1 Conveying air comply with class 3 or 4!
Clean air for filter circulation comply with class 2 or 3!