


product:  
various oatmeal: 0,28 – 0,5 kg/l

throughput: 3,5 t/h

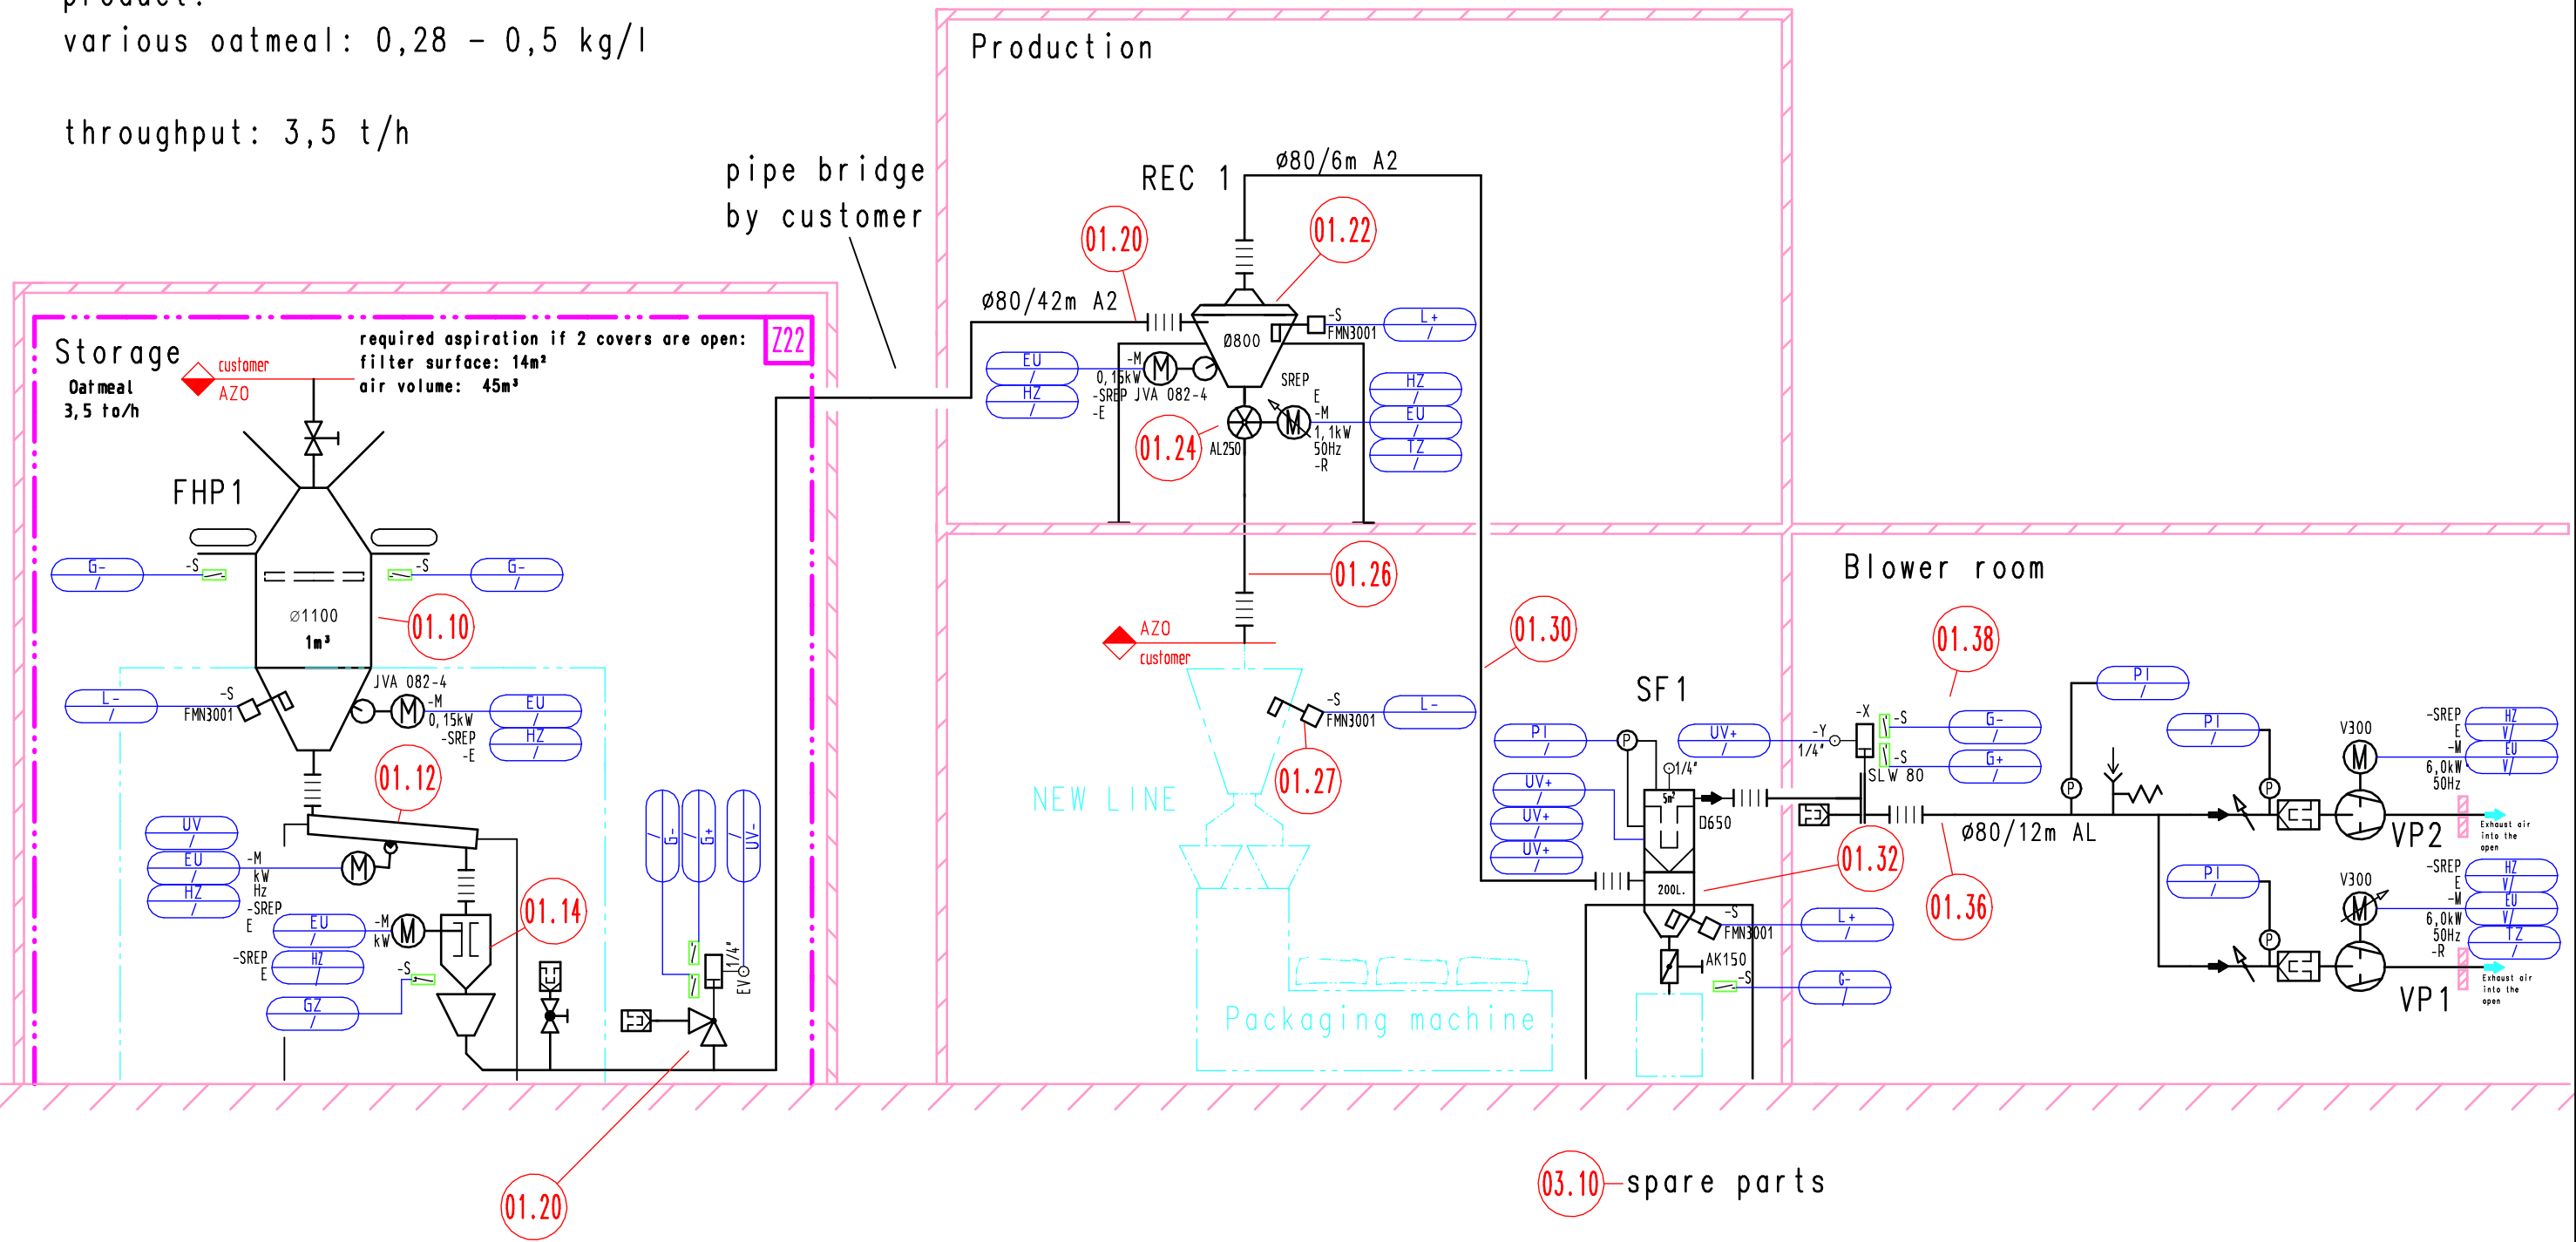

COMPRESSED AIR SUPPLY:  
Necessary air pressure: min. 5 bar max. 6 bar over pressure.  
Necessary air amount: ? Nm³/Min.

If the connection line to the valve is not larger than 2 m, the diameter for the tube could be like the connection diameter of the valve. At a longer connection line the diameter of the line should be designed bigger in accordance to the sub - supply line.

Purity classes standardized in ISO 8573-1: 2001

1 Conveying air comply with class 3 or 4!  
Clean air for filter circulation comply with class 2 or 3!

DETAILS ON VOLTAGE SUPPLY FOR THE AZO-SYSTEM:

protection class : IP54 VDE  
operation voltage : 220/400 Volt; 50Hz  
control voltage : 24 VDC  
max. connected load : ? kW  
running at the same time : ? kW

DEPICTION REFERENCE:

— AZO supply  
- - - provided by customer  
- - - later extension  
○ items see in offer

Ex-Bereich

Z22 = ZONE 22

NAME	DATE	PROTECTION MARK ISO 16016	<b>AZO.</b>	
DRAWN BY	JAD	09.08.2018		
STATUS	JAD	10.08.2018	In Bearbeitung	
Diagramm feeding packaging machine PJSC Russisches Produkt;			3-119663-00-0-001	
DIS 50681988			PROJECT:	119663-00
VERSION 02			FORMAT:	