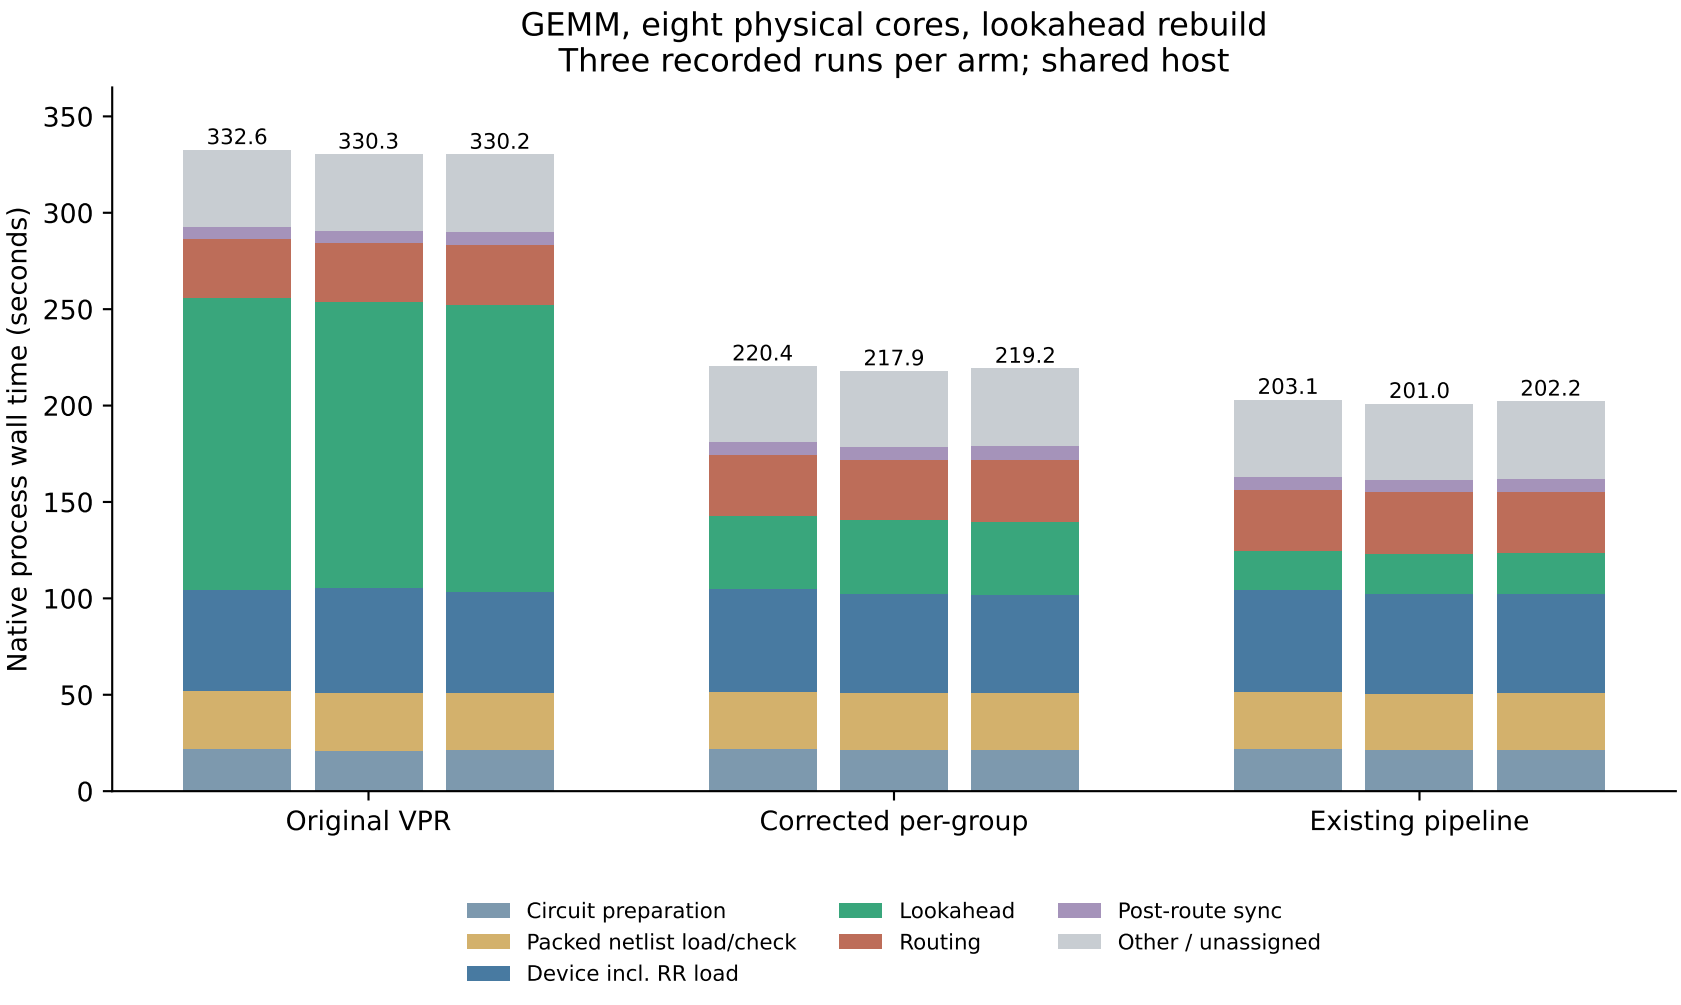
GEMM, eight physical cores, lookahead rebuild
Three recorded runs per arm; shared host
Native process wall time (seconds)
0
50
100
150
200
250
300
350
332.6
330.3
330.2
220.4
217.9
219.2
203.1
201.0
202.2
Original VPR
Corrected per-group
Existing pipeline
Circuit preparation
Packed netlist load/check
Device incl. RR load
Lookahead
Routing
Post-route sync
Other / unassigned