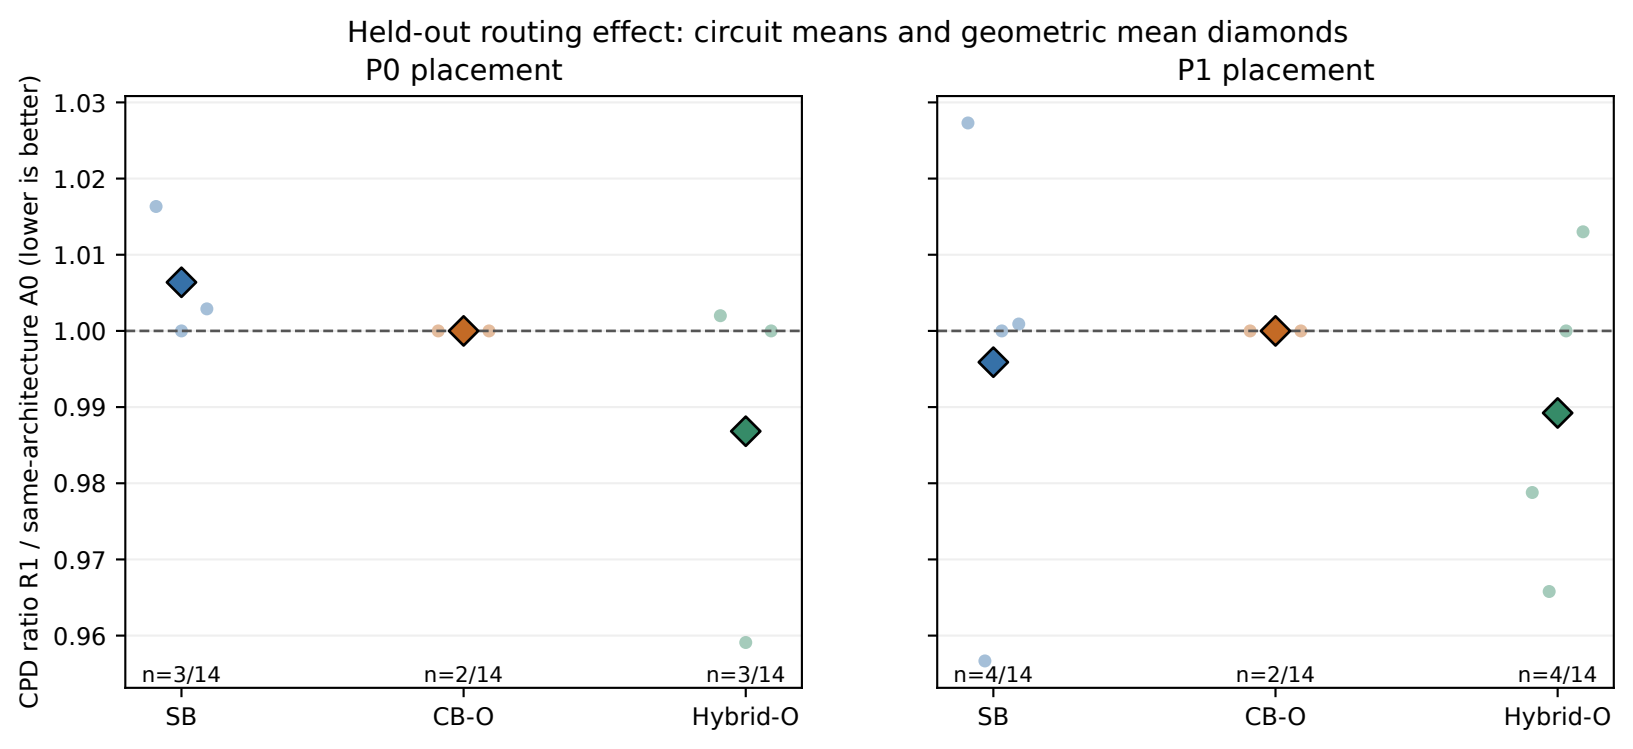
Held-out routing effect: circuit means and geometric mean diamonds
P0 placement
P1 placement
CPD ratio R1 / same-architecture A0 (lower is better)
1.03
1.02
1.01
1.00
0.99
0.98
0.97
0.96
n=3/14
n=2/14
n=3/14
n=4/14
n=2/14
n=4/14
SB
CB-O
Hybrid-O
SB
CB-O
Hybrid-O