

| Product Name | Hybrid Stepper Motor<br>1704HS168A-OB | |
|---|---|---|
| Made by | Approve | Date |





Laser Marking

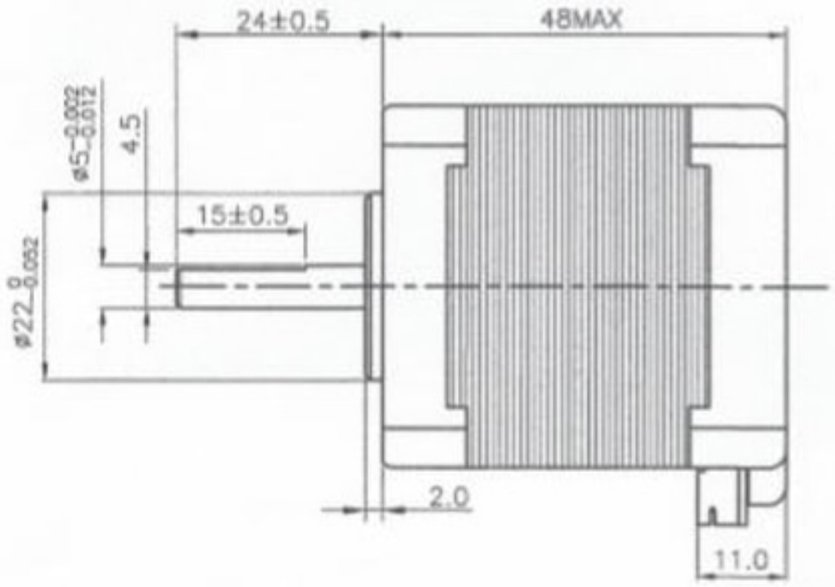


| Items | Specs | Items | Specs |
|---|---|---|---|
| Phase Number | 2 phases | Step Angle | 1.8°±5% |
| Driving Voltage | 12-24 VDC (Recommended) | Rated Current | DC 1.68 A / Phase |
| Resistance(20℃) | 1.65±10% Ω / phase | Inductance | 2.8±20% mH / Phase |
| Holding Torque | ≥ 5.5 Kg-cm(77 Oz-in) | Detent Torque | 0.2 Kg-cm REF. |
| Rotate Direction | ABCDA CW | MAX Starting PPS | 2500 PPS |
| MAX slewing PPS | 2500 PPS | Insulation Resistance | ≥100 MΩ(DC 500V) |
| HI POT | AC,600V/1mA/1S | Insulation Class | Class B |
| Rotor Inertia | 68 g.cm² | Weight | 0.35 Kg REF. |

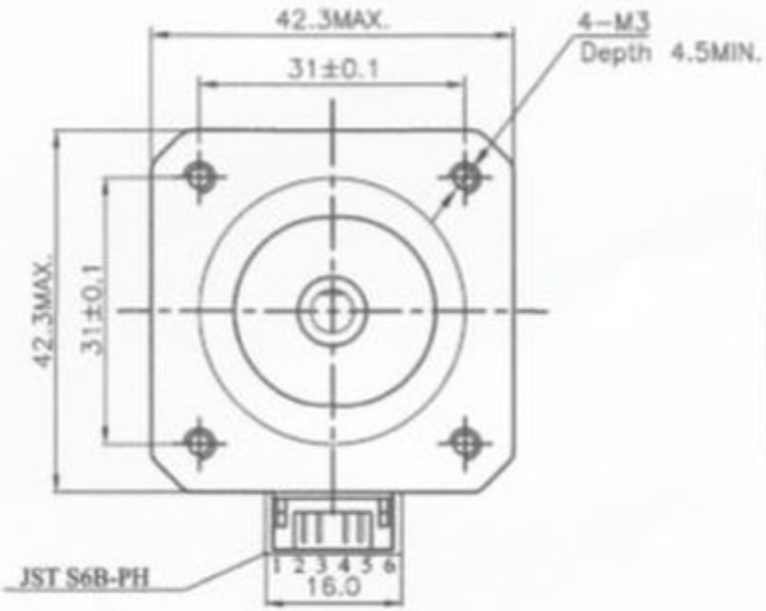

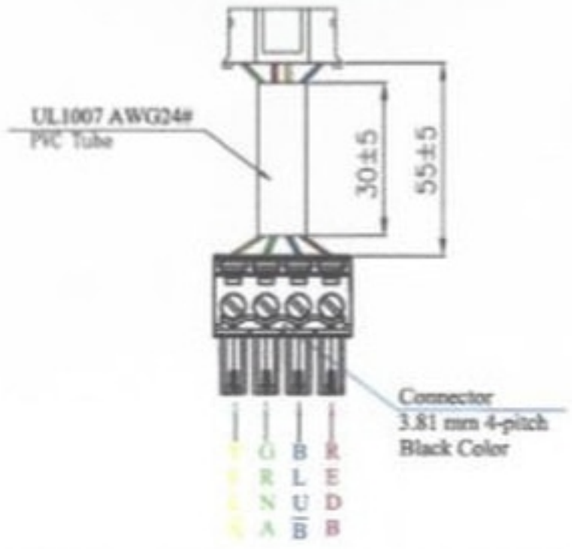
Wiring Diagram

