Catalogue

Motorized Linear Stage

ZXT(015-075)MA01----2

ZXT(050-500)HA00----3

ZXT(050-500)HA03----4

ZXT(050-500)HA07K----5

ZXT(050-600)MA06----6

Motorized Rotation Stage

ZXR060MA----7

ZXR100MA----8

ZXR200MA----9

ZXR400MA----10

Motorized Lab Jacks

ZXV005MA----11

ZXV050HA02----12

ZXV(100-150)MA----13

ZXV(200-300)MA01----14

ZXV(200-300)MA02----15

Motorized XY Integrated stage

ZXW050HA01----16

ZXW050HA02----17

ZXW100HA01----18

ZXW170HA----19

Shanghai ZhengXin Opto-Electrical Technology Co., Ltd

www.shzhengxin.com; shzhengxin.en.alibaba.com

Email: Peter@shzhengxin.com.cn

Phone: 86-21-54973729

Fax: 86-21-54973789


Date: 2011-6-1

ZXT (015-075) MA01

Feature

1) Equipped with step motor and standard RS232 port, working with ZXC motion controller to achieve automatic control
2) Ultra-thin design to save space
3) Lapped guide screw drive system, high resolution
4) Use crossed roller guide, smooth motion, good linearity and high load capacity
5) Step motor and ball screw connected with high quality elastic coupler to get low noise Synchronous transmission
6) Equipped with adjusting screw, easy for debugging
7) Zero position switch and limit switch at both ends for accurate positioning and protecting the stage
8) There are threaded holes and thru holes on the base, easy for mounting

Model	ZXT015MA01	ZXT030MA01	ZXT050MA01	ZXT075MA01
Travel	15mm	30mm	50mm	75mm
Table Size	65x65mm	90x90mm	90x110mm	90x110mm
Screw Pitch	0.5mm	1mm		
Resolution	0.0015625mm	0.003125mm		
Maximum Speed	5mm/sec	10mm/sec		
Repeatability	< 0.004mm			
Axial Clearance	< 0.03mm			
Standard Motor	42 Step Motor			
Max Static Torque	0.4Nm			
Rated Current	1.7A			
Load Capacity	10kg	15kg	15kg	20kg
Weight	1.2kg	1.3kg	1.5kg	1.7kg

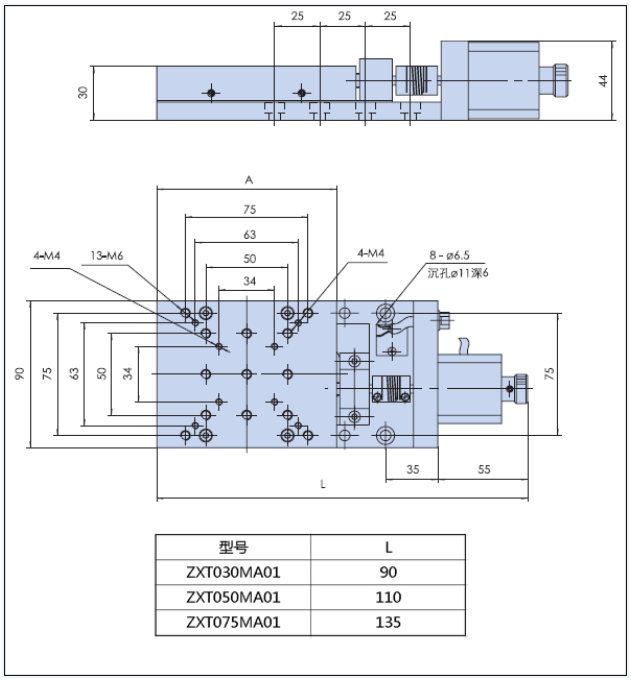

型号	L
ZXT030MA01	90
ZXT050MA01	110
ZXT075MA01	135




Shanghai ZhengXin Opto-Electrical Technology Co., Ltd
www.shzhengxin.com; shzhengxin.en.alibaba.com
Email: Peter@shzhengxin.com.cn
Phone: 86-21-54973729
Fax: 86-21-54973789
Date: 2011-6-1

ZXT (050-500) HA00

Feature

1) Equipped with step motor and standard RS232 port, working with ZXC motion controller to achieve automatic control
2) Actuated by high quality ball screw, good repeatability and long lifetime
3) New style of shaft tip structure to prevent screw from loosing, suitable for high speed reciprocating motion
4) Adopt high precision linear sliding guide, smooth motion and high load capacity, suitable for single axis heavy duty or multi-axis combination use
5) Step motor and ball screw connected with high quality elastic coupler to get low noise Synchronous transmission
6) Zero position switch and limit switch at both ends for accurate positioning and protecting the stage
7) There are threaded holes and thru holes on the base, easy for mounting
8) Servo-motor can be used for industrial application

Model	ZXT050HA00	ZXT100HA00	ZXT150HA00	ZXT200HA00	ZXT300HA00	ZXT400HA00	ZXT500HA00
Travel	50mm	100mm	150mm	200mm	300mm	400mm	500mm
Table Size	150mmx150mm						
Screw Pitch	5mm						
Resolution	0.0015625mm			0.003125mm			
Maximum Speed	20mm/sec			40mm/sec			
Repeatability	< 0.005mm						
Axial Clearance	< 0.03mm						
Standard Motor	42 Step Motor			42 Step Motor		56 Step Motor	
Max Static Torque	0.4Nm					1.2Nm	
Rated Current	1.7A					2.8A	
Load Capacity	30kg					50kg	
Weight	3kg	3.5kg	4kg	4.8kg	5.75kg	8kg	9kg

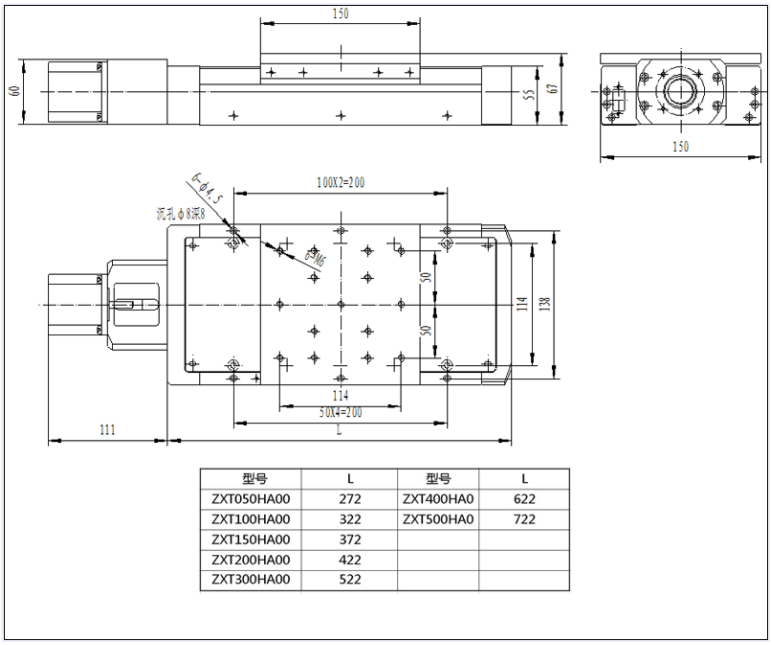

型号	L	型号	L
ZXT050HA00	272	ZXT400HA0	622
ZXT100HA00	322	ZXT500HA0	722
ZXT150HA00	372		
ZXT200HA00	422		
ZXT300HA00	522		



Shanghai ZhengXin Opto-Electrical Technology Co., Ltd
www.shzhengxin.com; shzhengxin.en.alibaba.com
Email: Peter@shzhengxin.com.cn
Phone: 86-21-54973729
Fax: 86-21-54973789


Date: 2011-6-1

ZXT (050-500) HA03


Feature

1) Equipped with step motor and standard RS232 port, working with ZXC motion controller to achieve automatic control
2) Actuated by high quality ball screw, good repeatability and long lifetime
3) New style shaft tip structure to prevent screw from loosing, suitable for high speed reciprocating motion
4) Adopt high precision linear sliding guide, smooth motion and high load capacity, suitable for single axis heavy duty or multi-axis combination use
5) Step motor and ball screw connected with high quality elastic coupler to get low noise Synchronous transmission
6) Equipped with adjusting screw, easy for debugging
7) Zero position switch and limit switch at both ends for accurate positioning and protecting the stage
8) There are threaded holes and thru holes on the base, easy for mounting
9) Servo-motor can be used for industrial application

Model	ZXT050HA03	ZXT100HA03	ZXT150HA03	ZXT200HA03	ZXT300HA03	ZXT400HA03	ZXT500HA03
Travel	50mm	100mm	150mm	200mm	300mm	400mm	500mm
Table Size	160mmx160mm						
Screw Pitch	5mm						
Resolution	0.0015625mm			0.003125mm			
Maximum Speed	20mm/sec			40mm/sec			
Repeatability	< 0.003mm						
Axial Clearance	< 0.005mm						
Standard Motor	42 Step Motor			42 Step Motor		56 Step Motor	
Max Static Torque	0.4Nm					1.2Nm	
Rated Current	1.7A					2.8A	
Load Capacity	30kg					50kg	
Weight	3kg	3.5kg	4kg	4.8kg	5.75kg	8kg	9kg

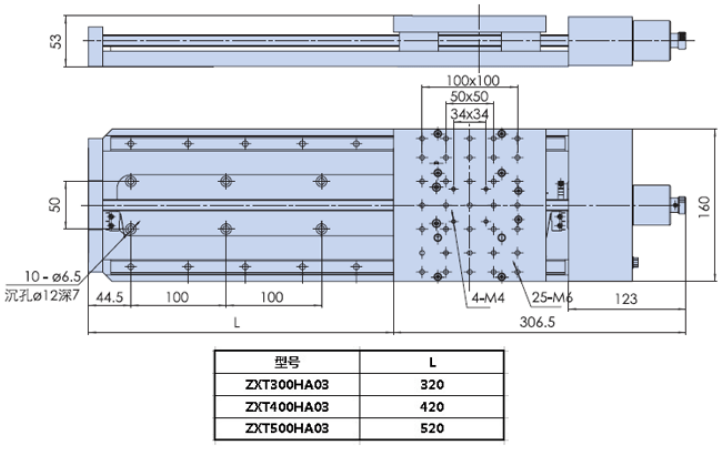

型号	L
ZXT300HA03	320
ZXT400HA03	420
ZXT500HA03	520

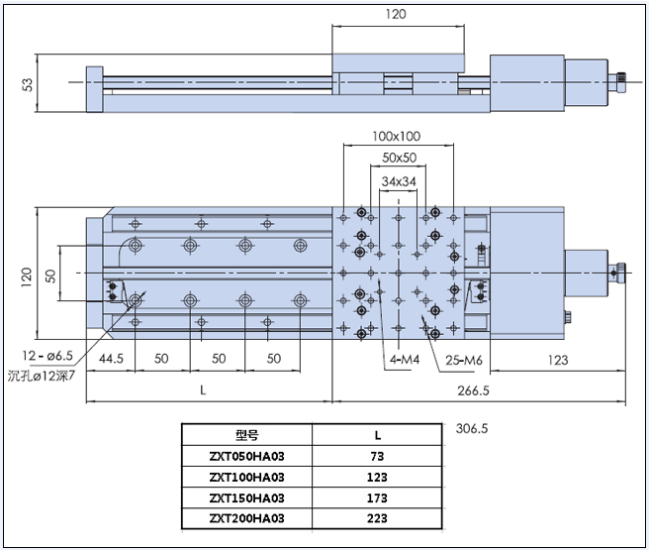

型号	L
ZXT050HA03	73
ZXT100HA03	123
ZXT150HA03	173
ZXT200HA03	223



Shanghai ZhengXin Opto-Electrical Technology Co., Ltd
www.shzhengxin.com; shzhengxin.en.alibaba.com
Email: Peter@shzhengxin.com.cn
Phone: 86-21-54973729
Fax: 86-21-54973789


Date: 2011-6-1

ZXT (050-500) HA07K

Feature

1) Equipped with step motor and standard RS232 port, working with ZXC motion controller to achieve automatic control
2) Actuated by high quality ball screw, good repeatability and positioning accuracy; Little end play and long lifetime
3) Anti-loosing and Anti-end play structure, suitable for high speed reciprocating motion
4) High precision guide, smooth motion and high load capacity, suitable for single axis heavy duty, unbalanced load and multi-axis use
5) Step motor and ball screw connected with high quality elastic coupler to minimize off-center perturbation motion and noise
6) Equipped with adjusting screw, easy for debugging
7) Zero position switch and limit switch at both ends for accurate positioning and protecting the stage
8) There are threaded holes and thru holes on the base, easy for mounting
9) Servo-motor and grating ruler can be used for close loop control to achieve high speed and heavy duty

Model	ZXT050HA07K	ZXT100HA07K	ZXT150HA07K	ZXT200HA07K	ZXT300HA07K	ZXT400HA07K	ZXT500HA07K
Travel	50mm	100mm	150mm	200mm	300mm	400mm	500mm
Table Size	200mmx200mm						
Screw Pitch	4mm					5mm	
Resolution	0.00125mm			0.0025mm		0.003125mm	
Maximum Speed	40mm/sec					50mm/sec	
Repeatability	< 0.005mm						
Axial Clearance	< 0.03mm						
Standard Motor	42 Step Motor			42 Step Motor		56 Step Motor	
Max Static Torque	0.4Nm					1.2Nm	
Rated Current	1.7A					2.8A	
Load Capacity	20kg		30kg				50kg
Weight	2.8kg	3.2kg	4.5kg	5.2kg	6.3kg	7.2kg	8.3kg

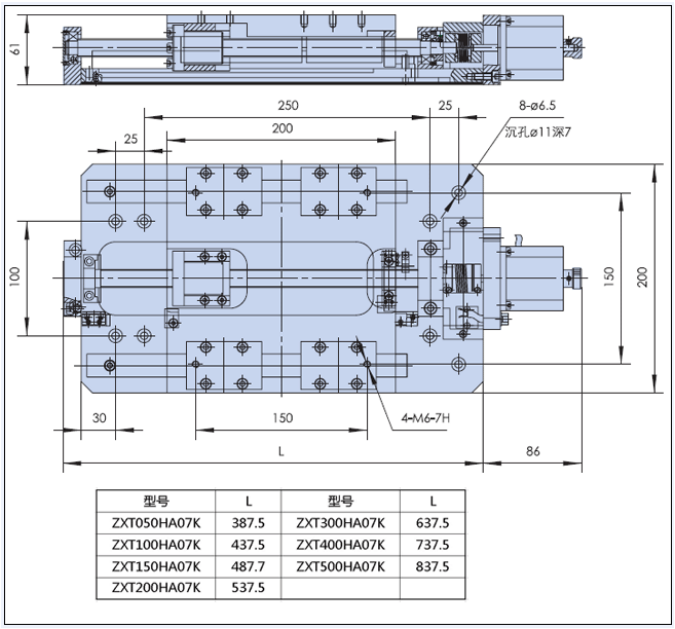

型号	L	型号	L
ZXT050HA07K	387.5	ZXT300HA07K	637.5
ZXT100HA07K	437.5	ZXT400HA07K	737.5
ZXT150HA07K	487.7	ZXT500HA07K	837.5
ZXT200HA07K	537.5		




Shanghai ZhengXin Opto-Electrical Technology Co., Ltd
www.shzhengxin.com; shzhengxin.en.alibaba.com
Email: Peter@shzhengxin.com.cn
Phone: 86-21-54973729
Fax: 86-21-54973789
Date: 2011-6-1


ZXT (050-600) MA06

Feature

1) Equipped with step motor and standard RS232 port, working with ZXC motion controller to achieve automatic control
2) Actuated by high quality ball screw, good repeatability and positioning accuracy; Little end play and long lifetime
3) Anti-loosing and Anti-end play structure, suitable for high speed reciprocating motion
4) Adopt high precision linear sliding guide, smooth motion and high load capacity, suitable for single axis heavy duty or multi-axis use
5) Fine ground base and scientific guide fixing method minimize the yaw and pitch
6) Step motor and ball screw connected with high quality elastic coupler to counter unbalanced load and to minimize perturbation and noise
7) Equipped with adjusting screw, easy for debugging
8) Zero position switch and limit switch at both ends for accurate positioning and protecting the stage
9) The base has threaded holes and thru holes, easy for mounting
10) Servo-motor and grating ruler can be used for close loop control to achieve high speed and heavy duty

Model	ZXT050MA06	ZXT100MA06	ZXT150MA06	ZXT200MA06	ZXT300MA06	ZXT400MA06	ZXT500MA06	ZXT600MA06
Travel	50mm	100mm	150mm	200mm	300mm	400mm	500mm	600mm
Guide Rail	Linear Ball Sliding Guide							
Table Size	120mmx120mm					160mmx160mm		
Screw Pitch	4mm					5mm		
Resolution	0.00125mm			0.00125mm		0.0015625mm		
Maximum Speed	10-40mm/sec					60-120mm/sec		
Repeatability	< 0.002mm					< 0.003mm		
Positioning Accuracy	< 0.003mm					< 0.005mm		
Axial Clearance	< 0.03mm							
Standard Motor	42 Step Motor 42BYG250B					56 Step Motor DM5656E		
Straightness	< 0.003mm		< 0.004mm			< 0.005mm		
Parallelism	< 0.01mm		< 0.015mm			< 0.02mm		
Pitch	25″		50″			60″		
Yaw	20″		25″			30″		
Max Static Torque	0.4Nm					1.2Nm		
Rated Current	1.7A					2.8A		
Load Capacity	20kg		30kg			50kg		
Weight	2.8kg	3.2kg	4.5kg	5.2kg	6.3kg	7.2kg	8.3kg	9.6kg

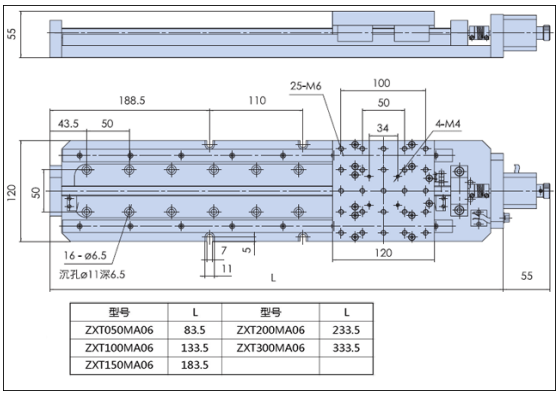

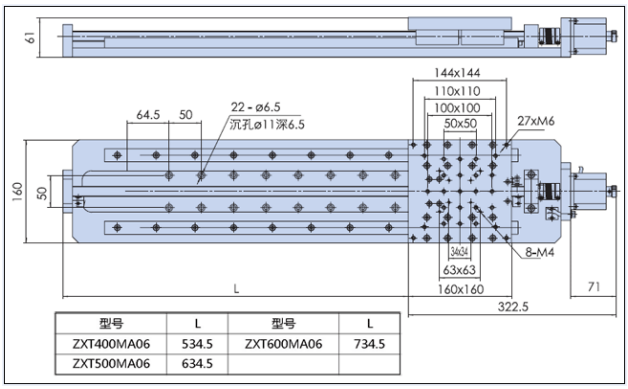




Shanghai ZhengXin Opto-Electrical Technology Co., Ltd
www.shzhengxin.com; shzhengxin.en.alibaba.com
Email: Peter@shzhengxin.com.cn
Phone: 86-21-54973729
Fax: 86-21-54973789
Date: 2011-6-1

ZXR060MA

Feature

1) Equipped with step motor and standard RS232 port, working with ZXC motion controller to achieve automatic control
2) High precision fit; High load capacity; Long lifetime
3) Worm gear / shaft drive system; Smooth motion
4) Free direct and reverse rotation
5) Ingenious design to minimize backlash
6) Special design to minimize the end runout and off center
7) Step motor and worm shaft connected with high quality elastic coupler to get low noise Synchronous transmission
8) Laser marked scale around 360°
9) Servo-motor can be used for industrial application

Model	ZXR060MA
Stage Diameter	60mm
Transmission Ratio	90:1
Repeatability	< 0.01°
Standard Motor	42 Step Motor
Rated Current	1.7A
Maximum Speed	50°/sec
Resolution (8 microstepping)	0.00125°
Central Thru Hole	None
Zero Position	Optional
Load Capacity	30 Kg
Weight	1 Kg

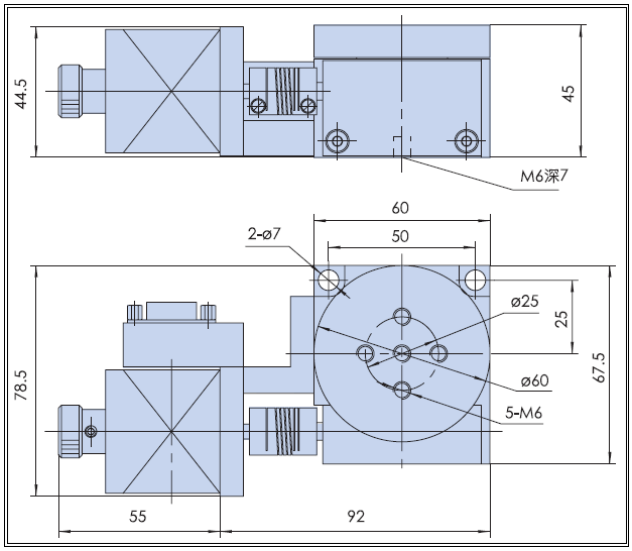




Shanghai ZhengXin Opto-Electrical Technology Co., Ltd
www.shzhengxin.com; shzhengxin.en.alibaba.com
Email: Peter@shzhengxin.com.cn
Phone: 86-21-54973729
Fax: 86-21-54973789
Date: 2011-6-1

ZXR100MA

Feature

1) Equipped with step motor and standard RS232 port, working with ZXC motion controller to achieve automatic control
2) High precision fit; High load capacity; Long lifetime
3) Worm gear / shaft drive system; Smooth motion
4) Free direct and reverse rotation
5) Ingenious design to minimize backlash
6) Step motor and worm shaft connected with high quality elastic coupler to get low noise Synchronous transmission
7) Laser marked scale around 360°
8) Servo-motor can be used for industrial application

Model	ZXR100MA
Stage Diameter	100mm
Transmission Ratio	180:1
Repeatability	< 0.005°
Standard Motor	42 Step Motor
Rated Current	1.7A
Maximum Speed	25°/sec
Resolution (8 micro stepping)	0.00125°
Central Thru Hole Diameter	Φ30 + 0.025
Zero Position	Optional
Load Capacity	50 Kg
Weight	1.54 Kg

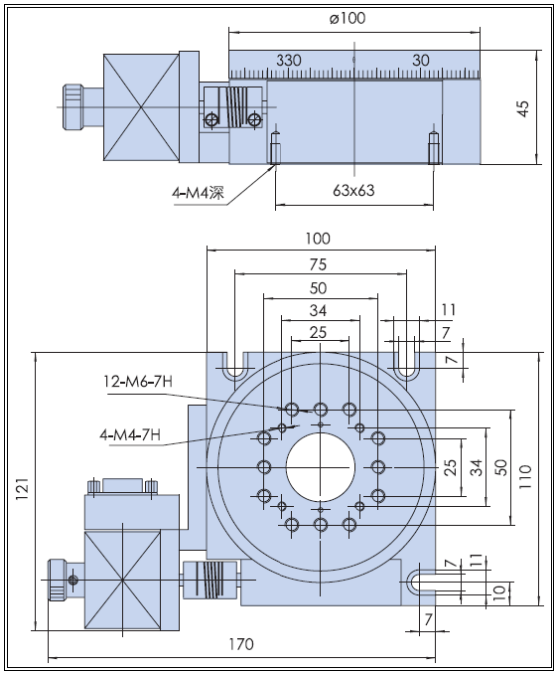




Shanghai ZhengXin Opto-Electrical Technology Co., Ltd
www.shzhengxin.com; shzhengxin.en.alibaba.com
Email: Peter@shzhengxin.com.cn
Phone: 86-21-54973729
Fax: 86-21-54973789
Date: 2011-6-1

ZXR200MA

Feature

1) Equipped with step motor and standard RS232 port, working with ZXC motion controller to achieve automatic control
2) High precision fit; High load capacity; Long lifetime
3) Precision gear transmission structure; Smooth motion
4) Free direct and reverse rotation
5) Ingenious design to minimize backlash
6) Special design to minimize the end runout and off center
7) Step motor and worm shaft connected with high quality elastic coupler to get low noize Synchronous transmission
8) Laser marked scale around 360°
9) Servo-motor can be used for industrial application

Model	ZXR200MA
Stage Diameter	200mm
Transmission Ratio	180:1
Repeatability	< 0.005°
Standard Motor	56 Step Motor
Rated Current	2.8A
Maximum Speed	25°/sec
Resolution (8 micro stepping)	0.00125°
Central Thru Hole Diameter	Φ90 +0.025
Zero Position	Optional
Load Capacity	60 Kg
Weight	7.7 Kg

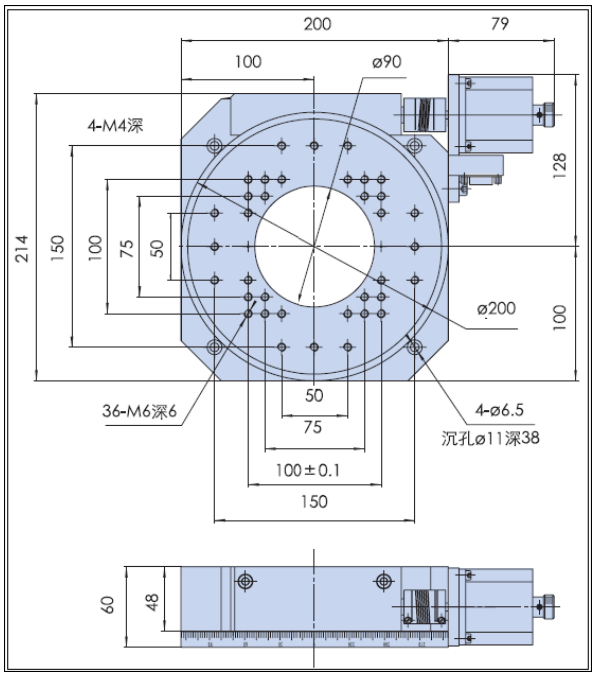




Shanghai ZhengXin Opto-Electrical Technology Co., Ltd
www.shzhengxin.com; shzhengxin.en.alibaba.com
Email: Peter@shzhengxin.com.cn
Phone: 86-21-54973729
Fax: 86-21-54973789
Date: 2011-6-1

ZXR400MA

Feature

1) Equipped with step motor and standard RS232 port, working with ZXC motion controller to achieve automatic control
2) High precision fit; High load capacity; Long lifetime
3) Precision gear transmission structure; Smooth motion
4) Free direct and reverse rotation
5) Ingenious design to minimize backlash
6) Special design to minimize the end runout and off center
7) Step motor and worm shaft connected with high quality elastic coupler to get low noize Synchronous transmission
8) Servo-motor can be used for industrial application

Model	ZXR400MA
Stage Diameter	400mm
Transmission Ratio	720:1
Repeatability	< 0.003°
Standard Motor	56 Step Motor
Rated Current	2.8A
Maximum Speed	5°/sec
Resolution	0.0003125°
Central Thru Hole Diameter	Φ100 + 0.025
Zero Position	Optional
Load Capacity	76 Kg
Weight	21 Kg

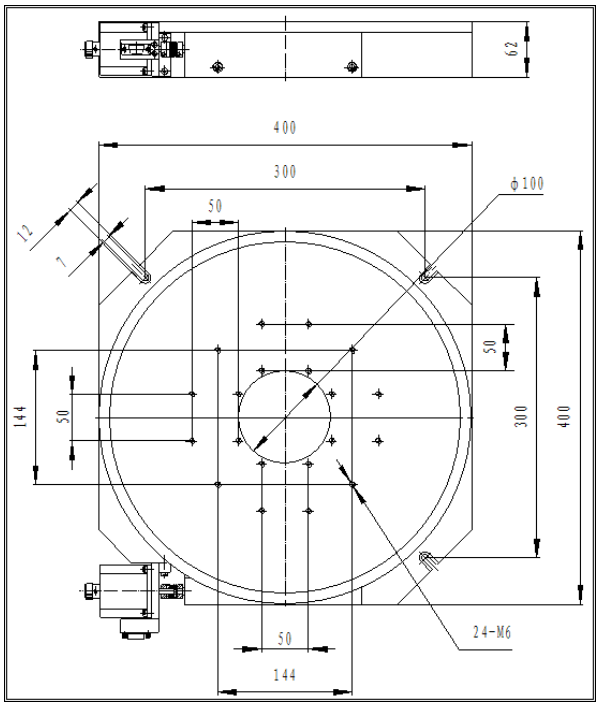




Shanghai ZhengXin Opto-Electrical Technology Co., Ltd
www.shzhengxin.com; shzhengxin.en.alibaba.com
Email: Peter@shzhengxin.com.cn
Phone: 86-21-54973729
Fax: 86-21-54973789
Date: 2011-6-1

ZXV005MA

Feature

1) Equipped with step motor and standard RS232 port, working with ZXC motion controller to achieve automatic control
2) Stage placed horizontally, driving force in the central area, 4 guides at four sides, avoid unbalanced load
3) High quality ball screw transmission; Good repeatability; Long lifetime
4) Lapped worm pairs driven, heavy load capacity, microstep adjustment, self-lock function
5) Linear bearing guide, high precision
6) Step motor and worm shaft connected with high quality elastic coupler to get low noise Synchronous transmission
7) Zero position switch and limit switch at both ends for accurate positioning and protecting the stage
8) There are threaded holes and thru holes on the base, easy for mounting
9) Dustproof cover is optional

Model	ZXV005MA
Travel	5mm
Table Size	50x64mm
Screw Pitch	5mm
Driving Mode	Thread pairs
Standard Motor	42 Step Motor
Resolution	0.625μm
Maximum Speed	5mm/s
Repeatability	0.007mm
Load Capacity	8kg
Weight	1.5kg

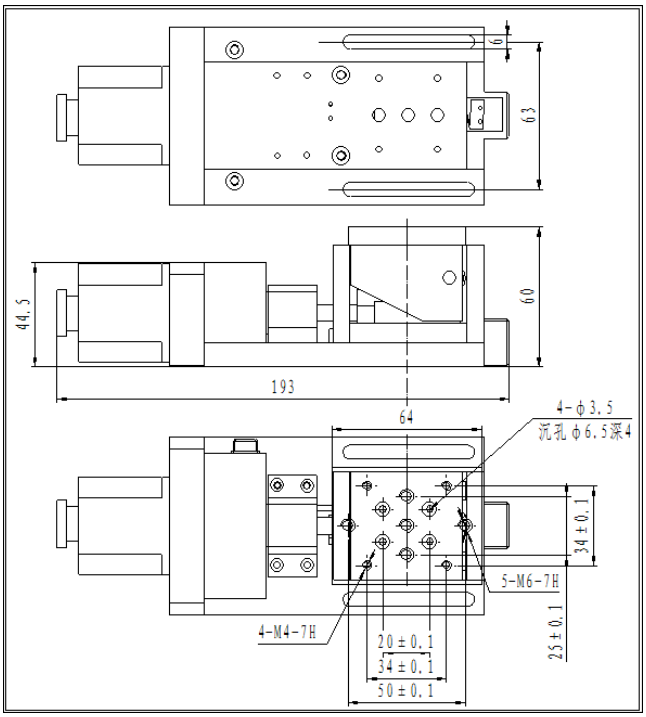




Shanghai ZhengXin Opto-Electrical Technology Co., Ltd
www.shzhengxin.com; shzhengxin.en.alibaba.com
Email: Peter@shzhengxin.com.cn
Phone: 86-21-54973729
Fax: 86-21-54973789
Date: 2011-6-1


ZXV050HA02

Feature

1) Equipped with step motor and standard RS232 port, working with ZXC motion controller to achieve automatic control
2) Stage placed horizontally, driving force in the center, 4 guides at four sides, avoid unbalanced load
3) High quality ball screw transmission; Good repeatability; Long lifetime
4) Driven by synchronous belt gear, high load capacity, microstep adjustment, self-lock function
5) Linear bearing guide, high precision
6) Step motor and guide screw connected with high quality synchronous belt to get low noise Synchronous transmission
7) Zero position switch and limit switch at both ends for accurate positioning and protecting the stage
8) There are threaded holes and thru holes on the base, easy for mounting

Model	ZXV050HA02
Travel	50mm
Table Size	150x118mm
Screw Pitch	2mm
Transmission Mode	Thread pairs
Standard Motor	42 Step Motor
Resolution	0.625μm
Maximum Speed	15mm/s
Repeatability	0.007mm
Load	10kg
Weight	3kg

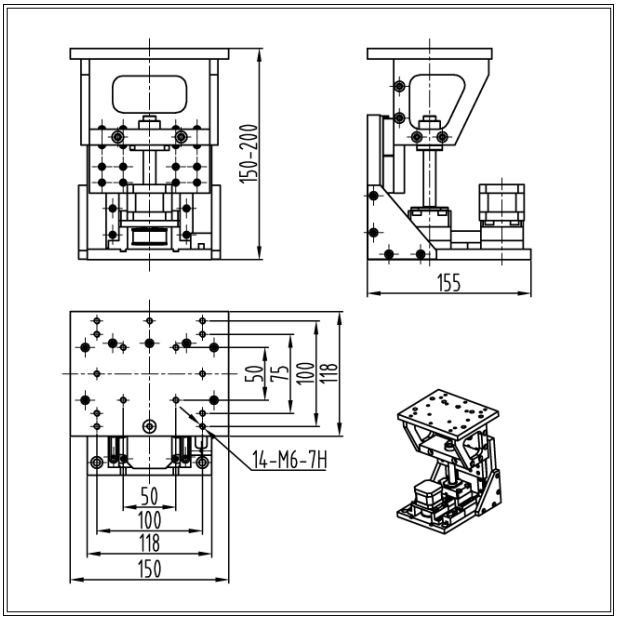

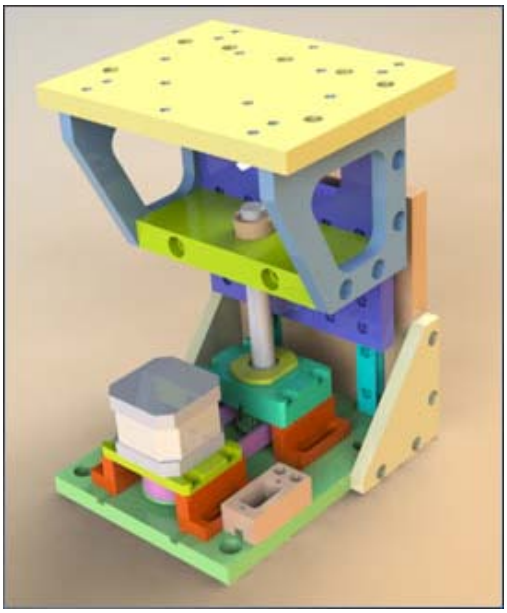


Shanghai ZhengXin Opto-Electrical Technology Co., Ltd
www.shzhengxin.com; shzhengxin.en.alibaba.com
Email: Peter@shzhengxin.com.cn
Phone: 86-21-54973729
Fax: 86-21-54973789
Date: 2011-6-1

ZXV(100-150)MA

Feature

1) Equipped with step motor and standard RS232 port, working with ZXC motion controller to achieve automatic control
2) Stage placed horizontally, driving force in the center, 4 guides at four sides, avoid unbalanced load
3) High quality ball screw transmission; Good repeatability; Long lifetime
4) Lapped worm pairs driven, high load capacity, microstep adjustment, self-lock function
5) Linear bearing guide, high precision
6) Step motor and worm shaft connected with high quality elastic coupler to get low noise Synchronous transmission
7) Zero position switch and limit switch at both ends for accurate positioning and protecting the stage
8) There are threaded holes and thru holes on the base, easy for mounting
9) Dustproof cover is optional

Model	ZXV100MA	ZXV150MA
Travel	100mm	150mm
Table Size	180mmx120mm	
Screw Pitch	5mm	
Transmission Ratio	180:1	
Standard Motor	85 Step Motor	
Resolution	0.025μm	
Maximum Speed	10mm/s	
Repeatability	0.005mm	
Load Capacity	50kg	
Weight	11kg	14kg

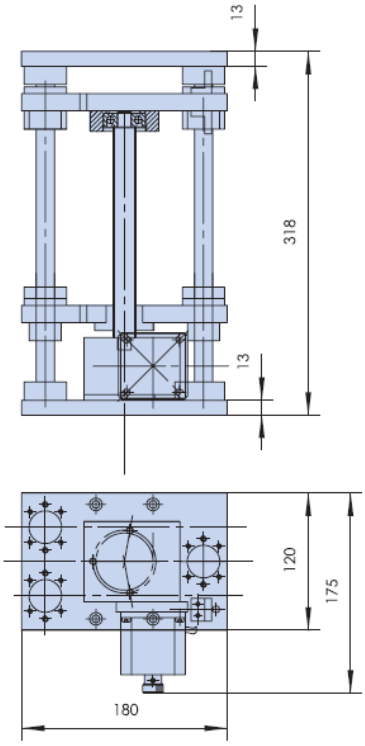




Shanghai ZhengXin Opto-Electrical Technology Co., Ltd
www.shzhengxin.com; shzhengxin.en.alibaba.com
Email: Peter@shzhengxin.com.cn
Phone: 86-21-54973729
Fax: 86-21-54973789
Date: 2011-6-1

ZXV(200-300)MA01

Feature

1) Equipped with step motor and standard RS232 port, working with ZXC motion controller to achieve automatic control
2) Stage placed horizontally, driving force in the center, 4 guides at four sides, avoid unbalanced load
3) High quality ball screw transmission; Good repeatability; Long lifetime
4) Lapped worm gear / shaft transmission; High load capacity, microstep adjustment, self-lock function
5) Linear bearing guide, high precision
6) Step motor and worm shaft connected with high quality elastic coupler to get low noise Synchronous transmission
7) Zero position switch and limit switch at both ends for accurate positioning and protecting the stage
8) There are threaded holes and thru holes on the base, easy for mounting
9) Dustproof cover is optional

Model	ZXV200MA01	ZXV300MA01
Travel	200mm	300mm
Table Size	400mmx250mm	
Screw Pitch	5mm	
Transmission Ratio	180:1	
Standard Motor	85 Step Motor	
Resolution	0.017μm	
Maximum Speed	0.35mm/s	
Repeatability	0.005mm	
Load Capacity	200kg	
Weight	38kg	40kg

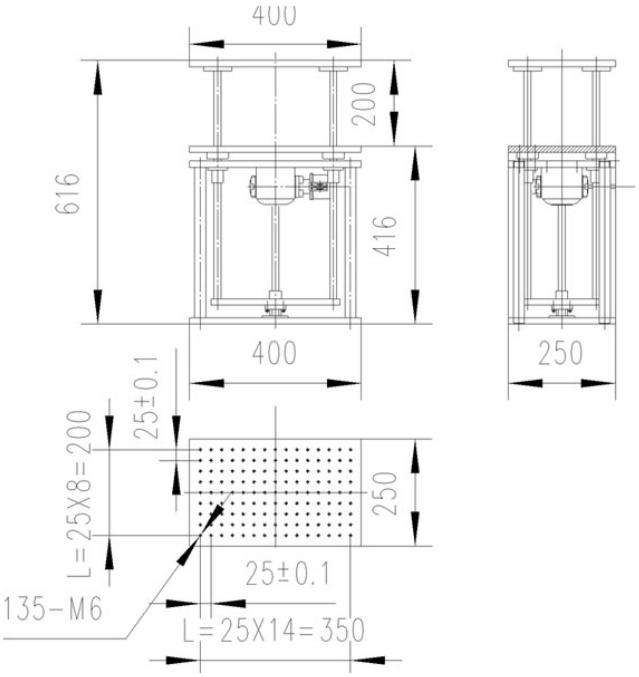




Shanghai ZhengXin Opto-Electrical Technology Co., Ltd
www.shzhengxin.com; shzhengxin.en.alibaba.com
Email: Peter@shzhengxin.com.cn
Phone: 86-21-54973729
Fax: 86-21-54973789
Date: 2011-6-1

ZXV(200-300)MA02

Feature

1) Equipped with step motor and standard RS232 port, working with ZXC motion controller to achieve automatic control
2) Stage placed horizontally, driving force in the center, 4 guides at four sides, avoid unbalanced load
3) High quality ball screw transmission; Good repeatability; Long lifetime
4) Lapped worm gear / shaft transmission; High load capacity, microstep adjustment, self-lock function
5) Linear bearing guide, high precision
6) Step motor and worm shaft connected with high quality elastic coupler to get low noise Synchronous transmission
7) Zero position switch and limit switch at both ends for accurate positioning and protecting the stage
8) There are threaded holes and thru holes on the base, easy for mounting
9) Dustproof cover is optional

Model	ZXV200MA02	ZXV300MA02
Travel	200mm	300mm
Table Size	400mmx200mm	
Screw Pitch	4mm	
Transmission Ratio	20:1	
Standard Motor	56 Step Motor	
Resolution	0.1μm	
Maximum Speed	2mm/s	
Repeatability	0.005mm	
Load Capacity	50kg	
Weight	23kg	32kg

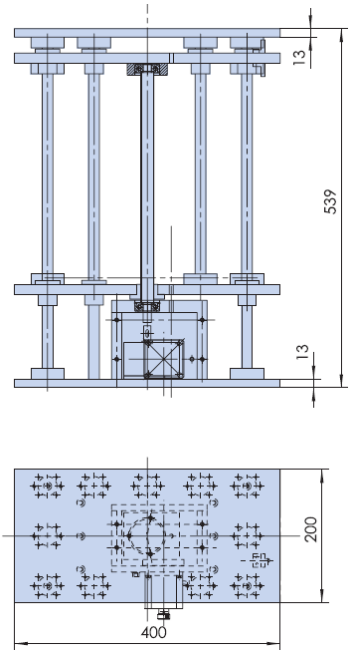




Shanghai ZhengXin Opto-Electrical Technology Co., Ltd
www.shzhengxin.com; shzhengxin.en.alibaba.com
Email: Peter@shzhengxin.com.cn
Phone: 86-21-54973729
Fax: 86-21-54973789
Date: 2011-6-1


ZXW050HA01

Feature

1) Equipped with step motor and standard RS232 port, working with ZXC motion controller to achieve automatic control
2) Two axis integral design, compact structure, high orthogonality
3) High quality ball screw transmission; Good repeatability and big driving force
4) Use high precision crossed roller V-shaped guide, smooth motion and high load capacity
5) Step motor and ball screw connected with high quality elastic coupler to get low noise Synchronous transmission
6) Zero position and limit switch at both sides, easy for accurate positioning and protecting the stage
7) Central thru opening for light through and glass sheet can be mounted on it
8) There are threaded holes and thru holes on the base, easy for mounting

Model	ZXW050HA01
Travel	50mm x 50mm
Guide	Crossed Ball Guide
Screw Pitch	1mm
Resolution (8 Microstepping)	0.000625mm
Repeatability	〈 0.005mm
Standard Motor	28 Step Motor
Max Static Torque	0.4Nm
Rated Current	1.6A
Load Capacity	10Kg
Grating Ruler	Optional



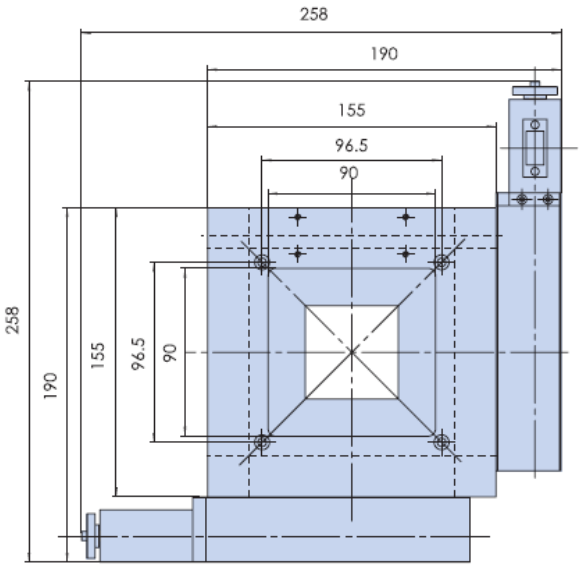




Shanghai ZhengXin Opto-Electrical Technology Co., Ltd
www.shzhengxin.com; shzhengxin.en.alibaba.com
Email: Peter@shzhengxin.com.cn
Phone: 86-21-54973729
Fax: 86-21-54973789
Date: 2011-6-1


ZXW050HA02

Feature

1) Equipped with step motor and standard RS232 port, working with ZXC motion controller to achieve automatic control
2) Grating ruler is used for close loop control to improve the accuracy
3) Two axis integral design, compact structure, high orthogonality
4) High quality ball screw transmission; Good repeatability and big driving force
5) Use high precision crossed roller V-shaped guide, smooth motion and high load capacity
6) Step motor and ball screw connected with high quality elastic coupler to get low noise Synchronous transmission
7) Zero position switch and limit switch at both sides, easy for positioning and protecting the stage
8) Central thru opening for light through and glass sheet can be mounted on it
9) There are threaded holes and thru holes on the base, easy for mounting

Model	ZXW050HA02
Travel	50mm x 50mm
Guide	Crossed Ball Guide
Screw Pitch	1mm
Resolution (8 Microstepping)	0.000625mm
Repeatability	〈 0.005mm
Standard Motor	42 Step Motor
Max Static Torque	0.4Nm
Rated Current	1.7A
Load Capacity	10Kg



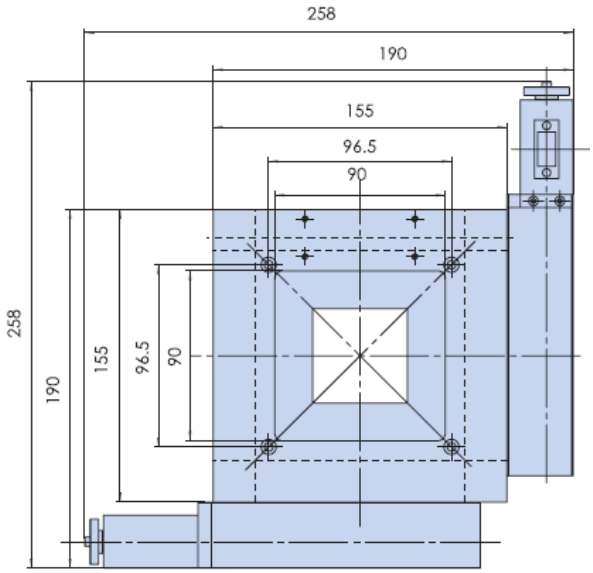




Shanghai ZhengXin Opto-Electrical Technology Co., Ltd
www.shzhengxin.com; shzhengxin.en.alibaba.com
Email: Peter@shzhengxin.com.cn
Phone: 86-21-54973729
Fax: 86-21-54973789
Date: 2011-6-1

ZXW100HA01

Feature

1) Equipped with step motor and standard RS232 port, working with ZXC motion controller to achieve automatic control
2) Two axis integral design, compact structure, high orthogonality
3) High quality ball screw transmission; Good repeatability and big driving force
4) Use high precision V-shaped crossed roller guide, smooth motion and high load capacity
5) Step motor and ball screw connected with high quality elastic coupler to get low noise Synchronous transmission
6) Zero position switch and limit swtich at both sides, easy for positioning and protecting the stage
7) Central thru opening for light through and glass sheet can be mounted on it
8) The base with threaded holes and thru holes, easy for mounting

Model	ZXW100HA01
Travel	100mm x 100mm
Guide	Crossed Ball Guide
Screw Pitch	4mm
Resolution (8 Microstepping)	0.00125mm
Repeatability	〈 0.005mm
Standard Motor	42 Step Motor
Max Static Torque	0.4Nm
Rated Current	1.6A
Load Capacity	20Kg
Grating Ruler	Optional

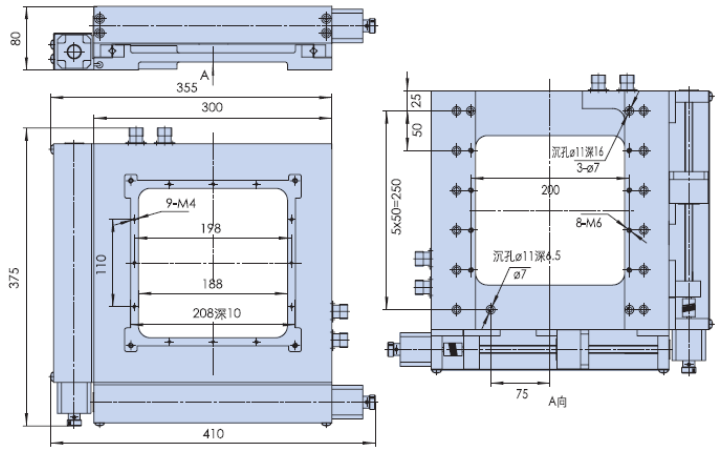




Shanghai ZhengXin Opto-Electrical Technology Co., Ltd
www.shzhengxin.com; shzhengxin.en.alibaba.com
Email: Peter@shzhengxin.com.cn
Phone: 86-21-54973729
Fax: 86-21-54973789
Date: 2011-6-1

ZXW170HA

Feature

1) Equipped with step motor and standard RS232 port, working with ZXC motion controller to achieve automatic control.
2) Two axis integral design, compact structure, high orthogonality
3) Use high precision V-shaped crossed roller guide, smooth motion and high load capacity
4) Step motor and ball screw connected with high quality elastic coupler to get low noise Synchronous transmission
5) Zero position switch and limit switch at both sides, easy for positioning
6) The base with threaded holes and thru holes, easy for mounting

Model	ZXW170HA
Table Size	300mm x 300mm
Travel	170mm x 170mm
Guide	Crossed Roller Guide
Screw Pitch	4mm
Resolution (8 Microstepping)	0.001mm
Repeatability	±0.001mm
Positioning Accuracy	±0.003mm
Straightness	< 0.015mm
Parallelism	< 0.015mm
Orthogonality	<20″
Max Speed	25mm/sec
Stanadard Motor	42 Step Motor
Loading Capacity	60Kg
Grating Ruler	Optional

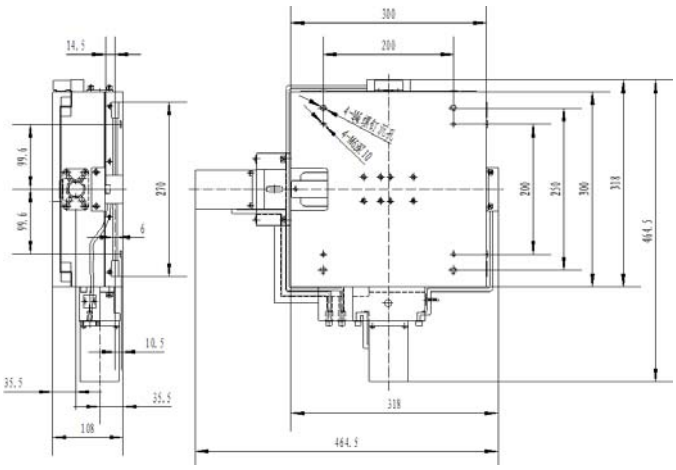



Shanghai ZhengXin Opto-Electrical Technology Co., Ltd
www.shzhengxin.com; shzhengxin.en.alibaba.com
Email: Peter@shzhengxin.com.cn
Phone: 86-21-54973729
Fax: 86-21-54973789
Date: 2011-6-1