




Data Center Building Block Solutions[®]

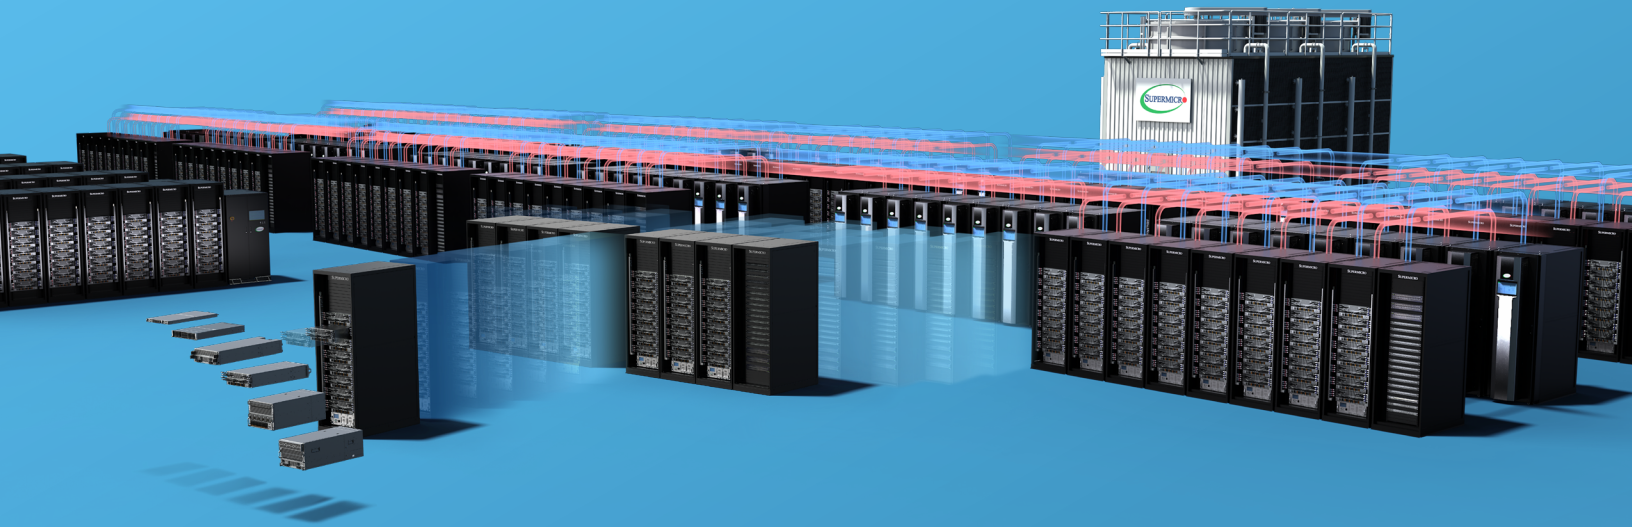

APRIL 2026

Supermicro Data Center Building Block Solutions®



**Speed up Time-to-Market
and Time-to-Online**



**One-Stop Shop Total Solution with
Optimized Quality and Performance**



Key DCBBS Components



AI & Compute Systems

Broadest AI, compute, and storage system portfolio with unmatched customization and liquid cooling



In-Rack Solutions

Complete in-rack integration—cooling distribution units & manifolds, hose kits, networking, power shelves and more




In-Row Solutions

Scalable liquid cooling from 200kW Liquid-to-Air Sidecars to 1.8MW In-Row CDUs, plus SuperCluster solutions



Site Infrastructure Solutions

Site-level cooling infrastructure with water and dry cooling towers, power, and optimized cabling



Management Software Suite

End-to-end software delivering unified infrastructure control, deployment automation, developer tools, and more



Services and Onsite Deployment

Comprehensive professional services from data center design and solution validation to on-site deployment and ongoing support

Supermicro DCBBS includes all critical computing, power, cooling infrastructure, software, and services. The modularized building block solution architecture—from system, to rack, to data center—reduces cost and speeds up time-to-online.



**Save Power and Cost with
Reduced OPEX and CAPEX**



**Tested and Validated
Before Shipping**



Featuring the Industry's Widest Selection of System-Level Building Blocks



4U NVIDIA HGX™
B300 DLC-2



4U NVIDIA HGX
B200 DLC



4U AMD
MI355X DLC



E3.S All-Flash AI
Storage



SuperBlade®
Multi-Node



8U NVIDIA HGX
B300



10U NVIDIA HGX
B200



8U AMD
MI350X




4U 90-Bay
Scale-Out Storage



FlexTwin™
Multi-Node

Rack and Cluster-Level Building Blocks

Once systems are defined, they're integrated into rack-level building blocks, the organizational backbone of your cluster. Racks are fully integrated and validated at cluster level with L11 and L2 testing to accelerate time to online and to assure plug-and-play deployment.

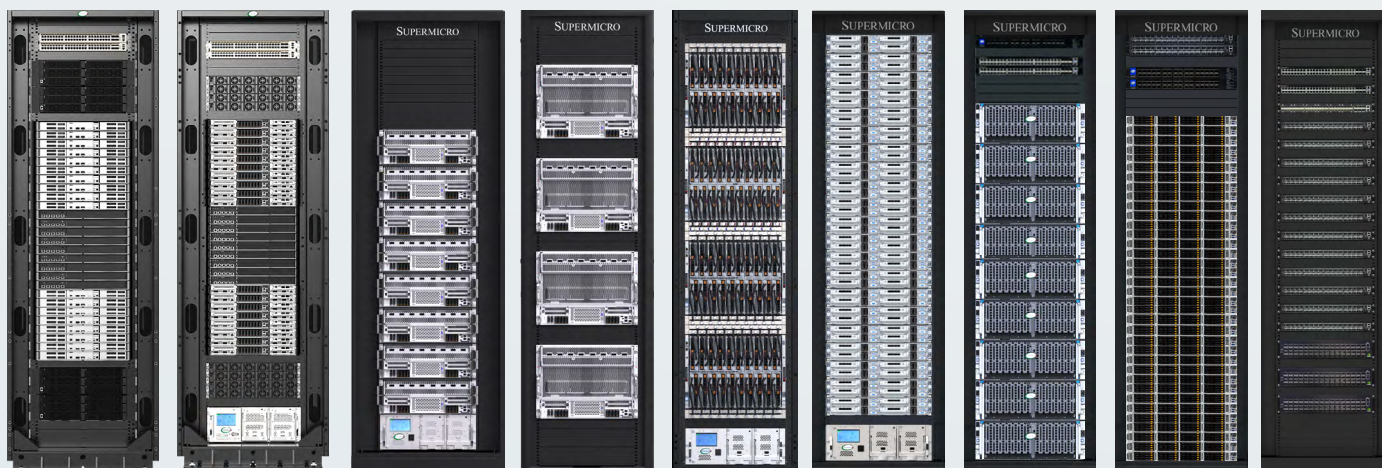

Supermicro
Vera Rubin
NVL72

Supermicro
NVIDIA
GB300
NVL72

Liquid-Cooled
4U Supermicro
NVIDIA HGX B300
8-GPU Rack

8U Supermicro
NVIDIA HGX
B300 8-GPU
Rack


SuperBlade®
for AI and HPC
with
Highest Node
Density

FlexTwin™
for Liquid-
Cooled HPC
at Scale

Object Storage
with Supermicro
Front and Top-
Loading
Systems

Petascale All-
Flash Systems
for High-
Performance AI
Storage

Networking
Rack with
Flexible
Configurations

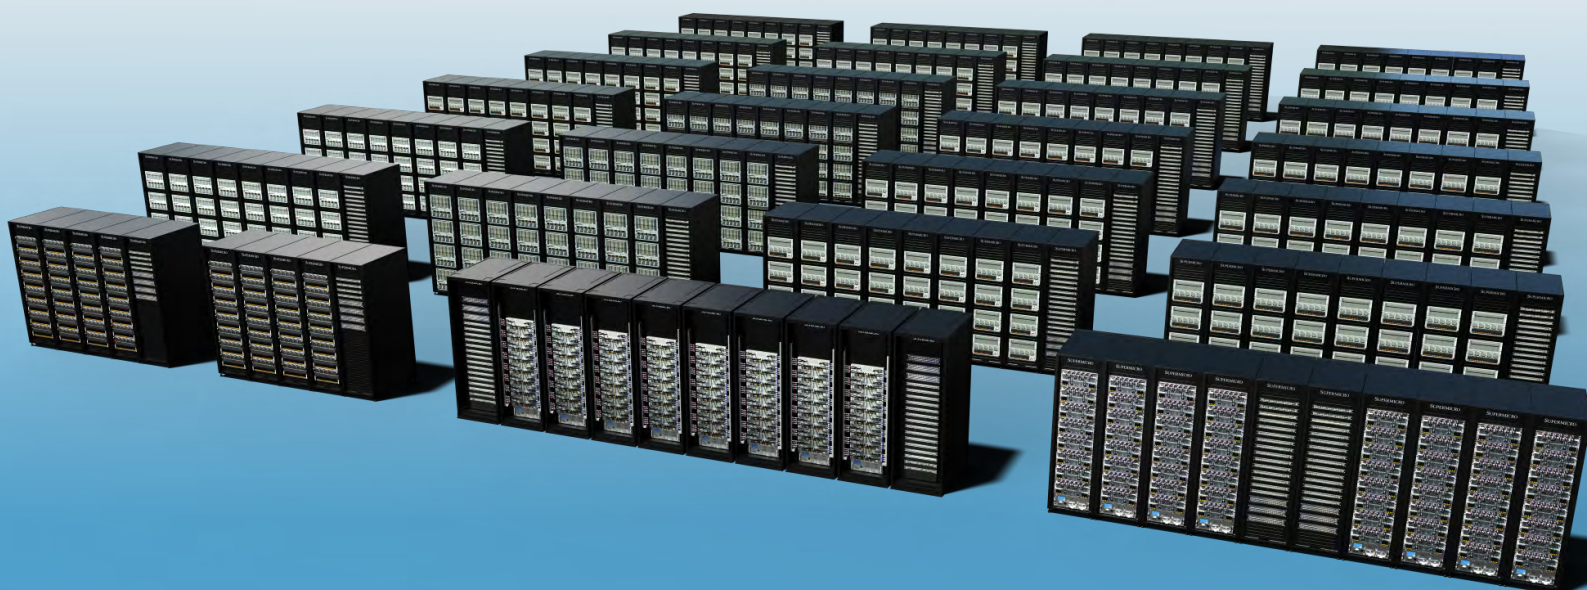

To achieve the complex building process of large AI clusters, such as 256 system node clusters, it can be made simpler by dividing it into smaller parts. These “scalable units” consist of groups of systems, interconnected with rail-optimized network topology, that can be further multiplied to achieve the desired cluster size.

AI and Compute Systems



GPU and CPU Systems

- Broad range of density, efficiency, and scalability-optimized systems
- Latest AI and compute technology from NVIDIA, AMD, and Intel in various form factors designed for diverse workloads

Form Factors

1U to 10U

Cooling Types

Air Cooling, Liquid Cooling

Storage Systems



- Petascale and object storage servers with seamless integration across leading software-defined networking partners
- Maximum throughput and scalability for data-intensive AI workloads


Drive Types

2.5", 3.5", E1.S, E3.S,

Interfaces

NVMe, SAS, SATA

System Building Blocks, Cold Plates

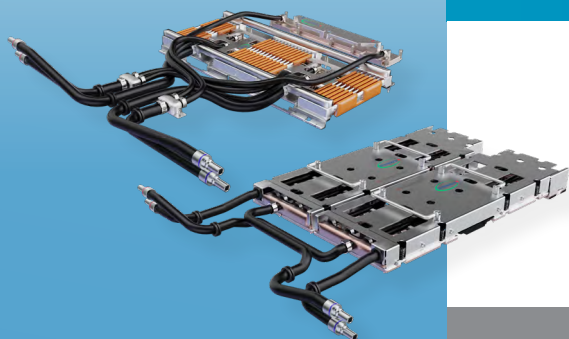

- Direct-to-Chip Liquid Cooling (DLC) cold plates for CPU, GPU, DIMM, VRM, PCIe Switch, PSU, and more
- Allows for heat capture directly from the chip
- Low thermal resistance

CPU Support

Intel Xeon, AMD EPYC

GPU Support

NVIDIA GPUs, AMD GPUs

In-Rack Solutions

In-Rack Coolant Distribution Unit (CDU)



- Supports cooling capacity up to 250 kW
- Features a redundant pump design that ensures uptime
- Includes redundancy control to secure power continuity
- Offers a touch screen and web interface for simplified operation
- Designed for seamless integration with both EIA and OCP rack architectures

Cooling Capacity

Up to 250 kW

Redundancy

EIA: 2N redundant pumps;
OCP: N+1 redundant pumps

Cooling Distribution Manifold (CDM)



- CDM distributes coolant to each server in the rack and returns hot coolant to the CDU
- Horizontal and vertical manifold mounting options available
- Integrated in racks for seamless scaling
- DLC-2 vertical CDM saves rack space and increases density

Mounting Types

Vertical, Horizontal

In-Rack Solutions



Rear Door Heat Exchanger (RDHx)


- Supports cooling capacities of 50 kW or 80 kW
- Higher efficiency, intelligent control, and seamless integration with modern AI racks
- Supports quick rack mounting with flexible installation
- High-performance fans for optimal airflow and heat dissipation
- Intelligent anti-condensation system prevents moisture

Cooling Capacity

Up to 80 kW

Redundancy

N+1 Fans

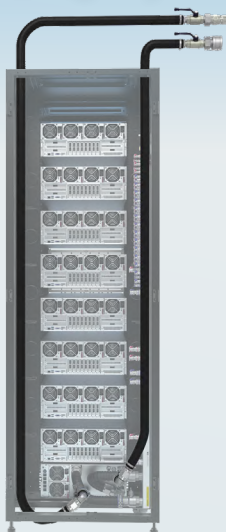

Hose Kit


- Flexible length design to fit different racks and data center placements
- High liquid pressure tolerance with 10-bar
- Ball valves provide excellent sealing which can prevent facility water and coolant evaporation
- Universal camlock for seamless integration with facility piping

Connection Type

1.25" standard CDU

Coolant


- Optimized for high heat flux and efficient thermal performance
- Broad material compatibility across metals, plastics, and elastomers
- Long-term stability for reliable continuous operation



Supply Specifications

20L / 200L / 1000L

In-Rack Solutions

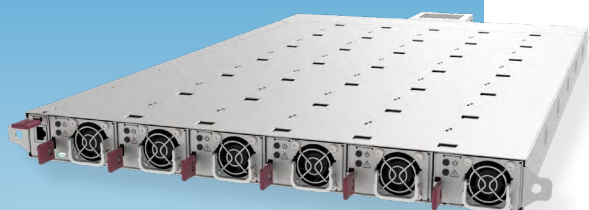

Power Shelf

- 6x 5500W high-efficiency PSUs with PMC
- PMC PoE with Redfish support
- Supermicro Management Tools support

Power Capacity

Up to 33 kW

Form Factor

1U, 19" or 21"



Battery Back-Up Unit (BBU)

- Provides direct current with backup power to ensure safety and continued operation
- Available in standard 19" rack and 21" (ORv3) rack design

Power Capacity

Up to 33 kW


Form Factor

2U, 19" or 21"

Discharge Duration

90 Seconds—33 kW
240 Seconds—24 kW


In-Rack Solutions

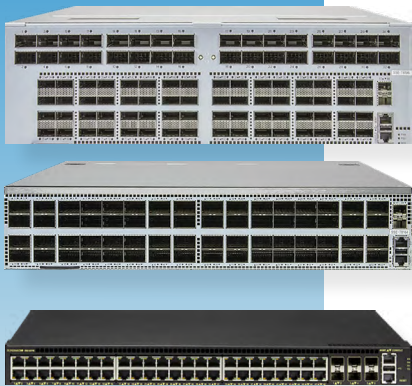

Supermicro Networking Switches

- Standard and unique 400G/800G platforms with liquid cooling solutions
- Optimized for AI workloads, high performance storage networks, and enterprise data centers
- Advanced Enterprise SONiC and ONIE support for custom NOS integration
- Open and wide range of validated transceivers and cable options

Standards	Ethernet
Speeds	1 Gb/s to up to 800 Gb/s options

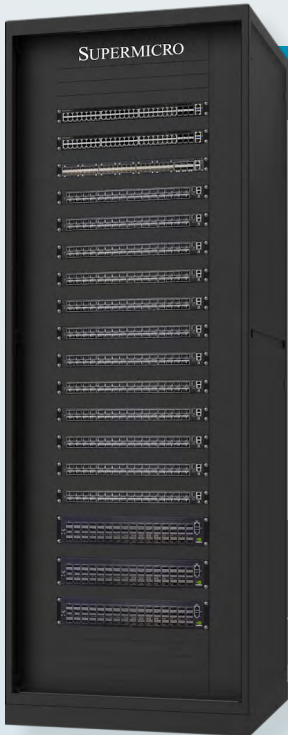

Partner Networking Switches

- Compute fabric InfiniBand switches supporting end-to-end 800 Gb/s
- Compute fabric ethernet switches supporting up to 800 GbE
- Converged network switches for both high-performance storage and in-band management networks

Standards	NVIDIA Spectrum Ethernet NVIDIA Quantum InfiniBand
Speeds	1 Gb/s to up to 800 Gb/s options

In-Row Solutions



Racks

- In-house design compatible with MGX, OCP, and more
- Liquid-cooling ready architecture optimized for high-density AI data centers
- Pre-assembled and streamlined logistics for faster deployment

Form Factor Support

MGX, OCP, and more

Static Load Capacity

Up to 2500 kg



In-Row Coolant Distribution Unit (CDU)

- Supports cooling capacity up to 1.8 MW
- Continuous operation via N+1 pumps and ATS
- Redundant PSUs prevent cooling interruptions

Cooling Capacity

Up to 1.8 MW

Redundancy

N+1 redundant pumps



Liquid-to-Air (L2A) Sidecar CDU

- Supports cooling capacity up to 200 kW
- Continuous operation via N+1 pumps and ATS
- Redundant PSUs prevent cooling interruptions

Cooling Capacity

Up to 200 kW

Redundancy

N+1 redundant pumps



SuperCluster

- Highly customizable, plug-and-play cluster solutions with multiple racks and integrated networking fabric
- Each system undergoes rigorous L11 or L12 validation testing before shipping, ensuring turnkey deployments

Cooling Types

Air, Liquid Cooling

Compute Network Type

Ethernet or InfiniBand

Site Infrastructure Solutions



Water Cooling Tower

- Supports cooling capacities from 1 MW to 50 MW*
- Adapts to any deployment size with a flexible, modular design
- Maximizes energy efficiency with EC fan design
- Enhances reliability and ensures quieter operation with N+1 submersible pump
- Minimizes risk and maintenance with a closed-loop design

Cooling Capacity

Up to 50 MW or more



Dry Cooler

- Supports cooling capacities from 1 MW to 50 MW*
- Adapts to any deployment size with a flexible, modular design
- Low PUE/WUE cooling solutions tailored for water-constrained regions
- Features adiabatic-assisted air pre-cooling for high-temperature environments
- Minimizes risk and maintenance with a closed-loop design

Cooling Capacity


Up to 50 MW or more



Cabling


- Optimized traffic engineering for site scale networking
- Complete cabling design, documentation, and implementation services
- Reduces time-to-online, material costs, and labor while ensuring high-performance data flow

Management Software Suite

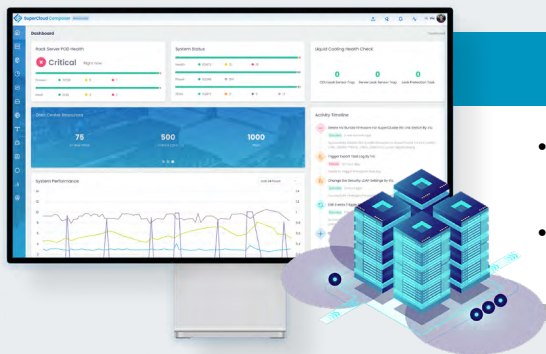


SuperCloud Composer® for DCBBS

- Unified rack-scale and liquid cooling management across servers, networks, PDUs, CDUs, and 3rd-party systems
- Power management, advanced leak detection, protection, and alerts

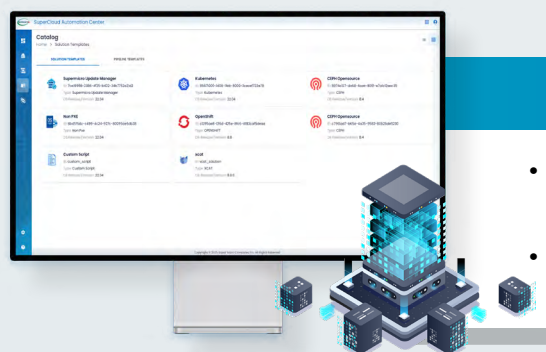


SuperCloud Automation Center

- Pre-built, enterprise-grade automation for data center and edge infrastructure.
- Covers everything from firmware and OS provisioning to Kubernetes and AI workload enablement

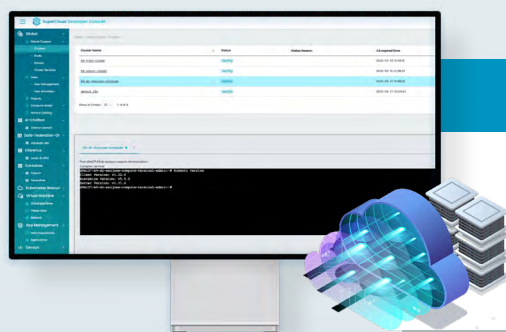

SuperCloud Developer Console

- Developer console that brings together GPU as a Service (GPUaaS), Kubernetes, AI pipelines, and data services
- Featuring self-service provisioning, AI-native workflows, and built in observability

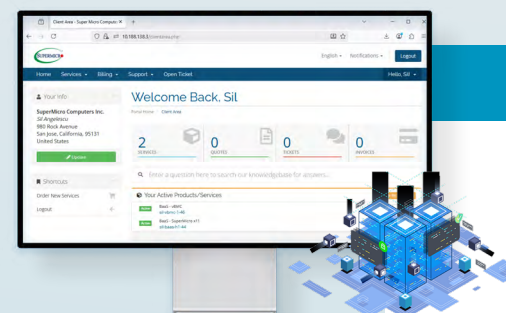

SuperCloud Director

- Multi-tenant AI cloud control with integrated bare metal, Ethernet & Infiniband network, and storage management
- Optimizes performance, security and developer agility

Supermicro Services and Support



Planning and Validation

- Carefully planned projects include designs for the data center floorplan, rack layout, port mapping, and more
- Before shipping, Supermicro goes beyond industry standards with testing that includes rack (L11) and cluster-level (L12) validation

Planning

Topology, floorplan, cabling, and more

Validation

Rack (L11) and Cluster (L12)



Onsite Deployment

- End-to-end deployment starts with Supermicro’s white-glove delivery service, ensuring the utmost care
- On-site service team members handle racking and stacking, with optional software installation available

Capabilities

Comprehensive, from shipment to online



Onsite Support

- Supermicro ensures a smooth transition after deployment, with full documentation and ongoing support to ensure long-term success
- Global Services provide options for on-site response time as short as 4 hours and parts replacement services

On-Site Response Time

As fast as 4-hours

Supermicro Data Center Solutions and Services

Build Service



- Turn-key solution with architecture design, engineering services, permitting, and full general contracting
- Robust redundancy schemes—including modular blocks and systems, redundant chilled water loops, and piping


Consideration

Real estate, power, water

Inclusion

Mechanical, Electrical, Plumbing, Building infrastructure

Retrofit Service

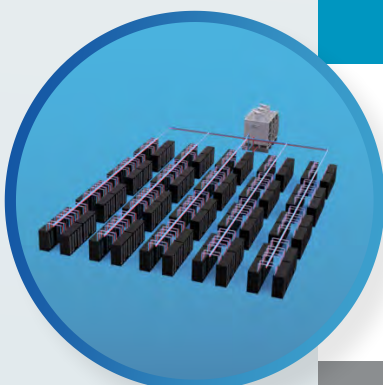

- Take your existing air-cooled facilities and upgrade to our next generation Direct Liquid Cooling (DLC-2)
- Provides the highest efficiency, density, and energy savings

Qualification

Air to Liquid Cooling (DLC-2)

Data Center Fit-Out Service



- Turn-key solution for building high-performance data center environments
- Designed to meet the demands of modern compute, storage, and networking infrastructures

Consideration

Real estate, power, water



Global Expansion

Providing Greater Economies of Scale and Accelerated Support to Data Center, Cloud Computing, AI, Enterprise IT, HPC, 5G, Hyperscale, and Embedded Solutions Customers Worldwide



Worldwide Headquarters
San Jose, California, USA



America

- Supermicro's Headquarters expansion: Over 1.5 million square foot **Green Computing Park** in San Jose, California signals the company's increasing leadership in the IT industry
- One of the largest high-tech R&D, manufacturing, and business hubs in Silicon Valley
- East Coast Sales and Service Office



APAC

Supermicro's **Asia Science and Technology Park** is a key milestone in the company's growth as a true global leader in the development of advanced, power saving computing technologies



Malaysia Campus

Expanded manufacturing



EMEA

Supermicro's system integration facility and services in The Netherlands serves the dynamic, rapidly growing EMEA market with localized supply and time-to-market advantages

Supermicro Worldwide

Worldwide Headquarters

Super Micro Computer, Inc.
980 Rock Avenue, San Jose, CA 95131 USA
Tel: +1-408-503-8000
Fax: +1-408-503-8008
General Info: Marketing@Supermicro.com
Tech Support: Support@Supermicro.com
Webmaster: Webmaster@Supermicro.com

European Branch

Super Micro Computer, B.V.
Het Sterrenbeeld 28, 5215 ML,
's-Hertogenbosch, The Netherlands
Tel: +31-73-640-0390
Fax: +31-73-641-6525
General Info: Sales_Europe@supermicro.com
Support: Support_Europe@supermicro.com

Taiwan Office

Super Micro Computer, Inc.
3F., No.150, Jian 1st Rd., Zhonghe Dist.,
New Taipei City 235, Taiwan (R.O.C.)
Tel: +886-2-8226-3990
Fax: +886-2-8226-3992
Support: Support@Supermicro.com.tw

Beijing, China Office

Supermicro Technology (Beijing) Co., Ltd
Suite 701, Tower D, Jiahua Building,
No.9, Shangdi 3rd Street,
Haidian District, 100085,
Beijing, China
Tel: +86-10-62969165
E-mail: Sales-CN@supermicro.com

Japan Office

Supermicro Japan
21F Shibuya Infos Tower, 20-1,
Sakuragaoka-cho, Shibuya-Ku, Tokyo,
150-0031 Japan
Tel: +81-3-5728-5196
Fax: +81-3-5728-5197
Sales inquiry: Sales_Inquiry_JP@Supermicro.com
Tech Support: Support_Japan@Supermicro.com

U.S. East Coast Office

Super Micro Computer, Inc.
525 Washington Blvd, 20th Floor
Jersey City, NJ 07310 USA
General Info: Marketing@Supermicro.com

U.K. Sales Office

Super Micro Computer, B.V.
Regus - Reading Green Park
100 Brook Drive, Green Park, Reading
Berkshire, England, RG2 6UJ, UK
Tel: +31-73-640-0390 Ext. 2800
General Info: Sales_Europe@supermicro.com
Tech Support: Support_Europe@supermicro.com

Supermicro Science & Technology Park

Super Micro Computer, Inc.
No.1899, Xingfeng Rd., Bade Dist.,
Taoyuan City 334, Taiwan (R.O.C.)
Tel: +886-2-8226-3990
Fax: +886-3-362-8266
Support: Support@Supermicro.com.tw

Shanghai, China Office


Super Micro Computer, Inc.
Room 702, No 398, North Caoxi Road,
HuiZhi Building, Xuhui District,
Shanghai, China 200030
Tel: +86-21-61152558
Tech Support: +86-21-61152556
E-mail: Sales-CN@supermicro.com
Support: Support-CN@supermicro.com

Korea Office

Super Micro Computer Holding B.V.
#1001, Trade Tower, 511, Yeongdong-daero,
Gangnam-gu, Seoul, Korea, 06164
Tel: +82-2-554-0045
Fax: +82-2-554-0146
Sales Inquiry: Sales-Asia@supermicro.com.tw

Better

Better Performance
Per Watt and Per Dollar

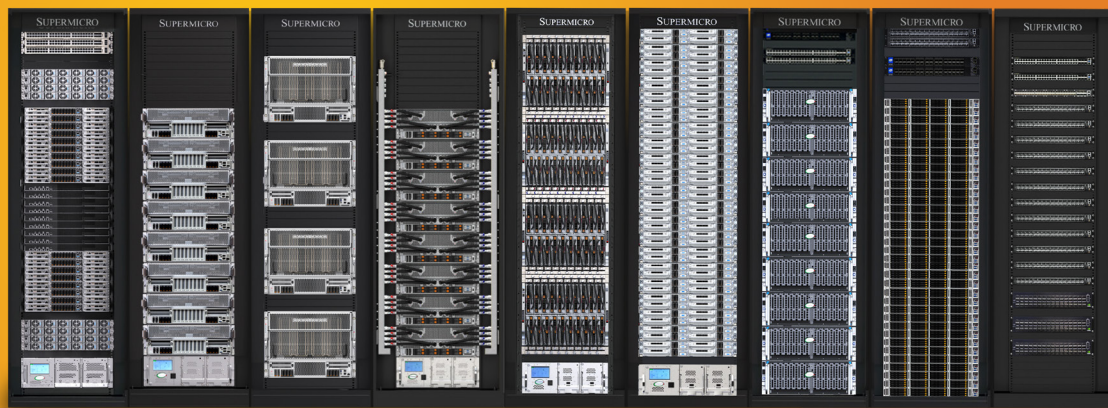


Faster

First-to-Market Innovation with the
Highest Performance Server Designs



Greener

Reduced Environmental
Impact and Lower TCO

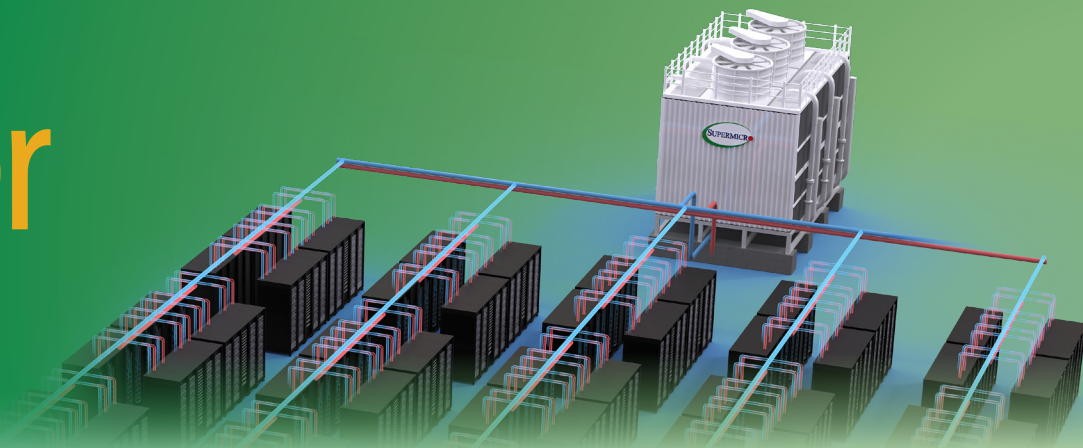

Worldwide Headquarters

Super Micro Computer, Inc.
980 Rock Ave.
San Jose, CA 95131, USA
Tel: +1-408-503-8000
Fax: +1-408-503-8008
E-mail: Marketing@Supermicro.com

APAC Headquarters

Super Micro Computer, Taiwan Inc.
3F, No. 150, Jian 1st Rd., Zhonghe Dist.,
New Taipei City 235, Taiwan
Tel: +886-2-8226-3990
Fax: +886-2-8226-3991
E-mail: Marketing@Supermicro.com.tw

Super Micro Computer, Malaysia Sdn. Bhd.
202201039780 (1485477-T)
No. 8, Jalan SAC 2/4, Senai Airport City,
81400 Senai, Johor, Malaysia
Tel: +60-7-552-8488
Fax: +60-7-552-8388

EMEA Headquarters

Super Micro Computer, B.V.
Het Sterrenbeeld 28, 5215 ML,
's-Hertogenbosch, The Netherlands
Tel: +31-73-640-0390
Fax: +31-73-641-6525
E-mail: Sales_Europe@supermicro.com

www.supermicro.com

©Super Micro Computer, Inc. Specifications subject to change without notice. All other brands and names are the property of their respective owners. All logos, brand names, campaign statements and product images contained herein are copyrighted and may not be reprinted and/or reproduced, in whole or in part, without express written permission by Supermicro Corporate Marketing.



MKT-0002-04/2026-R9