
Ground floor — proposed

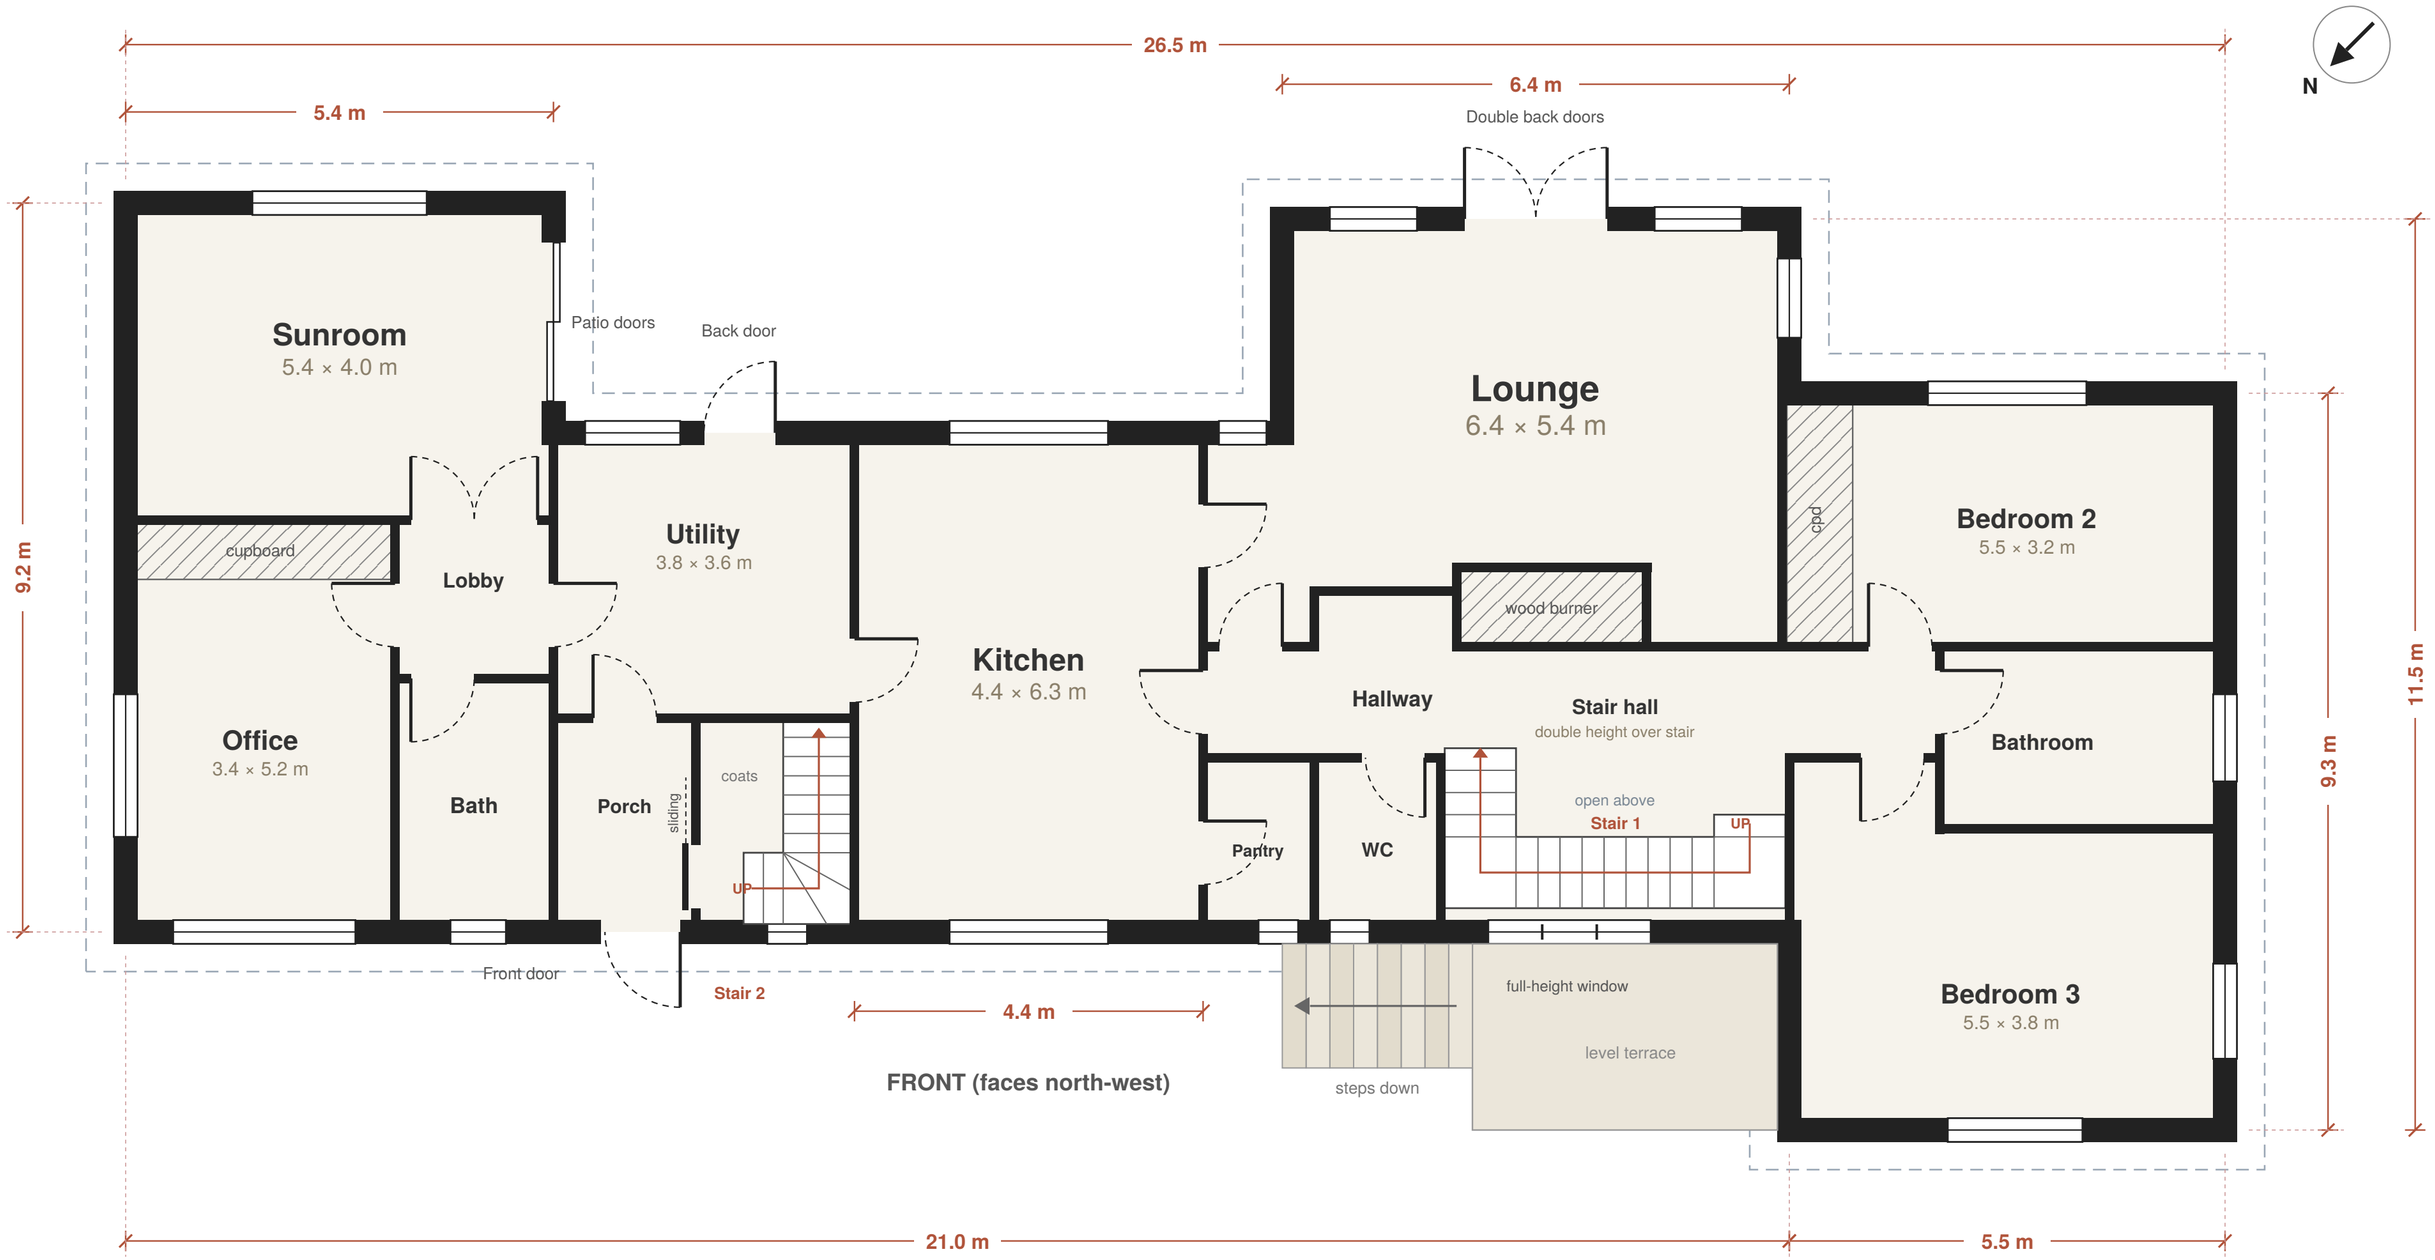


0 1 5 m

approx. roof eaves (0.5 m overhang)

storage / fireplace

Dimensions approximate (±0.5 m), scaled from aerial imagery

First floor — proposed (mansard / gambrel roof)

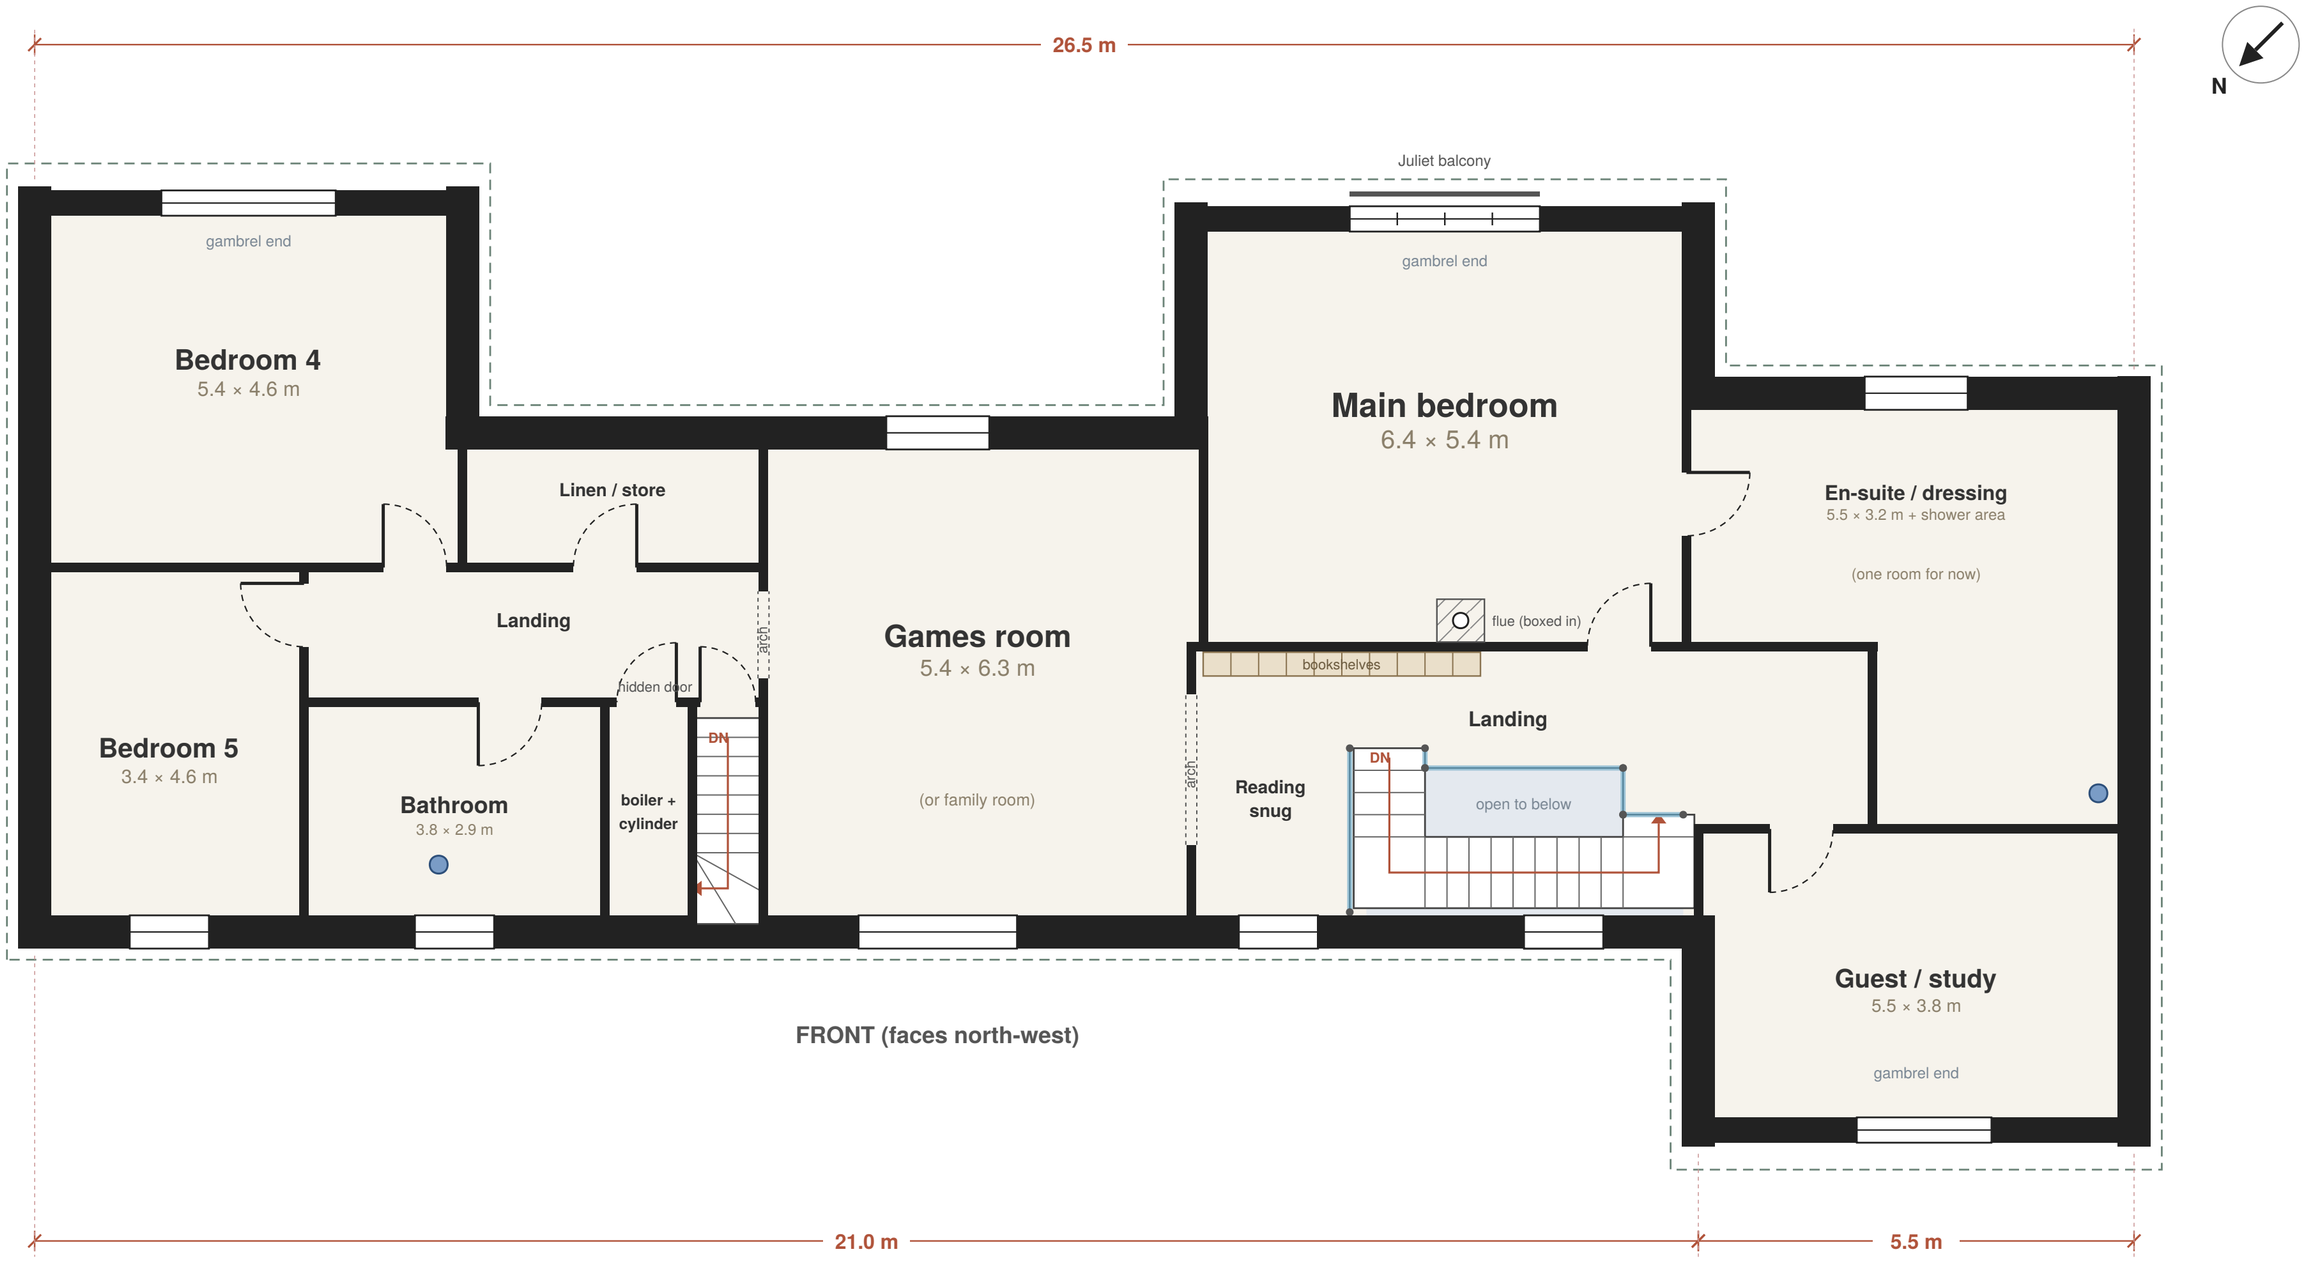

0 1 5 m


– – – roof edge / gutter (0.35 m overhang, 0.5 m at gambrel ends)

outer walls = vertical timber frame: ~2.1 m ceiling at the walls, ~3.6 m at the ridge

● soil stack (lines up with ground-floor bathroom)

Concept layout – approximate, subject to structural/building-regs design

Roof plan — proposed

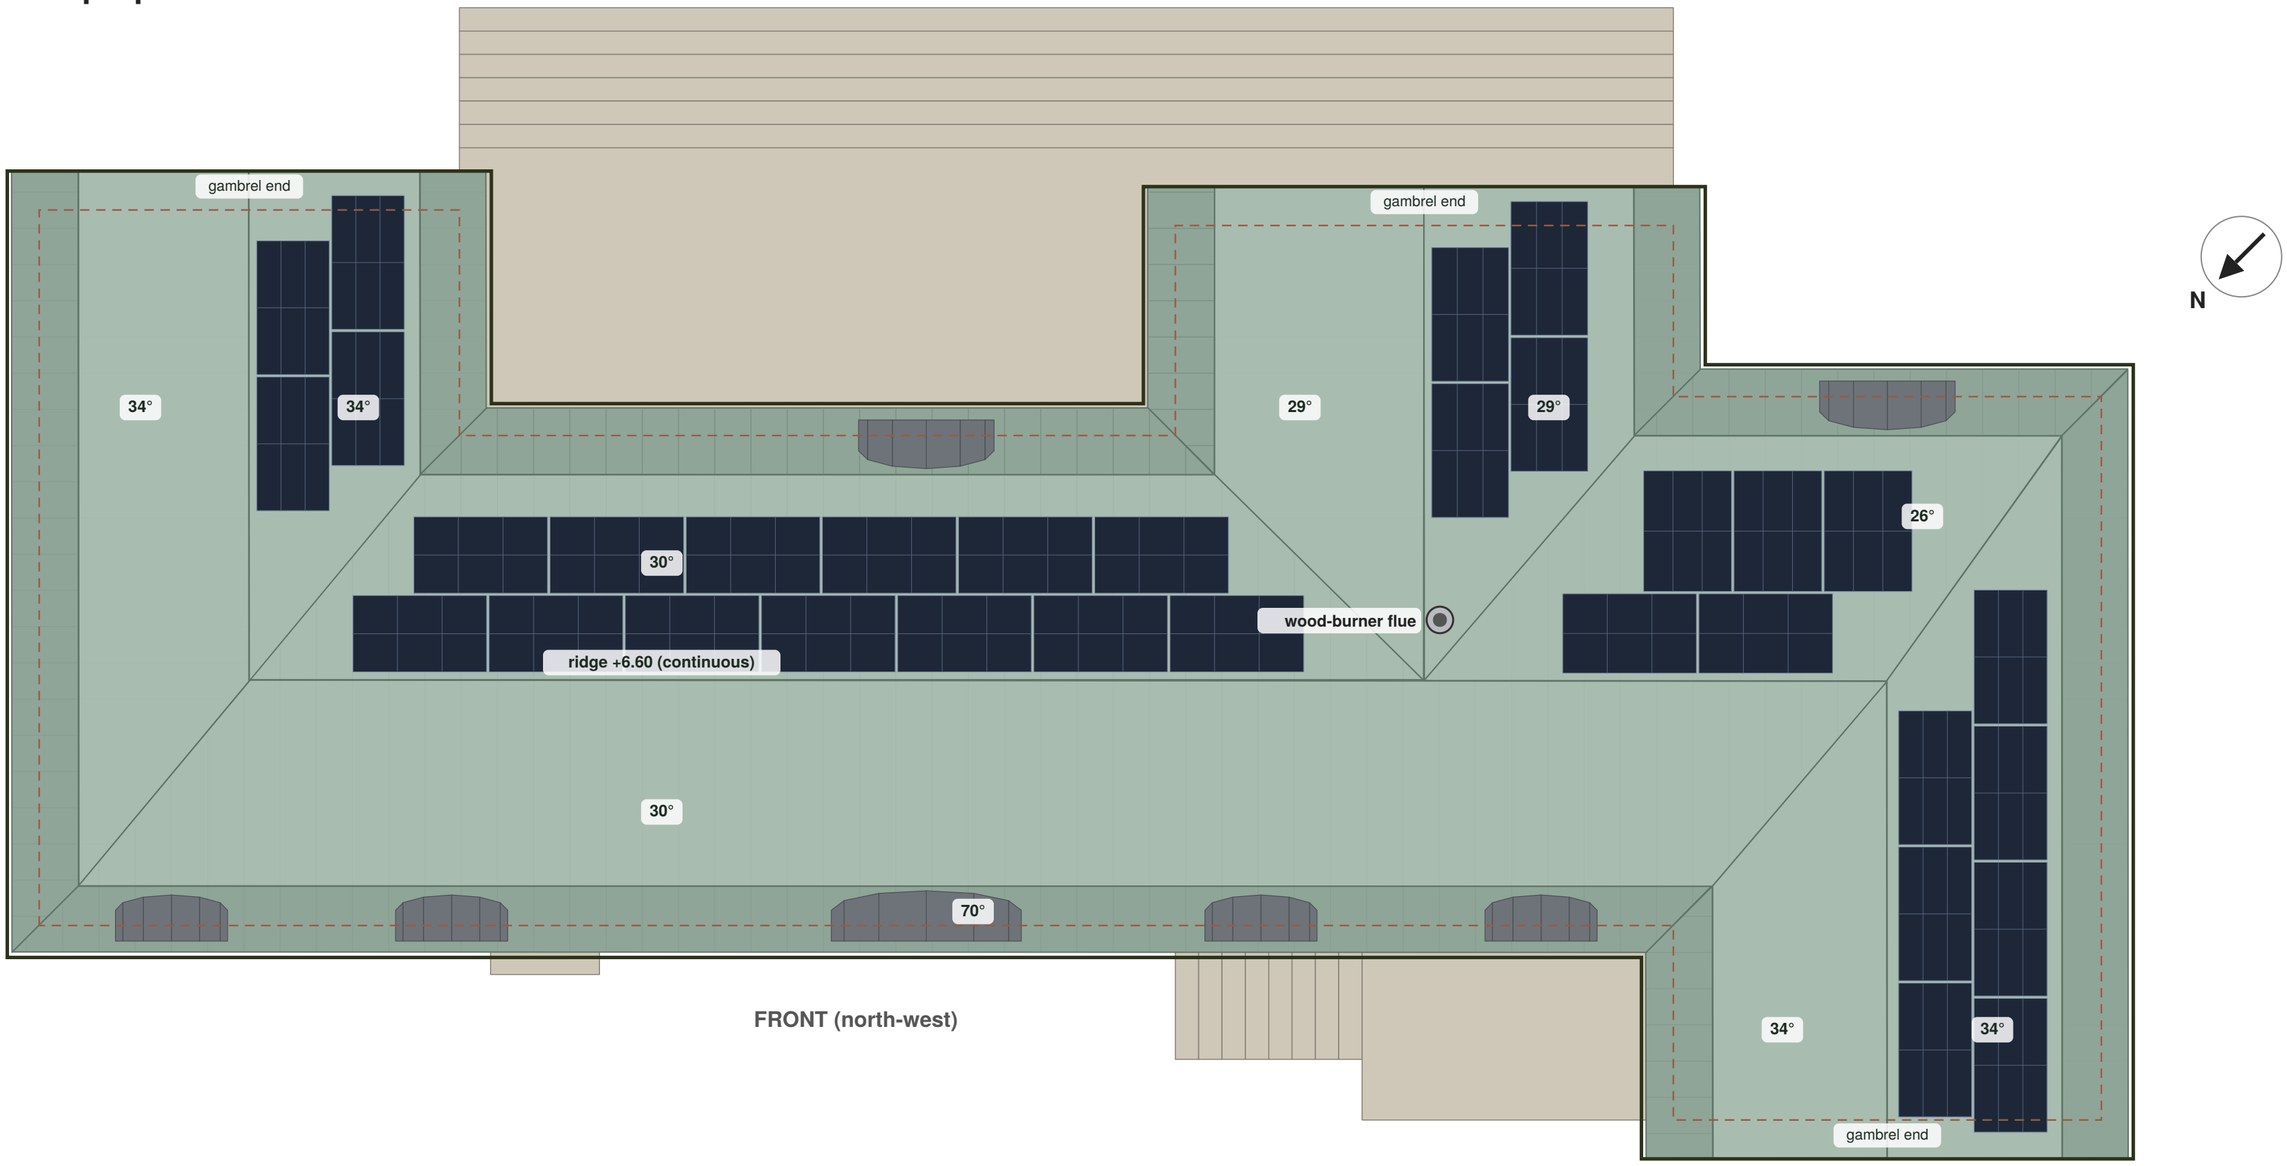

70° cladding over vertical frame (0.35 m overhang)

upper slopes (pitches set so every ridge = +6.60)

lead dormer hoods

solar PV — 33 standard 1.72×1.13 m panels ≈ 14.5 kWp (SE & SW slopes)

white boarded dormer faces


external walls below

thick line = gutter / verge — 0.35 m overhang to all walls, 0.5 m at gambrel ends · patina-green standing seam

0 5 m


Front elevation (north-west)

Concept — false mansard on vertical timber frame · patina-green standing seam (70° lower, ~25–34° upper, one ridge +6.60)
brown Kent peg-tiled gambrel ends with wrapped corners · arched white-boarded dormers with lead hoods

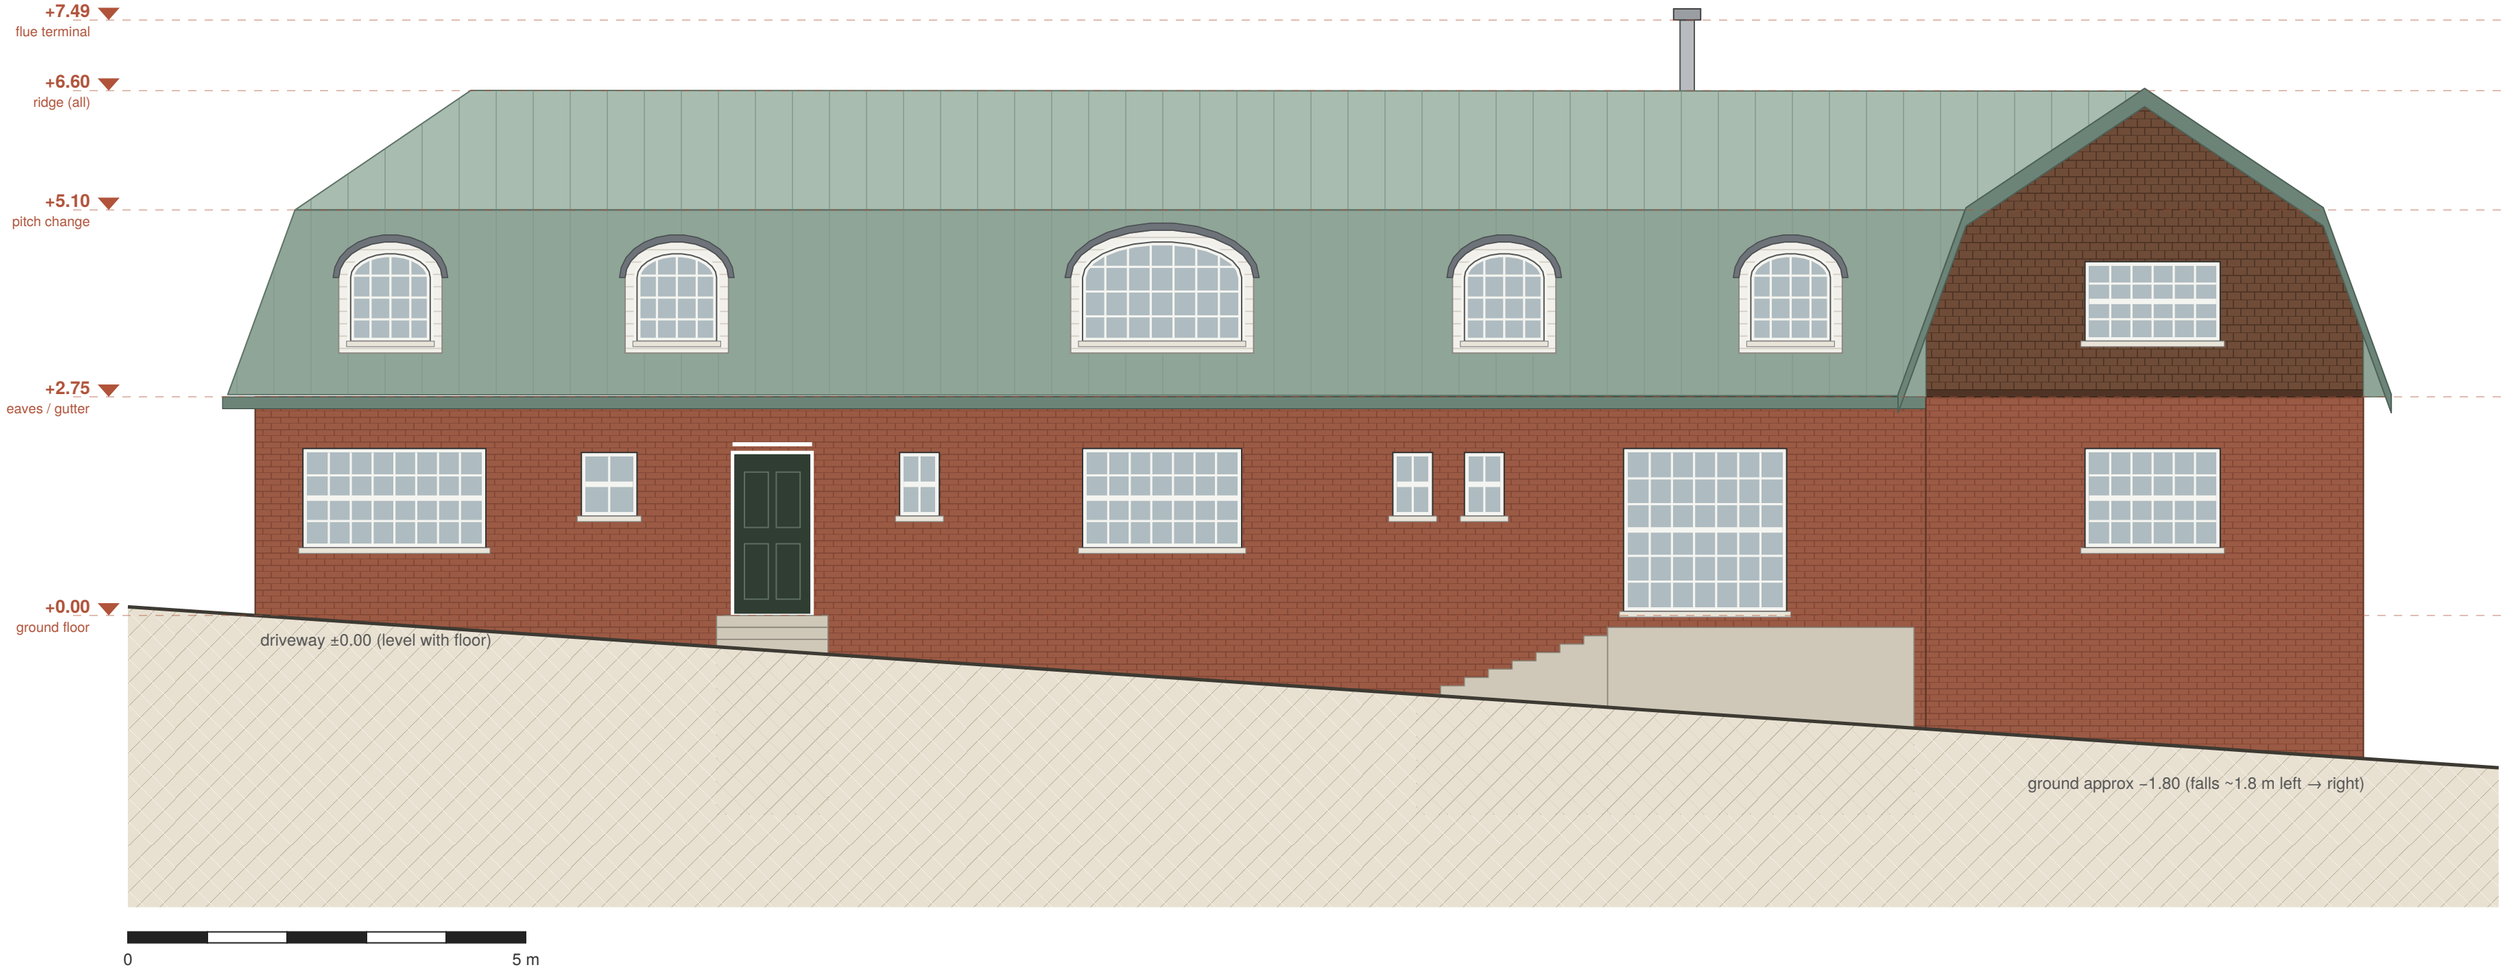


Rear elevation (south-east)

Concept — false mansard on vertical timber frame · patina-green standing seam (70° lower, ~25–34° upper, one ridge +6.60)
brown Kent peg-tiled gambrel ends with wrapped corners · arched white-boarded dormers with lead hoods

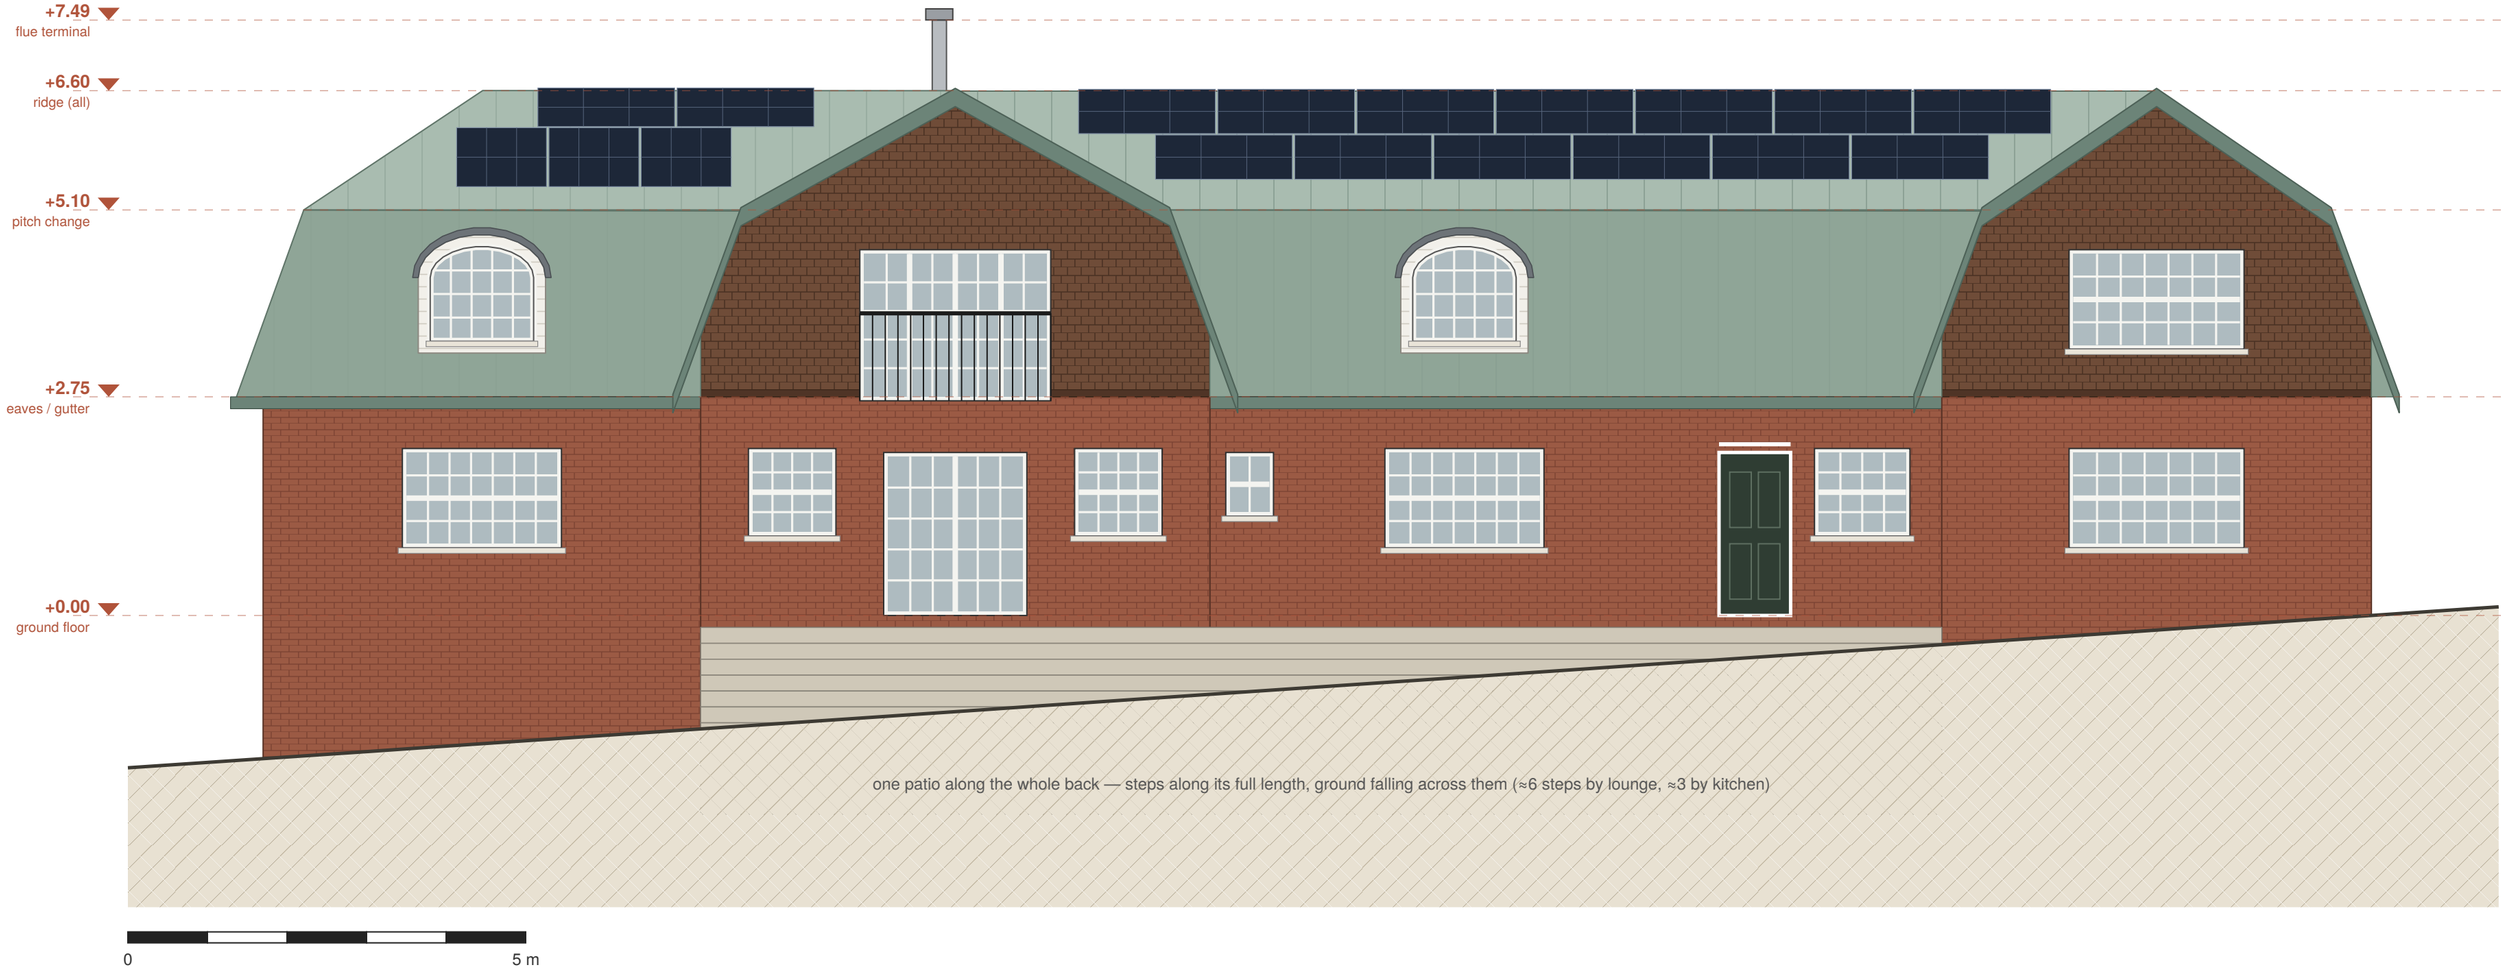

Side elevation — office / sunroom end (north-east)

Concept — false mansard on vertical timber frame · patina-green standing seam (70° lower, ~25–34° upper, one ridge +6.60)
brown Kent peg-tiled gambrel ends with wrapped corners · arched white-boarded dormers with lead hoods

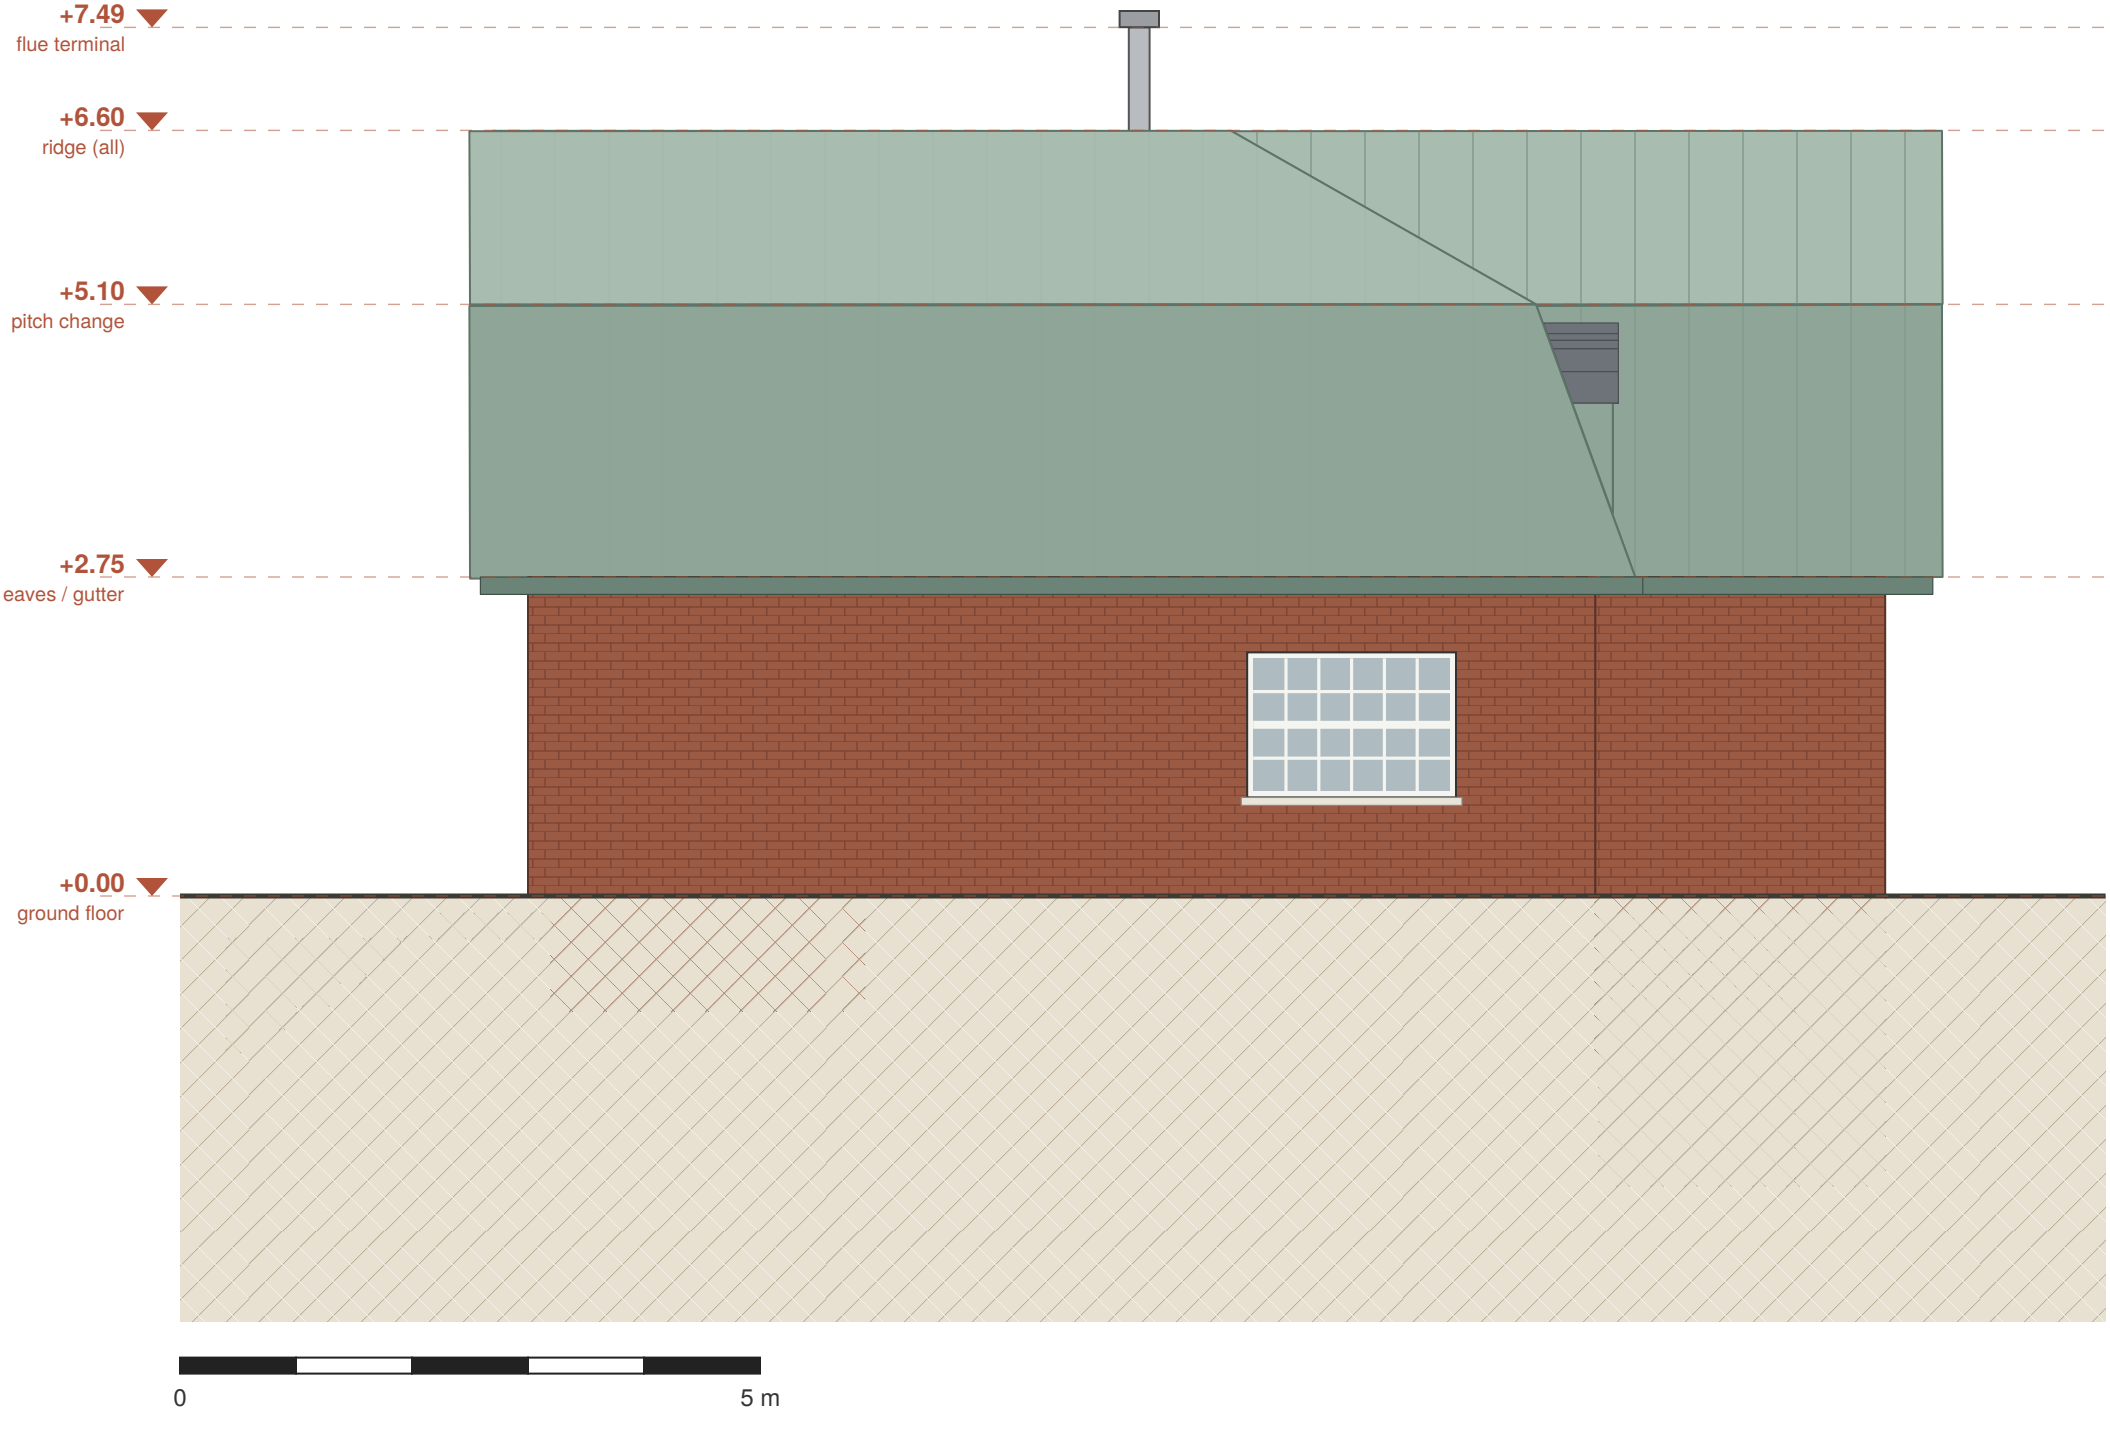

Side elevation — bedroom 3 end (south-west)

Concept — false mansard on vertical timber frame · patina-green standing seam (70° lower, ~25–34° upper, one ridge +6.60)
brown Kent peg-tiled gambrel ends with wrapped corners · arched white-boarded dormers with lead hoods

