



上海交通大学学位论文

# 面向 3C 工业生产线的双臂机器人视觉-语言-动作模型

姓名：杨皓然 521111910083

吴律 522370910167

吴毅昕 522370910185

程天纵 522370910227

顾益铭 522370910228

导师：班雨桐

指导教师：黄佩森

学院：浦江国际学院

专业名称：电子与计算机工程

申请学位层次：学士

2026 年 8 月

**A Dissertation Submitted to**

**Shanghai Jiao Tong University for the Degree of Bachelor**

**A VISION-LANGUAGE-ACTION MODEL FOR**

**DUAL-ARM ROBOTS IN 3C INDUSTRIAL**

**PRODUCTION LINES**

|                    |                    |              |
|--------------------|--------------------|--------------|
| <b>Name:</b>       | Yang Haoran        | 521111910083 |
|                    | Wu Lyu             | 522370910167 |
|                    | Wu Yixin           | 522370910185 |
|                    | Cheng Tianzong     | 522370910227 |
|                    | Gu Yiming          | 522370910228 |
| <b>Mentor:</b>     | Prof. Yutong Ban   |              |
| <b>Instructor:</b> | Prof. Peisen Huang |              |
| <b>College:</b>    | Global College     |              |

Global College

Shanghai Jiao Tong University

Shanghai, P.R. China

August, 2026

# 上海交通大学

## 学位论文原创性声明

本人郑重声明：所呈交的学位论文，是本人在导师的指导下，独立进行研究工作所取得的成果。除文中已经注明引用的内容外，本论文不包含任何其他个人或集体已经发表或撰写过的作品成果。对本文的研究做出重要贡献的个人和集体，已在文中以适当方式予以致谢。若在论文撰写过程中使用了人工智能工具，本人已遵循《上海交通大学关于在教育教学中使用 AI 的规范》，确保人工智能生成内容的应用场景、引用范围及标注方式均符合规定，并杜绝学术不端行为。本人完全知晓本声明的法律后果由本人承担。

学位论文作者签名：

日期： 年 月 日

# 上海交通大学

## 学位论文使用授权书

本人同意学校保留并向国家有关部门或机构送交论文的复印件和电子版，允许论文被查阅和借阅。

本学位论文属于：

☐ 公开论文

☐ 内部论文，保密 ☐ 1 年 / ☐ 2 年 / ☐ 3 年，过保密期后适用本授权书。

☐ 秘密论文，保密 \_\_\_\_ 年（不超过 10 年），过保密期后适用本授权书。

☐ 机密论文，保密 \_\_\_\_ 年（不超过 20 年），过保密期后适用本授权书。

（请在以上方框内选择打“√”）

学位论文作者签名：

日期： 年 月 日

指导教师签名：

日期： 年 月 日

## 摘 要

现代 3C 电子装配线需要处理小型元器件、高产品多样性和富接触操作，这些任务仍难以通过传统固定程序机器人实现自动化。本项目针对这一缺口，面向双臂工业操作开发视觉-语言-动作（Vision-Language-Action, VLA）系统。系统运行于双臂 Franka 平台，并完成了三个代表性任务：将带手柄的圆环套放到圆柱罐上、将两脚插头插入两孔插座，以及从主板上取下内存条并放入黄色托盘。

最终部署系统采用统一训练的  $\pi_{0.5}$  检查点，接收三个同步 RGB 图像、16 维双臂机器人状态和任务语言指令，并在闭环执行过程中输出双臂及夹爪动作。三个任务均由同一个检查点根据对应语言指令执行，无需加载任务特定模型。该系统已在真实双 Franka 工作站上完成语言条件多任务双臂控制验证。

最终实机验证对每项任务进行了 25 次试验，共计 75 次。圆环任务、插头插入任务和内存条任务的成功率分别为 84%、52% 和 100%，总体成功率为 78.7%。总体结果超过了 70% 的任务执行目标，但插头插入任务未能单独达到该目标，表明接触丰富的精细对准与插入仍是当前系统的主要限制。

**关键词：**双臂机器人，视觉-语言-动作模型，工业自动化

## ABSTRACT

Modern 3C electronics assembly lines deal with small components, high product variety, and contact-rich operations that remain difficult to automate with conventional fixed-program robots. Our project targets this gap by developing a Vision-Language-Action (VLA) system for bimanual industrial manipulation. The system runs on a dual-arm Franka platform and performs three representative tasks: placing a handled ring over a can, inserting a two-pin plug into a two-hole socket, and removing a memory module from a motherboard and placing it in a yellow tray.

The final deployed system uses one jointly trained  $\pi_{0.5}$  checkpoint. It receives three synchronized RGB images, a 16-dimensional bilateral robot state, and a task-specific language instruction, and outputs bimanual robot and gripper actions during closed-loop execution. All three tasks are executed by the same checkpoint under their corresponding language instructions without loading task-specific models. The system has therefore demonstrated language-conditioned multi-task bimanual control on the physical dual-Franka workcell.

The final physical validation comprised 25 trials per task and 75 trials in total. The ring, plug-insertion, and memory-module tasks achieved success rates of 84%, 52%, and 100%, respectively, producing an overall success rate of 78.7%. The aggregate result exceeded the 70% task-execution target, although the plug-insertion task did not independently meet the target, identifying contact-rich fine alignment and insertion as the principal limitation of the current system.

**Key words:** dual-arm robot, vision-language-action model, industrial automation

## Contents

|                                                               |           |
|---------------------------------------------------------------|-----------|
| 摘 要 .....                                                     | I         |
| ABSTRACT .....                                                | II        |
| <b>Chapter 1 Introduction .....</b>                           | <b>1</b>  |
| 1.1 Background and significance .....                         | 1         |
| 1.2 Design problem .....                                      | 2         |
| 1.3 Project objectives and scope.....                         | 3         |
| 1.4 Main contributions .....                                  | 3         |
| 1.5 Organization of this thesis .....                         | 4         |
| <b>Chapter 2 Design specification .....</b>                   | <b>5</b>  |
| 2.1 Customer requirements .....                               | 5         |
| 2.2 Engineering specifications.....                           | 6         |
| 2.3 Quality function deployment .....                         | 6         |
| <b>Chapter 3 Concept generation and selection .....</b>       | <b>8</b>  |
| 3.1 Concept generation .....                                  | 8         |
| 3.1.1 Functional decomposition .....                          | 8         |
| 3.1.2 Structured brainstorming .....                          | 8         |
| 3.1.3 Morphological chart and generated module concepts ..... | 9         |
| 3.2 Concept selection .....                                   | 10        |
| 3.2.1 Selection method and QFD-derived criteria .....         | 10        |
| 3.2.2 Scoring of the five selected module concepts .....      | 10        |
| 3.2.3 Comparative evaluation and selected concept .....       | 11        |
| <b>Chapter 4 Final design and implementation .....</b>        | <b>14</b> |
| 4.1 Selected concept description .....                        | 14        |
| 4.1.1 Design evolution from the DR3 baseline .....            | 14        |
| 4.1.2 Overall system architecture .....                       | 14        |

|        |                                                                        |    |
|--------|------------------------------------------------------------------------|----|
| 4.1.3  | Selected module concepts .....                                         | 15 |
| 4.1.4  | Operational workflow .....                                             | 17 |
| 4.2    | Engineering design analysis .....                                      | 18 |
| 4.2.1  | Relevant engineering fundamentals .....                                | 18 |
| 4.2.2  | Design assumptions and constraints .....                               | 19 |
| 4.2.3  | FR3 parameters and bimanual kinematic suitability .....                | 20 |
| 4.2.4  | Bimanual state and action representation .....                         | 21 |
| 4.2.5  | Shared workspace and role allocation .....                             | 22 |
| 4.2.6  | Contact, clearance, and insertion tolerance analysis .....             | 22 |
| 4.2.7  | Custom gripper geometry and mechanical analysis .....                  | 24 |
| 4.2.8  | Perception working distance, field of view, and camera selection ..... | 24 |
| 4.2.9  | Image format and preprocessing .....                                   | 25 |
| 4.2.10 | GELLO channel architecture and leader-follower mapping .....           | 26 |
| 4.2.11 | Data-collection pipeline .....                                         | 26 |
| 4.2.12 | Packet synchronization and action-label alignment .....                | 27 |
| 4.2.13 | Dataset construction and episode split .....                           | 27 |
| 4.2.14 | $\pi_{0.5}$ base model and software configuration .....                | 28 |
| 4.2.15 | Training procedure .....                                               | 28 |
| 4.2.16 | Validation and checkpoint selection .....                              | 29 |
| 4.2.17 | Action chunking and temporal interface .....                           | 30 |
| 4.2.18 | Deployment pipeline .....                                              | 30 |
| 4.2.19 | Control, computation, and safety boundary .....                        | 30 |
| 4.3    | Detailed system design .....                                           | 31 |
| 4.3.1  | Workcell layout .....                                                  | 31 |
| 4.3.2  | Dual-arm robotic platform .....                                        | 31 |
| 4.3.3  | GELLO leader assemblies .....                                          | 32 |
| 4.3.4  | End-effector and mechanical components .....                           | 32 |
| 4.3.5  | Vision and sensing system .....                                        | 32 |
| 4.3.6  | Demonstration data-collection system .....                             | 33 |
| 4.3.7  | Data processing pipeline .....                                         | 33 |
| 4.3.8  | Policy-training system .....                                           | 33 |

|                  |                                                                 |           |
|------------------|-----------------------------------------------------------------|-----------|
| 4.3.9            | Robot control and deployment system.....                        | 34        |
| 4.3.10           | Hardware–software interfaces .....                              | 34        |
| 4.3.11           | Task definitions and bilateral role allocation.....             | 36        |
| 4.3.12           | System operation .....                                          | 36        |
| 4.3.13           | Parts and components .....                                      | 37        |
| 4.4              | Manufacturing and implementation plan .....                     | 38        |
| 4.4.1            | Implementation scope.....                                       | 38        |
| 4.4.2            | Materials and manufacturing processes .....                     | 38        |
| 4.4.3            | Gripper fabrication and inspection .....                        | 38        |
| 4.4.4            | GELLO assembly and calibration.....                             | 38        |
| 4.4.5            | Camera and fixture implementation.....                          | 40        |
| 4.4.6            | Software implementation.....                                    | 40        |
| 4.4.7            | System integration sequence .....                               | 41        |
| 4.4.8            | Budget .....                                                    | 42        |
| 4.4.9            | Current implementation status and remaining documentation ..... | 43        |
| <b>Chapter 5</b> | <b>Validation results .....</b>                                 | <b>44</b> |
| 5.1              | Validation objectives and scope .....                           | 44        |
| 5.2              | Checkpoint selection and deployment configuration .....         | 44        |
| 5.2.1            | Selection criterion .....                                       | 44        |
| 5.2.2            | Deployment hardware.....                                        | 45        |
| 5.3              | Physical trial protocol and success definition.....             | 45        |
| 5.4              | Overall physical results .....                                  | 46        |
| 5.5              | Task-specific results and failure analysis.....                 | 47        |
| 5.5.1            | Memory-module removal and tray placement .....                  | 47        |
| 5.5.2            | Ring placement over the can.....                                | 47        |
| 5.5.3            | Two-pin plug grasping and two-hole socket insertion .....       | 48        |
| 5.6              | Cross-task interpretation.....                                  | 49        |
| 5.7              | Validation limitations .....                                    | 50        |
| 5.8              | Validation summary .....                                        | 50        |
| <b>Chapter 6</b> | <b>Discussion and conclusions .....</b>                         | <b>51</b> |



|                         |                                                               |           |
|-------------------------|---------------------------------------------------------------|-----------|
| 6.1                     | Discussion .....                                              | 51        |
| 6.2                     | Conclusions .....                                             | 53        |
| <b>Chapter 7</b>        | <b>Future Work .....</b>                                      | <b>54</b> |
| 7.1                     | Improve contact-rich task performance .....                   | 54        |
| 7.2                     | Develop autonomous failure detection and recovery .....       | 55        |
| 7.3                     | Expand data coverage and model evaluation .....               | 55        |
| 7.4                     | Improve language conditioning and task generalization .....   | 56        |
| 7.5                     | Close mechanical, sensing, and timing documentation gaps..... | 56        |
| 7.6                     | Prepare for a more reproducible and deployable system .....   | 57        |
| 7.7                     | Recommended continuation sequence .....                       | 58        |
| <b>References</b>       | .....                                                         | <b>59</b> |
| <b>Appendix I.</b>      | <b>Documentation of Generated Concepts.....</b>               | <b>61</b> |
| <b>Appendix II.</b>     | <b>Hardware Specifications and Parts Records .....</b>        | <b>64</b> |
| <b>Acknowledgements</b> | .....                                                         | <b>73</b> |

# Chapter 1 Introduction

## 1.1 Background and significance

The 3C industry—computer, communication, and consumer electronics—increasingly demands flexible robotic systems that can cope with short product life cycles, diverse part geometries, small components, and frequent line changeovers. Traditional hard-coded automation approaches are effective for stable, high-volume production, but they exhibit significant limitations in high-mix assembly scenarios. Each product variant typically requires reprogramming, fixture redesign, and system reconfiguration, which increases development and maintenance costs. In contrast, human operators can rapidly understand new tasks from natural-language instructions and adapt to new operating conditions with limited prior programming. This contrast highlights the importance of advancing industrial robotic systems toward more human-aligned capabilities, especially semantic understanding of instructions and data-efficient adaptation under limited demonstrations.

Recent advances in Vision-Language-Action (VLA) models offer a promising route toward this goal. By jointly learning from visual observations, language instructions, robot proprioceptive states, and action data, VLA models can in principle generalize across tasks without requiring separate hand-engineered programs for every product variant. Landmark systems, including RT-2, OpenVLA, RDT-1B, and the  $\pi$  series, demonstrate the potential of transferring semantic knowledge from large vision-language models to physical robot control<sup>[1-4]</sup>. Earlier work on visual and language-conditioned manipulation also established complementary design patterns: Transporter Networks use spatially grounded pick-and-place representations, CLIPort combines semantic and spatial pathways, and PerAct couples language goals to structured visual observations<sup>[5-7]</sup>. In parallel, BridgeData V2, Open X-Embodiment, DROID, and LIBERO have made dataset scale, embodiment diversity, and reproducible task evaluation central considerations in robot-learning system design<sup>[8-11]</sup>.

Despite this progress, adapting VLA-style systems to industrial assembly remains a system-level engineering problem. Many published demonstrations emphasize tabletop manipulation, single-arm control, or short-horizon tasks with relatively forgiving tolerances. In contrast, 3C assembly requires reliable perception of small components, accurate contact-rich

manipulation, synchronized sensing, safe robot execution, and repeatable validation under bounded physical conditions. These requirements motivate a complete manipulation pipeline that links hardware selection, teleoperation, data collection, model training, deployment, and quantitative evaluation.

## 1.2 Design problem

This project develops a dual-arm industrial manipulation platform that couples camera observations, natural-language task instructions, and robot proprioceptive state to learned bilateral actions. The workcell consists of two Franka Research 3 (FR3) robot arms, one fixed overhead camera, two wrist cameras, two custom grippers, and two GELLO leader devices for demonstration collection. Demonstrations are recorded as packet-associated visual observations, bilateral robot and gripper states, absolute target actions, and task instructions.

The implemented task set contains three bimanual manipulation sequences. In the first task, the left arm pushes a can to the middle while the right arm grasps a handled black ring, places it over the can, and releases it. In the second task, the right arm pushes a box containing a power socket to the middle while the left arm grasps a plug and inserts it into the socket. In the third task, the left arm pulls and stabilizes a computer motherboard while the right arm removes the memory module and places it in a yellow tray. The first task serves as a structured reposition–grasp–place benchmark, while the latter two represent constrained connector and computer-component operations.

The final controller is the LeRobot implementation of  $\pi_{0.5}$ , initialized from the official `pi05_base` checkpoint<sup>[12-15]</sup>. One jointly trained checkpoint is shared by all three tasks. At deployment, the same policy receives one of the documented natural-language instructions, three RGB observations, and the current 16-dimensional bilateral state, then predicts absolute targets for both arms and both grippers. The completed implementation therefore provides language-conditioned task input, unified multi-task inference, and dual-arm action generation within the three bounded workcell tasks. It does not claim unrestricted open-world generalization, autonomous task planning, certified failure recovery, or production-line autonomy beyond the evaluated conditions.

### 1.3 Project objectives and scope

The project objective is to establish an end-to-end engineering pipeline for bounded bimanual industrial-manipulation experiments. This pipeline includes hardware integration, packet-associated multi-camera sensing, bilateral teleoperated demonstration collection, LeRobot Dataset v3.0 preparation, joint multi-task  $\pi_{0.5}$  fine-tuning, language-conditioned deployment, and repeatable physical validation of the three scoped tasks.

The engineering acceptance targets inherited from the design-specification stage are planning success above 90%, task execution success above 70%, component detection accuracy above 90%, pose error below 20 mm, failure-detection rate above 90%, and recovery success above 70%. These values define validation thresholds rather than performance claims. Because the implemented  $\pi_{0.5}$  policy is an end-to-end controller without separate planning, detection, pose-estimation, or learned recovery modules, Chapter 5 distinguishes directly measurable end-to-end task outcomes from design-stage targets that are not independently observable in the final architecture.

### 1.4 Main contributions

The main contributions of this thesis are as follows:

1. A dual-FR3 manipulation platform is specified and integrated with GELLO teleoperation, synchronized camera sensing, robot-state recording, and task-compatible end effectors and fixtures.
2. A reproducible data and learning pipeline converts 240 bilateral teleoperated episodes into three LeRobot Dataset v3.0 task datasets with episode-level training and validation splits, equal-probability task sampling, and a common absolute-action representation.
3. A single language-conditioned LeRobot  $\pi_{0.5}$  checkpoint is fine-tuned and deployed for three bimanual tasks using three RGB views, a 16-dimensional bilateral state, and a 16-dimensional bilateral action interface.
4. A scoped physical-validation framework defines task-specific terminal conditions, run-termination rules, and end-to-end evaluation procedures for the ring, socket, and memory-module tasks.
5. A traceable engineering process links customer requirements and quality function de-

ployment to concept generation, module selection, implementation decisions, and validation criteria.

## **1.5 Organization of this thesis**

The remainder of this thesis is organized as follows. Chapter 2 translates customer requirements into measurable engineering specifications and presents the quality function deployment. Chapter 3 describes functional decomposition, concept generation, and selection of the major hardware, sensing, teleoperation, end-effector, and policy modules. Chapter 4 details the final system design, data and control architecture, model-training procedure, and implementation plan. Chapter 5 presents the physical validation methods and experimental results. Chapter 6 discusses the strengths and limitations of the system and summarizes the project conclusions. Chapter 7 presents system-level and implementation-level recommendations for future development.

## Chapter 2 Design specification

### 2.1 Customer requirements

Through discussions with the project sponsor and analysis of the target application, eight customer requirements were identified and assigned importance weights reflecting the sponsor's priorities. The requirements capture both functional goals and non-functional concerns, including robustness, safety, generalizability, cost, and reliability.

**Table 2–1 Customer requirements and importance weights**

| No. | Customer Requirement                   | Weight |
|-----|----------------------------------------|--------|
| CR1 | Complete assembly task successfully    | 0.18   |
| CR2 | High assembly precision                | 0.16   |
| CR3 | Robust to environment and disturbances | 0.15   |
| CR4 | Safe and collision-free operation      | 0.14   |
| CR5 | Fast task execution                    | 0.12   |
| CR6 | Easy to use and generalize             | 0.10   |
| CR7 | Cost-effective system                  | 0.08   |
| CR8 | System reliable and recovery capable   | 0.07   |

The customer requirements were translated into engineering specifications through the QFD process rather than by assigning targets independently. For each customer requirement  $i$  and engineering specification  $j$ , the team assigned a relationship value  $r_{ij} \in \{0, 1, 3, 9\}$  (none, weak, moderate, or strong) and calculated the unnormalized engineering priority as

$$I_j = \sum_i w_i r_{ij}, \quad (2-1)$$

where  $w_i$  is the customer-importance weight in Table 2–1. The priorities were then normalized to identify the technical characteristics that most directly protect the high-weight needs. CR1 and CR5 primarily drive ES1 and ES2; CR2 drives ES3 and ES4; CR3, CR4, and CR8 drive ES5 and ES6; and CR6–CR7 constrain the selected implementation to a usable, feasible, and maintainable route. This translation produces an auditable chain from the sponsor's language to acceptance tests and explains why the later concept search is organized around platform, teleoperation, data collection, gripper, and policy modules.

## 2.2 Engineering specifications

The customer requirements were converted into six measurable engineering specifications. The targets in Table 2–2 are the final acceptance thresholds for the present proof-of-concept, rather than performance claims. Each rate is calculated over independently initialized physical trials of the relevant task. A trial is counted once only; an unsuccessful recovery is not reclassified as an independent execution attempt. This convention prevents recovery behavior from artificially inflating the reported task-execution success rate.


**Table 2–2 Final engineering specifications and acceptance thresholds**

| No. | Engineering Specification    | Target  | Operational Definition                                                                                                    |
|-----|------------------------------|---------|---------------------------------------------------------------------------------------------------------------------------|
| ES1 | Planning success rate        | > 90%   | Fraction of trials in which the selected task policy and initialized scene form a valid executable plan.                  |
| ES2 | Task execution success rate  | > 70%   | Fraction of trials in which the prescribed assembly operation reaches its task-specific completion condition.             |
| ES3 | Component detection accuracy | > 90%   | Fraction of evaluated observations in which the required component is correctly detected for the active task.             |
| ES4 | Pose estimation error        | < 20 mm | Euclidean position error between the estimated and reference component pose.                                              |
| ES5 | Failure detection rate       | > 90%   | Fraction of induced or naturally occurring execution failures that are identified before further unsafe action is issued. |
| ES6 | Recovery rate                | > 70%   | Fraction of detected failures for which the defined recovery procedure restores a valid task state.                       |

## 2.3 Quality function deployment

Figure 2–1 records the resulting House of Quality. Its 9–3–1 relationship scale makes the engineering priorities interpretable rather than decorative: task completion, component localization, pose estimation, and failure handling carry influence across multiple high-weight customer requirements. The roof is used as a design-control device. For example, additional visual coverage can strengthen ES3 and ES4, but it increases calibration, synchronization, and data-management burden; similarly, recovery logic can improve ES5–ES6 while adding

controller integration work. These QFD trade-offs define the subsequent concept space. The platform and gripper must enable precise contact motion for ES1–ES2 and ES4; the tele-operator and data pipeline must produce usable demonstrations and observable scenes; and the policy must convert those observations into safe executable actions while leaving explicit hooks for failure monitoring and recovery.

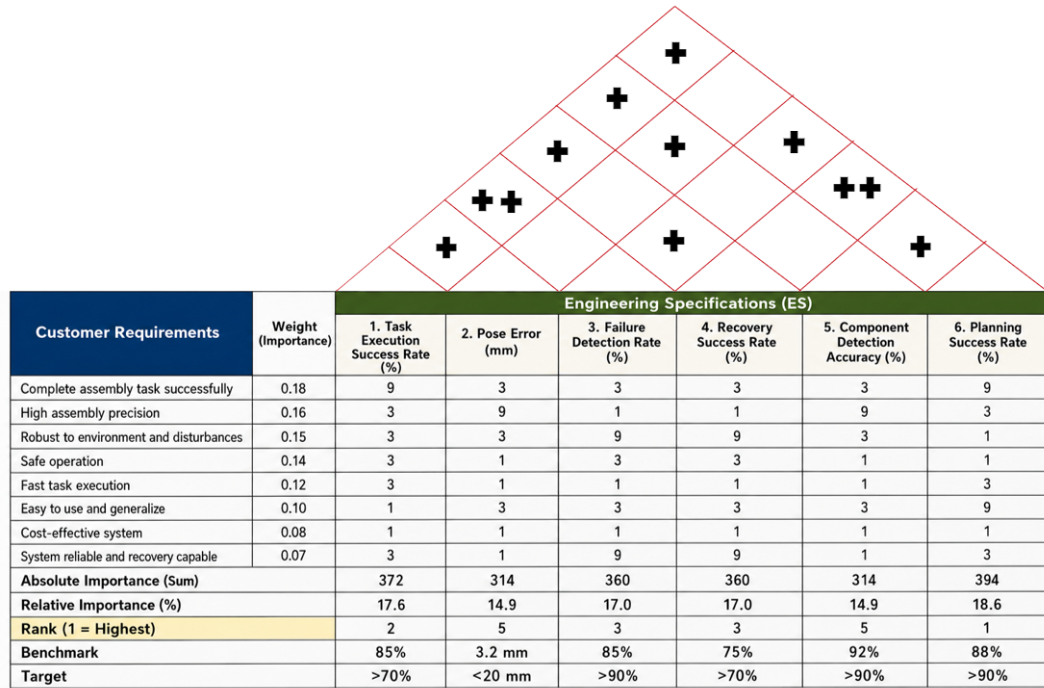

**Illustration 2–1 QFD House of Quality for the VLA bimanual manipulation system.**



## Chapter 3 Concept generation and selection

### 3.1 Concept generation

#### 3.1.1 Functional decomposition

The target assembly system was first decomposed into solution-neutral functions: establish the workspace state; create a stable robot–operator interface for demonstrations; record synchronized visual, proprioceptive, and action data; grasp and constrain the component during contact; map the current observation to coordinated motion; and detect or recover from an invalid execution state. The decomposition converts the QFD priorities into five design modules. The robot platform provides repeatable bimanual motion for ES1, ES2, and ES4; the teleoperation module enables usable demonstrations; the data-collection module supports ES3–ES4 and learning reproducibility; the gripper realizes component contact; and the policy maps observations and state to actions. Failure monitoring and recovery remain cross-cutting functions because they act across the collection and deployment loop.

#### 3.1.2 Structured brainstorming

The team used structured brainstorming to generate alternatives for each module before choosing a configuration. Candidate ideas were retained when they addressed at least one QFD-linked specification and did not violate laboratory safety, hardware access, or the project schedule. The session considered the available FR3 ecosystem alongside Flexiv and ALOHA-style platforms; direct joint-master, XR, and hand-held teleoperation; progressively richer observation schemas; compliant and rigid end-effectors; and policy families including Diffusion Policy, ACT, and the  $\pi_{0.5}$  VLA model. This procedure deliberately separates the choice of a data-collection interface from the choice of a learning algorithm, since neither can be justified independently of the sensing and robot-control path.

The generated alternatives were also informed by established research directions rather than by ad hoc feature lists. Robomimic and MimicGen motivate treating demonstration quality and dataset construction as system-level design variables<sup>[16-17]</sup>; RVT, 3D Diffusion Policy, and R3M respectively motivate the retained alternatives for multi-view geometry, 3D visuomotor control, and reusable robot visual representations<sup>[18-20]</sup>. These references

define the external concept space, while the selected configuration remains constrained by the laboratory hardware, the QFD priorities, and the project schedule.

### 3.1.3 Morphological chart and generated module concepts

Table 3–1 records the resulting concept space. A row represents one functional module, and a column entry represents one candidate realization. The bold entry in each row is the selected module concept; the table is not a claim that the unselected entries were all built or experimentally benchmarked.

Table 3–1 Morphological chart for the five functional modules

| Concept             | Candidate A                                            | Candidate B                                     | Candidate C                    |
|---------------------|--------------------------------------------------------|-------------------------------------------------|--------------------------------|
| C1: Platform        | <b>Dual Franka FR3</b>                                 | Dual Flexiv platform                            | ALOHA-style bimanual platform  |
| C2: Teleoperator    | <b>GELLO joint-master</b>                              | PICO 4 Ultra XR                                 | UMI hand-held                  |
| C3: Data collection | <b>Two wrist + one top camera + robot state/action</b> | One wrist + one top camera + robot state/action | Robot state/action only        |
| C4: Gripper         | Franka parallel gripper                                | 3D-printed hard gripper                         | <b>3D-printed soft gripper</b> |
| C5: Policy          | ACT in LeRobot                                         | $\pi_{0.5}$ <b>VLA in LeRobot</b>               | Diffusion policy               |

The morphological chart produces five leading module concepts, denoted C1–C5. C1 is a dual-FR3 platform; C2 is GELLO-based teleoperation; C3 is a synchronized three-camera, robot-state, and action pipeline; C4 is a 3D-printed soft gripper; and C5 is a unified  $\pi_{0.5}$  VLA policy integrated through LeRobot. Together they form one integrated system concept, rather than five competing end-to-end robot systems. Their alternatives are retained because each exposes a real engineering trade-off: platform precision against integration cost, operator intuitiveness against mapping complexity, observation coverage against synchronization burden, compliance against geometric repeatability, and policy capability against data and deployment maturity. Detailed descriptions of the unselected alternatives are provided in the appendix.

## 3.2 Concept selection

### 3.2.1 Selection method and QFD-derived criteria

Selection was conducted in two stages. First, an absolute screen removed a candidate if it could not be made safe in the laboratory, could not interface with the selected robot and data path, or could not be obtained and integrated within the project schedule. Second, the surviving alternatives were scored on a five-point ordinal scale, where 1 denotes a weak fit and 5 denotes a strong fit. Ratings were assigned from the QFD relationship to ES1–ES6, laboratory availability and interface knowledge, the existing collection workflow, and the cited primary or official sources; no rating is presented as an unreported benchmark result. Consistent with the functional decomposition, the “top five concepts” are the five selected module concepts C1–C5. Their combination forms the single system concept carried into the final design. For candidate  $a$  in module  $m$ , the decision score is

$$S_{m,a} = \sum_{k=1}^4 w_k r_{m,a,k}, \quad (3-1)$$

where  $r_{m,a,k}$  is the rating for criterion  $k$  and  $w_k$  is its QFD-derived weight. Scores are used only to compare alternatives within the same module; they are recorded design judgments, not measured task-performance results.

**Table 3–2 QFD-derived criteria for module selection**

| No. | Criterion                                                 | Weight | QFD Link                 |
|-----|-----------------------------------------------------------|--------|--------------------------|
| SC1 | Contribution to task performance and precision            | 0.30   | ES1, ES2, ES3, ES4       |
| SC2 | Data, control, and software integration compatibility     | 0.25   | ES1, ES2, ES3            |
| SC3 | Safety, robustness, and recovery support                  | 0.20   | ES5, ES6; CR3–CR4        |
| SC4 | Availability, manufacturability, and schedule feasibility | 0.25   | CR6–CR7 and project plan |

### 3.2.2 Scoring of the five selected module concepts

Table 3–3 provides the detailed selection record for the five leading module concepts. The same criterion definitions and weights are applied in every module so that the scoring

logic remains traceable to the QFD; however, the totals are interpreted only within a module because a robot platform, a gripper, and a policy make different contributions to the integrated system.

**Table 3–3 Module-level concept selection matrix (1 = weak fit; 5 = strong fit)**

| Module             | Candidate                             | SC1 | SC2 | SC3 | SC4 | Weighted score |
|--------------------|---------------------------------------|-----|-----|-----|-----|----------------|
| C1 Platform        | Dual Franka FR3                       | 5   | 5   | 4   | 3   | <b>4.30</b>    |
|                    | Dual Flexiv                           | 4   | 3   | 4   | 2   | 3.30           |
|                    | ALOHA-style bimanual                  | 3   | 4   | 3   | 5   | 3.85           |
| C2 Teleoperator    | GELLO joint-master                    | 4   | 5   | 4   | 5   | <b>4.50</b>    |
|                    | PICO 4 Ultra XR                       | 3   | 3   | 3   | 4   | 3.25           |
|                    | UMI hand-held                         | 3   | 3   | 3   | 4   | 3.25           |
| C3 Data collection | Two wrist + top camera + state/action | 5   | 5   | 4   | 3   | <b>4.35</b>    |
|                    | One wrist + top camera + state/action | 4   | 4   | 4   | 5   | 4.20           |
|                    | Robot state/action only               | 2   | 3   | 3   | 5   | 3.25           |
| C4 Gripper         | 3D-printed soft gripper               | 4   | 4   | 4   | 5   | <b>4.20</b>    |
|                    | Franka parallel gripper               | 3   | 5   | 4   | 3   | 3.70           |
|                    | 3D-printed hard gripper               | 4   | 5   | 3   | 4   | 4.05           |
| C5 Policy          | $\pi_{0.5}$ VLA in LeRobot            | 5   | 5   | 4   | 4   | <b>4.55</b>    |
|                    | ACT in LeRobot                        | 4   | 5   | 4   | 5   | 4.50           |
|                    | Diffusion Policy                      | 4   | 3   | 4   | 4   | 3.75           |

### 3.2.3 Comparative evaluation and selected concept

**C1: Dual Franka FR3 platform.** The dual Franka FR3 platform was selected as the mechanical foundation of the final system because it provides repeatable 7-DoF control, a direct connection to the available laboratory control ecosystem, and a credible path toward coordinated bimanual manipulation. Its principal disadvantage is the substantial integration effort required for workspace coordination, collision avoidance, commissioning, and bilateral control. Nevertheless, these costs are justified by the project objective: lower-cost alternatives may reduce initial hardware burden, but they would introduce a different control ecosystem

or provide a weaker fit to the required assembly precision.

**C2: GELLO teleoperation.** GELLO was selected and implemented as the demonstration-collection interface because it offers a direct and intuitive connection between operator motion and the robot-state/action records required by the learning pipeline<sup>[21]</sup>. Despite the need for reliable leader-follower mapping and calibration, GELLO remains preferable to immersive or hand-held alternatives for the present system because it provides the most direct route from teleoperated demonstrations to the joint-space data representation used by the FR3 and LeRobot workflow.

**C3: Three-camera data pipeline.** The selected sensing configuration uses one Intel RealSense D435 overhead camera and two Intel RealSense D405 wrist-mounted cameras, together with synchronized robot state, gripper state, and action records. The D435 provides a stable global view of the shared workspace, while the two D405 cameras preserve local visual information near the end-effectors and contact regions. This complementary arrangement reduces visual blind spots and directly supports the component-detection and pose-estimation requirements in ES3–ES4, at the cost of increased synchronization and data-management effort.

**C4: 3D-printed soft gripper.** The selected end-effector is a 3D-printed soft gripper derived from the open-source gripper design in the referenced UMI material; the project adopts only the gripper-finger component rather than reproducing the complete UMI hardware system<sup>[22]</sup>. Compliant contact and rapid geometry iteration are valuable for handling assembly components with small geometric variation, although deformation may reduce pose repeatability compared with a rigid locating gripper.

**C5: Unified  $\pi_{0.5}$  VLA policy in LeRobot.** ACT was initially selected and deployed as the task-specific policy baseline because it was already integrated with the LeRobot workflow and provided a traceable route from synchronized visual observations and robot-state inputs to action-chunk execution<sup>[14,23]</sup>. As the project progressed beyond the DR3 baseline, the policy selection was updated to the LeRobot implementation of  $\pi_{0.5}$ <sup>[12-13,15]</sup>. The final policy receives three synchronized RGB observations, the bilateral robot state, and a language instruction, and predicts bilateral robot and gripper actions. One jointly trained checkpoint is used for the ring, plug-insertion, and memory-module tasks; task identity is provided through the corresponding language instruction rather than by loading separate task-specific check-

points. Unified language-conditioned multi-task bimanual control was implemented and validated in 75 physical trials, as reported in Chapter 5. ACT and Diffusion Policy are therefore retained as earlier baselines rather than presented as the final deployed policy.

The selected architecture is the combination of the highest-scoring surviving candidate in each module. C1 and C4 establish the physical capability for controlled contact; C2 and C3 make demonstrations and visual evidence available to the learner; and C5 provides the deployable policy path. This combined decision covers the full ES1–ES6 chain while retaining a feasible implementation route for subsequent final design, manufacturing, and validation.

## Chapter 4 Final design and implementation

### 4.1 Selected concept description

#### 4.1.1 Design evolution from the DR3 baseline

The final implementation retains the modular physical architecture selected in Design Review 3 (DR3), but the learning system and demonstrated scope have changed substantially. DR3 proposed a dual-Franka Research 3 (FR3) workcell, GELLO demonstration collection, two wrist cameras and one overhead camera, custom compliant fingers, a LeRobot dataset, and an imitation-learning policy. At that stage, Action Chunking with Transformers (ACT) and task-specific checkpoints were the deployable baseline. Language-conditioned bimanual control was a future objective.

The completed system replaces the task-specific ACT controller with the LeRobot implementation of  $\pi_{0.5}$ . It uses two FR3 arms, two grippers, three RGB views, a 16-dimensional bilateral state and action interface, and one jointly trained multi-task checkpoint. The three tasks are selected by natural-language instructions rather than by manually loading three independent policy files. ACT therefore remains part of the design history and concept-selection evidence, but it is not presented as the final controller.

The mechanical elements selected in DR3 remain directly relevant. The two FR3 arms provide a common kinematic and controller interface, and the two GELLO leaders provide matched bilateral demonstration inputs. The wrist and overhead cameras provide complementary local and global views. The 3D-printed compliant fingers provide a task-compatible contact interface. The later policy update changes how these modules are connected and trained, but does not remove the need for their original engineering analysis.

#### 4.1.2 Overall system architecture

The final system is organized as four connected layers:

1. the physical workcell, consisting of two FR3 arms, two custom grippers, task fixtures, and three cameras;
2. the demonstration layer, consisting of the two GELLO leader devices, the ROS 2 bridge, and the episode recorder;

3. the learning layer, consisting of LeRobot Dataset v3.0, the  $\pi_{0.5}$  training configuration, and task-balanced validation; and
4. the deployment layer, consisting of language-conditioned policy inference, action-chunk handling, the bilateral robot adapter, and deterministic safety checks.

During demonstration collection, the operator moves the two GELLO leaders. The follower-side system commands the two FR3 arms. It records three RGB images, the measured bilateral state, the bilateral arm targets, the gripper commands, the episode index, and the task instruction. Accepted episodes are stored in LeRobot Dataset v3.0 format. During training, the three task datasets are sampled with equal task probability and used to update one  $\pi_{0.5}$  model. During deployment, one of the three language instructions and the current three-view observation are supplied to the same checkpoint. The policy returns an action chunk, and the robot-side adapter sends the admissible absolute targets to the two FR3 controllers.


Figure 4–1 summarizes the final  $\pi_{0.5}$  training and action-generation architecture. Three synchronized camera views are converted into multi-view visual tokens, while the task instruction and 16-dimensional bilateral proprioceptive state provide language and robot-state conditioning. The conditioned representation is processed by the adapted  $\pi_{0.5}$  model and its robot action expert to generate a continuous 16-dimensional bimanual action chunk containing absolute joint targets and gripper widths for the left and right arms. The figure therefore represents the implemented language-conditioned multi-task policy interface rather than the earlier DR3 ACT baseline.

### 4.1.3 Selected module concepts

#### 4.1.3.1 Dual-FR3 bimanual platform

Two FR3 arms are used as the follower robots. The use of the same robot model on both sides reduces interface asymmetry: each side contributes seven joint positions, receives seven absolute joint targets, and uses the same low-level controller family. The shared kinematic structure also makes bilateral indexing, joint-limit validation, and data normalization easier to audit. Bimanual operation is required because each task includes a preparation or stabilization action followed by a more precise manipulation action.



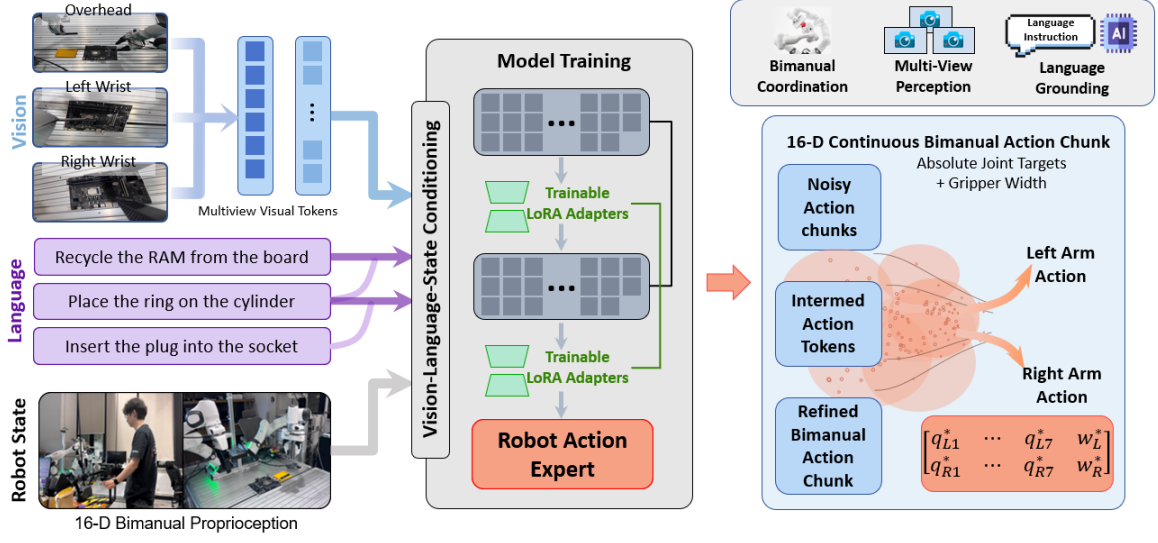

**Illustration 4–1** The  $\pi_{0.5}$  model architecture for language-conditioned bimanual manipulation. Multi-view visual observations, a task instruction, and the 16-dimensional bilateral robot state condition the adapted model, which produces continuous action chunks for both FR3 arms and grippers.

#### 4.1.3.2 GELLO demonstration interface

The demonstration interface uses one GELLO leader for each follower arm. GELLO provides a physical leader whose joint arrangement is mapped to the follower robot, giving the operator direct control of coordinated arm motion<sup>[21]</sup>. The selected project configuration provides seven arm channels and one gripper channel per leader. Its low-cost modular construction also allows damaged or geometrically unsuitable leader components to be reprinted without changing the follower robot.

#### 4.1.3.3 Three-camera visual observation

The final observation contains one fixed overhead view and two wrist views. The overhead Intel RealSense D435i observes the shared workspace, fixture positions, and large object motion. The two Intel RealSense D405 cameras move with the left and right wrists and preserve local visual information near grasp, contact, insertion, extraction, and placement regions. This arrangement avoids relying on a single global view that may be occluded by either arm, while avoiding a wrist-only configuration that loses global task context.

#### 4.1.3.4 Custom compliant grippers

Each arm uses the custom gripper developed during DR3. An assembly contains two identical screw-mounted fingers printed in TPU 64D. Each finger has an overall bounding-box size of

$$123.36 \times 25.80 \times 40.00 \text{ mm.}$$

The tapered outline and repeated ribs permit passive deformation around the handled ring, the insulated plug body, the motherboard edge, and the memory module. The reinforced mounting end keeps the screw interface stiffer than the contact region. Compliance is used to increase geometric tolerance; it is not treated as a substitute for camera coverage, accurate demonstration, or robot-side contact limits.

#### 4.1.3.5 LeRobot $\pi_{0.5}$ policy

The final policy is the LeRobot implementation of  $\pi_{0.5}$ , adapted from the open-source OpenPI implementation<sup>[12-15]</sup>. It receives three RGB images, the current bilateral state, and a language instruction. It predicts a chunk of bilateral actions in the same absolute joint-and-gripper representation used by the recorder and executor. The same model parameters are used for all three tasks.

### 4.1.4 Operational workflow

#### 4.1.4.1 Workcell initialization

Before an episode or an autonomous trial begins, the two arms are returned to the documented initial joint region, the grippers are inspected, and the task objects are reset. Camera mounts, image identities, network connections, controller status, workspace boundaries, and emergency-stop access are checked. The socket fixture is kept electrically unpowered. A run is not started if a camera is missing, a robot state is stale, or the scene does not match the selected instruction.

#### 4.1.4.2 Demonstration collection

The operator performs the selected task using the two GELLO leaders. The ROS 2 bridge assembles packets containing the three images, the measured robot and gripper state, and the commanded arm and gripper values. The recorder samples these packets at 5 Hz and stores a

complete episode. The operator then reviews task completion and resets the workcell before the next episode. Episode boundaries are preserved so that complete trajectories, rather than individual frames, can be assigned to training or validation.

#### 4.1.4.3 Dataset screening and training

The recorded episode is checked for the presence and consistent length of all three image streams, the 16-dimensional state, the 16-dimensional action, the task identity, and the episode metadata. Accepted episodes are added to one of the three task datasets. Training then samples the three tasks with equal probability, applies the defined image and numeric preprocessing, and fine-tunes one  $\pi_{0.5}$  checkpoint for 100,000 optimizer steps.

#### 4.1.4.4 Closed-loop deployment

At deployment, the operator selects the natural-language instruction that matches the prepared scene. The model receives the instruction, three current images, and the current bilateral state. It predicts 50 actions, of which the first 10 are consumed before a new observation is evaluated. The executor checks the returned targets and sends them to the two arms at the dataset-aligned control rate. A task terminates on completion, timeout, invalid observation, invalid action, protective stop, emergency stop, or manual intervention.

## 4.2 Engineering design analysis

### 4.2.1 Relevant engineering fundamentals

The implemented system combines serial-manipulator kinematics, shared-workspace bi-manual coordination, compliant contact, multi-view machine perception, imitation learning, packet-level data synchronization, and receding-horizon control. The learned policy produces high-level position targets. It does not replace the FR3 low-level servo controller, joint-limit enforcement, protective-stop behavior, or the external emergency-stop procedure.

For one seven-degree-of-freedom arm with joint vector

$$\mathbf{q}_t = [q_{1,t}, \dots, q_{7,t}]^T,$$

the end-effector pose is

$${}^B\mathbf{T}_{E,t} = f(\mathbf{q}_t), \quad (4-1)$$

where  $B$  is the robot-base frame,  $E$  is the end-effector frame, and  $f(\cdot)$  is the forward-kinematics map. In the dual-arm system, the corresponding transforms are

$${}^{B_L}\mathbf{T}_{E_L,t} = f_L(\mathbf{q}_t^L), \quad {}^{B_R}\mathbf{T}_{E_R,t} = f_R(\mathbf{q}_t^R). \quad (4-2)$$

If both base poses are expressed in a common workcell frame  $W$ , the relative end-effector transform can be written as

$${}^{E_L}\mathbf{T}_{E_R,t} = ({}^W\mathbf{T}_{B_L} {}^{B_L}\mathbf{T}_{E_L,t})^{-1} {}^W\mathbf{T}_{B_R} {}^{B_R}\mathbf{T}_{E_R,t}. \quad (4-3)$$

Equation 4–3 explains why the two base installations and task fixtures must remain fixed: the learned policy observes images and joint states rather than an explicitly recalibrated relative pose at every episode.

#### 4.2.2 Design assumptions and constraints

The system operates in a structured indoor workcell. Lighting, camera mounts, robot bases, and task fixtures remain sufficiently repeatable for the learned visual policy. Each trial begins within the demonstrated workspace. The can, handled ring, socket box, plug, motherboard, memory module, and yellow tray are treated as task-specific laboratory objects rather than arbitrary unseen industrial components.

The current model uses RGB images and bilateral proprioception. Although the selected RealSense devices can provide depth, and the D435i includes inertial sensing, depth and inertial measurements are not included in the implemented  $\pi_{0.5}$  feature contract. The chapter therefore uses manufacturer depth ranges and fields of view to justify camera placement, but it does not claim that the policy performs explicit metric depth reconstruction or six-degree-of-freedom pose estimation.

The recorder relies on software packets assembled by an upstream ROS 2 bridge. It does not use a hardware trigger or exposure-level synchronization. It also does not perform device-time interpolation or ROS approximate-time alignment. The valid engineering claim is packet-level synchronization, not exact simultaneity of the three camera exposures.

The design also assumes that deterministic safeguards remain outside the policy. The learned action is accepted only after dimensional, finite-value, joint, gripper, workspace, freshness, and communication checks. The socket task uses an electrically unpowered fixture.

The system is a supervised research workcell and is not represented as a certified production cell.

### 4.2.3 FR3 parameters and bimanual kinematic suitability


Each FR3 provides seven degrees of freedom, a nominal payload of 3 kg, a maximum reach of 855 mm, and link-side torque sensing in all seven axes<sup>[24-26]</sup>. These values are suitable for the project because the manipulated objects are light, the task is performed on a tabletop, and the seventh joint gives redundancy for changing wrist orientation while avoiding fixtures and the other arm.

**Table 4–1 FR3 parameters relevant to the selected bimanual workcell**

| Parameter          | Value                                      | Design relevance                                                                             |
|--------------------|--------------------------------------------|----------------------------------------------------------------------------------------------|
| Degrees of freedom | 7 per arm                                  | Provides redundant approach configurations and wrist orientation control.                    |
| Nominal payload    | 3 kg                                       | Exceeds the mass required for the project objects and custom fingers.                        |
| Maximum reach      | 855 mm                                     | Supports a shared central tabletop region when the two bases are arranged on opposite sides. |
| Joint sensing      | Link-side torque sensing in all seven axes | Supports compliant low-level control, contact monitoring, and protective behavior.           |

The complete joint ranges, mounting specification, environmental limits, controller interfaces, and dimension drawings are reference data rather than design arguments. They are collected in Appendix 2, Table 2–1, and Figures 2–1–2–2. The practical task workspace is deliberately smaller than those hardware bounds so that action chunks do not intentionally approach joint limits.

Figure 4–2 is retained in the main analysis because it directly supports placement of the shared task region. The 855 mm maximum reach is not treated as an invitation to place objects at the boundary: motion near maximum extension reduces available orientation freedom and can bring the arm closer to singular configurations.

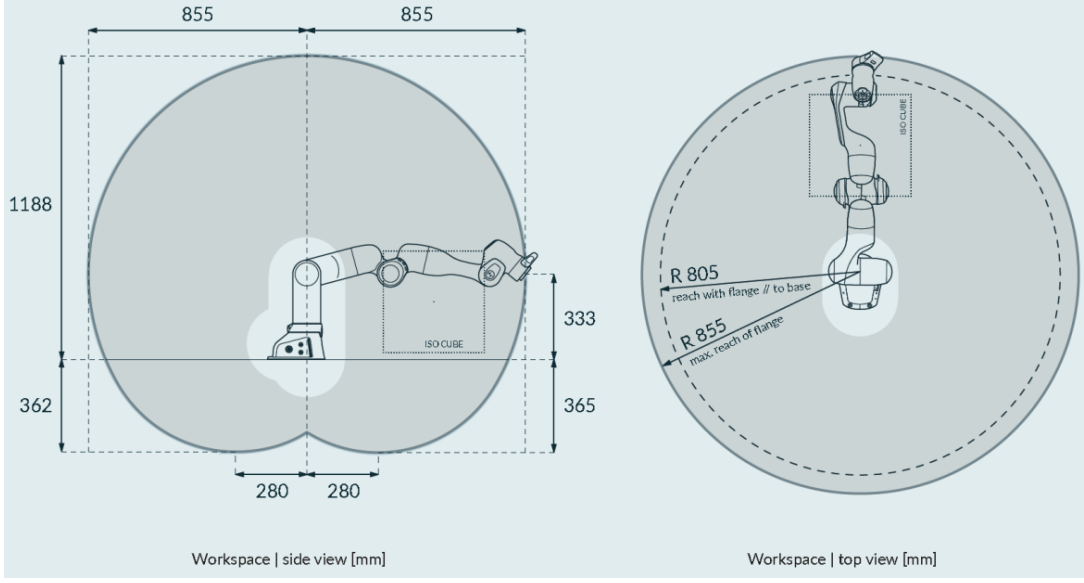

**Illustration 4-2 Side and top views of the FR3 workspace envelope. The shared task region is selected inside the overlap of the two practical arm workspaces rather than at the 855 mm reach boundary.**

#### 4.2.4 Bimanual state and action representation

The actual state and action are both stored as 16-dimensional `float32` arrays. The state is

$$\mathbf{s}_t = [q_{1,t}^L, \dots, q_{7,t}^L, g_t^L, q_{1,t}^R, \dots, q_{7,t}^R, g_t^R]^T \in \mathbb{R}^{16}, \quad (4-4)$$

where  $g_t^L$  and  $g_t^R$  are measured gripper opening widths in metres. The action uses the same ordering:

$$\mathbf{a}_t = [q_{1,t+1}^{L,target}, \dots, q_{7,t+1}^{L,target}, g_t^{L,target}, q_{1,t+1}^{R,target}, \dots, q_{7,t+1}^{R,target}, g_t^{R,target}]^T. \quad (4-5)$$

Indices 0–6 correspond to the left arm, index 7 to the left gripper, indices 8–14 to the right arm, and index 15 to the right gripper. Arm actions are absolute next-step joint targets, not joint increments. Gripper actions are absolute `open_width_m` commands. The implemented setting is therefore `use_relative_actions=false` in both training and deployment.

The  $\pi_{0.5}$  implementation pads state and action features to an internal maximum of 32 dimensions. Only entries 0–15 contain project data. Entries 16–31 are padding and are never interpreted as additional robot commands. The robot adapter explicitly slices and validates

the first 16 entries before decomposing them into left-arm, left-gripper, right-arm, and right-gripper targets.

#### 4.2.5 Shared workspace and role allocation

The two arms operate in a shared central region, so task role allocation is selected to reduce unnecessary crossing. In Task 1, the left arm pushes the can toward the centre while the right arm grasps and places the handled ring. In Task 2, the right arm pushes the socket box while the left arm grasps and inserts the plug. In Task 3, the left arm grips and pulls the motherboard while the right arm removes the memory module and places it in the yellow tray.

These assignments separate the large preparation motion from the subsequent precision motion. They also preserve the view of the precision-side wrist camera: the wrist that performs the ring placement, plug insertion, or RAM extraction approaches the relevant contact region directly. Role allocation is encoded by the demonstrations and the fixed action indexing; it is not dynamically reassigned by a separate planner.

The workcell dimensions and exact base-to-fixture transforms were not supplied as final measured values. Consequently, this report does not invent a dimensioned collision-free volume. The implemented engineering rule is that fixtures are placed in an experimentally verified overlap region, nominal trajectories stay away from the manufacturer reach boundary, and the robot-side workspace limits are tighter than the theoretical workspace shown in Figure 4–2. A production release would require the final base poses, fixture coordinates, swept-volume analysis, and inter-arm collision geometry to be documented numerically.

#### 4.2.6 Contact, clearance, and insertion tolerance analysis

##### 4.2.6.1 Ring-over-can placement

The ring task contains three mechanically distinct phases: a planar push of the can, a grasp of the ring handle, and a vertical placement of the ring over the can. Successful placement requires the ring inner opening to remain clear of the can outer profile throughout descent. If  $D_r$  is the effective ring inner diameter and  $D_c$  is the effective can outer diameter, the ideal radial clearance is

$$c_r = \frac{D_r - D_c}{2}. \quad (4-6)$$

The allowable lateral placement error must be smaller than  $c_r$ , with an additional margin for ring tilt, finger deformation, and uncertainty in the apparent object boundary. The actual  $D_r$  and  $D_c$  values were not provided, so Equation 4–6 defines the required measurement rather than claiming a numerical tolerance.

The handle allows the right gripper to avoid pinching the ring circumference, but it introduces an offset between the grasp point and the ring centre. This offset creates a moment that can tilt the ring during transport. A near-vertical final approach and release after the ring is supported by the target reduce the sensitivity to that moment.

#### 4.2.6.2 Plug insertion

Plug insertion is a constrained contact task. Lateral and angular misalignment can produce edge contact, jamming, incomplete seating, socket-box displacement, or excessive force. For an insertion depth  $L_i$  and effective lateral clearance  $c_i$ , a first-order small-clearance angular bound is

$$\theta_{\max} \approx \tan^{-1} \left( \frac{c_i}{L_i} \right). \quad (4-7)$$

The relation shows that angular tolerance decreases as insertion depth increases. The socket box is pushed into a repeatable central region before insertion so that the left arm can approach with sufficient remaining wrist orientation range. The right-arm push must end before the left-arm precision approach enters the same local region.

The DR3 socket mock-up was electrically unpowered and had a recorded overall size of  $80 \times 80 \times 30$  mm. The current task continues to use an unpowered socket fixture. The exact dimensions of the final socket box, pin clearance, insertion depth, and fixture compliance should be remeasured if the physical object differs from the DR3 mock-up. Until those values are recorded, success is defined functionally: the correct plug enters the correct socket, remains seated without manual assistance, and produces no visible damage.

#### 4.2.6.3 Memory-module extraction

The motherboard task requires fixture stabilization, connector release, module extraction, and safe placement. The left gripper pulls the motherboard closer and holds or stabilizes it. The right gripper must approach the memory module without contacting nearby components, apply a controlled extraction motion consistent with the connector geometry, and transport the released module to the yellow tray.



The mechanical tolerance is governed by the free space around the memory module, the width and compliance of the custom fingers, and the connector's extraction direction. Excess lateral motion can bend the module or load adjacent board components. Because connector retention force, neighbouring-component clearance, and module dimensions were not supplied, the report does not infer extraction force or a numerical clearance. These quantities remain required measurements for a complete contact-mechanics verification.

#### 4.2.7 Custom gripper geometry and mechanical analysis

Each gripper assembly uses two identical TPU 64D fingers, and the dual-arm workcell therefore uses four fingers. For one finger,

$$L = 123.36 \text{ mm}, \quad T = 25.80 \text{ mm}, \quad H = 40.00 \text{ mm}.$$

The principal geometric ratios are

$$\frac{L}{T} = \frac{123.36}{25.80} \approx 4.78, \quad \frac{L}{H} = \frac{123.36}{40.00} \approx 3.08. \quad (4-8)$$

These ratios describe an elongated finger rather than a short rigid jaw. The repeated ribs reduce local bending stiffness along the contact region, the tapered outline improves access, and the thicker mounting end distributes screw load.

The same compliance has a trade-off. It accommodates object-shape and pose variation and can reduce concentrated contact pressure, but deformation can reduce grasp repeatability and make the effective fingertip pose load dependent. The task design therefore uses compliance for tolerance while retaining fixed camera identities, repeatable starts, and arm-side position control. No finite-element stress, fatigue-life, or calibrated force-deflection result is claimed because print orientation, infill, wall count, actual TPU properties, contact loads, and cycle count were not supplied. The full orthographic drawing and fabrication-reference dimensions are provided in Appendix 2, Figure 2–4.

#### 4.2.8 Perception working distance, field of view, and camera selection

The overhead camera is an Intel RealSense D435i. Its specified ideal depth range is approximately 0.3–3 m and its depth field of view is approximately  $87^\circ \times 58^\circ$ <sup>[27]</sup>. This makes it suitable for observing the complete tabletop from a fixed elevated position. The overhead

view supplies global information when either wrist view is occluded or too close to show the relationship between the object, fixture, and destination.

Each wrist camera is an Intel RealSense D405. Its specified ideal depth range is approximately 7–50 cm, with an approximately  $87^\circ \times 58^\circ$  depth field of view<sup>[28]</sup>. This range is better matched to a camera mounted near the end effector. The wrist views preserve local detail during ring descent, plug alignment, and memory-module extraction.

**Table 4–2 Camera configuration and selection basis**

| Camera          | Quantity | Nominal<br>range | ideal | Depth FOV                  | Project function                                                                                       |
|-----------------|----------|------------------|-------|----------------------------|--------------------------------------------------------------------------------------------------------|
| RealSense D435i | 1        | 0.3–3 m          |       | $87^\circ \times 58^\circ$ | Fixed overhead context for the shared workcell, fixtures, destinations, and large object displacement. |
| RealSense D405  | 2        | 7–50 cm          |       | $87^\circ \times 58^\circ$ | Left- and right-wrist close-range views for grasp, contact, insertion, extraction, and placement.      |

The hardware can operate at higher image and depth rates than the learning pipeline, but the project records RGB at  $424 \times 240$  and 5 Hz. The selected policy does not consume depth or D435i inertial data. Camera range and field of view therefore justify coverage and mounting, while the learned input remains three RGB images.

#### 4.2.9 Image format and preprocessing

All three raw streams have width 424 and height 240. The LeRobot dataset stores each decoded RGB image in channel-first form:

$$[C, H, W] = [3, 240, 424].$$

Before an image is passed to  $\pi_{0.5}$ , it is converted to a  $3 \times 224 \times 224$  tensor. The conversion preserves aspect ratio. The  $424 \times 240$  image is scaled to approximately  $224 \times 126$ , and

the remaining square area is filled with approximately 49 black pixels above and below the resized image. The image is not stretched to  $224 \times 224$ .

Pixel values are represented in  $[0, 1]$  after decoding and are normalized to  $[-1, 1]$  before the model. This process is applied independently but identically to the overhead, left-wrist, and right-wrist images. Camera names and ordering are part of the feature contract. A swapped wrist-camera mapping can produce a dimensionally valid but semantically incorrect policy input, so identity is checked before recording and deployment.

#### 4.2.10 GELLO channel architecture and leader-follower mapping

The bilateral collection system uses two GELLO–Franka leaders. Each leader provides seven arm channels and one gripper-related channel, matching the seven joint targets and one gripper command required by its FR3 follower. This channel correspondence is the design-relevant property; the detailed actuator, controller-board, power-supply, structural-kit, and dual-system quantities are listed in Appendix 2, Table 2–2. The leader drawing and actuator reference data are also moved there.

Leader motion must be mapped to follower joint order, sign convention, zero offset, and permitted range. An incorrect offset can generate a valid numeric command that is unsafe for the follower. The pre-collection procedure therefore verifies the leader zero, moves each channel through a small range, confirms the corresponding follower direction, and checks the gripper-width mapping before a task episode is recorded.

#### 4.2.11 Data-collection pipeline

The implemented data path is

two GELLO leaders → two FR3 follower controllers → ROS 2 bridge  
 → assembled packets  
 → LeRobot recorder → Parquet records and three RGB videos.

The follower-side system provides measured joint positions and current gripper widths. The command side provides absolute arm targets and absolute gripper-width commands. The recorder samples the assembled packet stream at 5 Hz, assigns frames to the active episode, and preserves the task identity. A complete episode contains a continuous visual and propri-

oceptive record from the initial condition to either task completion or termination.

Collection and task review are intentionally separate operations. The recorder verifies schema and continuity, while the operator verifies whether the physical task was demonstrated correctly. A numerically complete episode can still be unsuitable for training if the operator intervened incorrectly, the object left the intended workspace, or the terminal state does not match the language instruction.

#### 4.2.12 Packet synchronization and action-label alignment

The stored cadence is 5 Hz, corresponding to approximately 0.2 s per step. The recorder pairs adjacent assembled packets. For the saved sample at index  $t$ ,

$$\mathbf{o}_t^{\text{visual}} = \text{three images from packet } t, \quad (4-9)$$

$$\mathbf{s}_t = \text{bilateral measured state from packet } t, \quad (4-10)$$

$$\mathbf{a}_t^{\text{arm}} = \mathbf{q}_{t+1}^{\text{target}} \text{ from packet } t + 1, \quad (4-11)$$

$$\mathbf{a}_t^{\text{gripper}} = \mathbf{g}_t^{\text{target}} \text{ from packet } t. \quad (4-12)$$

Images and measured state therefore come from the same current packet. The arm label is shifted forward by one packet so that the current observation is paired with the next absolute joint target. The gripper label follows the existing same-packet convention.

This procedure guarantees consistency of the saved software packet and label rule. It does not prove that all three camera exposures occurred at the same physical instant. The recorder does not interpolate device timestamps, perform ROS approximate-time alignment, or use a hardware trigger. It trusts the upstream bridge to provide an assembled packet. This limitation must be retained in the report because a nominal 5 Hz LeRobot timestamp alone cannot be used to reconstruct true camera skew or end-to-end latency.

#### 4.2.13 Dataset construction and episode split

The three task datasets contain 80 episodes each. All three use random seed 1000 and the same validation episode indices:

$$\{17, 35, 58, 65, 66, 72, 74, 75\}.$$

The remaining 72 episodes per task are used for training. Splitting by episode prevents neighbouring frames from the same physical trajectory from appearing in both the training and

validation sets.

**Table 4–3 Episode-level dataset split for the three bimanual tasks**

| Task dataset | Episodes   | Frames         | Training split                       | Validation split                   |
|--------------|------------|----------------|--------------------------------------|------------------------------------|
| dual_ring    | 80         | 46,326         | 72 episodes / 41,410 frames          | 8 episodes / 4,916 frames          |
| dual_socket  | 80         | 38,511         | 72 episodes / 34,655 frames          | 8 episodes / 3,856 frames          |
| dual_ram     | 80         | 34,813         | 72 episodes / 31,675 frames          | 8 episodes / 3,138 frames          |
| <b>Total</b> | <b>240</b> | <b>119,650</b> | <b>216 episodes / 107,740 frames</b> | <b>24 episodes / 11,910 frames</b> |

The tasks are sampled with equal probability during training. Task selection occurs before sample selection, so `dual_ring` does not receive a larger task-level probability merely because it contains more frames. This choice balances the three instructions and prevents the longest average trajectory from dominating the gradient updates.

#### 4.2.14 $\pi_{0.5}$ base model and software configuration

The final controller uses the official `pi05_base` model. The upstream checkpoint is identified by `gs://openpi-assets/checkpoints/pi05_base/params`, and training reads the converted PyTorch parameters from `real-exp/.hf-cache/pi05_base_pytorch/model.safetensors`. The base architecture combines a PaliGemma `gemma_2b` vision-language component with a `gemma_300m` action expert. The model weights use `bfloat16`.

The project uses LeRobot 0.5.2 with local project modifications. The base commit is

`dc06dba9d6220ab99c94e83ec7f0d45a35b44bed`.

The dataset format is LeRobot Dataset v3.0. Training is executed on physical GPU 1 of an NVIDIA RTX A6000 with 48 GB of memory.

#### 4.2.15 Training procedure

The three tasks are trained jointly for 100,000 optimizer steps. Batch size is 4 and the optimizer is AdamW. The peak learning rate is  $2.5 \times 10^{-5}$ . A 1,000-step warm-up is followed by cosine decay to  $2.5 \times 10^{-6}$ . Task-balanced validation is run every 5,000 steps.

**Table 4–4 Final  $\pi_{0.5}$  training configuration**

| Parameter              | Implemented value                                                                             |
|------------------------|-----------------------------------------------------------------------------------------------|
| Base model             | Official pi05_base                                                                            |
| Model structure        | PaliGemma gemma_2b and action expert gemma_300m                                               |
| Weight precision       | bfloat16                                                                                      |
| LeRobot version        | 0.5.2, with local modifications                                                               |
| Dataset format         | LeRobot Dataset v3.0                                                                          |
| Training hardware      | NVIDIA RTX A6000 48 GB, physical GPU 1                                                        |
| Batch size             | 4                                                                                             |
| Optimizer              | AdamW                                                                                         |
| Training length        | 100,000 joint-training steps                                                                  |
| Learning-rate schedule | 1,000-step warm-up to $2.5 \times 10^{-5}$ , followed by cosine decay to $2.5 \times 10^{-6}$ |
| Task sampling          | Equal probability for dual_ring, dual_socket, and dual_ram                                    |
| Validation interval    | Every 5,000 optimizer steps                                                                   |

The training configuration deliberately separates task balancing from frame count. The action and state normalizers are derived from the training data only. Validation episodes are not used to compute model updates. The same action representation and `use_relative_actions=false` setting are retained when the selected checkpoint is loaded for deployment.

#### 4.2.16 Validation and checkpoint selection

For each task, validation first computes the mean normalized flow-matching loss over at most 64 batches. With batch size 4, this corresponds to at most 256 validation samples per task at one validation point. The checkpoint-selection quantity is the unweighted task macro-average

$$\mathcal{L}_{\text{macro}} = \frac{\mathcal{L}_{\text{ring}} + \mathcal{L}_{\text{socket}} + \mathcal{L}_{\text{ram}}}{3}. \quad (4-13)$$

The best checkpoint is the validation point with the lowest  $\mathcal{L}_{\text{macro}}$ .

This metric is intentionally not weighted by the number of validation frames. It gives each task equal influence, just as the training sampler gives each task equal selection probability. The loss supports checkpoint comparison, but it is not a physical success rate, insertion-depth

measurement, contact-force measurement, or calibrated pose error. Real-robot performance is evaluated separately in Chapter 5.

#### 4.2.17 Action chunking and temporal interface

Collection and execution use 5 Hz, so one action step represents 0.2 s. The model predicts a 50-step chunk:

$$T_{\text{predicted}} = \frac{50}{5} = 10 \text{ s.} \quad (4-14)$$

Deployment uses `n_action_steps=10`, so the executor consumes approximately

$$T_{\text{executed}} = \frac{10}{5} = 2 \text{ s} \quad (4-15)$$

before requesting a new policy result from updated observations.

This is a receding-horizon interface. The 50-step prediction gives the action expert a longer temporal target, while executing only 10 steps limits the amount of open-loop motion. The exact policy-query interval may also include capture, preprocessing, inference, transfer, and queue overhead; therefore, the nominal two-second value describes the consumed action segment rather than a measured end-to-end latency.

#### 4.2.18 Deployment pipeline

Deployment begins by loading the selected unified checkpoint and its associated normalization statistics. The system verifies the three camera feature names, checks the 16-dimensional state, and confirms the language instruction. The current observation is preprocessed and passed to the policy server. The returned action chunk is denormalized, sliced to the 16 valid robot dimensions, checked for finite values and limits, and divided into left-arm, left-gripper, right-arm, and right-gripper targets.

The robot adapter sends absolute joint targets and absolute gripper widths. It does not reinterpret them as deltas. After the configured ten-step segment, new images and state are acquired and a new action chunk is requested. This loop continues until the terminal task condition or a stop condition is reached.

#### 4.2.19 Control, computation, and safety boundary

The policy is not the safety controller. Before motion is enabled, a dry run verifies camera freshness and ordering, state/action dimensions, normalization statistics, checkpoint identity,

language instruction, finite model outputs, network communication, joint and gripper limits, workspace bounds, and emergency-stop access.

During motion, the run stops on a missing image, stale state, malformed packet, non-finite output, excessive target, workspace violation, communication timeout, robot protective stop, emergency stop, or manual stop. Reset is performed only after policy execution has stopped and the shared workspace is clear. The power socket remains unpowered. These checks maintain a deterministic boundary around the probabilistic learned policy.

### 4.3 Detailed system design

#### 4.3.1 Workcell layout

The two FR3 arms are mounted upright on opposite sides of a shared tabletop region. Task fixtures are placed inside the verified overlap of the two practical workspaces. The D435i is fixed above the shared region. One D405 is attached to each wrist. Each arm carries one custom gripper. The two GELLO leaders remain outside the follower workcell and are used by the operator during demonstration collection.

Figure 4–1 identifies the three deployed camera views and the 16-dimensional bilateral state supplied to the policy, but it is a model-level architecture diagram rather than a dimensioned workcell drawing. Exact base spacing, camera height, camera pitch, and fixture coordinates were not included in the supplied implementation record; these values should be added to a future dimensioned workcell drawing rather than inferred from the conceptual image.

#### 4.3.2 Dual-arm robotic platform

Both arms use the same 16-value bilateral ordering defined in Equations 4–4 and 4–5. The left and right controllers remain independent low-level systems, but they are driven from one policy output and one episode timeline. Each arm can perform a large scene-preparation motion or a precise manipulation motion, depending on the demonstrated task role.

The redundant seventh joint is important in the shared workcell because end-effector pose alone does not determine a unique arm posture. Demonstrations implicitly select postures that provide camera visibility, avoid fixtures, and reduce inter-arm interference. The low-



level controller remains responsible for executing the admissible targets; the learned model does not directly output torque.

### 4.3.3 GELLO leader assemblies

Each leader measures seven arm channels and one gripper-related channel for its assigned follower. The operator does not bear follower-arm load through the leader; it is a position-input and command device. Mechanical looseness, servo zero error, cable interference, or incorrect joint signs can degrade demonstration quality, so the two leader assemblies are inspected and checked independently before bilateral collection. The component-level construction and quantities are recorded in Appendix 2, rather than repeated in the system-level design description.

### 4.3.4 End-effector and mechanical components

Each gripper uses two screw-mounted compliant fingers. The mounting screws must be tightened consistently, and the fingers must be installed with matching orientation. Before a run, the operator checks for tearing at rib roots, permanent bending, loose mounting holes, surface contamination, and insufficient opening range.

The task fixtures prevent uncontrolled object drift while retaining the manipulation required by the task. The can and socket box must still be pushable into the intended central region. The motherboard must be graspable and movable by the left gripper but sufficiently supported to allow the right gripper to extract the memory module. The tray must remain fixed so that successful placement is not confused with tray motion.

### 4.3.5 Vision and sensing system

The D435i mount is fixed relative to the workcell and is positioned to keep all source and destination regions in view. The two D405 mounts move with the wrists and are oriented so that the gripper contact region appears in the close-range image during approach. Cables are routed to avoid entering the gripper opening or restricting wrist motion.

The logical camera mapping is fixed:

$$\begin{aligned} \text{overhead} &\equiv \text{D435i}, \\ \text{left\_wrist} &\equiv \text{left D405}, & \text{right\_wrist} &\equiv \text{right D405}. \end{aligned}$$

The recorder and policy use these identities consistently. The three cameras provide RGB to the model; their depth and inertial capabilities are not part of the current learned observation.

#### 4.3.6 Demonstration data-collection system

The collection system starts the two robot interfaces, both gripper interfaces, three camera publishers, the ROS 2 bridge, and the LeRobot recorder. The bridge assembles the latest required fields into a packet. The recorder begins a named task episode only after all required fields are available.

The operator executes the complete instruction and then ends the episode. The episode is retained only if the three image streams decode correctly, state and action arrays have the required width, and the demonstration matches the intended task. Manual workcell reset is performed between episodes. The same task instruction is used during collection and later deployment so that language conditioning does not depend on an undocumented paraphrase.

#### 4.3.7 Data processing pipeline

Processing has separate visual and numeric branches. The visual branch decodes the three RGB streams, converts them to channel-first tensors, preserves aspect ratio during resizing, pads to  $224 \times 224$ , and normalizes to  $[-1, 1]$ . The numeric branch reads the 16-dimensional state and action, applies the training statistics, and pads the model-side representation to 32 dimensions.

Episode metadata determines the task and split. The eight validation episode indices are excluded from training for every task. During data loading, the task-balanced sampler chooses among the three task datasets with equal probability. The language instruction, three images, state, and supervised action target are then passed to the policy training step.

#### 4.3.8 Policy-training system

The training system loads `pi05_base`, the converted PyTorch weights, and the LeRobot v3.0 datasets. It uses batch size 4 on the RTX A6000. Optimizer state, learning-rate schedule, model state, step index, and validation quantities are saved at the configured checkpoints.

Validation runs every 5,000 steps. Each task is evaluated separately before the unweighted macro-average is calculated. This preserves per-task traceability and prevents a low loss on

the largest dataset from concealing a poor result on another task.

#### 4.3.9 Robot control and deployment system

The deployment system loads one checkpoint for all three instructions. The selected instruction and current observation are sent to  $\pi_{0.5}$ . A 50-step action chunk is returned, and the executor uses the first ten steps. The target ordering, absolute-action interpretation, 5 Hz cadence, and camera mapping are identical to training.

The left and right arm targets are separated only after policy output validation. The gripper commands are expressed as absolute opening widths in metres. After each executed segment, the queue is not blindly extended with the rest of the old 50-step chunk; the policy is queried again using updated images and state.

#### 4.3.10 Hardware–software interfaces

**Table 4–5 Detailed hardware–software interfaces in the final system**

| Information            | Source               | Destination                        | Implemented contract                                                                         |
|------------------------|----------------------|------------------------------------|----------------------------------------------------------------------------------------------|
| Left leader joints     | Left GELLO           | Left follower interface            | Seven leader positions mapped to left FR3 joint order, signs, offsets, and permitted range.  |
| Left leader gripper    | Left GELLO           | Left gripper interface             | One leader channel mapped to absolute gripper opening width.                                 |
| Right leader joints    | Right GELLO          | Right follower interface           | Seven leader positions mapped to right FR3 joint order, signs, offsets, and permitted range. |
| Right leader gripper   | Right GELLO          | Right gripper interface            | One leader channel mapped to absolute gripper opening width.                                 |
| Left measured joints   | Left FR3 controller  | ROS 2 bridge / recorder / executor | Seven current joint positions in state indices 0–6.                                          |
| Left measured gripper  | Left gripper         | ROS 2 bridge / recorder / executor | Current opening width in metres at state index 7.                                            |
| Right measured joints  | Right FR3 controller | ROS 2 bridge / recorder / executor | Seven current joint positions in state indices 8–14.                                         |
| Right measured gripper | Right gripper        | ROS 2 bridge / recorder / executor | Current opening width in metres at state index 15.                                           |

| Information           | Source                                                | Destination                | Implemented contract                                                                                                                |
|-----------------------|-------------------------------------------------------|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Overhead RGB          | RealSense D435i                                       | Bridge / recorder / policy | RGB $424 \times 240$ at 5 Hz; stored as $3 \times 240 \times 424$ , then resized and padded to $3 \times 224 \times 224$ .          |
| Left-wrist RGB        | Left RealSense D405                                   | Bridge / recorder / policy | Same tensor contract under the fixed left-wrist feature name.                                                                       |
| Right-wrist RGB       | Right RealSense D405                                  | Bridge / recorder / policy | Same tensor contract under the fixed right-wrist feature name.                                                                      |
| Assembled packet      | ROS 2 bridge                                          | LeRobot recorder           | Same-packet images and measured state; adjacent-packet arm action label.                                                            |
| Episode record        | LeRobot recorder                                      | Dataset v3.0               | Three videos, state, absolute action, task instruction, episode and frame indexing.                                                 |
| Training sample       | Dataset and sampler                                   | $\pi_{0.5}$ trainer        | Equal-probability task sampling; training episodes only.                                                                            |
| Language instruction  | Task interface                                        | $\pi_{0.5}$ policy         | One of the three documented task instructions matching the prepared scene.                                                          |
| Policy observation    | Preprocessor                                          | $\pi_{0.5}$ policy         | Three normalized $3 \times 224 \times 224$ images and a padded numeric state whose first 16 entries are valid.                      |
| Predicted action      | $\pi_{0.5}$ policy                                    | Robot adapter              | 50-step chunk; first 10 steps consumed per query.                                                                                   |
| Left arm command      | Robot adapter                                         | Left FR3 controller        | Absolute joint targets from action indices 0–6.                                                                                     |
| Left gripper command  | Robot adapter                                         | Left gripper               | Absolute opening width from action index 7.                                                                                         |
| Right arm command     | Robot adapter                                         | Right FR3 controller       | Absolute joint targets from action indices 8–14.                                                                                    |
| Right gripper command | Robot adapter                                         | Right gripper              | Absolute opening width from action index 15.                                                                                        |
| Stop conditions       | Cameras, bridge, adapter, robot controllers, operator | Both robot command paths   | Stop on stale/missing data, invalid action, timeout, workspace or joint violation, protective stop, emergency stop, or manual stop. |

### 4.3.11 Task definitions and bilateral role allocation

**Table 4–6 Language instructions, bilateral roles, and terminal conditions**

| Task | Language instruction                                                                                                  | Demonstrated arm roles                                                                    | Terminal completion condition                                                           |
|------|-----------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| T1   | First, push the can to the middle, then pick up the black ring with the handle, put it over the can, and set it down. | Left arm pushes the can; right arm grasps the handled ring and places it.                 | The can is repositioned and the released ring remains stably over the can.              |
| T2   | Push the box with the power socket to the middle, then pick up the plug and insert it into the socket.                | Right arm pushes the socket box; left arm grasps and inserts the plug.                    | The socket box is repositioned and the plug remains inserted without manual assistance. |
| T3   | Pull the computer motherboard closer, then remove the memory module and place it in the yellow tray.                  | Left arm grips and pulls the motherboard; right arm removes and places the memory module. | The memory module is fully removed and remains inside the yellow tray.                  |

### 4.3.12 System operation

#### 4.3.12.1 Pre-run checks

The operator confirms the checkpoint, instruction, object arrangement, camera mapping, gripper condition, network status, and robot status. Both arms are returned to the approved start region. The socket is verified to be unpowered. The shared workspace is cleared of unrelated objects, and the emergency stop remains accessible.

#### 4.3.12.2 Collection run

The leader offsets and channel directions are checked. Recording begins only after all three cameras and all bilateral state/action fields are present. The operator executes the complete task through the two GELLO leaders. The episode is stopped, reviewed, accepted or rejected, and then the scene is reset.

#### 4.3.12.3 Policy dry run

The policy is first queried without enabling robot motion. The returned shape, finite values, absolute-action interpretation, camera ordering, and initial target relative to the current

robot state are inspected. A dry run that fails any check is not promoted to physical execution.

#### 4.3.12.4 Autonomous run

The executor enables the approved command path, consumes ten actions from each predicted chunk, and re-observes the workcell. The operator does not manually assist a counted trial. The trial ends when the documented terminal condition is met or a stop condition occurs. Outcome, stop reason, checkpoint, instruction, and video record are retained for Chapter 5 evaluation.

#### 4.3.13 Parts and components

Table 4–7 retains only the system-level composition needed to understand the implementation. Manufacturer model details, leader subcomponents, and the complete 22-item parts record are provided in Appendix 2, Table 2–5.

**Table 4–7 System-level component summary**

| System group                 | Quantity | Function                                                                         |
|------------------------------|----------|----------------------------------------------------------------------------------|
| FR3 follower systems         | 2        | Left- and right-arm manipulation with low-level robot control and protection.    |
| Custom grippers              | 2        | Task-compatible grasping with four compliant TPU fingers in total.               |
| RGB camera views             | 3        | One fixed overhead view and two wrist-local views.                               |
| GELLO leaders                | 2        | Bilateral demonstration input, one leader per follower arm.                      |
| Training and bridge compute  | 1 system | Dataset recording, packet assembly, policy training, validation, and deployment. |
| Task-object and fixture sets | 3        | Ring/can, plug/socket, and motherboard/memory-module tasks.                      |
| Safety and storage resources | 1 set    | Deterministic stopping, supervision, dataset storage, checkpoints, and logs.     |

## 4.4 Manufacturing and implementation plan

### 4.4.1 Implementation scope

The project reuses laboratory robot arms, controllers, cameras, computing resources, and network infrastructure. Custom manufacturing is concentrated in the compliant fingers, GELLO structural parts, camera mounts, and task fixtures. Software implementation covers collection, packet assembly, LeRobot conversion, preprocessing, multi-task sampling,  $\pi_{0.5}$  training, validation, inference, action adaptation, and run logging.

The full economic value of the workcell is not equal to the incremental cash expenditure. The FR3 arms, cameras, GPU, and safety equipment are in-kind laboratory resources. The DR3 budget recorded no additional out-of-pocket expense for the proof of concept. The expanded budget below preserves that statement while separating unpriced in-kind assets from incremental fabrication cost.

### 4.4.2 Materials and manufacturing processes

### 4.4.3 Gripper fabrication and inspection

The finger CAD is prepared for TPU 64D printing with the mounting face and rib structure preserved. The selected print orientation must avoid weak inter-layer loading at the mounting holes and rib roots. After printing, supports and stringing are removed without cutting the compliant ribs. The overall envelope, paired symmetry, hole condition, and free deformation are inspected before assembly.

The two fingers on one gripper are installed with matching orientation and adequate clearance through the commanded opening range. A manual opening-and-closing check verifies that neither finger contacts the camera mount or wrist cable. The assembly is rejected if a rib is torn, the base is permanently warped, a screw cannot retain the finger, or the two contact surfaces are visibly mismatched.

### 4.4.4 GELLO assembly and calibration

Each leader is assembled from the FPX330-H101 structure, printed links and brackets, seven M288 actuators, one M077 actuator, controller board, and 5 V power supply. Joint axes are checked for free movement before wiring. Cables are routed so that the full demonstrated

**Table 4–8 Materials, manufacturing processes, and critical considerations**

| No. | Part or resource         | Material or source                              | Process or tool                                         | Critical consideration                                                                        |
|-----|--------------------------|-------------------------------------------------|---------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| 1   | FR3 arms and controllers | Laboratory equipment                            | Upright installation and interface configuration        | Base rigidity, shared workspace, controller limits, network isolation, emergency stop         |
| 2   | Compliant fingers        | TPU 64D                                         | Fused-filament 3D printing, support removal, inspection | Print orientation, rib integrity, screw-hole quality, paired geometry, permanent deformation  |
| 3   | Gripper attachment       | Existing gripper and printed/adapted interfaces | Mechanical assembly with screws                         | Alignment, thread engagement, consistent tightening, opening clearance                        |
| 4   | GELLO structures         | FPX330-H101 and printed parts                   | Additive manufacturing and modular assembly             | Joint-axis alignment, low friction, cable strain relief, repeatable zero offsets              |
| 5   | Camera mounts            | Laboratory or printed brackets                  | Rigid mounting and cable routing                        | Working distance, FOV, gripper visibility, occlusion, cable interference                      |
| 6   | Task fixtures            | Printed or manually assembled fixture parts     | Additive manufacturing and bench assembly               | Repeatable initial pose, pushability where required, no mains power, stable destination       |
| 7   | Software environment     | LeRobot, PyTorch, ROS 2, project modifications  | Version-controlled configuration and scripted execution | Commit traceability, feature names, absolute-action setting, dataset/model compatibility      |
| 8   | Dataset and checkpoints  | Recorded demonstrations and training outputs    | Validation, indexing, backup, and integrity checks      | Episode-level split, three-view completeness, task balance, reproducible checkpoint selection |



range does not pull on connectors or bias the leader posture.

After electrical assembly, servo identifiers, zero positions, directions, and range mappings are verified one channel at a time. The left and right leaders are calibrated independently because a mirrored workcell does not imply identical signs and offsets. The final mapping is stored with the collection configuration so that later episodes can be traced to the leader calibration used.

#### 4.4.5 Camera and fixture implementation

The overhead mount is installed so that the complete source, interaction, and destination regions remain visible. Each D405 is mounted within its intended 7–50 cm close-range operating envelope during manipulation. The wrist view is checked at approach, contact, and retreat postures, not only at the robot start pose.

Task fixtures are placed in the verified shared workspace. The can, socket box, and motherboard must permit the instructed preparation motion, while their target regions remain visible. The yellow tray is fixed against accidental displacement. The socket fixture is electrically isolated and unpowered. Reference markings or stops are used where necessary to make scene reset repeatable.

#### 4.4.6 Software implementation

The software stack is configured in independent stages:

1. robot, gripper, camera, and GELLO device interfaces;
2. ROS 2 state and command topics;
3. bridge packet assembly and freshness checks;
4. LeRobot Dataset v3.0 episode recording;
5. image preprocessing and 16-to-32-dimensional model padding;
6. episode-level split and equal-probability task sampling;
7.  $\pi_{0.5}$  fine-tuning and macro-loss validation;
8. unified-checkpoint policy inference; and
9. bilateral absolute-action adaptation and safety checks.

The configuration records LeRobot version 0.5.2, the project commit, local modifications, base-checkpoint source, training steps, learning-rate schedule, camera feature names,

`use_relative_actions=false`, action chunk size, and `n_action_steps`. These values are treated as part of the reproducible implementation rather than left as implicit code defaults.

#### **4.4.7 System integration sequence**

Integration proceeds from independent hardware checks to full learned control. First, each arm and gripper is checked without the policy. Second, all three cameras are checked under their final logical names. Third, each GELLO leader is mapped to its follower. Fourth, bilateral teleoperation is tested at low speed with an empty workspace. Fifth, complete episodes are recorded and decoded. Sixth, a training batch is inspected for camera order, numeric order, and action alignment. Seventh, the policy is run without opening the robot command path. Finally, supervised physical trials are enabled.

This sequence isolates failures. A camera-identity error should be found before training; a leader offset should be found before collecting a large dataset; a state/action index error should be found before robot execution; and a policy-output error should be found during the dry run.

#### 4.4.8 Budget

Table 4–9 separates the reported incremental cash cost from the laboratory equipment, compute, and fabrication resources supplied in kind. This distinction avoids presenting an in-kind research workcell as a zero-value system.

**Table 4–9 Expanded implementation budget and resource status**

| No.                                           | Component, service, and quantity                         | Provider                               | Cash cost          | Status and accounting note                                                        |
|-----------------------------------------------|----------------------------------------------------------|----------------------------------------|--------------------|-----------------------------------------------------------------------------------|
| 1                                             | Two FR3 arms, controllers, and safety equipment (2 sets) | Laboratory                             | CNY 0 incremental  | Existing in-kind assets; acquisition value not supplied                           |
| 2                                             | D435i, two D405 cameras, and mounts (3 cameras)          | Laboratory                             | CNY 0 incremental  | Existing in-kind assets; mount material not separately recorded                   |
| 3                                             | RTX A6000 training workstation and storage (1 set)       | Laboratory                             | CNY 0 incremental  | Existing shared compute; energy and depreciation not allocated                    |
| 4                                             | GELLO leader assemblies (2)                              | Laboratory / project resources         | CNY 0 incremental  | DR3 records availability; itemized acquisition value not supplied                 |
| 5                                             | TPU 64D compliant fingers (4)                            | Student Innovation Center              | CNY 0 incremental  | Fabricated through available resources; material mass and print time not recorded |
| 6                                             | Task objects and fixtures (3 sets)                       | Laboratory / Student Innovation Center | CNY 0 incremental  | Available; final fixture-material value not supplied                              |
| 7                                             | Software stack (1 configuration)                         | Open source and project code           | CNY 0 licence cost | LeRobot, ROS 2, PyTorch, and project modifications                                |
| <b>Reported additional out-of-pocket cost</b> |                                                          |                                        | <b>CNY 0</b>       | Excludes in-kind asset value, labour, energy, and depreciation                    |

The CNY 0 value is therefore an incremental cash figure, not the total system value. A full economic budget would require the purchase or replacement value of two FR3 systems, two GELLO assemblies, three cameras, the GPU workstation, storage, safety hardware, print material, print time, labour, and energy. Those values were not included in the supplied DR3

or final implementation record and should be added only from invoices or the laboratory asset register.

#### 4.4.9 Current implementation status and remaining documentation

The final implementation now includes dual-arm state and action handling, three RGB inputs, LeRobot Dataset v3.0 data, one jointly trained  $\pi_{0.5}$  checkpoint, equal-probability three-task sampling, the defined episode-level validation split, macro flow-matching checkpoint selection, and a 5 Hz absolute-action deployment interface. The selected DR3 hardware modules and engineering drawings have been retained in this chapter.

Several quantities remain documentation gaps rather than model-design gaps. They include measured FR3 base poses, camera extrinsics and mounting distances, dimensioned fixture locations, ring and can clearances, and final socket insertion clearance and depth. They also include motherboard and memory-module clearances, measured gripper force–deflection behaviour, TPU print settings, print mass and time, full in-kind asset value, and measured end-to-end latency. These values should be added if the report is expected to make production-level tolerance, structural, timing, or economic claims.

## Chapter 5 Validation results

### 5.1 Validation objectives and scope

The validation evaluates the final unified  $\pi_{0.5}$  system described in Chapter 4. Its principal purpose is to determine whether one jointly trained checkpoint can execute the three documented bimanual tasks on the physical dual-FR3 workcell. The evaluation therefore separates two quantities that have different meanings:

1. the offline normalized flow-matching loss used to select a checkpoint; and
2. the end-to-end physical task success rate measured after deployment.

The first quantity measures agreement with held-out demonstration samples and is used only for model selection. The second measures whether a complete physical trial reaches the task-specific terminal condition in Table 4–6. A low validation loss is not treated as a substitute for physical task completion.

The physical evaluation covers the three bounded task configurations used during final implementation: ring placement over a can, insertion of a two-pin plug into a two-hole socket, and memory-module removal from a motherboard followed by placement in a yellow tray. Each task was evaluated in 25 counted trials, giving 75 physical trials in total. The results establish performance within these prepared laboratory scenes; they do not by themselves demonstrate open-world object generalization, arbitrary language understanding, or production-line reliability.

### 5.2 Checkpoint selection and deployment configuration

#### 5.2.1 Selection criterion

Chapter 4 defines the checkpoint-selection procedure in Equation 4–13. Validation was performed every 5,000 optimizer steps. For each validation point, the normalized flow-matching losses of the ring, socket, and RAM datasets were first calculated separately and then combined as the unweighted macro-average

$$\mathcal{L}_{\text{macro}} = \frac{\mathcal{L}_{\text{ring}} + \mathcal{L}_{\text{socket}} + \mathcal{L}_{\text{ram}}}{3}.$$

The checkpoint with the lowest recorded  $\mathcal{L}_{\text{macro}}$  was selected. Under this criterion, the best checkpoint occurred at 95,000 training steps. The model selected for physical deployment was therefore the 95,000-step unified checkpoint rather than the final 100,000-step training state.

This selection preserves equal task importance. The ring dataset contains more frames than the other two datasets, but neither the training sampler nor the checkpoint-selection metric gives it greater task-level weight.

### 5.2.2 Deployment hardware

Training was performed on the RTX A6000 system documented in Chapter 4. Physical deployment used an NVIDIA GeForce RTX 5070 Ti. The deployed policy used the same three image inputs, 16-dimensional bilateral state, absolute 16-dimensional action representation, language-instruction interface, and `use_relative_actions=false` setting as the training configuration. It predicted a 50-step action chunk and the executor consumed ten steps before requesting an updated prediction.

The deployment-GPU model is recorded to distinguish training compute from inference compute. A complete task execution took approximately one minute under the evaluated conditions. This is an approximate operational duration rather than a mean calculated from per-trial timestamps. End-to-end policy inference latency, GPU utilization, and the achieved policy-query period were not measured separately, so the nominal 5 Hz action cadence and approximately two-second executed chunk remain interface settings rather than measured latency results.

## 5.3 Physical trial protocol and success definition

For each trial, the prepared scene corresponded to one of the three fixed language instructions in Table 4–6. The same 95,000-step checkpoint was used for every task. Task identity was provided through the language instruction; separate task-specific checkpoints were not loaded.

The objects were reset before every trial and their initial positions were randomly perturbed around the nominal task arrangement. The permitted placement variation was approximately 5 cm for the ring and RAM scenes and approximately 3 cm for the socket scene. For

each task, the 25 trials were conducted consecutively. Once autonomous execution started, no manual intervention or corrective assistance was permitted during a counted trial.

A trial was counted as an end-to-end success only when its complete terminal condition was achieved:

- for the ring task, the can was repositioned and the released ring remained over the can;
- for the socket task, the socket box was repositioned and the two-pin plug remained inserted in the two-hole socket; and
- for the RAM task, the memory module was fully removed from the motherboard and remained inside the yellow tray.

Failures were categorized by the first task stage that prevented the terminal condition. Partial completion was retained for failure analysis but was not counted as end-to-end success.

The randomized reset evaluates tolerance to moderate initial-position variation rather than exact repetition of one fixed scene. However, the displacement limits are approximate and the individual trial coordinates were not logged. The results are therefore reported as descriptive success rates over the bounded reset procedure rather than as estimates over a precisely sampled statistical distribution.

## 5.4 Overall physical results

For task  $k$ , the end-to-end success rate is

$$R_k = \frac{N_k^{\text{success}}}{N_k^{\text{trial}}} \times 100\%. \quad (5-1)$$

Table 5–1 reports the resulting task-level values.

**Table 5–1 End-to-end physical success rates using the 95,000-step unified checkpoint**

| Task                       | Successful | Failed    | Total     | Success rate |
|----------------------------|------------|-----------|-----------|--------------|
| Ring over can              | 21         | 4         | 25        | 84%          |
| Plug into socket           | 13         | 12        | 25        | 52%          |
| Memory-module removal      | 25         | 0         | 25        | 100%         |
| <b>All physical trials</b> | <b>59</b>  | <b>16</b> | <b>75</b> | <b>78.7%</b> |

Because every task contains the same number of physical trials, the micro-average over

all 75 trials and the unweighted macro-average of the three task success rates are both

$$\frac{59}{75} \times 100\% = \frac{84\% + 52\% + 100\%}{3} \approx 78.7\%.$$

This aggregate value is higher than the 70% task-execution target in Table 2–2. However, the aggregate conceals a large task difference. The RAM and ring tasks individually exceed 70%, whereas the socket task reaches only 52%. The final system therefore does not satisfy the task-execution threshold uniformly across all three tasks.

## 5.5 Task-specific results and failure analysis

### 5.5.1 Memory-module removal and tray placement

The RAM task succeeded in all 25 counted trials, giving an observed success rate of 100%. In the successful sequence, the left arm pulled and stabilized the motherboard while the right arm removed the memory module and transferred it to the yellow tray. No end-to-end failure was recorded in the 25-trial set.

This result shows that the selected demonstration data, bilateral role allocation, camera observations, compliant grippers, and unified checkpoint were sufficient for the evaluated motherboard configuration. The 25-out-of-25 result should nevertheless be interpreted as performance within the tested setup. A finite trial set with no observed failure does not establish a zero failure probability, and the current evaluation does not quantify sensitivity to motherboard pose, memory-module type, connector retention force, lighting, or camera displacement.

### 5.5.2 Ring placement over the can

The ring task succeeded in 21 of 25 trials, corresponding to 84%. Four trials failed. Table 5–2 separates the observed failure modes.

Three of the four failures occurred before secure transport because the right gripper did not successfully acquire the ring handle. The remaining failure occurred at the ring-over-can placement stage. The observed distribution therefore identifies handle acquisition as the dominant bottleneck in this task, rather than the initial can-pushing operation.

In two failures, the right gripper approached with an offset from the handle and therefore did not establish a grasp. The obstruction failure shows that the ring base can remove the



**Table 5–2 Observed failure modes in the ring task**

| <b>Failure mode</b>                                               | <b>Count</b> | <b>Share of ring failures</b> |
|-------------------------------------------------------------------|--------------|-------------------------------|
| Ring not successfully placed over the can                         | 1            | 25%                           |
| Right gripper deviated from the handle and missed the grasp       | 2            | 50%                           |
| Handle grasp failed because the ring base obstructed the approach | 1            | 25%                           |
| <b>Total</b>                                                      | <b>4</b>     | <b>100%</b>                   |

approach clearance required by the custom fingers. These observations motivate additional demonstrations around displaced handle configurations, inspection of wrist-camera visibility near the ring base, and evaluation of a more reliable pre-grasp alignment. They also provide a concrete basis for evaluating whether a revised finger profile or a more vertical pre-grasp approach would improve robustness; these changes are proposed from the observed failures and were not evaluated in the present trial set.

### 5.5.3 Two-pin plug grasping and two-hole socket insertion

The socket task succeeded in 13 of 25 trials, corresponding to 52%. Twelve trials failed. Table 5–3 reports the two observed failure categories.

**Table 5–3 Observed failure modes in the socket task**

| <b>Failure mode</b>                                                         | <b>Count</b> | <b>Share of socket failures</b> |
|-----------------------------------------------------------------------------|--------------|---------------------------------|
| Left gripper did not acquire or retain the plug                             | 2            | 16.7%                           |
| Two-pin plug grasped, but alignment with the two-hole socket was inaccurate | 10           | 83.3%                           |
| <b>Total</b>                                                                | <b>12</b>    | <b>100%</b>                     |

The dominant failure is constrained insertion rather than plug acquisition. Ten of the twelve failures reached the stage at which the two-pin plug had been grasped but did not enter the two-hole socket accurately enough to satisfy the terminal condition. This is consistent with the tolerance analysis in Section 4.2.6: the insertion requires both lateral alignment of the two pins with their corresponding holes and sufficiently small angular error through the

insertion motion.

The result does not by itself identify a single root cause. Possible contributors include residual socket-box pose variation after the right-arm push, plug pose variation inside the compliant left gripper, limited visual information at the contact point, and the temporal interval over which ten predicted actions are executed before replanning. These are engineering hypotheses inferred from the failure stage, not measured causal conclusions. Confirming them would require trial-level video review, socket and plug geometry measurements, and preferably logging of the wrist view and commanded joint targets immediately before contact.

## 5.6 Cross-task interpretation

The results demonstrate that one 95,000-step  $\pi_{0.5}$  checkpoint can produce successful physical executions for all three language-selected tasks without loading separate policies. Performance is nevertheless task dependent. The RAM task was fully successful in the observed trial set, the ring task was largely successful but sensitive to handle acquisition, and the socket task remained limited by precision insertion.

The failure distribution also separates gross bimanual sequencing from local contact precision. No failure category in the supplied record was assigned to choosing the wrong arm role or loading the wrong task-specific checkpoint. The observed failures instead occur at local grasp or placement/insertion stages. This supports the feasibility of the unified bilateral action interface while showing that unified task representation does not remove the need for task-specific contact robustness.

The current three scenes are visually distinct and each scene is paired with its expected instruction. Consequently, these trials validate deployment of a language-conditioned unified checkpoint, but they do not isolate how strongly the learned behavior depends on the language input. A separate instruction-sensitivity experiment using paraphrased, exchanged, or deliberately mismatched instructions would be required to distinguish language grounding from task recognition based primarily on scene appearance.

## 5.7 Validation limitations

Four limitations constrain interpretation of the reported percentages. First, although the objects were randomly perturbed within approximately 5 cm for the ring and RAM tasks and 3 cm for the socket task, the individual initial coordinates and exact sampling distribution were not logged. Second, the approximately one-minute completion time was not recorded as a per-trial timing series, and end-to-end inference latency was not measured separately. Third, the evaluation contains one selected checkpoint and no ACT, single-task, or alternative-checkpoint baseline; it therefore demonstrates final-system performance but not the superiority of  $\pi_{0.5}$  over the DR3 baseline. Fourth, the visually distinct scenes were evaluated with their corresponding instructions, so the trials do not independently measure sensitivity to instruction wording.

These limitations do not change the counted physical outcomes, but they define the boundary of the supported claims. The strongest supported conclusion is that the unified checkpoint executed all three scoped tasks on the physical dual-arm setup with task-dependent reliability. Broader claims about generalization, timing, language sensitivity, or production readiness require the additional measurements identified above.

## 5.8 Validation summary

The 95,000-step checkpoint, selected by the minimum task-balanced macro flow-matching loss, was deployed on an NVIDIA GeForce RTX 5070 Ti and evaluated in 75 physical trials. Objects were reset and randomly perturbed before every trial, the 25 trials for each task were conducted consecutively without manual intervention, and a complete execution took approximately one minute. The memory-module task achieved 25/25 successes, the ring task achieved 21/25, and the socket task achieved 13/25. The combined result was 59/75, or 78.7%.

Failure analysis shows that ring failures were dominated by unsuccessful handle acquisition, while socket failures were dominated by inaccurate alignment and insertion into the two-hole socket. The RAM and ring tasks exceeded the 70% task-execution target, but the socket task did not. The validation therefore confirms successful unified multi-task deployment and identifies precision plug insertion as the principal remaining performance bottleneck.

## Chapter 6 Discussion and conclusions

### 6.1 Discussion

This project developed a bimanual industrial manipulation system for representative 3C assembly operations. The final system integrates a dual-Franka Research 3 platform, GELLO-based demonstration collection, synchronized visual and proprioceptive data recording, task-compatible end effectors and fixtures, and a unified  $\pi_{0.5}$  VLA policy deployment workflow. The design process remains traceable from customer requirements to engineering specifications, concept generation, concept selection, implementation, and validation.

The principal validation result is that one 95,000-step checkpoint executed all three language-selected tasks on the physical dual-arm workcell without loading separate task-specific policies. Across 75 counted trials, the system completed 59 trials successfully, giving an observed overall success rate of 78.7%. The memory-module task succeeded in 25 of 25 trials (100%), the ring task succeeded in 21 of 25 trials (84%), and the plug-insertion task succeeded in 13 of 25 trials (52%). The overall result exceeded the 70% task-execution target, but performance was not uniform: the memory-module and ring tasks exceeded the target individually, whereas the plug-insertion task did not.

The strongest aspect of the design is its system-level integration. The two FR3 arms, bilateral GELLO demonstration interface, three-camera observation, 16-dimensional state and action representation, LeRobot data pipeline, and unified  $\pi_{0.5}$  checkpoint operated together in real-robot trials. No reported failure was attributed to selecting the wrong arm role or loading an incorrect task-specific checkpoint. This supports the feasibility of using one language-conditioned bilateral policy interface for multiple tasks. The 100% observed success rate in the memory-module task also indicates that the demonstrated division of work—left-arm stabilization followed by right-arm extraction and placement—was well represented in the data for the evaluated motherboard configuration.

The ring results show that the system can perform a multi-stage reposition–grasp–place sequence reliably under moderate initial-position variation, but they also expose sensitivity at the grasp interface. Three of the four ring failures occurred before secure transport: two were caused by the right gripper approaching away from the handle, and one occurred when

the ring base obstructed the handle approach. Only one failure occurred during placement over the can. The dominant limitation is therefore handle acquisition rather than the initial can-pushing motion or the overall bilateral sequence. Improved wrist-camera visibility, additional demonstrations near displaced handle configurations, and a more repeatable pre-grasp approach would directly address the observed failure pattern.

The plug-insertion task is the least successful and the clearest remaining engineering bottleneck. Two of its twelve failures occurred because the left gripper did not acquire or retain the plug, while ten failures (83.3% of socket failures) occurred after grasping because the two pins were not aligned accurately enough with the two socket holes. The system can therefore complete the gross bimanual sequence of repositioning the socket box and acquiring the plug, but it lacks sufficient local contact precision for reliable insertion. Likely contributors include residual socket-box pose variation, plug-pose variation within the compliant gripper, limited visual information at the contact point, and the approximately two-second interval over which ten predicted actions are executed before replanning. These explanations are consistent with the observed failure stage but remain hypotheses because contact force, insertion depth, trial-level pose, and pre-contact action traces were not measured.

Several limitations restrict the conclusions that can be drawn from the results. The work-cell, task objects, fixtures, and lighting were controlled, and the exact randomized initial coordinates were not logged. Each visually distinct scene was paired with its expected instruction, so the study demonstrates deployment of a language-conditioned unified checkpoint but does not isolate whether task selection depends primarily on language or scene appearance. The evaluation also contains no ACT, task-specific, or alternative-checkpoint physical baseline and therefore does not establish that  $\pi_{0.5}$  is superior to the earlier controller. In addition, the trials directly validate end-to-end task execution, but planning success, component-detection accuracy, pose-estimation error, failure-detection rate, and recovery rate were not independently measured in the final end-to-end architecture.

If additional development time were available, the first priority would be to improve plug alignment and insertion through a more constrained fixture or lead-in geometry, a clearer close-range view, shorter action execution between observations, and force- or torque-informed contact handling. The ring task would benefit from targeted demonstrations and pre-grasp alignment around difficult handle poses. A subsequent evaluation should record initial ob-

ject coordinates and timing, test instruction paraphrases and mismatches, include comparison baselines, and evaluate explicit failure detection and bounded recovery. These changes would preserve the demonstrated unified multi-task architecture while addressing the local precision and validation weaknesses revealed by the final trials.

## 6.2 Conclusions

The thesis presents an end-to-end engineering process for VLA-oriented bimanual industrial manipulation. Starting from customer requirements, the project defined measurable engineering specifications, generated modular solution concepts, selected a dual-FR3 and GELLO-based architecture, and implemented a data-driven manipulation pipeline using synchronized sensing and one jointly trained  $\pi_{0.5}$  checkpoint. The final controller receives three RGB observations, a 16-dimensional bilateral robot state, and a language instruction, and generates coordinated actions for both robot arms and grippers.

The completed system demonstrates language-conditioned multi-task bimanual control on the physical dual-FR3 workcell. The same unified checkpoint was evaluated in 25 trials for each of the three tasks, giving 75 physical trials in total. The ring-over-can task achieved an 84% success rate, the plug-insertion task achieved 52%, and the memory-module task achieved 100%. Across all trials, the observed overall success rate was 78.7%.

The overall result exceeded the 70% task-execution target, demonstrating the feasibility of the integrated hardware, data, and  $\pi_{0.5}$  control pipeline under the evaluated laboratory conditions. However, performance was not uniform across tasks: the ring and memory-module tasks exceeded the target, whereas the plug-insertion task did not. The final result therefore establishes a working and traceable proof of concept while identifying contact-rich plug alignment and insertion as the principal remaining performance limitation.

## Chapter 7 Future Work

The completed prototype establishes a functional basis for language-conditioned bimanual manipulation, but it remains a laboratory proof of concept rather than a production-ready assembly system. Future development should therefore proceed at two levels. At the system level, the work should improve robustness, generalization, autonomous failure handling, and deployment readiness. At the detailed engineering level, it should close the measurement and documentation gaps identified during implementation and validation. The recommendations below are intended to provide the project sponsor and future student teams with a practical continuation plan.

### 7.1 Improve contact-rich task performance

The first priority is the plug-insertion task. Its observed success rate was 52%, compared with 84% for the ring task and 100% for the memory-module task. Future work should first separate failures occurring during socket-box positioning, plug grasping, alignment, and final insertion. Each stage should be given an independently observable terminal condition so that additional demonstrations can be targeted at the actual bottleneck rather than collected uniformly across the entire task.

The insertion stage would benefit from a more constrained mechanical and sensing design. Recommended changes include adding a passive lead-in chamfer or alignment fixture, improving plug-grasp repeatability, reducing socket-box motion during insertion, and recording a close-range view that clearly exposes the plug pins and socket openings. If the available robot interface permits it, force or joint-torque feedback should be used to detect premature contact and to execute a compliant search or guarded insertion motion. The redesigned system should then be evaluated using the same end-to-end success definition and at least the same number of trials as the present study so that the result can be compared directly with the 52% baseline.

## 7.2 Develop autonomous failure detection and recovery

The current system can stop safely when communication, state, action, or workspace checks fail, but it does not yet perform task-level recovery after a manipulation error. A future controller should distinguish among recoverable failures, unrecoverable failures, and safety-critical conditions. Recoverable events may include a missed grasp, an object displaced within the reachable workspace, an incomplete insertion, or a ring that remains graspable after a failed placement. Protective stops, unexpected human entry, invalid sensor data, and objects leaving the verified workspace should continue to require operator intervention.

A practical recovery architecture can combine deterministic checks with learned visual assessment. After each important task stage, the controller should evaluate whether the expected state has been reached. If not, it should select a bounded recovery routine such as reopening the gripper, retreating to a safe pose, reacquiring the object, or repeating the final alignment. Every recovery attempt should be logged separately from the initial attempt. Future validation should report the failure-detection rate, false-alarm rate, recovery-attempt rate, and recovery success rate, including whether the current engineering target of greater than 70% recovery success is achieved.

## 7.3 Expand data coverage and model evaluation

The present validation covers controlled scenes with moderate object-position perturbations. Future datasets should systematically vary object pose, lighting, camera displacement, background clutter, component type, and fixture tolerance. Initial conditions should be sampled from defined distributions and recorded numerically for every episode and physical trial. This would allow performance to be reported as a function of perturbation magnitude rather than as a single success percentage over an approximately defined reset region.

Data collection should emphasize failure-prone and boundary conditions while preserving task balance. Failed demonstrations, recovery demonstrations, and successful corrections should be retained with explicit stage and outcome labels. Dataset versions should record episode counts, frame counts, camera calibration, operator identity, task instruction, object configuration, and the software commit used for collection. A held-out test set should remain unchanged across model revisions so that improvements are not inferred from repeat-



edly tuned validation data.

The unified  $\pi_{0.5}$  checkpoint should also be compared with meaningful baselines. At minimum, future experiments should include the DR3 ACT implementation, task-specific checkpoints, and alternative checkpoints from the same  $\pi_{0.5}$  training run. Ablation studies should evaluate the contribution of language instructions, individual camera views, bilateral state input, equal-probability task sampling, and action-chunk execution length. These comparisons are necessary to determine which parts of the final architecture produce the observed performance rather than merely demonstrating that the integrated system can operate.

## 7.4 Improve language conditioning and task generalization

The current evaluation uses one fixed instruction for each visually distinct task. Consequently, it does not independently establish robustness to instruction wording or the ability to disambiguate tasks from language alone. Future testing should introduce paraphrases, re-ordered but equivalent instructions, irrelevant wording, and deliberately conflicting instructions. Visual scenes should also be designed so that the same objects can support more than one valid operation, making language information necessary for selecting the intended behavior.

Longer-term work should investigate compositional task execution. Instead of learning each complete sequence only as a fixed demonstration pattern, the system could represent reusable skills such as locating, grasping, stabilizing, transporting, aligning, inserting, and releasing. A high-level instruction could then select and order these skills while the action model performs continuous control. Any such extension should preserve the deterministic safety boundary and should not permit language-model output to bypass robot-side joint, workspace, communication, or emergency-stop constraints.

## 7.5 Close mechanical, sensing, and timing documentation gaps

Several quantities required for production-level reproducibility were not measured in the present project. A future team should create a dimensioned workcell record containing the two FR3 base poses, fixture coordinates, camera positions and orientations, usable shared workspace, and verified inter-arm clearance. Camera intrinsic and extrinsic calibra-

tion should be stored with each dataset version, and calibration drift should be checked after mount adjustment or accidental contact.

The custom TPU fingers should be documented with slicer version, print orientation, layer height, wall count, infill, nozzle and bed temperatures, print mass, print time, and fastening torque. Simple force–deflection and repeated-cycle tests should quantify compliance, permanent deformation, and failure. The ring/can clearance, plug/socket clearance and insertion depth, and memory-module extraction clearance should be measured using the available ruler and caliper rather than inferred from images.

The deployment pipeline should record timestamps at image acquisition, packet assembly, policy-query start and completion, command publication, and robot-state feedback. These measurements would distinguish the configured 5 Hz action cadence from the achieved closed-loop rate and would identify whether image transport, model inference, network communication, or robot execution is the dominant source of delay.

## 7.6 Prepare for a more reproducible and deployable system

Future releases should package the software environment, configuration files, dataset metadata, calibration records, model checkpoint, and run procedure as one versioned deployment bundle. The Bill of Materials should be updated with supplier, catalog number, version, quantity, unit cost, and replacement value for both physical and virtual components. A reproduction checklist should allow a new team to reconstruct the workcell, validate device identities and coordinate conventions, perform a dry run, and reproduce the reported evaluation without relying on undocumented knowledge from the original team.

For operation beyond supervised laboratory trials, the workcell will also require a formal risk assessment. The assessment should define guarded operating zones, speed and force limits, inter-arm collision handling, fixture retention requirements, emergency-stop access, safe reset procedures, and criteria for rejecting a scene before autonomous execution. Production deployment should be considered only after the system demonstrates repeatable performance across multiple operators, days, object instances, and controlled environmental variations.

## 7.7 Recommended continuation sequence

To avoid expanding the project before its present weaknesses are resolved, future work should follow a staged sequence:

1. reproduce the current 75-trial result using the archived checkpoint, configuration, and task definitions;
2. complete the missing dimensional, calibration, fabrication, cost, and latency records;
3. improve the plug-insertion mechanics and collect targeted demonstrations until the task independently exceeds the 70% success target;
4. implement stage-level failure detection and bounded recovery, then evaluate recovery against the defined engineering specifications;
5. compare the unified  $\pi_{0.5}$  model with ACT, task-specific models, and controlled ablations; and
6. expand language and scene variation only after the revised system remains stable under the original evaluation protocol.

This sequence preserves a measurable baseline while progressively addressing the main limitation revealed by the final validation. It also gives future teams a clear separation between documentation work, engineering redesign, learning-system experiments, and higher-level research extensions.

## References

- [1] BROHAN A, et al. RT-2: Vision-Language-Action Models Transfer Web Knowledge to Robotic Control[C]//Conference on Robot Learning (CoRL). 2023. arXiv: 2307.15818.
- [2] KIM M J, et al. OpenVLA: An Open-Source Vision-Language-Action Model[J]. ArXiv preprint, 2024. arXiv: 2406.09246.
- [3] LIU S, et al. RDT-1B: A Diffusion Foundation Model for Bimanual Manipulation[J]. ArXiv preprint, 2024. arXiv: 2410.07864.
- [4] BLACK K, et al.  $\pi_0$ : A Vision-Language-Action Flow Model for General Robot Control[J]. ArXiv preprint, 2024. arXiv: 2410.24164.
- [5] ZENG A, et al. Transporter Networks: Rearranging the Visual World for Robotic Manipulation[C]//Conference on Robot Learning (CoRL). 2020. arXiv: 2010.14406.
- [6] SHRIDHAR M, MANUELLI L, FOX D. CLIPort: What and Where Pathways for Robotic Manipulation[C]//Conference on Robot Learning (CoRL). 2021. arXiv: 2109.12098.
- [7] SHRIDHAR M, MANUELLI L, FOX D. Perceiver-Actor: A Multi-Task Transformer for Robotic Manipulation[C]//Conference on Robot Learning (CoRL). 2022. arXiv: 2209.05451.
- [8] WALKER H, et al. BridgeData V2: A Dataset for Robot Learning at Scale[C]//Conference on Robot Learning (CoRL). 2023. arXiv: 2308.12952.
- [9] Open X-Embodiment Collaboration, et al. Open X-Embodiment: Robotic Learning Datasets and RT-X Models[C]//Conference on Robot Learning (CoRL). 2023. arXiv: 2310.08864.
- [10] KHAZATSKY A, et al. DROID: A Large-Scale In-the-Wild Robot Manipulation Dataset[C]//Robotics: Science and Systems (RSS). 2024. arXiv: 2403.12945.
- [11] LIU B, et al. LIBERO: Benchmarking Knowledge Transfer for Lifelong Robot Learning[C]//Advances in Neural Information Processing Systems (NeurIPS). 2023. arXiv: 2306.03310.
- [12] BLACK K, et al.  $\pi_{0.5}$ : A Vision-Language-Action Model with Open-World Generalization[J]. ArXiv preprint, 2025. arXiv: 2504.16054.
- [13] Physical Intelligence. OpenPI: Open-Source Models and Packages for Robotics[EB/OL]. [2026-07-27]. <https://github.com/Physical-Intelligence/openpi>.
- [14] Hugging Face. LeRobot: Making AI for Robotics More Accessible with End-to-End Learning[EB/OL]. [2026-07-27]. <https://github.com/huggingface/lerobot>.
- [15] Hugging Face.  $\pi_{0.5}$  (Pi05) Policy in LeRobot[EB/OL]. [2026-07-27]. <https://github.com/huggingface/lerobot/blob/main/docs/source/pi05.mdx>.
- [16] MANDLEKAR A, et al. What Matters in Learning from Offline Human Demonstrations for Robot Manipulation[C]//Conference on Robot Learning (CoRL). 2021. arXiv: 2108.03298.
- [17] MANDLEKAR A, et al. MimicGen: A Data Generation System for Scalable Robot Learning Using Human Demonstrations[C]//Conference on Robot Learning (CoRL). 2023. arXiv: 2310.17596.
- [18] GOYAL A, et al. RVT: Robotic View Transformer for 3D Object Manipulation[C]//Conference on Robot Learning (CoRL). 2023. arXiv: 2306.14896.
- [19] ZE Y, et al. 3D Diffusion Policy: Generalizable Visuomotor Policy Learning via Simple 3D Representations[C]//Robotics: Science and Systems (RSS). 2024. arXiv: 2403.03954.
- [20] NAIR S, RAJESWARAN A, KUMAR V, et al. R3M: A Universal Visual Representation for Robot Manipulation[C]//Conference on Robot Learning (CoRL). 2022. arXiv: 2203.12601.

- [21] WU P, SHENTU Y, YI Z, et al. GELLO: A General, Low-Cost, and Intuitive Teleoperation Framework for Robot Manipulators[C]//IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS). 2024. arXiv: 2309.13037.
- [22] CHI C, et al. Universal Manipulation Interface: In-The-Wild Robot Teaching Without In-The-Wild Robots[C]//Robotics: Science and Systems (RSS). 2024. arXiv: 2402.10329.
- [23] ZHAO T Z, et al. Learning Fine-Grained Bimanual Manipulation with Low-Cost Hardware[C]//Robotics: Science and Systems (RSS). 2023.
- [24] Franka Robotics. Franka Research 3 Datasheet[EB/OL]. [2026-07-27]. [https://download.franka.de/Franka-Research-3\\_Datasheet\\_v1.1\\_August2022.pdf](https://download.franka.de/Franka-Research-3_Datasheet_v1.1_August2022.pdf).
- [25] Franka Robotics. Franka Research 3[EB/OL]. [2026-07-27]. <https://franka.de/franka-research-3>.
- [26] Franka Robotics. Franka Control Interface Documentation[EB/OL]. [2026-07-27]. <https://support.franka.de/docs/overview.html>.
- [27] RealSense. RealSense Depth Camera D435i: Technical Specifications[EB/OL]. [2026-07-27]. <https://realsenseai.com/products/depth-camera-d435i/>.
- [28] RealSense. RealSense Depth Camera D405: Technical Specifications[EB/OL]. [2026-07-27]. <https://realsenseai.com/products/stereo-depth-camera-d405/>.
- [29] PICO. PICO 4 Ultra[EB/OL]. [2026-07-27]. <https://www.picoxr.com/global/products/pico4-ultra>.
- [30] CHI C, et al. Diffusion Policy: Visuomotor Policy Learning via Action Diffusion[C]//Robotics: Science and Systems (RSS). 2023. DOI: 10.15607/RSS.2023.XIX.026.
- [31] ROBOTIS. DYNAMIXEL XL330-M288-T: Specifications[EB/OL]. [2026-07-27]. <https://emanual.robotis.com/docs/en/dxl/x/xl330-m288/>.

## Documentation of Generated Concepts Appendix 1

### Purpose and design evolution

This appendix preserves the alternatives generated during the DR3 concept-development process and records the implementation-stage change from an ACT baseline to the LeRobot  $\pi_{0.5}$  policy. The alternatives were retained because they expose the principal engineering trade-offs in platform selection, teleoperation, sensing, end-effector design, and learned control. The update to  $\pi_{0.5}$  does not invalidate the earlier concept generation; it documents how implementation evidence and the requirement for language-conditioned multi-task control changed the final policy decision.

**Table 1–1 Evolution from the DR3 baseline to the final implementation**

| Design aspect  | DR3 baseline                                                          | Final implementation                                        |
|----------------|-----------------------------------------------------------------------|-------------------------------------------------------------|
| Robot platform | Dual FR3 selected; single-arm evidence used for staged risk reduction | Dual FR3 physical execution                                 |
| Policy         | ACT in LeRobot; task-specific checkpoint selection                    | $\pi_{0.5}$ in LeRobot with language-conditioned task input |
| Task scope     | Ring placement and plug insertion used as staged cases                | Ring over can, plug insertion, and memory-module removal    |
| Language       | Future extension                                                      | Runtime task instruction supplied to the VLA policy         |
| Control scope  | Vision–action imitation-learning baseline                             | Vision–language–action bimanual control                     |

### Module alternatives retained after concept generation

#### C1: Robot-platform alternatives

The selected platform is the dual-FR3 workcell because it provides a direct controller path within the available laboratory ecosystem and supports coordinated bimanual manipulation. A dual Flexiv platform remains attractive for force-aware contact tasks, but it would require a different controller, teleoperation interface, and data-integration path. An ALOHA-

style platform offers a lower-cost bimanual research route, but its mechanical capability and software ecosystem are less directly aligned with the existing FR3 workcell. The selected platform accepts higher integration effort in exchange for continuity with the available hardware and a direct route to the final dual-arm system.

## **C2: Teleoperation alternatives**

GELLO was selected because its leader-arm structure provides an intuitive relationship between operator motion and the robot state/action trajectories recorded for learning<sup>[21]</sup>. PICO 4 Ultra offers an XR-controller and hand-tracking route, but would add motion-mapping and calibration work<sup>[29]</sup>. The Universal Manipulation Interface (UMI) provides a portable hand-held demonstration approach<sup>[22]</sup>; it remains a useful research comparator but is less directly coupled to the fixed dual-FR3 joint-state pipeline.

## **C3: Data-collection alternatives**

The selected concept uses synchronized multi-view RGB observations together with the state and action channels of both arms and grippers. The global view provides workspace and fixture context, while wrist or side views preserve information around grasping and contact regions. A reduced one-wrist-plus-global configuration lowers storage, calibration, and synchronization burden, whereas a proprioception-only configuration removes visual synchronization entirely. Both alternatives reduce the information available for language-grounded object selection, occlusion handling, and contact-region observation.

## **C4: End-effector alternatives**

The standard Franka parallel gripper provides a direct robot interface and repeatable parallel-jaw motion, but offers limited passive adaptation to object geometry. A rigid 3D-printed gripper can be tailored to one component and can provide accurate locating features. The compliant finger concept retained from DR3 offers greater tolerance to small geometric and pose variation and can reduce concentrated contact forces during grasping and insertion. Because the final system contains three materially different tasks, the deployed end-effector configuration must be documented per task rather than assuming that one finger geometry is optimal for the ring handle, plug body, and memory module.

## C5: Policy alternatives

ACT was the deployable DR3 baseline because it was integrated with the existing LeRobot demonstration workflow and could predict temporally structured actions from images and robot state<sup>[23]</sup>. Diffusion Policy remains a credible visuomotor baseline for contact-rich manipulation<sup>[30]</sup>. Neither model natively provides the same language-conditioned task interface required by the final three-task system.

The final implementation therefore uses  $\pi_{0.5}$  through LeRobot<sup>[12,15]</sup>. Compared with the ACT baseline, the selected VLA policy accepts a natural-language task description in addition to visual and proprioceptive observations. This supports a common interface for the three demonstrated tasks and aligns the deployed controller with the original VLA objective. The selection is an implementation decision; superiority over ACT or Diffusion Policy should only be claimed if controlled comparative trials are reported.

## Generated task concepts

The final demonstrations instantiate three task concepts from the common bimanual VLA architecture:

1. workspace preparation followed by ring grasping and placement over a can;
2. workspace preparation followed by grasping, alignment, and plug insertion;
3. motherboard repositioning followed by memory-module removal and placement in a tray.

These tasks were retained because they collectively exercise object repositioning, language-grounded object selection, bimanual coordination, grasping, transport, constrained insertion, component extraction, and terminal placement. Their exact language instructions and completion conditions are listed in Table 4–6.



## Hardware Specifications and Parts Records Appendix 2


### Purpose

This appendix collects manufacturer reference parameters, component-level construction details, engineering drawings, and the complete parts record. These items support procurement, maintenance, replication, and hardware verification, but they are separated from Chapter 4 so that the main engineering analysis remains focused on design suitability, workspace, contact tolerance, sensing coverage, learning interfaces, and system operation.

### Franka Research 3 reference parameters

Chapter 4 retains the four FR3 characteristics that directly justify the selected workcell: seven degrees of freedom, a 3 kg nominal payload, an 855 mm maximum reach, and link-side torque sensing in all seven axes. Table 2–1 preserves the broader manufacturer parameter set used during DR3<sup>[24-26]</sup>.

Figure 2–1 records the arm appearance, joint-axis convention, and principal link dimensions. Figure 2–2 preserves the complete DR3 parameter graphic. The workspace envelope remains in Figure 4–2 because it is used directly in the main shared-workspace analysis.

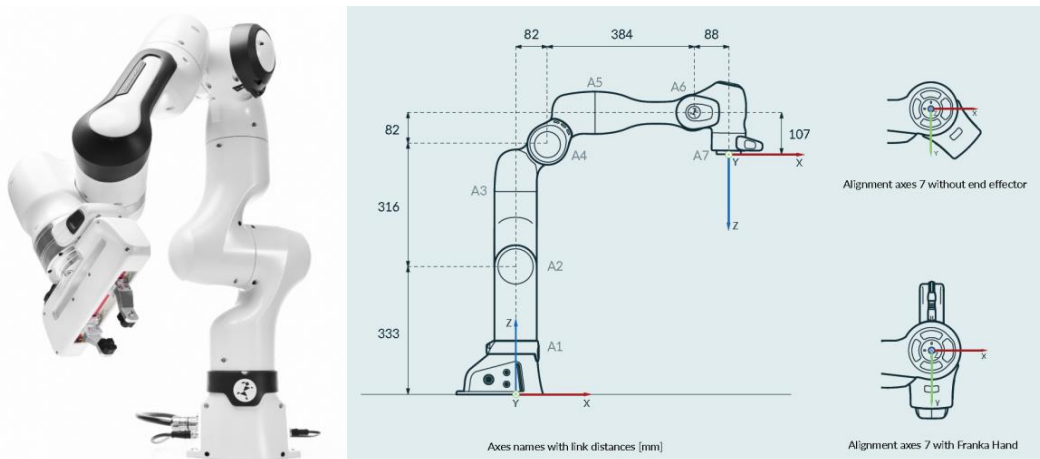

**Illustration 2–1 FR3 arm, joint-axis convention, and principal kinematic dimensions retained as a hardware reference.**

**Table 2–1 FR3 manufacturer reference parameters used in the hardware record**

| <b>Parameter</b>                  | <b>Reference value or interface</b>                                                                                                                                                                                                   |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Degrees of freedom                | 7                                                                                                                                                                                                                                     |
| Nominal payload                   | 3 kg                                                                                                                                                                                                                                  |
| Maximum reach                     | 855 mm                                                                                                                                                                                                                                |
| Force/torque sensing              | Link-side torque sensing in all seven axes                                                                                                                                                                                            |
| Joint position limits             | A1 and A3: $-166^{\circ}$ to $166^{\circ}$ ; A2: $-105^{\circ}$ to $105^{\circ}$ ; A4: $-176^{\circ}$ to $-7^{\circ}$ ; A5: $-165^{\circ}$ to $165^{\circ}$ ; A6: $25^{\circ}$ to $265^{\circ}$ ; A7: $-175^{\circ}$ to $175^{\circ}$ |
| Mounting flange                   | DIN ISO 9409-1-A50                                                                                                                                                                                                                    |
| Installation position             | Upright                                                                                                                                                                                                                               |
| Weight in the DR3 reference sheet | Approximately 17.8 kg; the value should be checked against the exact hardware and datasheet revision used in the laboratory                                                                                                           |
| Protection rating                 | IP40                                                                                                                                                                                                                                  |
| Ambient temperature               | $+5^{\circ}\text{C}$ to $+45^{\circ}\text{C}$                                                                                                                                                                                         |
| Air humidity                      | 20–80%, non-condensing                                                                                                                                                                                                                |
| Primary interfaces                | Ethernet (TCP/IP), control connector, end-effector connector, and safety-rated inputs                                                                                                                                                 |
| Project control boundary          | High-level absolute targets are supplied through the project interface; low-level execution and manufacturer protection remain active                                                                                                 |

| ARM                              |                                       |                                         |                                                                                                                                                                |
|----------------------------------|---------------------------------------|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Degrees of freedom               | 7                                     | Interfaces                              | • ethernet (TCP/IP) for visual intuitive programming with Desk                                                                                                 |
| Payload                          | 3 kg                                  |                                         | • safety-rated input for external enabling device                                                                                                              |
| Maximum reach                    | 855 mm                                |                                         | • 2 configurable safety-rated inputs for emergency stop devices, safeguards or other protective devices (OSSD devices via external OSSD converter connectable) |
| Force/Torque sensing             | link-side torque sensor in all 7 axes |                                         | • hardware prepared for: 2x DI & 2x DO (24V, isolated, EN 61131-2 type 3 characteristics, 100 Hz sampling rate)                                                |
| Joint position limits            | A1, A3: -166/166 deg                  |                                         | • Control connector                                                                                                                                            |
|                                  | A2: -105/105 deg                      |                                         | • connector for end effector                                                                                                                                   |
|                                  | A4: -176/-7 deg                       | User Interfaces at the Arm's Pilot Grip | • integrated safety-rated guiding enabling switch                                                                                                              |
|                                  | A5: -165/165 deg                      |                                         | • guiding button                                                                                                                                               |
|                                  | A6: 25/265 deg                        |                                         | • guiding mode selector                                                                                                                                        |
|                                  | A7: -175/175 deg                      |                                         |                                                                                                                                                                |
| Mounting flange                  | DIN ISO 9409-1-A50                    | User Interfaces at the Arm's Pilot Disc | • status light                                                                                                                                                 |
| Installation position            | upright                               |                                         | • Pilot mode selector                                                                                                                                          |
| Weight                           | ~ 17.8 kg                             |                                         | • arrow keys, teach, confirm, delete                                                                                                                           |
| Protection rating                | IP40                                  |                                         |                                                                                                                                                                |
| Ambient temperature <sup>2</sup> | +5 °C to +45 °C                       |                                         |                                                                                                                                                                |
| Air humidity                     | 20 – 80 % non-condensing              |                                         |                                                                                                                                                                |

**Illustration 2–2 FR3 joint limits, mounting, environmental, and controller-interface parameters documented during DR3.**

## GELLO component-level construction

The final bilateral demonstration system uses one GELLO leader for each FR3 follower. Each leader supplies seven arm channels and one gripper-related channel. Table 2–2 lists the per-leader construction and the corresponding total for the dual-arm system.

**Table 2–2 GELLO component-level construction**

| Component                               | Per leader | Dual total | Function                                                                 |
|-----------------------------------------|------------|------------|--------------------------------------------------------------------------|
| DYNAMIXEL XL330-M288-T                  | 7          | 14         | Measures the seven leader-arm joint channels                             |
| DYNAMIXEL XL330-M077-T                  | 1          | 2          | Provides the gripper-related input channel                               |
| ZNJ integrated control board            | 1          | 2          | Reads and communicates the leader actuator states                        |
| Switched-mode power supply              | 1, 5 V 5 A | 2          | Supplies the leader electronics and actuator bus                         |
| FPX330-H101 structural kit              | 1 set      | 2 sets     | Provides the modular leader structure                                    |
| Printed links, brackets, and interfaces | 1 set      | 2 sets     | Completes the leader geometry, base, and Franka-compatible gripper input |

The XL330 reference properties used during hardware selection are summarized in Table 2–3. They are component specifications rather than follower-robot requirements: the leader is used to measure and publish operator motion, not to reproduce the payload or torque capability of the FR3.

**Table 2–3 DYNAMIXEL XL330 series reference properties**

| Property                | Reference value                                                                       |
|-------------------------|---------------------------------------------------------------------------------------|
| Input-voltage range     | 3.7–6 V                                                                               |
| Recommended supply      | 5 V                                                                                   |
| Approximate dimensions  | 20 × 34 × 26 mm                                                                       |
| Approximate mass        | 18 g per actuator                                                                     |
| Supported control modes | Position, extended position, velocity, PWM, current, and current-based position modes |
| Selected variants       | M288 for the seven arm joints and M077 for the gripper-related joint                  |
| Source                  | ROBOTIS XL330 documentation <sup>[31]</sup>                                           |


**Illustration 2–3 GELLO–Franka leader device retained as the component-level teleoperation reference.**

## Compliant gripper drawing and fabrication reference

Each gripper assembly uses two identical TPU 64D fingers, giving four fingers in the dual-arm system. One finger has an overall bounding box of  $123.36 \times 25.80 \times 40.00$  mm, corresponding to  $L/T \approx 4.78$  and  $L/H \approx 3.08$ . It is screw mounted, with a reinforced attachment region and a tapered ribbed body.

**Table 2–4 Compliant-finger fabrication reference**

| Item                  | Recorded design information                                                                                                   |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------|
| Material              | TPU, Shore hardness 64D                                                                                                       |
| Overall size          | $123.36 \times 25.80 \times 40.00$ mm per finger                                                                              |
| Quantity              | Two fingers per gripper; four fingers for the dual-arm workcell                                                               |
| Attachment            | Screw-mounted reinforced base                                                                                                 |
| Contact geometry      | Elongated tapered profile with repeated compliant ribs                                                                        |
| Intended function     | Passive accommodation of object-shape and pose variation during grasping and contact                                          |
| Required inspection   | Rib tearing, permanent bending, hole damage, paired-finger symmetry, screw retention, and opening clearance                   |
| Unreported quantities | Print orientation, infill, wall count, print mass and time, calibrated force–deflection curve, fatigue life, and contact load |

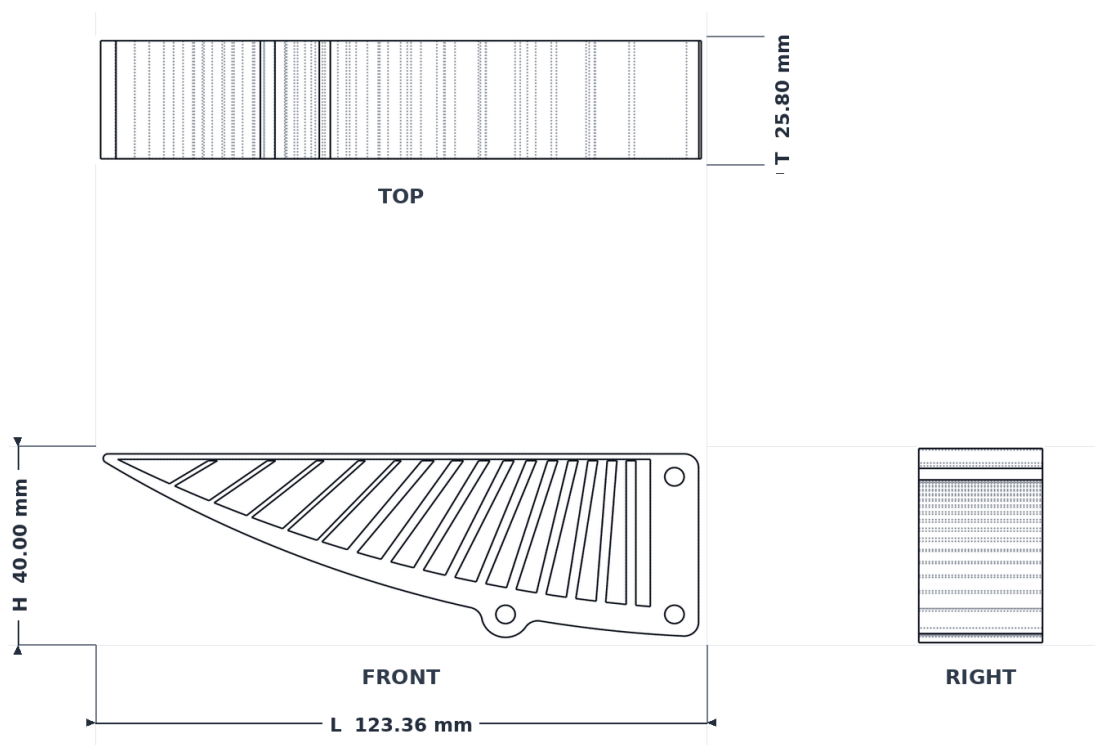

**Illustration 2-4 Orthographic views of one TPU 64D compliant gripper finger and its overall dimensions.**

## Complete parts and components record

Table 2–5 preserves the complete system composition. Chapter 4 contains only a system-level summary so that component model numbers and procurement-oriented details do not interrupt the engineering argument.

**Table 2–5 Complete parts and components record for the bimanual system**

| No. | Part or component                  | Specification                                                                           | Qty.   | Purpose                                              |
|-----|------------------------------------|-----------------------------------------------------------------------------------------|--------|------------------------------------------------------|
| 1   | Franka Research 3 arm              | 7-DoF, 3 kg nominal payload, 855 mm maximum reach, joint torque sensing                 | 2      | Left and right follower manipulation                 |
| 2   | FR3 controller and robot interface | Manufacturer controller, network interface, low-level protection, FCI/ROS 2 integration | 2 sets | State feedback and admissible joint-target execution |
| 3   | Custom gripper assembly            | Project gripper with two screw-mounted compliant fingers                                | 2      | One end effector per arm                             |
| 4   | Compliant finger                   | TPU 64D, $123.36 \times 25.80 \times 40.00$ mm, tapered and ribbed                      | 4      | Object contact with passive geometric tolerance      |
| 5   | Wrist camera                       | Intel RealSense D405, short-range RGB/depth device; RGB used by policy                  | 2      | Left- and right-wrist close-range observation        |
| 6   | Overhead camera                    | Intel RealSense D435i; RGB used by policy                                               | 1      | Global shared-workspace observation                  |
| 7   | GELLO leader assembly              | 7 arm channels plus 1 gripper channel                                                   | 2      | Bilateral human demonstration input                  |
| 8   | DYNAMIXEL XL330-M288-T             | 3.7–6 V actuator module; 5 V recommended                                                | 14     | Seven arm joints per GELLO leader                    |
| 9   | DYNAMIXEL XL330-M077-T             | 3.7–6 V actuator module; 5 V recommended                                                | 2      | Gripper-related channel on each GELLO leader         |
| 10  | GELLO control board                | ZNJ integrated control board                                                            | 2      | Reads and communicates leader joint positions        |
| 11  | GELLO power supply                 | 5 V, 5 A switched-mode supply                                                           | 2      | Leader-device electrical supply                      |
| 12  | GELLO structural kit               | FPX330-H101 with project 3D-printed links and brackets                                  | 2 sets | Leader mechanism and mounting                        |



| No. | Part or component                    | Specification                                                                    | Qty.      | Purpose                                                      |
|-----|--------------------------------------|----------------------------------------------------------------------------------|-----------|--------------------------------------------------------------|
| 13  | Camera mounts and cable routing      | Fixed overhead mount and two wrist mounts                                        | 1 set     | Preserves camera identity, pose, and cable clearance         |
| 14  | Training workstation                 | NVIDIA RTX A6000, 48 GB; physical GPU 1 used                                     | 1         | Joint $\pi_{0.5}$ fine-tuning and validation                 |
| 15  | Network and ROS 2 bridge host        | Project-configured communication and packet-assembly system                      | 1 set     | Connects robots, grippers, cameras, recorder, and policy     |
| 16  | LeRobot software environment         | LeRobot 0.5.2 with local changes; Dataset v3.0                                   | 1 config. | Recording, preprocessing, training, and deployment           |
| 17  | Can and handled ring                 | Task 1 objects                                                                   | 1 set     | Repositioning, grasp, and ring placement                     |
| 18  | Socket box and plug                  | Electrically unpowered insertion task fixture and matching plug                  | 1 set     | Repositioning and constrained insertion                      |
| 19  | Motherboard, memory module, and tray | Task 3 objects; yellow destination tray                                          | 1 set     | Stabilization, extraction, transport, and placement          |
| 20  | Task fixtures and reset references   | Printed or manually assembled positioning aids                                   | 3 sets    | Repeatable task initialization and terminal-state inspection |
| 21  | Safety equipment                     | Physical emergency stop, manufacturer protective functions, supervised operation | 1 set     | Deterministic stop and operator protection                   |
| 22  | Data storage                         | Storage for 119,650 frames, three-view video, checkpoints, and logs              | 1 set     | Dataset and experiment traceability                          |

## Acknowledgements

We would like to express our sincere gratitude to our mentor, Prof. Yutong Ban, for his guidance throughout this project. His advice on research direction, robotic-system integration, experimental design, and technical presentation was essential to the development of the dual-arm manipulation platform and the completion of this thesis. His careful feedback encouraged us to examine the system objectively, distinguish demonstrated results from unsupported claims, and continuously improve both the engineering work and its documentation.

We are also deeply grateful to our instructor, Prof. Peisen Huang, for his guidance during the design-review process. His instruction on translating customer requirements into measurable engineering specifications, evaluating design alternatives, validating prototype performance, and communicating engineering decisions provided the methodological foundation for this project.

We sincerely thank SJTU SIRIUS Lab for providing the experimental platform, equipment, computing resources, and technical environment required for this work. We are especially grateful to Han Fang for his patient assistance and valuable guidance throughout the development, integration, and experimental validation of the system. His support helped us address practical difficulties encountered during the project and contributed significantly to the successful completion of the experiments.

We thank the faculty and staff of Global College, Shanghai Jiao Tong University, for providing the academic environment and organizational support necessary for this work. We also appreciate the Student Innovation Center for providing fabrication facilities and assistance with the custom grippers, fixtures, and other prototype components.

We further acknowledge the developers and research communities behind OpenPI, LeRobot, GELLO, ROS 2, PyTorch, and the related open-source tools used in this project. Their publicly available software, documentation, and research made it possible to construct, train, and deploy the integrated  $\pi_{0.5}$  system within the project schedule.

Finally, we would like to thank our families and friends for their patience, encouragement, and support throughout the project. Their understanding sustained us during the intensive

periods of system integration, data collection, model training, physical validation, and thesis preparation.

## A VISION-LANGUAGE-ACTION MODEL FOR DUAL-ARM ROBOTS IN 3C INDUSTRIAL PRODUCTION LINES

**Background and objectives.** Modern computer, communication, and consumer-electronics manufacturing must handle small components, frequent product changes, and contact-rich operations. Conventional fixed-program automation performs well in stable high-volume production, but each new component or assembly sequence can require substantial reprogramming, fixture redesign, and system integration. This project investigated whether a learning-based, language-conditioned dual-arm system could provide a more flexible foundation for representative 3C manipulation tasks. The objective was not to claim unrestricted factory autonomy, but to establish and validate an end-to-end engineering pipeline that connects customer requirements, hardware selection, teleoperated demonstration collection, multi-view sensing, model training, real-robot deployment, and quantitative physical evaluation.

The final task scope consisted of three bimanual operations. In the ring task, the left arm repositioned a can while the right arm grasped a handled black ring, placed it over the can, and released it. In the socket task, the right arm pushed a box containing a two-hole socket to the middle of the workspace while the left arm grasped a two-pin plug and inserted it. In the memory-module task, the left arm pulled and stabilized a motherboard while the right arm removed the memory module and placed it in a yellow tray. These tasks were selected to cover repositioning, grasping, coordinated bilateral roles, constrained insertion, extraction, transport, and placement.

**Requirements and concept selection.** Customer requirements were translated into six engineering specifications through quality function deployment. The design-stage targets were planning success above 90%, task-execution success above 70%, component-detection accuracy above 90%, pose-estimation error below 20 mm, failure-detection rate above 90%, and recovery success above 70%. The final end-to-end architecture directly measured task completion, whereas planning, component detection, pose estimation, task-level failure detection, and recovery were not exposed as independent modules and were therefore not independently validated.

The concept-generation process separated the system into robot platform, teleoperation,

data collection, end-effector, and policy modules. Alternatives were screened for safety, interface compatibility, availability, manufacturability, and schedule feasibility, and the surviving candidates were evaluated using QFD-derived criteria. The selected physical system uses two Franka Research 3 robots, two GELLO leader devices, one overhead camera, two wrist cameras, and custom compliant grippers with TPU fingers. ACT and Diffusion Policy were retained as earlier policy baselines. As the project progressed beyond the DR3 stage, the final policy selection was updated to the LeRobot implementation of  $\pi_{0.5}$  so that one jointly trained checkpoint could accept language instructions and generate bilateral actions for all three tasks.

**Final system design.** The workcell contains two upright FR3 arms operating in a shared tabletop region. Each arm contributes seven joint positions and one gripper value, producing a 16-dimensional bilateral proprioceptive state. The action interface uses the corresponding 16-dimensional ordering: seven absolute left-arm joint targets, left-gripper width, seven absolute right-arm joint targets, and right-gripper width. One fixed Intel RealSense D435i camera provides an overhead view of the shared scene, while two Intel RealSense D405 cameras provide close-range left- and right-wrist views. The three RGB streams provide complementary global and local observations near grasp, contact, insertion, extraction, and placement regions.

Demonstrations were collected bilaterally with two GELLO leaders. The operator controlled the left and right follower arms while the recording system stored synchronized visual observations, measured robot and gripper state, absolute action targets, task identity, and episode metadata. The same task instruction used during collection was retained for training and deployment. Before collection, the system checked leader zero positions, channel directions, gripper mappings, camera identities, packet freshness, and command limits. Episodes were accepted only when all three image streams and the complete numeric state/action record were present and the intended task was completed correctly.

**Dataset and model training.** The final dataset contains 240 bilateral episodes: 80 for the ring task, 80 for the socket task, and 80 for the memory-module task. In total, the dataset contains 119,650 frames. Eight episodes from each task were assigned to validation using the same fixed episode indices, leaving 216 episodes for training and 24 for validation. The split was performed at the episode level to prevent neighbouring frames from the same physical

trajectory from appearing in both sets. During training, the three task datasets were selected with equal probability so that the larger ring dataset did not dominate the optimization solely because it contained more frames.

The final controller was initialized from the official `pi05_base` model and trained through LeRobot 0.5.2 with project-specific modifications. The model received three resized and normalized RGB images, a language instruction, and the current bilateral state. The valid 16-dimensional state and action vectors were padded to the model-side representation while preserving their physical ordering. Joint training ran for 100,000 optimizer steps on an NVIDIA RTX A6000 with batch size 4 and AdamW optimization. Validation was performed every 5,000 steps. For checkpoint selection, the normalized flow-matching losses of the three tasks were averaged without frame-count weighting, giving every task equal influence. The minimum task-balanced macro loss occurred at 95,000 steps, and this checkpoint was selected for physical deployment.

**Deployment and safety boundary.** Physical deployment used the same unified 95,000-step checkpoint for all three instructions. No task-specific model file was loaded. The policy received the selected instruction, the three current RGB images, and the 16-dimensional bilateral state. It predicted a 50-step continuous bimanual action chunk, and the executor consumed the first ten actions before acquiring an updated observation and requesting another prediction. At the configured 5 Hz action cadence, ten executed steps corresponded to a nominal two-second action segment.

The learned policy was not treated as the safety controller. Before enabling motion, a dry run verified the checkpoint identity, camera ordering and freshness, state/action dimensions, normalization statistics, instruction, network communication, and finite model output. Robot-side checks rejected invalid or excessive targets and enforced joint, gripper, workspace, timeout, protective-stop, emergency-stop, and manual-stop conditions. The socket fixture remained electrically unpowered. A counted trial received no manual correction after autonomous execution began.

**Physical validation results.** The selected checkpoint was evaluated on an NVIDIA GeForce RTX 5070 Ti in 75 counted physical trials, with 25 trials per task. Before each trial, the objects were reset and randomly perturbed around the nominal arrangement. The permitted variation was approximately 5 cm for the ring and memory-module scenes and approximately

3 cm for the socket scene. A trial was counted as successful only when the complete task-specific terminal condition was achieved. Partial completion was retained for failure analysis but was not counted as an end-to-end success.

The memory-module task succeeded in all 25 trials, producing an observed success rate of 100%. The ring task succeeded in 21 of 25 trials, producing 84%. The plug-insertion task succeeded in 13 of 25 trials, producing 52%. Across all tasks, the system completed 59 of 75 trials successfully, giving an overall observed success rate of 78.7%. The overall value exceeded the 70% task-execution target, and the memory-module and ring tasks exceeded the target individually. However, the socket task did not meet the target, demonstrating that the aggregate result did not represent uniform performance across all three operations.

**Failure analysis and discussion.** The memory-module result indicates that the selected arm roles, camera observations, compliant grippers, demonstration data, and unified checkpoint were sufficient for the evaluated motherboard configuration. Nevertheless, 25 successful trials do not establish a zero failure probability or guarantee robustness to different motherboard poses, memory-module types, connector forces, lighting conditions, or camera displacement.

Three of the four ring failures occurred before secure transport. In two trials, the right gripper approached away from the handle and missed the grasp; in one trial, the ring base obstructed the handle approach. The remaining failure occurred during placement over the can. The dominant limitation was therefore handle acquisition rather than the initial can repositioning or the overall bilateral sequence. Additional demonstrations around displaced handle poses, improved wrist-camera visibility, a more repeatable pre-grasp approach, or a revised finger profile could directly address this failure pattern.

The socket task exposed the most important remaining performance bottleneck. Two of its twelve failures occurred because the left gripper did not acquire or retain the plug. The other ten failures occurred after successful acquisition because the two pins were not aligned accurately enough with the two holes. The gross bimanual sequence was therefore feasible, but local contact precision was insufficient for reliable insertion. Possible contributors include residual socket-box pose variation after pushing, plug-pose variation inside the compliant gripper, limited close-range visual information, and the interval over which ten predicted actions were executed before replanning. These explanations are engineering hypotheses rather than measured causal conclusions because contact force, insertion depth,

exact trial-level pose, and pre-contact action traces were not recorded.

The evaluation also has broader limitations. Initial object coordinates and their exact sampling distributions were not logged. Task duration was approximately one minute, but per-trial timing and end-to-end inference latency were not measured. The three visually distinct scenes were always paired with their corresponding instructions, so the experiment did not isolate sensitivity to language wording or distinguish language grounding from scene recognition. No physical ACT, task-specific, or alternative-checkpoint baseline was included; consequently, the results demonstrate successful  $\pi_{0.5}$  deployment but do not establish its superiority over the DR3 controller.

**Conclusions and recommendations.** The project produced a functioning and traceable proof-of-concept system for language-conditioned bimanual manipulation. Its principal contribution is the integration of bilateral teleoperation, synchronized multi-view sensing, reproducible dataset construction, joint multi-task  $\pi_{0.5}$  training, a unified 16-dimensional action interface, deterministic robot-side safeguards, and real-robot validation. The same checkpoint successfully executed all three scoped tasks, confirming the feasibility of unified multi-task deployment, while the task-dependent success rates showed that a shared representation does not eliminate the need for task-specific contact robustness.

Future development should first improve plug alignment and insertion through a more constrained fixture or passive lead-in geometry, better close-range visibility, more repeatable plug grasping, shorter execution between observations, and force- or torque-informed contact handling. The ring task would benefit from targeted demonstrations and pre-grasp alignment around difficult handle configurations. Later experiments should record exact initial coordinates and timing, test instruction paraphrases and mismatches, compare against ACT and task-specific baselines, and evaluate explicit task-level failure detection and bounded recovery. These improvements would preserve the demonstrated unified architecture while addressing the precision, generalization, and validation limitations identified by the final physical trials.