# **Requirements Document**

**Project:** LIBERTY

Task: Zip line traversal

**Document Version Number: 4.0** 

Date: 28/11/17

Author: Andi-Camille Bakti Editor: Andi-Camille Bakti

Edit History: https://github.com/Gabetn/DPM 01 Project Documentation



# 1.0 TABLE OF CONTENTS

1.0 TABLE OF CONTENTS	2
2.0 CAPABILITIES	3
2.1 PURPOSE	3
2.2 SCOPE	3
2.3 CONSTRAINTS	3
2.4 USER FUNCTIONS	4
2.5 OPERATING ENVIRONMENT	4
2.6 PERFORMANCE	4
3.0 COMPATIBILITY	4
3.1 COMPONENT RE-USE	4
3.2 COMPATIBILITY WITH THIRD PARTY PRODUCTS	5
4.0 GLOSSARY OF TERMS	5
5.0 REFERENCES	6

#### 2.0 CAPABILITIES

#### 2.1 PURPOSE

The purpose of the zip line transportation system is to cross the river (traversing from one zone to another) via the zip line over the river area and then resume navigation towards the flag zone.

#### 2.2 SCOPE

The system shall:

- 1. traverse, mount and dismount the zip line in a controlled, non-obtrusive and repeatable fashion [REQ ZIP 2.2.1].
- 2. withstand the load under its own weight [REQ ZIP 2.2.2].
- 3. keep track of its position on the zip line [REQ ZIP 2.2.3].
- 4. not touch the playing field during the whole traversal [REQ ZIP 2.2.4].

See *REQ - GEN*; 2.5.1

#### 2.3 CONSTRAINTS

**REQ - ZIP - 2.3.1:** The system shall perform the traversal under 1 minute and 30 seconds.

**REQ - ZIP - 2.3.2:** The dimensions of the zip line are referenced in figure 1 in references (see 5.0).

**REQ - ZIP - 2.3.3:** Taken from the **Project Specification (v 1.2F):** "A robot traversing the zip line must not come into contact with the ground."

**REQ - ZIP - 2.3.4**: Taken from the **Project Specification (v 1.2F):** "The zip line is unidirectional".

See *REQ - ZIPLINE*; 2.2.1 for the constraints concerning mounting, traversing and dismounting the zip line.

#### 2.4 USER FUNCTIONS

See CON - GEN; 2.4.1

#### 2.5 OPERATING ENVIRONMENT

See *REQ - GEN*; 2.5.1

#### 2.6 PERFORMANCE

Time performance: found in REQ - ZIPLINE; 2.3.2

# 3.0 COMPATIBILITY

#### 3.1 COMPONENT RE-USE

Concerning mounting onto the zipline, previous implementations of this design have not been developed as of labs 1 - 4. The results of lab 5 will provide critical components for the zip line traversal. However, the implementation of odometry will be needed to meet the requirement, see *REQ - ZIP*; 2.2.3.

.

#### 3.2 COMPATIBILITY WITH THIRD PARTY PRODUCTS

Third party products could be manufactured using the 3D printer and be made to fit other Lego pieces of the Mindstorms kit.

# 4.0 GLOSSARY OF TERMS

Note that this document should be reviewed with the "Clients" and should be developed in conjunction with them.

# **5.0 REFERENCES**

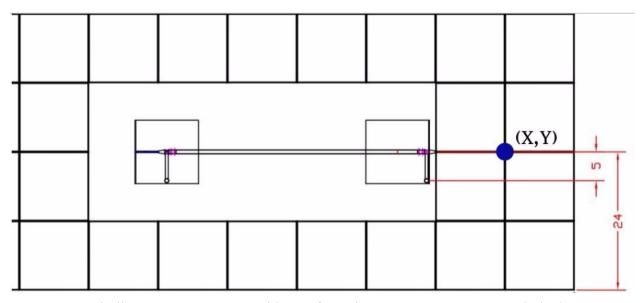


Figure 1.a: Zip line set up on a 8 x 8 grid seen from the top. Measurements are in inches.

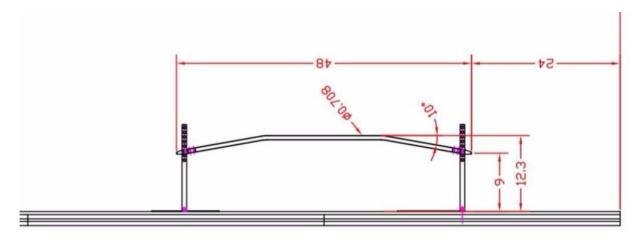


Figure 1.b: Zip line set up seen from the side. Measurements are in inches.