


MG90S Servo Metal Gear Digital 9g Servo



Features:

- 1.High quality and high cost performance.
- 2.245mm connector wire.
- 3.Large stall torque of 1.5 Kg.
- 4.Small size and light weight.Less noise.
- 5.Metal Gear.

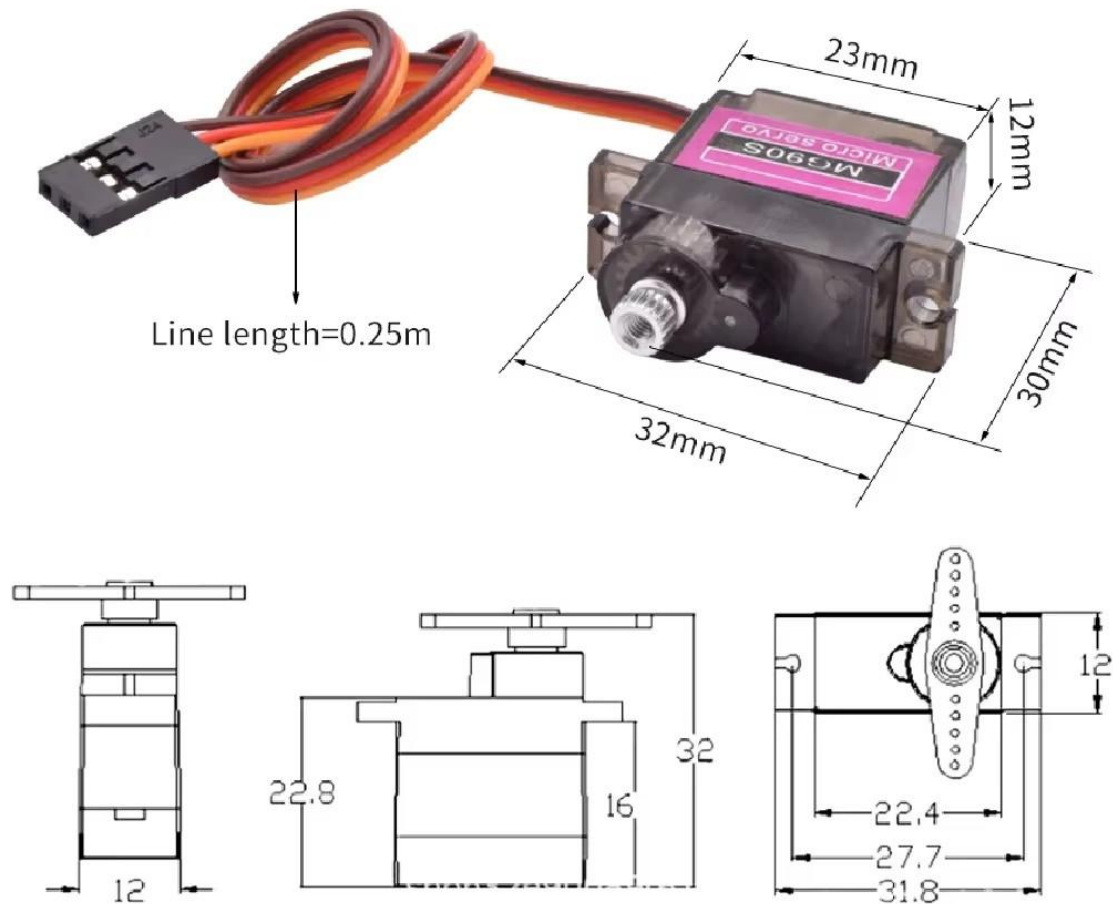

Unit:mm

Specification:

Product Model: MG90S

Dimensions: 22.8 x 22.4 x 12mm

Working Torque: 2kg/cm

Reaction Speed: 0.11 seconds / 60 degrees (4.8V)

Operating Temperature: 0 °C - 55 °C

Dead Band Width: 5msec

Plug Type: JR, FUTABA General

Rotation Angle: 0-180°/360°(Continuous Rotation)

Operating Mode: Analog

Operating Voltage: 4.8V

Gear Material: Plastics/All Metal

Accessories: Multi-arm, Fixing screws(AS the picture shows)

Connector Wire: 250mm(Brown: Negative; Red: Positive; Orange: Pulse Input)

Scope: Small and medium-sized electric model aircraft and model


(at locked)	$1.5 \pm 0.01 \text{ kg} \cdot \text{cm}$	$1.8 \pm 0.1 \text{ kg} \cdot \text{cm}$
2-4 停止電流 Stall current (at locked)	$700 \text{ ma} \pm 50 \text{ mA}$	$900 \text{ ma} \pm 50 \text{ mA}$
2-5 待機電流 Idle current (at stopped)	$4 \pm 1 \text{ mA}$	$4 \pm 1 \text{ mA}$

注：项目 2-2 定义平均值时，伺服器无负荷运行。

3. 控制特性 Control Specification:

项目 (Item)	规格 (Specification)
3-1 控制系统 Control system	改变脉冲宽度 Change the pulse width
3-2 放大器種類 Amplifier type	控制器 Analog controller
3-3 操作角度 Operating travel	$90^\circ \pm 5^\circ$ (在 $1000 \rightarrow 2000 \mu \text{ sec}$)
3-4 两边角度差 Left&Right travelling Angle deviation	$\leq 3^\circ$
3-5 回中差 Centering deviation	$\leq 1^\circ$
3-6 中立位置 Neutral position	$1500 \mu \text{ sec}$
3-7 脈波訊號虛位 Dead band width $\leq$	$\leq 3 \mu \text{ sec}$
3-8 旋轉方向 Rotating direction	顺时针 Counter Clockwise (在 $1500 \rightarrow 800 \mu \text{ sec}$)
3-9 脈波寬度範圍 Pulse width range	$800 \rightarrow 2200 \mu \text{ sec}$
3-10 可動作角度範圍 Maximum travel	大约 About 145° (在 $800 \rightarrow 2200 \mu \text{ sec}$)

产品外观 appearance

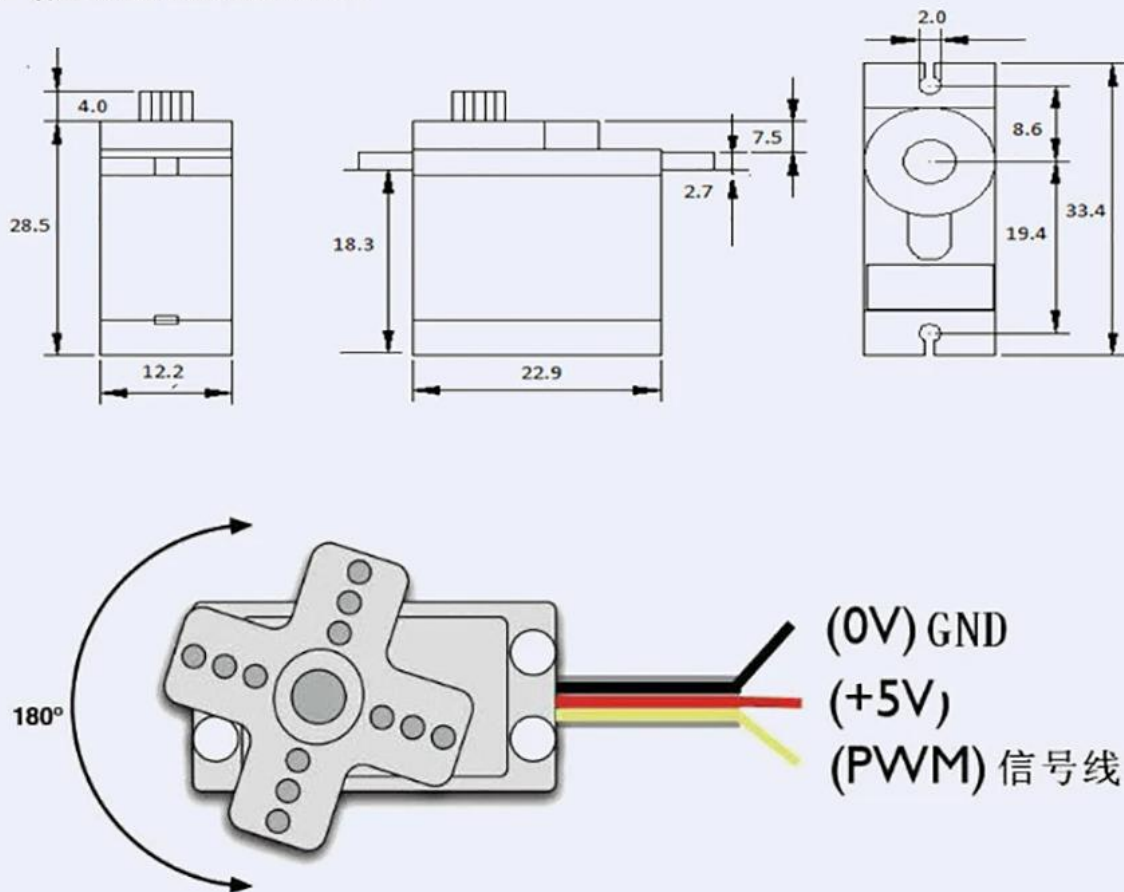

Model: MG90S Upgraded Version
Reaction Speed: 0.11 seconds / 60 degrees (4.8V)
Operating Temperature: 0 -55
The Dead Band Setting: 5 microseconds
Plug Type: JR, FUTABA General
Rotation angle: 90 degrees/360 degrees
Servo: analog Servo
Operating voltage: 4.8V

