



HIT-HP MVX-0202-hh-100-cc													
HIT-HP MVX-0101-hh-050-cc													
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37					
		$A_{s,Sp,h}$		$A_{s,v}$	$A_{s,Sp,h}$		$A_{s,v}$	$A_{s,Sp,h}$		$A_{s,v}$			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]			
		$A_{s,req}$	0,21	0,26	0,99	0,21	0,28	1,01	0,21	0,28	1,01		
	$A_{s,min}$	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13			
$A_{s,prov}$	Ø8	Ø6/25	Ø6/25	Ø8	Ø6/25	Ø6/25	Ø8	Ø6/25	Ø6/25				
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkratt-Wertepaare für c _{nom} =30 - 50mm	h-c _{nom}	Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		$M_{Rd,1}$	$\pm V_{Rd,1}$	$M_{Rd,2}$	$\pm V_{Rd,2}$	$M_{Rd,1}$	$\pm V_{Rd,1}$	$M_{Rd,2}$	$\pm V_{Rd,2}$	$M_{Rd,1}$	$\pm V_{Rd,1}$	$M_{Rd,2}$	$\pm V_{Rd,2}$
		[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]
	125	-8,5	32,0	-8,5	32,0	-8,7	32,0	-8,7	32,0	-8,7	32,0	-8,7	32,0
	130	-8,9	32,0	-8,9	32,0	-9,2	32,0	-9,2	32,0	-9,2	32,0	-9,2	32,0
	135	-9,4	32,0	-9,4	32,0	-9,7	32,0	-9,7	32,0	-9,7	32,0	-9,7	32,0
	140	-9,9	32,0	-9,9	32,0	-10,2	32,0	-10,2	32,0	-10,2	32,0	-10,2	32,0
	145	-10,4	32,0	-10,4	32,0	-10,7	32,0	-10,7	32,0	-10,7	32,0	-10,7	32,0
	150	-10,9	32,0	-10,9	32,0	-11,2	32,0	-11,2	32,0	-11,2	32,0	-11,2	32,0
	155	-11,4	32,0	-11,4	32,0	-11,7	32,0	-11,7	32,0	-11,7	32,0	-11,7	32,0
	160	-11,9	32,0	-11,9	32,0	-12,2	32,0	-12,2	32,0	-12,2	32,0	-12,2	32,0
	165	-12,4	32,0	-12,4	32,0	-12,6	32,0	-12,6	32,0	-12,6	32,0	-12,6	32,0
	170	-12,9	32,0	-12,9	32,0	-13,1	32,0	-13,1	32,0	-13,1	32,0	-13,1	32,0
	175	-13,4	32,0	-13,4	32,0	-13,6	32,0	-13,6	32,0	-13,6	32,0	-13,6	32,0
	180	-13,9	32,0	-13,9	32,0	-14,1	32,0	-14,1	32,0	-14,1	32,0	-14,1	32,0
	185	-14,4	32,0	-14,4	32,0	-14,6	32,0	-14,6	32,0	-14,6	32,0	-14,6	32,0
	190	-14,8	32,0	-14,8	32,0	-15,1	32,0	-15,1	32,0	-15,1	32,0	-15,1	32,0
	195	-15,3	32,0	-15,3	32,0	-15,6	32,0	-15,6	32,0	-15,6	32,0	-15,6	32,0
	200	-15,8	32,0	-15,8	32,0	-16,1	32,0	-16,1	32,0	-16,1	32,0	-16,1	32,0
	205	-16,3	32,0	-16,3	32,0	-16,6	32,0	-16,6	32,0	-16,6	32,0	-16,6	32,0
	210	-16,8	32,0	-16,8	32,0	-17,1	32,0	-17,1	32,0	-17,1	32,0	-17,1	32,0
	215	-17,3	32,0	-17,3	32,0	-17,6	32,0	-17,6	32,0	-17,6	32,0	-17,6	32,0
	220	-17,8	32,0	-17,8	32,0	-18,1	32,0	-18,1	32,0	-18,1	32,0	-18,1	32,0
	225	-18,3	32,0	-18,3	32,0	-18,5	32,0	-18,5	32,0	-18,5	32,0	-18,5	32,0
	230	-18,8	32,0	-18,8	32,0	-19,0	32,0	-19,0	32,0	-19,0	32,0	-19,0	32,0
	235	-19,3	32,0	-19,3	32,0	-19,5	32,0	-19,5	32,0	-19,5	32,0	-19,5	32,0
	240	-19,8	32,0	-19,8	32,0	-20,0	32,0	-20,0	32,0	-20,0	32,0	-20,0	32,0
	245	-20,3	32,0	-20,3	32,0	-20,5	32,0	-20,5	32,0	-20,5	32,0	-20,5	32,0
	250	-20,7	32,0	-20,7	32,0	-21,0	32,0	-21,0	32,0	-21,0	32,0	-21,0	32,0
	255	-21,2	32,0	-21,2	32,0	-21,5	32,0	-21,5	32,0	-21,5	32,0	-21,5	32,0
	260	-21,7	32,0	-21,7	32,0	-22,0	32,0	-22,0	32,0	-22,0	32,0	-22,0	32,0
	265	-22,2	32,0	-22,2	32,0	-22,5	32,0	-22,5	32,0	-22,5	32,0	-22,5	32,0
	270	-22,7	32,0	-22,7	32,0	-23,0	32,0	-23,0	32,0	-23,0	32,0	-23,0	32,0
	275	-23,2	32,0	-23,2	32,0	-23,5	32,0	-23,5	32,0	-23,5	32,0	-23,5	32,0
	280	-23,7	32,0	-23,7	32,0	-24,0	32,0	-24,0	32,0	-24,0	32,0	-24,0	32,0
	285	-24,2	32,0	-24,2	32,0	-24,4	32,0	-24,4	32,0	-24,4	32,0	-24,4	32,0
	290	-24,7	32,0	-24,7	32,0	-24,9	32,0	-24,9	32,0	-24,9	32,0	-24,9	32,0
	295	-25,2	32,0	-25,2	32,0	-25,4	32,0	-25,4	32,0	-25,4	32,0	-25,4	32,0
	300	-25,7	32,0	-25,7	32,0	-25,9	32,0	-25,9	32,0	-25,9	32,0	-25,9	32,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

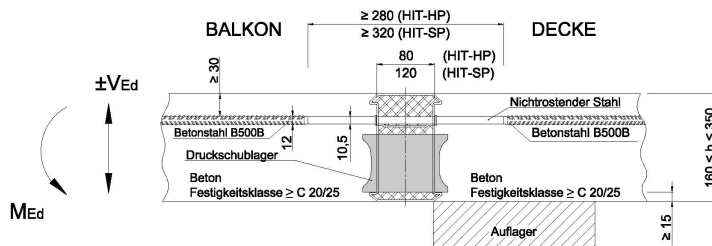


HIT-HP MVX-0302-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]			
	A _{s,req}	0,32	0,30	1,04	0,32	0,33	1,07	0,32	0,33	1,07			
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13			
	A _{s,prov}	Ø8	Ø6/25	Ø6/25	Ø8	Ø6/25	Ø6/25	Ø8	Ø6/25	Ø6/25			
h-c _{nom}	Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		
	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
	[mm]	[kNm/m]	[kNm]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-11,3	32,0	-11,3	32,0	-11,9	32,0	-11,9	32,0	-11,9	32,0	-11,9	32,0
	130	-12,1	32,0	-12,1	32,0	-12,7	32,0	-12,7	32,0	-12,7	32,0	-12,7	32,0
	135	-12,8	32,0	-12,8	32,0	-13,4	32,0	-13,4	32,0	-13,4	32,0	-13,4	32,0
	140	-13,6	32,0	-13,6	32,0	-14,1	32,0	-14,1	32,0	-14,1	32,0	-14,1	32,0
	145	-14,3	32,0	-14,3	32,0	-14,9	32,0	-14,9	32,0	-14,9	32,0	-14,9	32,0
	150	-15,0	32,0	-15,0	32,0	-15,6	32,0	-15,6	32,0	-15,6	32,0	-15,6	32,0
	155	-15,8	32,0	-15,8	32,0	-16,4	32,0	-16,4	32,0	-16,4	32,0	-16,4	32,0
	160	-16,5	32,0	-16,5	32,0	-17,1	32,0	-17,1	32,0	-17,1	32,0	-17,1	32,0
	165	-17,2	32,0	-17,2	32,0	-17,8	32,0	-17,8	32,0	-17,8	32,0	-17,8	32,0
	170	-18,0	32,0	-18,0	32,0	-18,6	32,0	-18,6	32,0	-18,6	32,0	-18,6	32,0
	175	-18,7	32,0	-18,7	32,0	-19,3	32,0	-19,3	32,0	-19,3	32,0	-19,3	32,0
	180	-19,5	32,0	-19,5	32,0	-20,0	32,0	-20,0	32,0	-20,0	32,0	-20,0	32,0
	185	-20,2	32,0	-20,2	32,0	-20,8	32,0	-20,8	32,0	-20,8	32,0	-20,8	32,0
	190	-20,9	32,0	-20,9	32,0	-21,5	32,0	-21,5	32,0	-21,5	32,0	-21,5	32,0
	195	-21,7	32,0	-21,7	32,0	-22,3	32,0	-22,3	32,0	-22,3	32,0	-22,3	32,0
	200	-22,4	32,0	-22,4	32,0	-23,0	32,0	-23,0	32,0	-23,0	32,0	-23,0	32,0
	205	-23,1	32,0	-23,1	32,0	-23,7	32,0	-23,7	32,0	-23,7	32,0	-23,7	32,0
	210	-23,9	32,0	-23,9	32,0	-24,5	32,0	-24,5	32,0	-24,5	32,0	-24,5	32,0
	215	-24,6	32,0	-24,6	32,0	-25,2	32,0	-25,2	32,0	-25,2	32,0	-25,2	32,0
	220	-25,4	32,0	-25,4	32,0	-25,9	32,0	-25,9	32,0	-25,9	32,0	-25,9	32,0
	225	-26,1	32,0	-26,1	32,0	-26,7	32,0	-26,7	32,0	-26,7	32,0	-26,7	32,0
	230	-26,8	32,0	-26,8	32,0	-27,4	32,0	-27,4	32,0	-27,4	32,0	-27,4	32,0
	235	-27,6	32,0	-27,6	32,0	-28,2	32,0	-28,2	32,0	-28,2	32,0	-28,2	32,0
	240	-28,3	32,0	-28,3	32,0	-28,9	32,0	-28,9	32,0	-28,9	32,0	-28,9	32,0
	245	-29,0	32,0	-29,0	32,0	-29,6	32,0	-29,6	32,0	-29,6	32,0	-29,6	32,0
	250	-29,8	32,0	-29,8	32,0	-30,4	32,0	-30,4	32,0	-30,4	32,0	-30,4	32,0
	255	-30,5	32,0	-30,5	32,0	-31,1	32,0	-31,1	32,0	-31,1	32,0	-31,1	32,0
	260	-31,3	32,0	-31,3	32,0	-31,8	32,0	-31,8	32,0	-31,8	32,0	-31,8	32,0
	265	-32,0	32,0	-32,0	32,0	-32,6	32,0	-32,6	32,0	-32,6	32,0	-32,6	32,0
	270	-32,7	32,0	-32,7	32,0	-33,3	32,0	-33,3	32,0	-33,3	32,0	-33,3	32,0
275	-33,5	32,0	-33,5	32,0	-34,1	32,0	-34,1	32,0	-34,1	32,0	-34,1	32,0	
280	-34,2	32,0	-34,2	32,0	-34,8	32,0	-34,8	32,0	-34,8	32,0	-34,8	32,0	
285	-34,9	32,0	-34,9	32,0	-35,5	32,0	-35,5	32,0	-35,5	32,0	-35,5	32,0	
290	-35,7	32,0	-35,7	32,0	-36,3	32,0	-36,3	32,0	-36,3	32,0	-36,3	32,0	
295	-36,4	32,0	-36,4	32,0	-37,0	32,0	-37,0	32,0	-37,0	32,0	-37,0	32,0	
300	-37,2	32,0	-37,2	32,0	-37,7	32,0	-37,7	32,0	-37,7	32,0	-37,7	32,0	

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

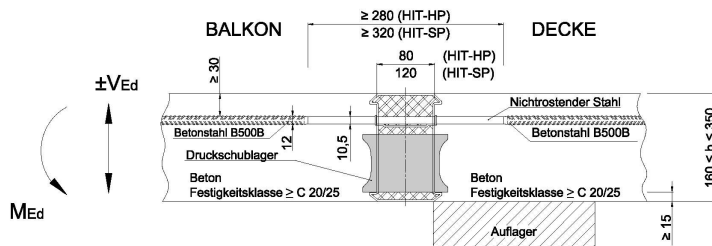


HIT-HP MVX-0402-hh-100-cc													
HIT-HP MVX-0201-hh-050-cc													
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]			
	A _{s,req}	0,42	0,33	1,05	0,42	0,37	1,11	0,42	0,37	1,11			
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13			
	A _{s,prov}	Ø8	Ø6/25	Ø6/25	Ø8	Ø6/25	Ø6/25	Ø8	Ø6/25	Ø6/25			
	h-c _{nom}	Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
		[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkratt-Wertepaare für c _{nom} =30 - 50mm	125	-12,3	32,0	-13,3	15,6	-14,3	32,0	-14,4	31,7	-14,4	32,0	-14,4	32,0
	130	-13,2	32,0	-14,3	15,6	-15,3	32,0	-15,4	31,7	-15,4	32,0	-15,4	32,0
	135	-14,0	32,0	-15,3	15,6	-16,3	32,0	-16,4	31,7	-16,4	32,0	-16,4	32,0
	140	-14,9	32,0	-16,3	15,6	-17,3	32,0	-17,3	31,7	-17,3	32,0	-17,3	32,0
	145	-15,7	32,0	-17,3	15,6	-18,2	32,0	-18,3	31,7	-18,3	32,0	-18,3	32,0
	150	-16,6	32,0	-18,3	15,6	-19,2	32,0	-19,3	31,7	-19,3	32,0	-19,3	32,0
	155	-17,4	32,0	-19,2	15,6	-20,2	32,0	-20,3	31,7	-20,3	32,0	-20,3	32,0
	160	-18,3	32,0	-20,2	15,6	-21,2	32,0	-21,3	31,7	-21,3	32,0	-21,3	32,0
	165	-19,1	32,0	-21,2	15,6	-22,2	32,0	-22,3	31,7	-22,3	32,0	-22,3	32,0
	170	-19,9	32,0	-22,2	15,6	-23,1	32,0	-23,2	31,7	-23,2	32,0	-23,2	32,0
	175	-20,8	32,0	-23,2	15,6	-24,1	32,0	-24,2	31,7	-24,2	32,0	-24,2	32,0
	180	-21,6	32,0	-24,2	15,6	-25,1	32,0	-25,2	31,7	-25,2	32,0	-25,2	32,0
	185	-22,5	32,0	-25,1	15,6	-26,1	32,0	-26,2	31,7	-26,2	32,0	-26,2	32,0
	190	-23,3	32,0	-26,1	15,6	-27,0	32,0	-27,2	31,7	-27,2	32,0	-27,2	32,0
	195	-24,2	32,0	-27,1	15,6	-28,0	32,0	-28,2	31,7	-28,2	32,0	-28,2	32,0
	200	-25,0	32,0	-28,1	15,6	-29,0	32,0	-29,1	31,7	-29,1	32,0	-29,1	32,0
	205	-25,9	32,0	-29,1	15,6	-30,0	32,0	-30,1	31,7	-30,1	32,0	-30,1	32,0
	210	-26,7	32,0	-30,1	15,6	-31,0	32,0	-31,1	31,7	-31,1	32,0	-31,1	32,0
	215	-27,6	32,0	-31,0	15,6	-31,9	32,0	-32,1	31,7	-32,1	32,0	-32,1	32,0
	220	-28,4	32,0	-32,0	15,6	-32,9	32,0	-33,1	31,7	-33,1	32,0	-33,1	32,0
	225	-29,2	32,0	-33,0	15,6	-33,9	32,0	-34,1	31,7	-34,1	32,0	-34,1	32,0
	230	-30,1	32,0	-34,0	15,6	-34,9	32,0	-35,0	31,7	-35,0	32,0	-35,0	32,0
	235	-30,9	32,0	-35,0	15,6	-35,8	32,0	-36,0	31,7	-36,0	32,0	-36,0	32,0
	240	-31,8	32,0	-36,0	15,6	-36,8	32,0	-37,0	31,7	-37,0	32,0	-37,0	32,0
	245	-32,6	32,0	-36,9	15,6	-37,8	32,0	-38,0	31,7	-38,0	32,0	-38,0	32,0
	250	-33,5	32,0	-37,9	15,6	-38,8	32,0	-39,0	31,7	-39,0	32,0	-39,0	32,0
	255	-34,3	32,0	-38,9	15,6	-39,8	32,0	-40,0	31,7	-40,0	32,0	-40,0	32,0
	260	-35,2	32,0	-39,9	15,6	-40,7	32,0	-40,9	31,7	-40,9	32,0	-40,9	32,0
	265	-36,0	32,0	-40,9	15,6	-41,7	32,0	-41,9	31,7	-41,9	32,0	-41,9	32,0
	270	-36,9	32,0	-41,9	15,6	-42,7	32,0	-42,9	31,7	-42,9	32,0	-42,9	32,0
	275	-37,7	32,0	-42,8	15,6	-43,7	32,0	-43,9	31,7	-43,9	32,0	-43,9	32,0
	280	-38,6	32,0	-43,8	15,6	-44,6	32,0	-44,9	31,7	-44,9	32,0	-44,9	32,0
	285	-39,4	32,0	-44,8	15,6	-45,6	32,0	-45,9	31,7	-45,9	32,0	-45,9	32,0
	290	-40,2	32,0	-45,8	15,6	-46,6	32,0	-46,8	31,7	-46,8	32,0	-46,8	32,0
	295	-41,1	32,0	-46,8	15,6	-47,6	32,0	-47,8	31,7	-47,8	32,0	-47,8	32,0
	300	-41,9	32,0	-47,8	15,6	-48,5	32,0	-48,8	31,7	-48,8	32,0	-48,8	32,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

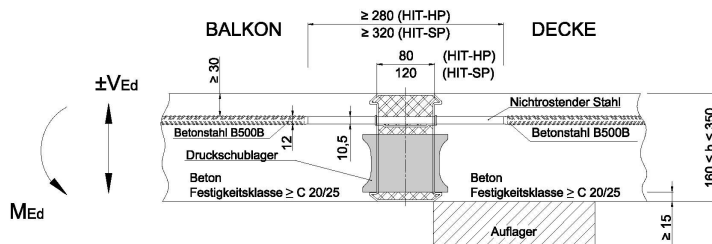

HIT-HP MVX-0502-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37					
		$A_{s,Sp,h}$		$A_{s,v}$	$A_{s,Sp,h}$		$A_{s,v}$	$A_{s,Sp,h}$		$A_{s,v}$			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]			
	$A_{s,req}$	0,49	0,34	1,05	0,53	0,40	1,11	0,53	0,40	1,11			
	$A_{s,min}$	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13			
	$A_{s,prov}$	Ø8	Ø6/25	Ø6/25	Ø10	Ø6/25	Ø6/25	Ø10	Ø6/25	Ø6/25			
h-c _{nom}	Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		
	$M_{Rd,1}$	$\pm V_{Rd,1}$	$M_{Rd,2}$	$\pm V_{Rd,2}$	$M_{Rd,1}$	$\pm V_{Rd,1}$	$M_{Rd,2}$	$\pm V_{Rd,2}$	$M_{Rd,1}$	$\pm V_{Rd,1}$	$M_{Rd,2}$	$\pm V_{Rd,2}$	
	[mm]	[kNm/m]	[kNm]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-12,3	32,0	-14,1	0,0	-14,3	32,0	-16,1	13,1	-14,9	32,0	-16,1	13,1
	130	-13,2	32,0	-15,2	0,0	-15,3	32,0	-17,3	13,1	-16,0	32,0	-17,3	13,1
	135	-14,0	32,0	-16,4	0,0	-16,3	32,0	-18,5	13,1	-17,1	32,0	-18,5	13,1
	140	-14,9	32,0	-17,5	0,0	-17,3	32,0	-19,8	13,1	-18,1	32,0	-19,8	13,1
	145	-15,7	32,0	-18,6	0,0	-18,2	32,0	-21,0	13,1	-19,2	32,0	-21,0	13,1
	150	-16,6	32,0	-19,8	0,0	-19,2	32,0	-22,2	13,1	-20,2	32,0	-22,2	13,1
	155	-17,4	32,0	-20,9	0,0	-20,2	32,0	-23,5	13,1	-21,3	32,0	-23,5	13,1
	160	-18,3	32,0	-22,0	0,0	-21,2	32,0	-24,7	13,1	-22,3	32,0	-24,7	13,1
	165	-19,1	32,0	-23,1	0,0	-22,2	32,0	-25,9	13,1	-23,4	32,0	-25,9	13,1
	170	-19,9	32,0	-24,3	0,0	-23,1	32,0	-27,2	13,1	-24,4	32,0	-27,2	13,1
	175	-20,8	32,0	-25,4	0,0	-24,1	32,0	-28,4	13,1	-25,5	32,0	-28,4	13,1
	180	-21,6	32,0	-26,5	0,0	-25,1	32,0	-29,6	13,1	-26,5	32,0	-29,6	13,1
	185	-22,5	32,0	-27,7	0,0	-26,1	32,0	-30,8	13,1	-27,6	32,0	-30,8	13,1
	190	-23,3	32,0	-28,8	0,0	-27,0	32,0	-32,1	13,1	-28,6	32,0	-32,1	13,1
	195	-24,2	32,0	-29,9	0,0	-28,0	32,0	-33,3	13,1	-29,7	32,0	-33,3	13,1
	200	-25,0	32,0	-31,0	0,0	-29,0	32,0	-34,5	13,1	-30,7	32,0	-34,5	13,1
	205	-25,9	32,0	-32,2	0,0	-30,0	32,0	-35,8	13,1	-31,8	32,0	-35,8	13,1
	210	-26,7	32,0	-33,3	0,0	-31,0	32,0	-37,0	13,1	-32,8	32,0	-37,0	13,1
	215	-27,6	32,0	-34,4	0,0	-31,9	32,0	-38,2	13,1	-33,9	32,0	-38,2	13,1
	220	-28,4	32,0	-35,6	0,0	-32,9	32,0	-39,4	13,1	-35,0	32,0	-39,4	13,1
	225	-29,2	32,0	-36,7	0,0	-33,9	32,0	-40,7	13,1	-36,0	32,0	-40,7	13,1
	230	-30,1	32,0	-37,8	0,0	-34,9	32,0	-41,9	13,1	-37,1	32,0	-41,9	13,1
	235	-30,9	32,0	-38,9	0,0	-35,8	32,0	-43,1	13,1	-38,1	32,0	-43,1	13,1
	240	-31,8	32,0	-40,1	0,0	-36,8	32,0	-44,4	13,1	-39,2	32,0	-44,4	13,1
	245	-32,6	32,0	-41,2	0,0	-37,8	32,0	-45,6	13,1	-40,2	32,0	-45,6	13,1
	250	-33,5	32,0	-42,3	0,0	-38,8	32,0	-46,8	13,1	-41,3	32,0	-46,8	13,1
	255	-34,3	32,0	-43,5	0,0	-39,8	32,0	-48,1	13,1	-42,3	32,0	-48,1	13,1
	260	-35,2	32,0	-44,6	0,0	-40,7	32,0	-49,3	13,1	-43,4	32,0	-49,3	13,1
	265	-36,0	32,0	-45,7	0,0	-41,7	32,0	-50,5	13,1	-44,4	32,0	-50,5	13,1
	270	-36,9	32,0	-46,8	0,0	-42,7	32,0	-51,7	13,1	-45,5	32,0	-51,7	13,1
275	-37,7	32,0	-48,0	0,0	-43,7	32,0	-53,0	13,1	-46,5	32,0	-53,0	13,1	
280	-38,6	32,0	-49,1	0,0	-44,6	32,0	-54,2	13,1	-47,6	32,0	-54,2	13,1	
285	-39,4	32,0	-50,2	0,0	-45,6	32,0	-55,4	13,1	-48,6	32,0	-55,4	13,1	
290	-40,2	32,0	-51,4	0,0	-46,6	32,0	-56,7	13,1	-49,7	32,0	-56,7	13,1	
295	-41,1	32,0	-52,5	0,0	-47,6	32,0	-57,9	13,1	-50,7	32,0	-57,9	13,1	
300	-41,9	32,0	-53,6	0,0	-48,5	32,0	-59,1	13,1	-51,8	32,0	-59,1	13,1	

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

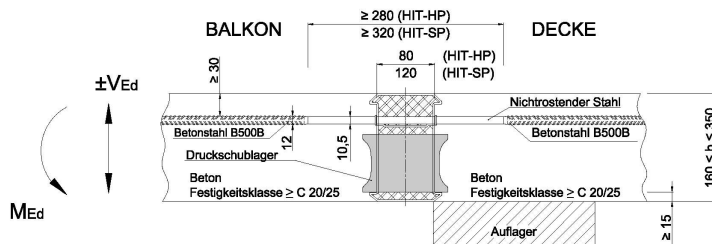


¹⁾ "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]



Anlage 1_5


HIT-HP MVX-0303-hh-100-cc											
Spaltzug- und Aufhängewehrung		C20/25			C25/30			C30/37			
		$A_{s,Sp,h}$		$A_{s,v}$	$A_{s,Sp,h}$		$A_{s,v}$	$A_{s,Sp,h}$		$A_{s,v}$	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	
		$A_{s,req}$	0,21	0,38	1,49	0,21	0,42	1,52	0,21	0,42	1,52
	$A_{s,min}$	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13	
	$A_{s,prov}$	Ø8	Ø6/25	Ø6/18,5	Ø8	Ø6/25	Ø6/18,5	Ø8	Ø6/25	Ø6/18,5	
h-C _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		$M_{Rd,1}$	$\pm V_{Rd,1}$	$M_{Rd,2}$	$\pm V_{Rd,2}$	$M_{Rd,1}$	$\pm V_{Rd,1}$	$M_{Rd,2}$	$\pm V_{Rd,2}$	$M_{Rd,1}$	$\pm V_{Rd,1}$
		[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm/m]	[kNm]
	125	-12,7	48,0	-12,7	48,0	-13,1	48,0	-13,1	48,0	-13,1	48,0
	130	-13,4	48,0	-13,4	48,0	-13,8	48,0	-13,8	48,0	-13,8	48,0
	135	-14,2	48,0	-14,2	48,0	-14,5	48,0	-14,5	48,0	-14,5	48,0
	140	-14,9	48,0	-14,9	48,0	-15,3	48,0	-15,3	48,0	-15,3	48,0
	145	-15,6	48,0	-15,6	48,0	-16,0	48,0	-16,0	48,0	-16,0	48,0
	150	-16,4	48,0	-16,4	48,0	-16,8	48,0	-16,8	48,0	-16,8	48,0
	155	-17,1	48,0	-17,1	48,0	-17,5	48,0	-17,5	48,0	-17,5	48,0
	160	-17,8	48,0	-17,8	48,0	-18,2	48,0	-18,2	48,0	-18,2	48,0
	165	-18,6	48,0	-18,6	48,0	-19,0	48,0	-19,0	48,0	-19,0	48,0
	170	-19,3	48,0	-19,3	48,0	-19,7	48,0	-19,7	48,0	-19,7	48,0
	175	-20,1	48,0	-20,1	48,0	-20,4	48,0	-20,4	48,0	-20,4	48,0
	180	-20,8	48,0	-20,8	48,0	-21,2	48,0	-21,2	48,0	-21,2	48,0
	185	-21,5	48,0	-21,5	48,0	-21,9	48,0	-21,9	48,0	-21,9	48,0
	190	-22,3	48,0	-22,3	48,0	-22,7	48,0	-22,7	48,0	-22,7	48,0
	195	-23,0	48,0	-23,0	48,0	-23,4	48,0	-23,4	48,0	-23,4	48,0
	200	-23,7	48,0	-23,7	48,0	-24,1	48,0	-24,1	48,0	-24,1	48,0
	205	-24,5	48,0	-24,5	48,0	-24,9	48,0	-24,9	48,0	-24,9	48,0
	210	-25,2	48,0	-25,2	48,0	-25,6	48,0	-25,6	48,0	-25,6	48,0
	215	-26,0	48,0	-26,0	48,0	-26,3	48,0	-26,3	48,0	-26,3	48,0
	220	-26,7	48,0	-26,7	48,0	-27,1	48,0	-27,1	48,0	-27,1	48,0
	225	-27,4	48,0	-27,4	48,0	-27,8	48,0	-27,8	48,0	-27,8	48,0
	230	-28,2	48,0	-28,2	48,0	-28,6	48,0	-28,6	48,0	-28,6	48,0
	235	-28,9	48,0	-28,9	48,0	-29,3	48,0	-29,3	48,0	-29,3	48,0
	240	-29,6	48,0	-29,6	48,0	-30,0	48,0	-30,0	48,0	-30,0	48,0
	245	-30,4	48,0	-30,4	48,0	-30,8	48,0	-30,8	48,0	-30,8	48,0
	250	-31,1	48,0	-31,1	48,0	-31,5	48,0	-31,5	48,0	-31,5	48,0
	255	-31,9	48,0	-31,9	48,0	-32,2	48,0	-32,2	48,0	-32,2	48,0
	260	-32,6	48,0	-32,6	48,0	-33,0	48,0	-33,0	48,0	-33,0	48,0
	265	-33,3	48,0	-33,3	48,0	-33,7	48,0	-33,7	48,0	-33,7	48,0
	270	-34,1	48,0	-34,1	48,0	-34,5	48,0	-34,5	48,0	-34,5	48,0
	275	-34,8	48,0	-34,8	48,0	-35,2	48,0	-35,2	48,0	-35,2	48,0
	280	-35,5	48,0	-35,5	48,0	-35,9	48,0	-35,9	48,0	-35,9	48,0
	285	-36,3	48,0	-36,3	48,0	-36,7	48,0	-36,7	48,0	-36,7	48,0
	290	-37,0	48,0	-37,0	48,0	-37,4	48,0	-37,4	48,0	-37,4	48,0
	295	-37,8	48,0	-37,8	48,0	-38,1	48,0	-38,1	48,0	-38,1	48,0
	300	-38,5	48,0	-38,5	48,0	-38,9	48,0	-38,9	48,0	-38,9	48,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

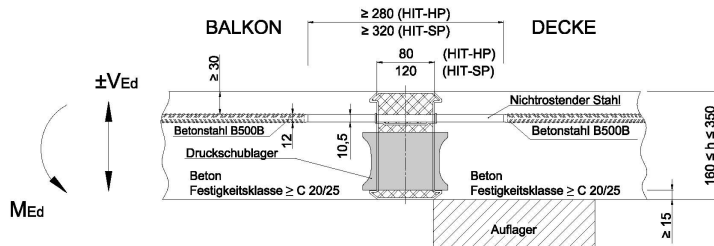


HIT-HP MVX-0403-hh-100-cc											
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37			
		$A_{s,Sp,h}$		$A_{s,v}$	$A_{s,Sp,h}$		$A_{s,v}$	$A_{s,Sp,h}$		$A_{s,v}$	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	
		$A_{s,req}$	0,28	0,43	1,54	0,28	0,48	1,58	0,28	0,48	1,58
		$A_{s,min}$	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13
		$A_{s,prov}$	Ø8	Ø6/25	Ø6/18	Ø8	Ø6/25	Ø6/17,5	Ø8	Ø6/25	Ø6/17,5
	h-c _{nom}	Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)	
		$M_{Rd,1}$	$\pm V_{Rd,1}$	$M_{Rd,2}$	$\pm V_{Rd,2}$	$M_{Rd,1}$	$\pm V_{Rd,1}$	$M_{Rd,2}$	$\pm V_{Rd,2}$	$M_{Rd,1}$	$\pm V_{Rd,1}$
		[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-15,7	48,0	-15,7	48,0	-16,4	48,0	-16,4	48,0	-16,4	48,0
	130	-16,7	48,0	-16,7	48,0	-17,4	48,0	-17,4	48,0	-17,4	48,0
	135	-17,7	48,0	-17,7	48,0	-18,4	48,0	-18,4	48,0	-18,4	48,0
	140	-18,7	48,0	-18,7	48,0	-19,4	48,0	-19,4	48,0	-19,4	48,0
	145	-19,6	48,0	-19,6	48,0	-20,3	48,0	-20,3	48,0	-20,3	48,0
	150	-20,6	48,0	-20,6	48,0	-21,3	48,0	-21,3	48,0	-21,3	48,0
	155	-21,6	48,0	-21,6	48,0	-22,3	48,0	-22,3	48,0	-22,3	48,0
	160	-22,6	48,0	-22,6	48,0	-23,3	48,0	-23,3	48,0	-23,3	48,0
	165	-23,6	48,0	-23,6	48,0	-24,3	48,0	-24,3	48,0	-24,3	48,0
	170	-24,6	48,0	-24,6	48,0	-25,3	48,0	-25,3	48,0	-25,3	48,0
	175	-25,5	48,0	-25,5	48,0	-26,2	48,0	-26,2	48,0	-26,2	48,0
	180	-26,5	48,0	-26,5	48,0	-27,2	48,0	-27,2	48,0	-27,2	48,0
	185	-27,5	48,0	-27,5	48,0	-28,2	48,0	-28,2	48,0	-28,2	48,0
	190	-28,5	48,0	-28,5	48,0	-29,2	48,0	-29,2	48,0	-29,2	48,0
	195	-29,5	48,0	-29,5	48,0	-30,2	48,0	-30,2	48,0	-30,2	48,0
	200	-30,5	48,0	-30,5	48,0	-31,2	48,0	-31,2	48,0	-31,2	48,0
	205	-31,5	48,0	-31,5	48,0	-32,1	48,0	-32,1	48,0	-32,1	48,0
	210	-32,4	48,0	-32,4	48,0	-33,1	48,0	-33,1	48,0	-33,1	48,0
	215	-33,4	48,0	-33,4	48,0	-34,1	48,0	-34,1	48,0	-34,1	48,0
	220	-34,4	48,0	-34,4	48,0	-35,1	48,0	-35,1	48,0	-35,1	48,0
	225	-35,4	48,0	-35,4	48,0	-36,1	48,0	-36,1	48,0	-36,1	48,0
	230	-36,4	48,0	-36,4	48,0	-37,1	48,0	-37,1	48,0	-37,1	48,0
	235	-37,4	48,0	-37,4	48,0	-38,0	48,0	-38,0	48,0	-38,0	48,0
	240	-38,3	48,0	-38,3	48,0	-39,0	48,0	-39,0	48,0	-39,0	48,0
	245	-39,3	48,0	-39,3	48,0	-40,0	48,0	-40,0	48,0	-40,0	48,0
	250	-40,3	48,0	-40,3	48,0	-41,0	48,0	-41,0	48,0	-41,0	48,0
	255	-41,3	48,0	-41,3	48,0	-42,0	48,0	-42,0	48,0	-42,0	48,0
	260	-42,3	48,0	-42,3	48,0	-43,0	48,0	-43,0	48,0	-43,0	48,0
	265	-43,3	48,0	-43,3	48,0	-43,9	48,0	-43,9	48,0	-43,9	48,0
	270	-44,2	48,0	-44,2	48,0	-44,9	48,0	-44,9	48,0	-44,9	48,0
	275	-45,2	48,0	-45,2	48,0	-45,9	48,0	-45,9	48,0	-45,9	48,0
	280	-46,2	48,0	-46,2	48,0	-46,9	48,0	-46,9	48,0	-46,9	48,0
	285	-47,2	48,0	-47,2	48,0	-47,9	48,0	-47,9	48,0	-47,9	48,0
	290	-48,2	48,0	-48,2	48,0	-48,9	48,0	-48,9	48,0	-48,9	48,0
	295	-49,2	48,0	-49,2	48,0	-49,8	48,0	-49,8	48,0	-49,8	48,0
	300	-50,1	48,0	-50,1	48,0	-50,8	48,0	-50,8	48,0	-50,8	48,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

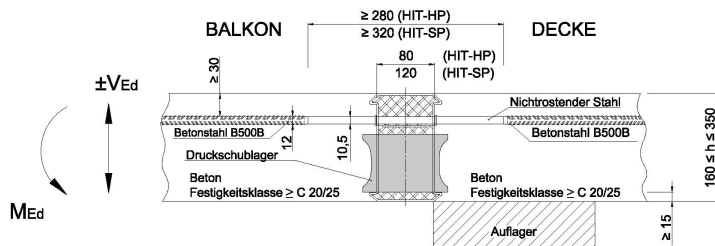


HIT-HP MVX-0503-hh-100-cc											
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37			
		$A_{s,Sp,h}$		$A_{s,v}$	$A_{s,Sp,h}$		$A_{s,v}$	$A_{s,Sp,h}$		$A_{s,v}$	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	
		$A_{s,req}$	0,35	0,47	1,57	0,35	0,52	1,62	0,35	0,52	1,62
	$A_{s,min}$	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13	
	$A_{s,prov}$	Ø8	Ø6/25	Ø6/17,5	Ø8	Ø6/25	Ø6/17	Ø8	Ø6/25	Ø6/17	
h-C _{nom}	h-C _{nom}	Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)	
		$M_{Rd,1}$	$\pm V_{Rd,1}$	$M_{Rd,2}$	$\pm V_{Rd,2}$	$M_{Rd,1}$	$\pm V_{Rd,1}$	$M_{Rd,2}$	$\pm V_{Rd,2}$	$M_{Rd,1}$	$\pm V_{Rd,1}$
		[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Werte paare für c _{nom} =30 - 50mm	125	-18,2	48,0	-18,2	48,0	-19,2	48,0	-19,2	48,0	-19,2	48,0
	130	-19,4	48,0	-19,4	48,0	-20,5	48,0	-20,5	48,0	-20,5	48,0
	135	-20,6	48,0	-20,6	48,0	-21,7	48,0	-21,7	48,0	-21,7	48,0
	140	-21,8	48,0	-21,8	48,0	-22,9	48,0	-22,9	48,0	-22,9	48,0
	145	-23,1	48,0	-23,1	48,0	-24,2	48,0	-24,2	48,0	-24,2	48,0
	150	-24,3	48,0	-24,3	48,0	-25,4	48,0	-25,4	48,0	-25,4	48,0
	155	-25,5	48,0	-25,5	48,0	-26,6	48,0	-26,6	48,0	-26,6	48,0
	160	-26,8	48,0	-26,8	48,0	-27,9	48,0	-27,9	48,0	-27,9	48,0
	165	-28,0	48,0	-28,0	48,0	-29,1	48,0	-29,1	48,0	-29,1	48,0
	170	-29,2	48,0	-29,2	48,0	-30,3	48,0	-30,3	48,0	-30,3	48,0
	175	-30,5	48,0	-30,5	48,0	-31,5	48,0	-31,5	48,0	-31,5	48,0
	180	-31,7	48,0	-31,7	48,0	-32,8	48,0	-32,8	48,0	-32,8	48,0
	185	-32,9	48,0	-32,9	48,0	-34,0	48,0	-34,0	48,0	-34,0	48,0
	190	-34,1	48,0	-34,1	48,0	-35,2	48,0	-35,2	48,0	-35,2	48,0
	195	-35,4	48,0	-35,4	48,0	-36,5	48,0	-36,5	48,0	-36,5	48,0
	200	-36,6	48,0	-36,6	48,0	-37,7	48,0	-37,7	48,0	-37,7	48,0
	205	-37,8	48,0	-37,8	48,0	-38,9	48,0	-38,9	48,0	-38,9	48,0
	210	-39,1	48,0	-39,1	48,0	-40,1	48,0	-40,1	48,0	-40,1	48,0
	215	-40,3	48,0	-40,3	48,0	-41,4	48,0	-41,4	48,0	-41,4	48,0
	220	-41,5	48,0	-41,5	48,0	-42,6	48,0	-42,6	48,0	-42,6	48,0
	225	-42,7	48,0	-42,7	48,0	-43,8	48,0	-43,8	48,0	-43,8	48,0
	230	-44,0	48,0	-44,0	48,0	-45,1	48,0	-45,1	48,0	-45,1	48,0
	235	-45,2	48,0	-45,2	48,0	-46,3	48,0	-46,3	48,0	-46,3	48,0
	240	-46,4	48,0	-46,4	48,0	-47,5	48,0	-47,5	48,0	-47,5	48,0
	245	-47,7	48,0	-47,7	48,0	-48,8	48,0	-48,8	48,0	-48,8	48,0
	250	-48,9	48,0	-48,9	48,0	-50,0	48,0	-50,0	48,0	-50,0	48,0
	255	-50,1	48,0	-50,1	48,0	-51,2	48,0	-51,2	48,0	-51,2	48,0
	260	-51,4	48,0	-51,4	48,0	-52,4	48,0	-52,4	48,0	-52,4	48,0
	265	-52,6	48,0	-52,6	48,0	-53,7	48,0	-53,7	48,0	-53,7	48,0
	270	-53,8	48,0	-53,8	48,0	-54,9	48,0	-54,9	48,0	-54,9	48,0
	275	-55,0	48,0	-55,0	48,0	-56,1	48,0	-56,1	48,0	-56,1	48,0
	280	-56,3	48,0	-56,3	48,0	-57,4	48,0	-57,4	48,0	-57,4	48,0
	285	-57,5	48,0	-57,5	48,0	-58,6	48,0	-58,6	48,0	-58,6	48,0
	290	-58,7	48,0	-58,7	48,0	-59,8	48,0	-59,8	48,0	-59,8	48,0
	295	-60,0	48,0	-60,0	48,0	-61,0	48,0	-61,0	48,0	-61,0	48,0
	300	-61,2	48,0	-61,2	48,0	-62,3	48,0	-62,3	48,0	-62,3	48,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

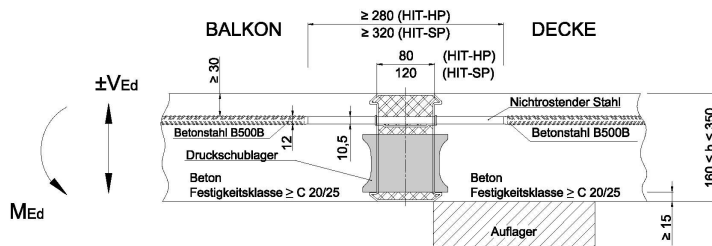


HIT-HP MVX-0603-hh-100-cc											
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37			
		$A_{s,Sp,h}$		$A_{s,v}$	$A_{s,Sp,h}$		$A_{s,v}$	$A_{s,Sp,h}$		$A_{s,v}$	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	
		$A_{s,req}$	0,42	0,50	1,58	0,42	0,56	1,66	0,42	0,56	1,66
	$A_{s,min}$	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13	
	$A_{s,prov}$	Ø8	Ø6/25	Ø6/17,5	Ø8	Ø6/25	Ø6/17	Ø8	Ø6/25	Ø6/17	
	$h-c_{nom}$	Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)	
		$M_{Rd,1}$	$\pm V_{Rd,1}$	$M_{Rd,2}$	$\pm V_{Rd,2}$	$M_{Rd,1}$	$\pm V_{Rd,1}$	$M_{Rd,2}$	$\pm V_{Rd,2}$	$M_{Rd,1}$	$\pm V_{Rd,1}$
		[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für $c_{nom}=30$ - 50mm	125	-18,5	48,0	-20,0	28,7	-21,5	48,0	-21,6	47,6	-21,6	48,0
	130	-19,8	48,0	-21,5	28,7	-23,0	48,0	-23,1	47,6	-23,1	48,0
	135	-21,0	48,0	-23,0	28,7	-24,4	48,0	-24,5	47,6	-24,5	48,0
	140	-22,3	48,0	-24,4	28,7	-25,9	48,0	-26,0	47,6	-26,0	48,0
	145	-23,6	48,0	-25,9	28,7	-27,4	48,0	-27,5	47,6	-27,5	48,0
	150	-24,8	48,0	-27,4	28,7	-28,8	48,0	-29,0	47,6	-29,0	48,0
	155	-26,1	48,0	-28,9	28,7	-30,3	48,0	-30,4	47,6	-30,4	48,0
	160	-27,4	48,0	-30,3	28,7	-31,8	48,0	-31,9	47,6	-31,9	48,0
	165	-28,6	48,0	-31,8	28,7	-33,2	48,0	-33,4	47,6	-33,4	48,0
	170	-29,9	48,0	-33,3	28,7	-34,7	48,0	-34,9	47,6	-34,9	48,0
	175	-31,2	48,0	-34,8	28,7	-36,2	48,0	-36,3	47,6	-36,3	48,0
	180	-32,5	48,0	-36,2	28,7	-37,6	48,0	-37,8	47,6	-37,8	48,0
	185	-33,7	48,0	-37,7	28,7	-39,1	48,0	-39,3	47,6	-39,3	48,0
	190	-35,0	48,0	-39,2	28,7	-40,6	48,0	-40,8	47,6	-40,8	48,0
	195	-36,3	48,0	-40,7	28,7	-42,0	48,0	-42,2	47,6	-42,2	48,0
	200	-37,5	48,0	-42,1	28,7	-43,5	48,0	-43,7	47,6	-43,7	48,0
	205	-38,8	48,0	-43,6	28,7	-45,0	48,0	-45,2	47,6	-45,2	48,0
	210	-40,1	48,0	-45,1	28,7	-46,4	48,0	-46,7	47,6	-46,7	48,0
	215	-41,3	48,0	-46,6	28,7	-47,9	48,0	-48,1	47,6	-48,1	48,0
	220	-42,6	48,0	-48,0	28,7	-49,4	48,0	-49,6	47,6	-49,6	48,0
	225	-43,9	48,0	-49,5	28,7	-50,8	48,0	-51,1	47,6	-51,1	48,0
	230	-45,1	48,0	-51,0	28,7	-52,3	48,0	-52,6	47,6	-52,6	48,0
	235	-46,4	48,0	-52,5	28,7	-53,8	48,0	-54,0	47,6	-54,0	48,0
	240	-47,7	48,0	-53,9	28,7	-55,2	48,0	-55,5	47,6	-55,5	48,0
	245	-48,9	48,0	-55,4	28,7	-56,7	48,0	-57,0	47,6	-57,0	48,0
	250	-50,2	48,0	-56,9	28,7	-58,2	48,0	-58,5	47,6	-58,5	48,0
	255	-51,5	48,0	-58,4	28,7	-59,6	48,0	-59,9	47,6	-59,9	48,0
	260	-52,8	48,0	-59,8	28,7	-61,1	48,0	-61,4	47,6	-61,4	48,0
	265	-54,0	48,0	-61,3	28,7	-62,6	48,0	-62,9	47,6	-62,9	48,0
	270	-55,3	48,0	-62,8	28,7	-64,0	48,0	-64,4	47,6	-64,4	48,0
	275	-56,6	48,0	-64,3	28,7	-65,5	48,0	-65,8	47,6	-65,8	48,0
	280	-57,8	48,0	-65,7	28,7	-67,0	48,0	-67,3	47,6	-67,3	48,0
	285	-59,1	48,0	-67,2	28,7	-68,4	48,0	-68,8	47,6	-68,8	48,0
	290	-60,4	48,0	-68,7	28,7	-69,9	48,0	-70,3	47,6	-70,3	48,0
	295	-61,6	48,0	-70,2	28,7	-71,4	48,0	-71,7	47,6	-71,7	48,0
	300	-62,9	48,0	-71,6	28,7	-72,8	48,0	-73,2	47,6	-73,2	48,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

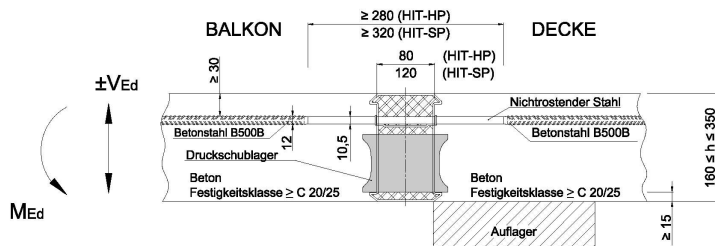


HIT-HP MVX-0703-hh-100-cc											
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37			
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,49	0,52	1,58	0,49	0,58	1,66	0,49	0,58	1,67
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13	
	A _{s,prov}	Ø8	Ø6/25	Ø6/17,5	Ø8	Ø6/25	Ø6/17	Ø8	Ø6/25	Ø6/16,5	
h-C _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}
		[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm/m]	[kNm]
	125	-18,5	48,0	-19,8	32,6	-21,5	48,0	-23,4	34,5	-22,4	48,0
	130	-19,8	48,0	-21,2	32,6	-23,0	48,0	-25,1	34,5	-24,0	48,0
	135	-21,0	48,0	-22,7	32,6	-24,4	48,0	-26,9	34,5	-25,6	48,0
	140	-22,3	48,0	-24,1	32,6	-25,9	48,0	-28,6	34,5	-27,2	48,0
	145	-23,6	48,0	-25,5	32,6	-27,4	48,0	-30,3	34,5	-28,7	48,0
	150	-24,8	48,0	-27,0	32,6	-28,8	48,0	-32,0	34,5	-30,3	48,0
	155	-26,1	48,0	-28,4	32,6	-30,3	48,0	-33,7	34,5	-31,9	48,0
	160	-27,4	48,0	-29,8	32,6	-31,8	48,0	-35,5	34,5	-33,5	48,0
	165	-28,6	48,0	-31,3	32,6	-33,2	48,0	-37,2	34,5	-35,1	48,0
	170	-29,9	48,0	-32,7	32,6	-34,7	48,0	-38,9	34,5	-36,6	48,0
	175	-31,2	48,0	-34,2	32,6	-36,2	48,0	-40,6	34,5	-38,2	48,0
	180	-32,5	48,0	-35,6	32,6	-37,6	48,0	-42,3	34,5	-39,8	48,0
	185	-33,7	48,0	-37,0	32,6	-39,1	48,0	-44,1	34,5	-41,4	48,0
	190	-35,0	48,0	-38,5	32,6	-40,6	48,0	-45,8	34,5	-43,0	48,0
	195	-36,3	48,0	-39,9	32,6	-42,0	48,0	-47,5	34,5	-44,5	48,0
	200	-37,5	48,0	-41,4	32,6	-43,5	48,0	-49,2	34,5	-46,1	48,0
	205	-38,8	48,0	-42,8	32,6	-45,0	48,0	-50,9	34,5	-47,7	48,0
	210	-40,1	48,0	-44,2	32,6	-46,4	48,0	-52,7	34,5	-49,3	48,0
	215	-41,3	48,0	-45,7	32,6	-47,9	48,0	-54,4	34,5	-50,8	48,0
	220	-42,6	48,0	-47,1	32,6	-49,4	48,0	-56,1	34,5	-52,4	48,0
	225	-43,9	48,0	-48,5	32,6	-50,8	48,0	-57,8	34,5	-54,0	48,0
	230	-45,1	48,0	-50,0	32,6	-52,3	48,0	-59,6	34,5	-55,6	48,0
	235	-46,4	48,0	-51,4	32,6	-53,8	48,0	-61,3	34,5	-57,2	48,0
	240	-47,7	48,0	-52,9	32,6	-55,2	48,0	-63,0	34,5	-58,7	48,0
	245	-48,9	48,0	-54,3	32,6	-56,7	48,0	-64,7	34,5	-60,3	48,0
	250	-50,2	48,0	-55,7	32,6	-58,2	48,0	-66,4	34,5	-61,9	48,0
	255	-51,5	48,0	-57,2	32,6	-59,6	48,0	-68,2	34,5	-63,5	48,0
	260	-52,8	48,0	-58,6	32,6	-61,1	48,0	-69,9	34,5	-65,1	48,0
	265	-54,0	48,0	-60,1	32,6	-62,6	48,0	-71,6	34,5	-66,6	48,0
	270	-55,3	48,0	-61,5	32,6	-64,0	48,0	-73,3	34,5	-68,2	48,0
	275	-56,6	48,0	-62,9	32,6	-65,5	48,0	-75,0	34,5	-69,8	48,0
	280	-57,8	48,0	-64,4	32,6	-67,0	48,0	-76,8	34,5	-71,4	48,0
	285	-59,1	48,0	-65,8	32,6	-68,4	48,0	-78,5	34,5	-73,0	48,0
	290	-60,4	48,0	-67,2	32,6	-69,9	48,0	-80,2	34,5	-74,5	48,0
	295	-61,6	48,0	-68,7	32,6	-71,4	48,0	-81,9	34,5	-76,1	48,0
	300	-62,9	48,0	-70,1	32,6	-72,8	48,0	-83,6	34,5	-77,7	48,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

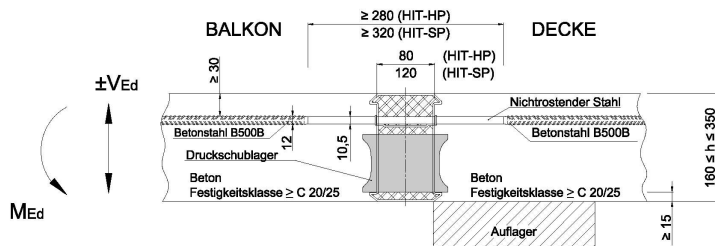


HIT-HP MVX-0204-hh-100-cc											
HIT-HP MVX-0102-hh-050-cc											
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37			
		$A_{s,Sp,h}$		$A_{s,v}$	$A_{s,Sp,h}$		$A_{s,v}$	$A_{s,Sp,h}$		$A_{s,v}$	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	
		$A_{s,req}$	0,11	0,35	1,69	0,11	0,37	1,76	0,11	0,37	1,76
h-C _{nom}		$A_{s,min}$	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13
		$A_{s,prov}$	Ø8	Ø6/25	Ø6/16,5	Ø8	Ø6/25	Ø6/16	Ø8	Ø6/25	Ø6/16
		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)	
		$M_{Rd,1}$	$\pm V_{Rd,1}$	$M_{Rd,2}$	$\pm V_{Rd,2}$	$M_{Rd,1}$	$\pm V_{Rd,1}$	$M_{Rd,2}$	$\pm V_{Rd,2}$	$M_{Rd,1}$	$\pm V_{Rd,1}$
		[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-9,3	58,0	-9,3	58,0	-9,5	60,4	-9,5	60,4	-9,5	60,4
	130	-9,8	58,0	-9,8	58,0	-10,0	60,4	-10,0	60,4	-10,0	60,4
	135	-10,3	58,0	-10,3	58,0	-10,5	60,4	-10,5	60,4	-10,5	60,4
	140	-10,8	58,0	-10,8	58,0	-10,9	60,4	-10,9	60,4	-10,9	60,4
	145	-11,3	58,0	-11,3	58,0	-11,4	60,4	-11,4	60,4	-11,4	60,4
	150	-11,8	58,0	-11,8	58,0	-11,9	60,4	-11,9	60,4	-11,9	60,4
	155	-12,3	58,0	-12,3	58,0	-12,4	60,4	-12,4	60,4	-12,4	60,4
	160	-12,8	58,0	-12,8	58,0	-12,9	60,4	-12,9	60,4	-12,9	60,4
	165	-13,3	58,0	-13,3	58,0	-13,4	60,4	-13,4	60,4	-13,4	60,4
	170	-13,8	58,0	-13,8	58,0	-13,9	60,4	-13,9	60,4	-13,9	60,4
	175	-14,3	58,0	-14,3	58,0	-14,4	60,4	-14,4	60,4	-14,4	60,4
	180	-14,7	58,0	-14,7	58,0	-14,9	60,4	-14,9	60,4	-14,9	60,4
	185	-15,2	58,0	-15,2	58,0	-15,4	60,4	-15,4	60,4	-15,4	60,4
	190	-15,7	58,0	-15,7	58,0	-15,9	60,4	-15,9	60,4	-15,9	60,4
	195	-16,2	58,0	-16,2	58,0	-16,4	60,4	-16,4	60,4	-16,4	60,4
	200	-16,7	58,0	-16,7	58,0	-16,8	60,4	-16,8	60,4	-16,8	60,4
	205	-17,2	58,0	-17,2	58,0	-17,3	60,4	-17,3	60,4	-17,3	60,4
	210	-17,7	58,0	-17,7	58,0	-17,8	60,4	-17,8	60,4	-17,8	60,4
	215	-18,2	58,0	-18,2	58,0	-18,3	60,4	-18,3	60,4	-18,3	60,4
	220	-18,7	58,0	-18,7	58,0	-18,8	60,4	-18,8	60,4	-18,8	60,4
	225	-19,2	58,0	-19,2	58,0	-19,3	60,4	-19,3	60,4	-19,3	60,4
	230	-19,7	58,0	-19,7	58,0	-19,8	60,4	-19,8	60,4	-19,8	60,4
	235	-20,2	58,0	-20,2	58,0	-20,3	60,4	-20,3	60,4	-20,3	60,4
	240	-20,6	58,0	-20,6	58,0	-20,8	60,4	-20,8	60,4	-20,8	60,4
	245	-21,1	58,0	-21,1	58,0	-21,3	60,4	-21,3	60,4	-21,3	60,4
	250	-21,6	58,0	-21,6	58,0	-21,8	60,4	-21,8	60,4	-21,8	60,4
	255	-22,1	58,0	-22,1	58,0	-22,3	60,4	-22,3	60,4	-22,3	60,4
	260	-22,6	58,0	-22,6	58,0	-22,7	60,4	-22,7	60,4	-22,7	60,4
	265	-23,1	58,0	-23,1	58,0	-23,2	60,4	-23,2	60,4	-23,2	60,4
	270	-23,6	58,0	-23,6	58,0	-23,7	60,4	-23,7	60,4	-23,7	60,4
	275	-24,1	58,0	-24,1	58,0	-24,2	60,4	-24,2	60,4	-24,2	60,4
	280	-24,6	58,0	-24,6	58,0	-24,7	60,4	-24,7	60,4	-24,7	60,4
	285	-25,1	58,0	-25,1	58,0	-25,2	60,4	-25,2	60,4	-25,2	60,4
	290	-25,6	58,0	-25,6	58,0	-25,7	60,4	-25,7	60,4	-25,7	60,4
	295	-26,1	58,0	-26,1	58,0	-26,2	60,4	-26,2	60,4	-26,2	60,4
	300	-26,5	58,0	-26,5	58,0	-26,7	60,4	-26,7	60,4	-26,7	60,4

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

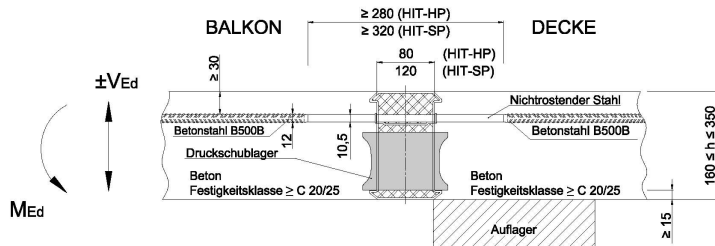

HIT-HP MVX-0304-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]			
		A _{s,req}	0,16	0,45	1,92	0,16	0,48	1,95	0,16	0,48		1,95	
		A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13		1,13	
		A _{s,prov}	Ø8	Ø6/25	Ø6/14,5	Ø8	Ø6/25	Ø6/14	Ø8	Ø6/25		Ø6/14	
	h-C _{nom}	Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
		[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Werte paare für c _{nom} =30 - 50mm	125	-13,3	64,0	-13,3	64,0	-13,6	64,0	-13,6	64,0	-13,6	64,0	-13,6	64,0
	130	-14,1	64,0	-14,1	64,0	-14,4	64,0	-14,4	64,0	-14,4	64,0	-14,4	64,0
	135	-14,8	64,0	-14,8	64,0	-15,1	64,0	-15,1	64,0	-15,1	64,0	-15,1	64,0
	140	-15,6	64,0	-15,6	64,0	-15,8	64,0	-15,8	64,0	-15,8	64,0	-15,8	64,0
	145	-16,3	64,0	-16,3	64,0	-16,6	64,0	-16,6	64,0	-16,6	64,0	-16,6	64,0
	150	-17,0	64,0	-17,0	64,0	-17,3	64,0	-17,3	64,0	-17,3	64,0	-17,3	64,0
	155	-17,8	64,0	-17,8	64,0	-18,1	64,0	-18,1	64,0	-18,1	64,0	-18,1	64,0
	160	-18,5	64,0	-18,5	64,0	-18,8	64,0	-18,8	64,0	-18,8	64,0	-18,8	64,0
	165	-19,2	64,0	-19,2	64,0	-19,5	64,0	-19,5	64,0	-19,5	64,0	-19,5	64,0
	170	-20,0	64,0	-20,0	64,0	-20,3	64,0	-20,3	64,0	-20,3	64,0	-20,3	64,0
	175	-20,7	64,0	-20,7	64,0	-21,0	64,0	-21,0	64,0	-21,0	64,0	-21,0	64,0
	180	-21,5	64,0	-21,5	64,0	-21,7	64,0	-21,7	64,0	-21,7	64,0	-21,7	64,0
	185	-22,2	64,0	-22,2	64,0	-22,5	64,0	-22,5	64,0	-22,5	64,0	-22,5	64,0
	190	-22,9	64,0	-22,9	64,0	-23,2	64,0	-23,2	64,0	-23,2	64,0	-23,2	64,0
	195	-23,7	64,0	-23,7	64,0	-24,0	64,0	-24,0	64,0	-24,0	64,0	-24,0	64,0
	200	-24,4	64,0	-24,4	64,0	-24,7	64,0	-24,7	64,0	-24,7	64,0	-24,7	64,0
	205	-25,1	64,0	-25,1	64,0	-25,4	64,0	-25,4	64,0	-25,4	64,0	-25,4	64,0
	210	-25,9	64,0	-25,9	64,0	-26,2	64,0	-26,2	64,0	-26,2	64,0	-26,2	64,0
	215	-26,6	64,0	-26,6	64,0	-26,9	64,0	-26,9	64,0	-26,9	64,0	-26,9	64,0
	220	-27,4	64,0	-27,4	64,0	-27,6	64,0	-27,6	64,0	-27,6	64,0	-27,6	64,0
	225	-28,1	64,0	-28,1	64,0	-28,4	64,0	-28,4	64,0	-28,4	64,0	-28,4	64,0
	230	-28,8	64,0	-28,8	64,0	-29,1	64,0	-29,1	64,0	-29,1	64,0	-29,1	64,0
	235	-29,6	64,0	-29,6	64,0	-29,9	64,0	-29,9	64,0	-29,9	64,0	-29,9	64,0
	240	-30,3	64,0	-30,3	64,0	-30,6	64,0	-30,6	64,0	-30,6	64,0	-30,6	64,0
	245	-31,0	64,0	-31,0	64,0	-31,3	64,0	-31,3	64,0	-31,3	64,0	-31,3	64,0
	250	-31,8	64,0	-31,8	64,0	-32,1	64,0	-32,1	64,0	-32,1	64,0	-32,1	64,0
	255	-32,5	64,0	-32,5	64,0	-32,8	64,0	-32,8	64,0	-32,8	64,0	-32,8	64,0
	260	-33,3	64,0	-33,3	64,0	-33,6	64,0	-33,6	64,0	-33,6	64,0	-33,6	64,0
	265	-34,0	64,0	-34,0	64,0	-34,3	64,0	-34,3	64,0	-34,3	64,0	-34,3	64,0
	270	-34,7	64,0	-34,7	64,0	-35,0	64,0	-35,0	64,0	-35,0	64,0	-35,0	64,0
	275	-35,5	64,0	-35,5	64,0	-35,8	64,0	-35,8	64,0	-35,8	64,0	-35,8	64,0
	280	-36,2	64,0	-36,2	64,0	-36,5	64,0	-36,5	64,0	-36,5	64,0	-36,5	64,0
	285	-36,9	64,0	-36,9	64,0	-37,2	64,0	-37,2	64,0	-37,2	64,0	-37,2	64,0
	290	-37,7	64,0	-37,7	64,0	-38,0	64,0	-38,0	64,0	-38,0	64,0	-38,0	64,0
	295	-38,4	64,0	-38,4	64,0	-38,7	64,0	-38,7	64,0	-38,7	64,0	-38,7	64,0
	300	-39,2	64,0	-39,2	64,0	-39,5	64,0	-39,5	64,0	-39,5	64,0	-39,5	64,0


1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

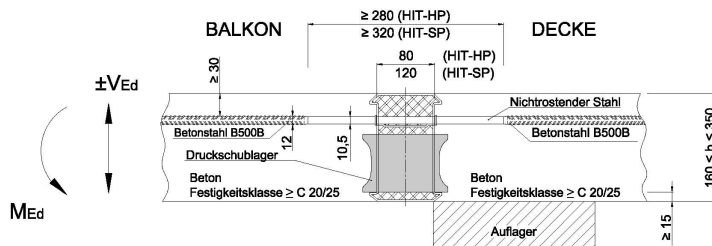

HIT-HP MVX-0404-hh-100-cc													
HIT-HP MVX-0202-hh-050-cc													
HIT-HP MVX-0101-hh-025-cc													
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]			
		A _{s,req}	0,21	0,51	1,98	0,21	0,56	2,03	0,21	0,56		2,03	
A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13				
A _{s,prov}	Ø8	Ø6/25	Ø6/14	Ø8	Ø6/25	Ø6/13,5	Ø8	Ø6/25	Ø6/13,5				
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)			
	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-16,9	64,0	-16,9	64,0	-17,4	64,0	-17,4	64,0	-17,4	64,0	-17,4	64,0
	130	-17,9	64,0	-17,9	64,0	-18,4	64,0	-18,4	64,0	-18,4	64,0	-18,4	64,0
	135	-18,9	64,0	-18,9	64,0	-19,4	64,0	-19,4	64,0	-19,4	64,0	-19,4	64,0
	140	-19,9	64,0	-19,9	64,0	-20,4	64,0	-20,4	64,0	-20,4	64,0	-20,4	64,0
	145	-20,8	64,0	-20,8	64,0	-21,4	64,0	-21,4	64,0	-21,4	64,0	-21,4	64,0
	150	-21,8	64,0	-21,8	64,0	-22,3	64,0	-22,3	64,0	-22,3	64,0	-22,3	64,0
	155	-22,8	64,0	-22,8	64,0	-23,3	64,0	-23,3	64,0	-23,3	64,0	-23,3	64,0
	160	-23,8	64,0	-23,8	64,0	-24,3	64,0	-24,3	64,0	-24,3	64,0	-24,3	64,0
	165	-24,8	64,0	-24,8	64,0	-25,3	64,0	-25,3	64,0	-25,3	64,0	-25,3	64,0
	170	-25,8	64,0	-25,8	64,0	-26,3	64,0	-26,3	64,0	-26,3	64,0	-26,3	64,0
	175	-26,7	64,0	-26,7	64,0	-27,3	64,0	-27,3	64,0	-27,3	64,0	-27,3	64,0
	180	-27,7	64,0	-27,7	64,0	-28,2	64,0	-28,2	64,0	-28,2	64,0	-28,2	64,0
	185	-28,7	64,0	-28,7	64,0	-29,2	64,0	-29,2	64,0	-29,2	64,0	-29,2	64,0
	190	-29,7	64,0	-29,7	64,0	-30,2	64,0	-30,2	64,0	-30,2	64,0	-30,2	64,0
	195	-30,7	64,0	-30,7	64,0	-31,2	64,0	-31,2	64,0	-31,2	64,0	-31,2	64,0
	200	-31,7	64,0	-31,7	64,0	-32,2	64,0	-32,2	64,0	-32,2	64,0	-32,2	64,0
	205	-32,6	64,0	-32,6	64,0	-33,2	64,0	-33,2	64,0	-33,2	64,0	-33,2	64,0
	210	-33,6	64,0	-33,6	64,0	-34,1	64,0	-34,1	64,0	-34,1	64,0	-34,1	64,0
	215	-34,6	64,0	-34,6	64,0	-35,1	64,0	-35,1	64,0	-35,1	64,0	-35,1	64,0
	220	-35,6	64,0	-35,6	64,0	-36,1	64,0	-36,1	64,0	-36,1	64,0	-36,1	64,0
	225	-36,6	64,0	-36,6	64,0	-37,1	64,0	-37,1	64,0	-37,1	64,0	-37,1	64,0
	230	-37,6	64,0	-37,6	64,0	-38,1	64,0	-38,1	64,0	-38,1	64,0	-38,1	64,0
	235	-38,5	64,0	-38,5	64,0	-39,1	64,0	-39,1	64,0	-39,1	64,0	-39,1	64,0
	240	-39,5	64,0	-39,5	64,0	-40,0	64,0	-40,0	64,0	-40,0	64,0	-40,0	64,0
	245	-40,5	64,0	-40,5	64,0	-41,0	64,0	-41,0	64,0	-41,0	64,0	-41,0	64,0
	250	-41,5	64,0	-41,5	64,0	-42,0	64,0	-42,0	64,0	-42,0	64,0	-42,0	64,0
	255	-42,5	64,0	-42,5	64,0	-43,0	64,0	-43,0	64,0	-43,0	64,0	-43,0	64,0
	260	-43,5	64,0	-43,5	64,0	-44,0	64,0	-44,0	64,0	-44,0	64,0	-44,0	64,0
	265	-44,4	64,0	-44,4	64,0	-45,0	64,0	-45,0	64,0	-45,0	64,0	-45,0	64,0
	270	-45,4	64,0	-45,4	64,0	-45,9	64,0	-45,9	64,0	-45,9	64,0	-45,9	64,0
275	-46,4	64,0	-46,4	64,0	-46,9	64,0	-46,9	64,0	-46,9	64,0	-46,9	64,0	
280	-47,4	64,0	-47,4	64,0	-47,9	64,0	-47,9	64,0	-47,9	64,0	-47,9	64,0	
285	-48,4	64,0	-48,4	64,0	-48,9	64,0	-48,9	64,0	-48,9	64,0	-48,9	64,0	
290	-49,4	64,0	-49,4	64,0	-49,9	64,0	-49,9	64,0	-49,9	64,0	-49,9	64,0	
295	-50,3	64,0	-50,3	64,0	-50,9	64,0	-50,9	64,0	-50,9	64,0	-50,9	64,0	
300	-51,3	64,0	-51,3	64,0	-51,8	64,0	-51,8	64,0	-51,8	64,0	-51,8	64,0	
c _{nom} = 30mm	310	-49,3	64,0	-49,3	64,0	-53,8	64,0	-53,8	64,0	-53,8	64,0	-53,8	64,0
	320	-51,1	64,0	-51,1	64,0	-55,8	64,0	-55,8	64,0	-55,8	64,0	-55,8	64,0
c _{nom} = 35mm	305	-48,4	64,0	-48,4	64,0	-52,8	64,0	-52,8	64,0	-52,8	64,0	-52,8	64,0
	315	-50,2	64,0	-50,2	64,0	-54,8	64,0	-54,8	64,0	-54,8	64,0	-54,8	64,0


HIT-HP MVX-0504-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]	
		A _{s,req}	0,27	0,56	2,04		0,27	0,62	2,09		0,27	0,62	2,09
	A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13	
	A _{s,prov}	Ø8	Ø6/25	Ø6/13,5		Ø8	Ø6/25	Ø6/13,5		Ø8	Ø6/25	Ø6/13,5	
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)			
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
	[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-20,0	64,0	-20,0	64,0	-20,8	64,0	-20,8	64,0	-20,8	64,0	-20,8	64,0
	130	-21,2	64,0	-21,2	64,0	-22,1	64,0	-22,1	64,0	-22,1	64,0	-22,1	64,0
	135	-22,5	64,0	-22,5	64,0	-23,3	64,0	-23,3	64,0	-23,3	64,0	-23,3	64,0
	140	-23,7	64,0	-23,7	64,0	-24,5	64,0	-24,5	64,0	-24,5	64,0	-24,5	64,0
	145	-24,9	64,0	-24,9	64,0	-25,7	64,0	-25,7	64,0	-25,7	64,0	-25,7	64,0
	150	-26,2	64,0	-26,2	64,0	-27,0	64,0	-27,0	64,0	-27,0	64,0	-27,0	64,0
	155	-27,4	64,0	-27,4	64,0	-28,2	64,0	-28,2	64,0	-28,2	64,0	-28,2	64,0
	160	-28,6	64,0	-28,6	64,0	-29,4	64,0	-29,4	64,0	-29,4	64,0	-29,4	64,0
	165	-29,8	64,0	-29,8	64,0	-30,7	64,0	-30,7	64,0	-30,7	64,0	-30,7	64,0
	170	-31,1	64,0	-31,1	64,0	-31,9	64,0	-31,9	64,0	-31,9	64,0	-31,9	64,0
	175	-32,3	64,0	-32,3	64,0	-33,1	64,0	-33,1	64,0	-33,1	64,0	-33,1	64,0
	180	-33,5	64,0	-33,5	64,0	-34,4	64,0	-34,4	64,0	-34,4	64,0	-34,4	64,0
	185	-34,8	64,0	-34,8	64,0	-35,6	64,0	-35,6	64,0	-35,6	64,0	-35,6	64,0
	190	-36,0	64,0	-36,0	64,0	-36,8	64,0	-36,8	64,0	-36,8	64,0	-36,8	64,0
	195	-37,2	64,0	-37,2	64,0	-38,0	64,0	-38,0	64,0	-38,0	64,0	-38,0	64,0
	200	-38,5	64,0	-38,5	64,0	-39,3	64,0	-39,3	64,0	-39,3	64,0	-39,3	64,0
	205	-39,7	64,0	-39,7	64,0	-40,5	64,0	-40,5	64,0	-40,5	64,0	-40,5	64,0
	210	-40,9	64,0	-40,9	64,0	-41,7	64,0	-41,7	64,0	-41,7	64,0	-41,7	64,0
	215	-42,1	64,0	-42,1	64,0	-43,0	64,0	-43,0	64,0	-43,0	64,0	-43,0	64,0
	220	-43,4	64,0	-43,4	64,0	-44,2	64,0	-44,2	64,0	-44,2	64,0	-44,2	64,0
	225	-44,6	64,0	-44,6	64,0	-45,4	64,0	-45,4	64,0	-45,4	64,0	-45,4	64,0
	230	-45,8	64,0	-45,8	64,0	-46,6	64,0	-46,6	64,0	-46,6	64,0	-46,6	64,0
	235	-47,1	64,0	-47,1	64,0	-47,9	64,0	-47,9	64,0	-47,9	64,0	-47,9	64,0
	240	-48,3	64,0	-48,3	64,0	-49,1	64,0	-49,1	64,0	-49,1	64,0	-49,1	64,0
	245	-49,5	64,0	-49,5	64,0	-50,3	64,0	-50,3	64,0	-50,3	64,0	-50,3	64,0
	250	-50,7	64,0	-50,7	64,0	-51,6	64,0	-51,6	64,0	-51,6	64,0	-51,6	64,0
	255	-52,0	64,0	-52,0	64,0	-52,8	64,0	-52,8	64,0	-52,8	64,0	-52,8	64,0
	260	-53,2	64,0	-53,2	64,0	-54,0	64,0	-54,0	64,0	-54,0	64,0	-54,0	64,0
	265	-54,4	64,0	-54,4	64,0	-55,3	64,0	-55,3	64,0	-55,3	64,0	-55,3	64,0
	270	-55,7	64,0	-55,7	64,0	-56,5	64,0	-56,5	64,0	-56,5	64,0	-56,5	64,0
275	-56,9	64,0	-56,9	64,0	-57,7	64,0	-57,7	64,0	-57,7	64,0	-57,7	64,0	
280	-58,1	64,0	-58,1	64,0	-58,9	64,0	-58,9	64,0	-58,9	64,0	-58,9	64,0	
285	-59,4	64,0	-59,4	64,0	-60,2	64,0	-60,2	64,0	-60,2	64,0	-60,2	64,0	
290	-60,6	64,0	-60,6	64,0	-61,4	64,0	-61,4	64,0	-61,4	64,0	-61,4	64,0	
295	-61,8	64,0	-61,8	64,0	-62,6	64,0	-62,6	64,0	-62,6	64,0	-62,6	64,0	
300	-63,0	64,0	-63,0	64,0	-63,9	64,0	-63,9	64,0	-63,9	64,0	-63,9	64,0	
c _{nom} = 30mm	310	-61,3	64,0	-61,3	64,0	-66,3	64,0	-66,3	64,0	-66,3	64,0	-66,3	64,0
	320	-63,6	64,0	-63,6	64,0	-68,8	64,0	-68,8	64,0	-68,8	64,0	-68,8	64,0
c _{nom} = 35mm	305	-60,1	64,0	-60,1	64,0	-65,1	64,0	-65,1	64,0	-65,1	64,0	-65,1	64,0
	315	-62,4	64,0	-62,4	64,0	-67,5	64,0	-67,5	64,0	-67,5	64,0	-67,5	64,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

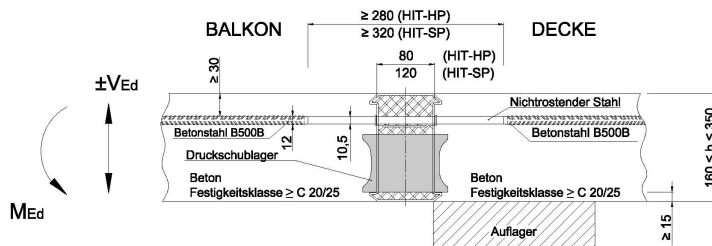


HIT-HP MVX-0604-hh-100-cc													
HIT-HP MVX-0302-hh-050-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]	
		A _{s,req}	0,32	0,60	2,08		0,32	0,67	2,14		0,32	0,67	2,14
A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13		
A _{s,prov}	Ø8	Ø6/25	Ø6/13,5		Ø8	Ø6/25	Ø6/13		Ø8	Ø6/25	Ø6/13		
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
		[mm]	[kNm/m]	[kNm/m]	[kNm/m]	[mm]	[kNm/m]	[kNm/m]	[kNm/m]	[mm]	[kNm/m]	[kNm/m]	[kNm/m]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-22,7	64,0	-22,7	64,0	-23,9	64,0	-23,9	64,0	-23,9	64,0	-23,9	64,0
	130	-24,2	64,0	-24,2	64,0	-25,3	64,0	-25,3	64,0	-25,3	64,0	-25,3	64,0
	135	-25,6	64,0	-25,6	64,0	-26,8	64,0	-26,8	64,0	-26,8	64,0	-26,8	64,0
	140	-27,1	64,0	-27,1	64,0	-28,3	64,0	-28,3	64,0	-28,3	64,0	-28,3	64,0
	145	-28,6	64,0	-28,6	64,0	-29,8	64,0	-29,8	64,0	-29,8	64,0	-29,8	64,0
	150	-30,1	64,0	-30,1	64,0	-31,2	64,0	-31,2	64,0	-31,2	64,0	-31,2	64,0
	155	-31,5	64,0	-31,5	64,0	-32,7	64,0	-32,7	64,0	-32,7	64,0	-32,7	64,0
	160	-33,0	64,0	-33,0	64,0	-34,2	64,0	-34,2	64,0	-34,2	64,0	-34,2	64,0
	165	-34,5	64,0	-34,5	64,0	-35,7	64,0	-35,7	64,0	-35,7	64,0	-35,7	64,0
	170	-36,0	64,0	-36,0	64,0	-37,1	64,0	-37,1	64,0	-37,1	64,0	-37,1	64,0
	175	-37,4	64,0	-37,4	64,0	-38,6	64,0	-38,6	64,0	-38,6	64,0	-38,6	64,0
	180	-38,9	64,0	-38,9	64,0	-40,1	64,0	-40,1	64,0	-40,1	64,0	-40,1	64,0
	185	-40,4	64,0	-40,4	64,0	-41,6	64,0	-41,6	64,0	-41,6	64,0	-41,6	64,0
	190	-41,9	64,0	-41,9	64,0	-43,0	64,0	-43,0	64,0	-43,0	64,0	-43,0	64,0
	195	-43,3	64,0	-43,3	64,0	-44,5	64,0	-44,5	64,0	-44,5	64,0	-44,5	64,0
	200	-44,8	64,0	-44,8	64,0	-46,0	64,0	-46,0	64,0	-46,0	64,0	-46,0	64,0
	205	-46,3	64,0	-46,3	64,0	-47,5	64,0	-47,5	64,0	-47,5	64,0	-47,5	64,0
	210	-47,8	64,0	-47,8	64,0	-48,9	64,0	-48,9	64,0	-48,9	64,0	-48,9	64,0
	215	-49,2	64,0	-49,2	64,0	-50,4	64,0	-50,4	64,0	-50,4	64,0	-50,4	64,0
	220	-50,7	64,0	-50,7	64,0	-51,9	64,0	-51,9	64,0	-51,9	64,0	-51,9	64,0
	225	-52,2	64,0	-52,2	64,0	-53,4	64,0	-53,4	64,0	-53,4	64,0	-53,4	64,0
	230	-53,7	64,0	-53,7	64,0	-54,8	64,0	-54,8	64,0	-54,8	64,0	-54,8	64,0
	235	-55,1	64,0	-55,1	64,0	-56,3	64,0	-56,3	64,0	-56,3	64,0	-56,3	64,0
	240	-56,6	64,0	-56,6	64,0	-57,8	64,0	-57,8	64,0	-57,8	64,0	-57,8	64,0
	245	-58,1	64,0	-58,1	64,0	-59,3	64,0	-59,3	64,0	-59,3	64,0	-59,3	64,0
	250	-59,6	64,0	-59,6	64,0	-60,7	64,0	-60,7	64,0	-60,7	64,0	-60,7	64,0
	255	-61,0	64,0	-61,0	64,0	-62,2	64,0	-62,2	64,0	-62,2	64,0	-62,2	64,0
	260	-62,5	64,0	-62,5	64,0	-63,7	64,0	-63,7	64,0	-63,7	64,0	-63,7	64,0
	265	-64,0	64,0	-64,0	64,0	-65,2	64,0	-65,2	64,0	-65,2	64,0	-65,2	64,0
	270	-65,5	64,0	-65,5	64,0	-66,6	64,0	-66,6	64,0	-66,6	64,0	-66,6	64,0
275	-66,9	64,0	-66,9	64,0	-68,1	64,0	-68,1	64,0	-68,1	64,0	-68,1	64,0	
280	-68,4	64,0	-68,4	64,0	-69,6	64,0	-69,6	64,0	-69,6	64,0	-69,6	64,0	
285	-69,9	64,0	-69,9	64,0	-71,1	64,0	-71,1	64,0	-71,1	64,0	-71,1	64,0	
290	-71,4	64,0	-71,4	64,0	-72,5	64,0	-72,5	64,0	-72,5	64,0	-72,5	64,0	
295	-72,8	64,0	-72,8	64,0	-74,0	64,0	-74,0	64,0	-74,0	64,0	-74,0	64,0	
300	-74,3	64,0	-74,3	64,0	-75,5	64,0	-75,5	64,0	-75,5	64,0	-75,5	64,0	
c _{nom} = 30mm	310	-73,1	64,0	-73,1	64,0	-78,4	64,0	-78,4	64,0	-78,4	64,0	-78,4	64,0
	320	-75,9	64,0	-75,9	64,0	-81,4	64,0	-81,4	64,0	-81,4	64,0	-81,4	64,0
c _{nom} = 35mm	305	-71,7	64,0	-71,7	64,0	-77,0	64,0	-77,0	64,0	-77,0	64,0	-77,0	64,0
	315	-74,5	64,0	-74,5	64,0	-79,9	64,0	-79,9	64,0	-79,9	64,0	-79,9	64,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

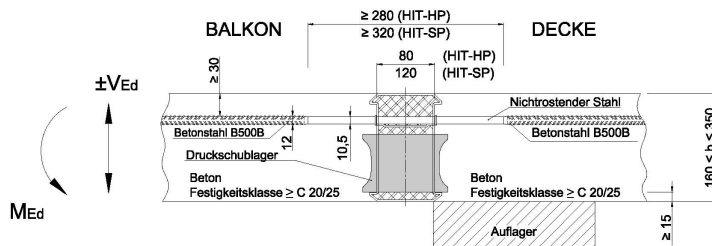


HIT-HP MVX-0704-hh-100-cc											
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37			
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,37	0,64	2,10	0,37	0,71	2,18	0,37	0,71	2,18
		A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13
		A _{s,prov}	Ø8	Ø6/2,5	Ø6/13	Ø8	Ø6/2,5	Ø6/12,5	Ø8	Ø6/2,5	Ø6/12,5
	h-c _{nom}	Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Werte paare für c _{nom} =30 - 50mm	[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
	125	-24,7	64,0	-24,9	61,7	-26,5	64,0	-26,5	64,0	-26,5	64,0
	130	-26,3	64,0	-26,6	61,7	-28,2	64,0	-28,2	64,0	-28,2	64,0
	135	-28,0	64,0	-28,4	61,7	-29,9	64,0	-29,9	64,0	-29,9	64,0
	140	-29,7	64,0	-30,1	61,7	-31,7	64,0	-31,7	64,0	-31,7	64,0
	145	-31,4	64,0	-31,8	61,7	-33,4	64,0	-33,4	64,0	-33,4	64,0
	150	-33,1	64,0	-33,5	61,7	-35,1	64,0	-35,1	64,0	-35,1	64,0
	155	-34,8	64,0	-35,2	61,7	-36,8	64,0	-36,8	64,0	-36,8	64,0
	160	-36,5	64,0	-37,0	61,7	-38,6	64,0	-38,6	64,0	-38,6	64,0
	165	-38,2	64,0	-38,7	61,7	-40,3	64,0	-40,3	64,0	-40,3	64,0
	170	-39,9	64,0	-40,4	61,7	-42,0	64,0	-42,0	64,0	-42,0	64,0
	175	-41,6	64,0	-42,1	61,7	-43,7	64,0	-43,7	64,0	-43,7	64,0
	180	-43,3	64,0	-43,8	61,7	-45,4	64,0	-45,4	64,0	-45,4	64,0
	185	-44,9	64,0	-45,6	61,7	-47,2	64,0	-47,2	64,0	-47,2	64,0
	190	-46,6	64,0	-47,3	61,7	-48,9	64,0	-48,9	64,0	-48,9	64,0
	195	-48,3	64,0	-49,0	61,7	-50,6	64,0	-50,6	64,0	-50,6	64,0
	200	-50,0	64,0	-50,7	61,7	-52,3	64,0	-52,3	64,0	-52,3	64,0
	205	-51,7	64,0	-52,4	61,7	-54,0	64,0	-54,0	64,0	-54,0	64,0
	210	-53,4	64,0	-54,2	61,7	-55,8	64,0	-55,8	64,0	-55,8	64,0
	215	-55,1	64,0	-55,9	61,7	-57,5	64,0	-57,5	64,0	-57,5	64,0
	220	-56,8	64,0	-57,6	61,7	-59,2	64,0	-59,2	64,0	-59,2	64,0
	225	-58,5	64,0	-59,3	61,7	-60,9	64,0	-60,9	64,0	-60,9	64,0
	230	-60,2	64,0	-61,1	61,7	-62,6	64,0	-62,6	64,0	-62,6	64,0
	235	-61,9	64,0	-62,8	61,7	-64,4	64,0	-64,4	64,0	-64,4	64,0
	240	-63,5	64,0	-64,5	61,7	-66,1	64,0	-66,1	64,0	-66,1	64,0
	245	-65,2	64,0	-66,2	61,7	-67,8	64,0	-67,8	64,0	-67,8	64,0
	250	-66,9	64,0	-67,9	61,7	-69,5	64,0	-69,5	64,0	-69,5	64,0
	255	-68,6	64,0	-69,7	61,7	-71,3	64,0	-71,3	64,0	-71,3	64,0
	260	-70,3	64,0	-71,4	61,7	-73,0	64,0	-73,0	64,0	-73,0	64,0
	265	-72,0	64,0	-73,1	61,7	-74,7	64,0	-74,7	64,0	-74,7	64,0
	270	-73,7	64,0	-74,8	61,7	-76,4	64,0	-76,4	64,0	-76,4	64,0
	275	-75,4	64,0	-76,5	61,7	-78,1	64,0	-78,1	64,0	-78,1	64,0
	280	-77,1	64,0	-78,3	61,7	-79,9	64,0	-79,9	64,0	-79,9	64,0
	285	-78,8	64,0	-80,0	61,7	-81,6	64,0	-81,6	64,0	-81,6	64,0
	290	-80,5	64,0	-81,7	61,7	-83,3	64,0	-83,3	64,0	-83,3	64,0
	295	-82,1	64,0	-83,4	61,7	-85,0	64,0	-85,0	64,0	-85,0	64,0
	300	-83,8	64,0	-85,1	61,7	-86,7	64,0	-86,7	64,0	-86,7	64,0
	c _{nom} =30mm	310	-84,7	64,0	-84,7	64,0	-90,2	64,0	-90,2	64,0	64,0
		320	-87,9	64,0	-87,9	64,0	-93,6	64,0	-93,6	64,0	64,0
	c _{nom} =35mm	305	-83,0	64,0	-83,0	64,0	-88,5	64,0	-88,5	64,0	64,0
		315	-86,3	64,0	-86,3	64,0	-91,9	64,0	-91,9	64,0	64,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

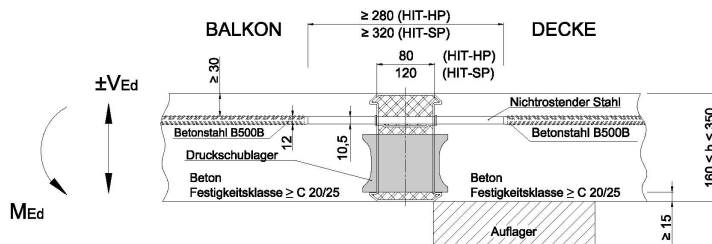


HIT-HP MVX-0804-hh-100-cc													
HIT-HP MVX-0402-hh-050-cc													
HIT-HP MVX-0201-hh-025-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		$A_{s,Sp,h}$		$A_{s,v}$		$A_{s,Sp,h}$		$A_{s,v}$		$A_{s,Sp,h}$		$A_{s,v}$	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]			
		$A_{s,req}$	0,42	0,66	2,11	0,42	0,74	2,21	0,42	0,74	2,21		
$A_{s,min}$	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13				
$A_{s,prov}$	Ø8	Ø6/25	Ø6/13	Ø8	Ø6/25	Ø6/12,5	Ø8	Ø6/25	Ø6/12,5				
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		$M_{Rd,1}$	$\pm V_{Rd,1}$	$M_{Rd,2}$	$\pm V_{Rd,2}$	$M_{Rd,1}$	$\pm V_{Rd,1}$	$M_{Rd,2}$	$\pm V_{Rd,2}$	$M_{Rd,1}$	$\pm V_{Rd,1}$	$M_{Rd,2}$	$\pm V_{Rd,2}$
		[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-24,7	64,0	-26,7	38,2	-28,7	64,0	-28,8	63,4	-28,8	64,0	-28,8	64,0
	130	-26,4	64,0	-28,7	38,2	-30,6	64,0	-30,7	63,4	-30,7	64,0	-30,7	64,0
	135	-28,0	64,0	-30,6	38,2	-32,6	64,0	-32,7	63,4	-32,7	64,0	-32,7	64,0
	140	-29,7	64,0	-32,6	38,2	-34,5	64,0	-34,7	63,4	-34,7	64,0	-34,7	64,0
	145	-31,4	64,0	-34,6	38,2	-36,5	64,0	-36,6	63,4	-36,6	64,0	-36,6	64,0
	150	-33,1	64,0	-36,5	38,2	-38,4	64,0	-38,6	63,4	-38,6	64,0	-38,6	64,0
	155	-34,8	64,0	-38,5	38,2	-40,4	64,0	-40,6	63,4	-40,6	64,0	-40,6	64,0
	160	-36,5	64,0	-40,5	38,2	-42,4	64,0	-42,5	63,4	-42,5	64,0	-42,5	64,0
	165	-38,2	64,0	-42,4	38,2	-44,3	64,0	-44,5	63,4	-44,5	64,0	-44,5	64,0
	170	-39,9	64,0	-44,4	38,2	-46,3	64,0	-46,5	63,4	-46,5	64,0	-46,5	64,0
	175	-41,6	64,0	-46,4	38,2	-48,2	64,0	-48,4	63,4	-48,4	64,0	-48,4	64,0
	180	-43,3	64,0	-48,3	38,2	-50,2	64,0	-50,4	63,4	-50,4	64,0	-50,4	64,0
	185	-45,0	64,0	-50,3	38,2	-52,1	64,0	-52,4	63,4	-52,4	64,0	-52,4	64,0
	190	-46,7	64,0	-52,3	38,2	-54,1	64,0	-54,3	63,4	-54,3	64,0	-54,3	64,0
	195	-48,3	64,0	-54,2	38,2	-56,0	64,0	-56,3	63,4	-56,3	64,0	-56,3	64,0
	200	-50,0	64,0	-56,2	38,2	-58,0	64,0	-58,3	63,4	-58,3	64,0	-58,3	64,0
	205	-51,7	64,0	-58,2	38,2	-60,0	64,0	-60,2	63,4	-60,2	64,0	-60,2	64,0
	210	-53,4	64,0	-60,1	38,2	-61,9	64,0	-62,2	63,4	-62,2	64,0	-62,2	64,0
	215	-55,1	64,0	-62,1	38,2	-63,9	64,0	-64,2	63,4	-64,2	64,0	-64,2	64,0
	220	-56,8	64,0	-64,1	38,2	-65,8	64,0	-66,1	63,4	-66,1	64,0	-66,1	64,0
	225	-58,5	64,0	-66,0	38,2	-67,8	64,0	-68,1	63,4	-68,1	64,0	-68,1	64,0
	230	-60,2	64,0	-68,0	38,2	-69,7	64,0	-70,1	63,4	-70,1	64,0	-70,1	64,0
	235	-61,9	64,0	-70,0	38,2	-71,7	64,0	-72,0	63,4	-72,0	64,0	-72,0	64,0
	240	-63,6	64,0	-71,9	38,2	-73,6	64,0	-74,0	63,4	-74,0	64,0	-74,0	64,0
	245	-65,3	64,0	-73,9	38,2	-75,6	64,0	-76,0	63,4	-76,0	64,0	-76,0	64,0
	250	-67,0	64,0	-75,9	38,2	-77,5	64,0	-77,9	63,4	-77,9	64,0	-77,9	64,0
	255	-68,6	64,0	-77,8	38,2	-79,5	64,0	-79,9	63,4	-79,9	64,0	-79,9	64,0
	260	-70,3	64,0	-79,8	38,2	-81,5	64,0	-81,9	63,4	-81,9	64,0	-81,9	64,0
	265	-72,0	64,0	-81,8	38,2	-83,4	64,0	-83,8	63,4	-83,8	64,0	-83,8	64,0
	270	-73,7	64,0	-83,7	38,2	-85,4	64,0	-85,8	63,4	-85,8	64,0	-85,8	64,0
	275	-75,4	64,0	-85,7	38,2	-87,3	64,0	-87,8	63,4	-87,8	64,0	-87,8	64,0
	280	-77,1	64,0	-87,7	38,2	-89,3	64,0	-89,8	63,4	-89,8	64,0	-89,8	64,0
	285	-78,8	64,0	-89,6	38,2	-91,2	64,0	-91,7	63,4	-91,7	64,0	-91,7	64,0
	290	-80,5	64,0	-91,6	38,2	-93,2	64,0	-93,7	63,4	-93,7	64,0	-93,7	64,0
	295	-82,2	64,0	-93,6	38,2	-95,1	64,0	-95,7	63,4	-95,7	64,0	-95,7	64,0
	300	-83,9	64,0	-95,5	38,2	-97,1	64,0	-97,6	63,4	-97,6	64,0	-97,6	64,0
c _{nom} = 30mm	310	-87,3	64,0	-96,0	46,6	-101,0	64,0	-101,6	63,4	-101,6	64,0	-101,6	64,0
	320	-90,6	64,0	-99,8	46,6	-104,9	64,0	-105,5	63,4	-105,5	64,0	-105,5	64,0
c _{nom} = 35mm	305	-85,6	64,0	-94,1	46,6	-99,1	64,0	-99,6	63,4	-99,6	64,0	-99,6	64,0
	315	-88,9	64,0	-97,9	46,6	-103,0	64,0	-103,5	63,4	-103,5	64,0	-103,5	64,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

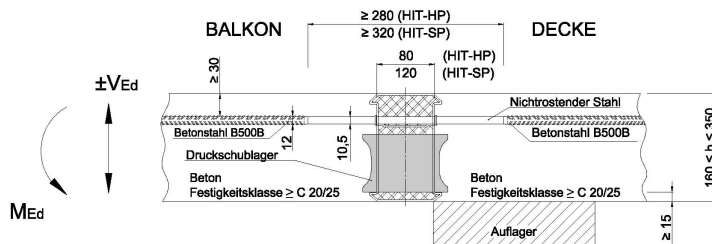


HIT-HP MVX-0904-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig		direkt	indirekt	beidseitig		direkt	indirekt	beidseitig		direkt	indirekt
		[cm ²]		[cm ² /m]	[cm ² /m]	[cm ²]		[cm ² /m]	[cm ² /m]	[cm ²]		[cm ² /m]	[cm ² /m]
		A _{s,req}	0,48	0,69	2,11	0,48	0,77	2,21	0,48	0,77	2,21	0,48	0,77
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13
A _{s,prov}	Ø8	Ø6/25	Ø6/13	Ø8	Ø6/25	Ø6/12,5	Ø8	Ø6/25	Ø6/12,5	Ø8	Ø6/25	Ø6/12,5	
h-c _{nom}	Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		
	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-24,7	64,0	-28,0	6,6	-28,7	64,0	-30,7	51,1	-29,9	64,0	-30,7	54,7
	130	-26,4	64,0	-30,2	6,6	-30,6	64,0	-32,9	51,1	-32,0	64,0	-32,9	54,7
	135	-28,0	64,0	-32,4	6,6	-32,6	64,0	-35,1	51,1	-34,1	64,0	-35,1	54,7
	140	-29,7	64,0	-34,7	6,6	-34,5	64,0	-37,3	51,1	-36,2	64,0	-37,3	54,7
	145	-31,4	64,0	-36,9	6,6	-36,5	64,0	-39,5	51,1	-38,3	64,0	-39,5	54,7
	150	-33,1	64,0	-39,1	6,6	-38,4	64,0	-41,7	51,1	-40,4	64,0	-41,7	54,7
	155	-34,8	64,0	-41,3	6,6	-40,4	64,0	-43,9	51,1	-42,5	64,0	-43,9	54,7
	160	-36,5	64,0	-43,5	6,6	-42,4	64,0	-46,2	51,1	-44,6	64,0	-46,2	54,7
	165	-38,2	64,0	-45,7	6,6	-44,3	64,0	-48,4	51,1	-46,7	64,0	-48,4	54,7
	170	-39,9	64,0	-47,9	6,6	-46,3	64,0	-50,6	51,1	-48,8	64,0	-50,6	54,7
	175	-41,6	64,0	-50,2	6,6	-48,2	64,0	-52,8	51,1	-50,9	64,0	-52,8	54,7
	180	-43,3	64,0	-52,4	6,6	-50,2	64,0	-55,0	51,1	-53,1	64,0	-55,0	54,7
	185	-45,0	64,0	-54,6	6,6	-52,1	64,0	-57,2	51,1	-55,2	64,0	-57,2	54,7
	190	-46,7	64,0	-56,8	6,6	-54,1	64,0	-59,4	51,1	-57,3	64,0	-59,4	54,7
	195	-48,3	64,0	-59,0	6,6	-56,0	64,0	-61,6	51,1	-59,4	64,0	-61,6	54,7
	200	-50,0	64,0	-61,2	6,6	-58,0	64,0	-63,9	51,1	-61,5	64,0	-63,9	54,7
	205	-51,7	64,0	-63,4	6,6	-60,0	64,0	-66,1	51,1	-63,6	64,0	-66,1	54,7
	210	-53,4	64,0	-65,6	6,6	-61,9	64,0	-68,3	51,1	-65,7	64,0	-68,3	54,7
	215	-55,1	64,0	-67,9	6,6	-63,9	64,0	-70,5	51,1	-67,8	64,0	-70,5	54,7
	220	-56,8	64,0	-70,1	6,6	-65,8	64,0	-72,7	51,1	-69,9	64,0	-72,7	54,7
	225	-58,5	64,0	-72,3	6,6	-67,8	64,0	-74,9	51,1	-72,0	64,0	-74,9	54,7
	230	-60,2	64,0	-74,5	6,6	-69,7	64,0	-77,1	51,1	-74,1	64,0	-77,1	54,7
	235	-61,9	64,0	-76,7	6,6	-71,7	64,0	-79,3	51,1	-76,2	64,0	-79,3	54,7
	240	-63,6	64,0	-78,9	6,6	-73,6	64,0	-81,6	51,1	-78,3	64,0	-81,6	54,7
	245	-65,3	64,0	-81,1	6,6	-75,6	64,0	-83,8	51,1	-80,4	64,0	-83,8	54,7
	250	-67,0	64,0	-83,3	6,6	-77,5	64,0	-86,0	51,1	-82,5	64,0	-86,0	54,7
	255	-68,6	64,0	-85,6	6,6	-79,5	64,0	-88,2	51,1	-84,6	64,0	-88,2	54,7
	260	-70,3	64,0	-87,8	6,6	-81,5	64,0	-90,4	51,1	-86,7	64,0	-90,4	54,7
	265	-72,0	64,0	-90,0	6,6	-83,4	64,0	-92,6	51,1	-88,9	64,0	-92,6	54,7
	270	-73,7	64,0	-92,2	6,6	-85,4	64,0	-94,8	51,1	-91,0	64,0	-94,8	54,7
275	-75,4	64,0	-94,4	6,6	-87,3	64,0	-97,1	51,1	-93,1	64,0	-97,1	54,7	
280	-77,1	64,0	-96,6	6,6	-89,3	64,0	-99,3	51,1	-95,2	64,0	-99,3	54,7	
285	-78,8	64,0	-98,8	6,6	-91,2	64,0	-101,5	51,1	-97,3	64,0	-101,5	54,7	
290	-80,5	64,0	-101,0	6,6	-93,2	64,0	-103,7	51,1	-99,4	64,0	-103,7	54,7	
295	-82,2	64,0	-103,3	6,6	-95,1	64,0	-105,9	51,1	-101,5	64,0	-105,9	54,7	
300	-83,9	64,0	-105,5	6,6	-97,1	64,0	-108,1	51,1	-103,6	64,0	-108,1	54,7	
c _{nom} = 30mm	310	-78,6	64,0	-78,6	64,0	-91,5	64,0	-91,5	64,0	-101,7	64,0	-101,7	64,0
	320	-81,7	64,0	-81,7	64,0	-95,0	64,0	-95,0	64,0	-105,6	64,0	-105,6	64,0
c _{nom} = 35mm	305	-77,1	64,0	-77,1	64,0	-89,7	64,0	-89,7	64,0	-99,7	64,0	-99,7	64,0
	315	-80,2	64,0	-80,2	64,0	-93,2	64,0	-93,2	64,0	-103,6	64,0	-103,6	64,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

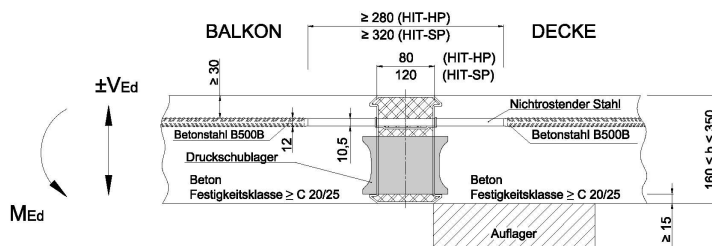


HIT-HP MVX-0405-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]	
		A _{s,req}	0,17	0,58	2,42		0,17	0,62	2,46		0,17	0,62	2,46
		A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13
A _{s,prov}	Ø8	Ø6/25	Ø8/20,5		Ø8	Ø6/25	Ø8/20		Ø8	Ø6/25	Ø8/20		
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)			Punkt 1 (max V)	Punkt 2 (max M)			Punkt 1 (max V)	Punkt 2 (max M)			
	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
125	-17,6	80,0	-17,6	80,0	-18,0	80,0	-18,0	80,0	-18,0	80,0	-18,0	80,0	
130	-18,6	80,0	-18,6	80,0	-19,0	80,0	-19,0	80,0	-19,0	80,0	-19,0	80,0	
135	-19,6	80,0	-19,6	80,0	-20,0	80,0	-20,0	80,0	-20,0	80,0	-20,0	80,0	
140	-20,6	80,0	-20,6	80,0	-21,0	80,0	-21,0	80,0	-21,0	80,0	-21,0	80,0	
145	-21,5	80,0	-21,5	80,0	-22,0	80,0	-22,0	80,0	-22,0	80,0	-22,0	80,0	
150	-22,5	80,0	-22,5	80,0	-22,9	80,0	-22,9	80,0	-22,9	80,0	-22,9	80,0	
155	-23,5	80,0	-23,5	80,0	-23,9	80,0	-23,9	80,0	-23,9	80,0	-23,9	80,0	
160	-24,5	80,0	-24,5	80,0	-24,9	80,0	-24,9	80,0	-24,9	80,0	-24,9	80,0	
165	-25,5	80,0	-25,5	80,0	-25,9	80,0	-25,9	80,0	-25,9	80,0	-25,9	80,0	
170	-26,5	80,0	-26,5	80,0	-26,9	80,0	-26,9	80,0	-26,9	80,0	-26,9	80,0	
175	-27,4	80,0	-27,4	80,0	-27,9	80,0	-27,9	80,0	-27,9	80,0	-27,9	80,0	
180	-28,4	80,0	-28,4	80,0	-28,8	80,0	-28,8	80,0	-28,8	80,0	-28,8	80,0	
185	-29,4	80,0	-29,4	80,0	-29,8	80,0	-29,8	80,0	-29,8	80,0	-29,8	80,0	
190	-30,4	80,0	-30,4	80,0	-30,8	80,0	-30,8	80,0	-30,8	80,0	-30,8	80,0	
195	-31,4	80,0	-31,4	80,0	-31,8	80,0	-31,8	80,0	-31,8	80,0	-31,8	80,0	
200	-32,4	80,0	-32,4	80,0	-32,8	80,0	-32,8	80,0	-32,8	80,0	-32,8	80,0	
205	-33,3	80,0	-33,3	80,0	-33,8	80,0	-33,8	80,0	-33,8	80,0	-33,8	80,0	
210	-34,3	80,0	-34,3	80,0	-34,7	80,0	-34,7	80,0	-34,7	80,0	-34,7	80,0	
215	-35,3	80,0	-35,3	80,0	-35,7	80,0	-35,7	80,0	-35,7	80,0	-35,7	80,0	
220	-36,3	80,0	-36,3	80,0	-36,7	80,0	-36,7	80,0	-36,7	80,0	-36,7	80,0	
225	-37,3	80,0	-37,3	80,0	-37,7	80,0	-37,7	80,0	-37,7	80,0	-37,7	80,0	
230	-38,3	80,0	-38,3	80,0	-38,7	80,0	-38,7	80,0	-38,7	80,0	-38,7	80,0	
235	-39,2	80,0	-39,2	80,0	-39,7	80,0	-39,7	80,0	-39,7	80,0	-39,7	80,0	
240	-40,2	80,0	-40,2	80,0	-40,6	80,0	-40,6	80,0	-40,6	80,0	-40,6	80,0	
245	-41,2	80,0	-41,2	80,0	-41,6	80,0	-41,6	80,0	-41,6	80,0	-41,6	80,0	
250	-42,2	80,0	-42,2	80,0	-42,6	80,0	-42,6	80,0	-42,6	80,0	-42,6	80,0	
255	-43,2	80,0	-43,2	80,0	-43,6	80,0	-43,6	80,0	-43,6	80,0	-43,6	80,0	
260	-44,2	80,0	-44,2	80,0	-44,6	80,0	-44,6	80,0	-44,6	80,0	-44,6	80,0	
265	-45,1	80,0	-45,1	80,0	-45,6	80,0	-45,6	80,0	-45,6	80,0	-45,6	80,0	
270	-46,1	80,0	-46,1	80,0	-46,5	80,0	-46,5	80,0	-46,5	80,0	-46,5	80,0	
275	-47,1	80,0	-47,1	80,0	-47,5	80,0	-47,5	80,0	-47,5	80,0	-47,5	80,0	
280	-48,1	80,0	-48,1	80,0	-48,5	80,0	-48,5	80,0	-48,5	80,0	-48,5	80,0	
285	-49,1	80,0	-49,1	80,0	-49,5	80,0	-49,5	80,0	-49,5	80,0	-49,5	80,0	
290	-50,1	80,0	-50,1	80,0	-50,5	80,0	-50,5	80,0	-50,5	80,0	-50,5	80,0	
295	-51,0	80,0	-51,0	80,0	-51,5	80,0	-51,5	80,0	-51,5	80,0	-51,5	80,0	
300	-52,0	80,0	-52,0	80,0	-52,4	80,0	-52,4	80,0	-52,4	80,0	-52,4	80,0	
c _{nom} = 30mm	310	-49,4	80,0	-49,4	80,0	-54,4	80,0	-54,4	80,0	-54,4	80,0	-54,4	80,0
	320	-51,2	80,0	-51,2	80,0	-56,4	80,0	-56,4	80,0	-56,4	80,0	-56,4	80,0
c _{nom} = 35mm	305	-48,5	80,0	-48,5	80,0	-53,4	80,0	-53,4	80,0	-53,4	80,0	-53,4	80,0
	315	-50,3	80,0	-50,3	80,0	-55,4	80,0	-55,4	80,0	-55,4	80,0	-55,4	80,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

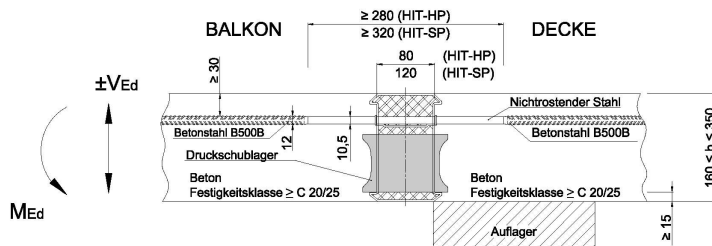


HIT-HP MVX-0505-hh-100-cc														
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37				
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		
		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]		
		A _{s,req}	0,21	0,64	2,48		0,21	0,70	2,54		0,21	0,70	2,54	
		A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13	
A _{s,prov}	Ø8	Ø6/25	Ø8/20		Ø8	Ø6/25	Ø8/19,5		Ø8	Ø6/25	Ø8/19,5			
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
		[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
Tragfähigkeit im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-21,1	80,0	-21,1	80,0	-21,8	80,0	-21,8	80,0	-21,8	80,0	-21,8	80,0	
	130	-22,4	80,0	-22,4	80,0	-23,0	80,0	-23,0	80,0	-23,0	80,0	-23,0	80,0	
	135	-23,6	80,0	-23,6	80,0	-24,2	80,0	-24,2	80,0	-24,2	80,0	-24,2	80,0	
	140	-24,8	80,0	-24,8	80,0	-25,5	80,0	-25,5	80,0	-25,5	80,0	-25,5	80,0	
	145	-26,0	80,0	-26,0	80,0	-26,7	80,0	-26,7	80,0	-26,7	80,0	-26,7	80,0	
	150	-27,3	80,0	-27,3	80,0	-27,9	80,0	-27,9	80,0	-27,9	80,0	-27,9	80,0	
	155	-28,5	80,0	-28,5	80,0	-29,2	80,0	-29,2	80,0	-29,2	80,0	-29,2	80,0	
	160	-29,7	80,0	-29,7	80,0	-30,4	80,0	-30,4	80,0	-30,4	80,0	-30,4	80,0	
	165	-31,0	80,0	-31,0	80,0	-31,6	80,0	-31,6	80,0	-31,6	80,0	-31,6	80,0	
	170	-32,2	80,0	-32,2	80,0	-32,8	80,0	-32,8	80,0	-32,8	80,0	-32,8	80,0	
	175	-33,4	80,0	-33,4	80,0	-34,1	80,0	-34,1	80,0	-34,1	80,0	-34,1	80,0	
	180	-34,6	80,0	-34,6	80,0	-35,3	80,0	-35,3	80,0	-35,3	80,0	-35,3	80,0	
	185	-35,9	80,0	-35,9	80,0	-36,5	80,0	-36,5	80,0	-36,5	80,0	-36,5	80,0	
	190	-37,1	80,0	-37,1	80,0	-37,8	80,0	-37,8	80,0	-37,8	80,0	-37,8	80,0	
	195	-38,3	80,0	-38,3	80,0	-39,0	80,0	-39,0	80,0	-39,0	80,0	-39,0	80,0	
	200	-39,6	80,0	-39,6	80,0	-40,2	80,0	-40,2	80,0	-40,2	80,0	-40,2	80,0	
	205	-40,8	80,0	-40,8	80,0	-41,4	80,0	-41,4	80,0	-41,4	80,0	-41,4	80,0	
	210	-42,0	80,0	-42,0	80,0	-42,7	80,0	-42,7	80,0	-42,7	80,0	-42,7	80,0	
	215	-43,3	80,0	-43,3	80,0	-43,9	80,0	-43,9	80,0	-43,9	80,0	-43,9	80,0	
	220	-44,5	80,0	-44,5	80,0	-45,1	80,0	-45,1	80,0	-45,1	80,0	-45,1	80,0	
	225	-45,7	80,0	-45,7	80,0	-46,4	80,0	-46,4	80,0	-46,4	80,0	-46,4	80,0	
	230	-46,9	80,0	-46,9	80,0	-47,6	80,0	-47,6	80,0	-47,6	80,0	-47,6	80,0	
	235	-48,2	80,0	-48,2	80,0	-48,8	80,0	-48,8	80,0	-48,8	80,0	-48,8	80,0	
	240	-49,4	80,0	-49,4	80,0	-50,1	80,0	-50,1	80,0	-50,1	80,0	-50,1	80,0	
	245	-50,6	80,0	-50,6	80,0	-51,3	80,0	-51,3	80,0	-51,3	80,0	-51,3	80,0	
	250	-51,9	80,0	-51,9	80,0	-52,5	80,0	-52,5	80,0	-52,5	80,0	-52,5	80,0	
	255	-53,1	80,0	-53,1	80,0	-53,7	80,0	-53,7	80,0	-53,7	80,0	-53,7	80,0	
	260	-54,3	80,0	-54,3	80,0	-55,0	80,0	-55,0	80,0	-55,0	80,0	-55,0	80,0	
	265	-55,5	80,0	-55,5	80,0	-56,2	80,0	-56,2	80,0	-56,2	80,0	-56,2	80,0	
	270	-56,8	80,0	-56,8	80,0	-57,4	80,0	-57,4	80,0	-57,4	80,0	-57,4	80,0	
275	-58,0	80,0	-58,0	80,0	-58,7	80,0	-58,7	80,0	-58,7	80,0	-58,7	80,0		
280	-59,2	80,0	-59,2	80,0	-59,9	80,0	-59,9	80,0	-59,9	80,0	-59,9	80,0		
285	-60,5	80,0	-60,5	80,0	-61,1	80,0	-61,1	80,0	-61,1	80,0	-61,1	80,0		
290	-61,7	80,0	-61,7	80,0	-62,3	80,0	-62,3	80,0	-62,3	80,0	-62,3	80,0		
295	-62,9	80,0	-62,9	80,0	-63,6	80,0	-63,6	80,0	-63,6	80,0	-63,6	80,0		
300	-64,2	80,0	-64,2	80,0	-64,8	80,0	-64,8	80,0	-64,8	80,0	-64,8	80,0		
c _{nom} = 30mm	310	-61,6	80,0	-61,6	80,0	-67,3	80,0	-67,3	80,0	-67,3	80,0	-67,3	80,0	
	320	-63,9	80,0	-63,9	80,0	-69,7	80,0	-69,7	80,0	-69,7	80,0	-69,7	80,0	
c _{nom} = 35mm	305	-60,5	80,0	-60,5	80,0	-66,0	80,0	-66,0	80,0	-66,0	80,0	-66,0	80,0	
	315	-62,7	80,0	-62,7	80,0	-68,5	80,0	-68,5	80,0	-68,5	80,0	-68,5	80,0	

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

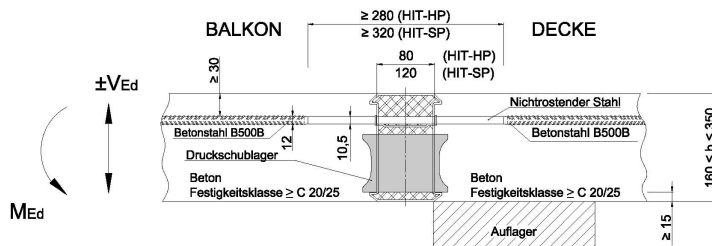


HIT-HP MVX-0605-hh-100-cc															
Spaltzug- und Aufhängewehrung		C20/25						C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt					
		[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]					
		A _{s,req}	0,25	0,69	2,53	0,25	0,76	2,60	0,25	0,76	2,60				
		A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13				
A _{s,prov}	Ø8	Ø6/25	Ø8/19,5	Ø8	Ø6/25	Ø8/19	Ø8	Ø6/25	Ø8/19						
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)			
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}		
		[mm]	[kNm/m]	[kNm]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]		
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-24,3	80,0	-24,3	80,0	-25,2	80,0	-25,2	80,0	-25,2	80,0	-25,2	80,0		
	130	-25,8	80,0	-25,8	80,0	-26,7	80,0	-26,7	80,0	-26,7	80,0	-26,7	80,0		
	135	-27,2	80,0	-27,2	80,0	-28,2	80,0	-28,2	80,0	-28,2	80,0	-28,2	80,0		
	140	-28,7	80,0	-28,7	80,0	-29,6	80,0	-29,6	80,0	-29,6	80,0	-29,6	80,0		
	145	-30,2	80,0	-30,2	80,0	-31,1	80,0	-31,1	80,0	-31,1	80,0	-31,1	80,0		
	150	-31,7	80,0	-31,7	80,0	-32,6	80,0	-32,6	80,0	-32,6	80,0	-32,6	80,0		
	155	-33,1	80,0	-33,1	80,0	-34,1	80,0	-34,1	80,0	-34,1	80,0	-34,1	80,0		
	160	-34,6	80,0	-34,6	80,0	-35,5	80,0	-35,5	80,0	-35,5	80,0	-35,5	80,0		
	165	-36,1	80,0	-36,1	80,0	-37,0	80,0	-37,0	80,0	-37,0	80,0	-37,0	80,0		
	170	-37,6	80,0	-37,6	80,0	-38,5	80,0	-38,5	80,0	-38,5	80,0	-38,5	80,0		
	175	-39,0	80,0	-39,0	80,0	-40,0	80,0	-40,0	80,0	-40,0	80,0	-40,0	80,0		
	180	-40,5	80,0	-40,5	80,0	-41,4	80,0	-41,4	80,0	-41,4	80,0	-41,4	80,0		
	185	-42,0	80,0	-42,0	80,0	-42,9	80,0	-42,9	80,0	-42,9	80,0	-42,9	80,0		
	190	-43,5	80,0	-43,5	80,0	-44,4	80,0	-44,4	80,0	-44,4	80,0	-44,4	80,0		
	195	-44,9	80,0	-44,9	80,0	-45,9	80,0	-45,9	80,0	-45,9	80,0	-45,9	80,0		
	200	-46,4	80,0	-46,4	80,0	-47,4	80,0	-47,4	80,0	-47,4	80,0	-47,4	80,0		
	205	-47,9	80,0	-47,9	80,0	-48,8	80,0	-48,8	80,0	-48,8	80,0	-48,8	80,0		
	210	-49,4	80,0	-49,4	80,0	-50,3	80,0	-50,3	80,0	-50,3	80,0	-50,3	80,0		
	215	-50,8	80,0	-50,8	80,0	-51,8	80,0	-51,8	80,0	-51,8	80,0	-51,8	80,0		
	220	-52,3	80,0	-52,3	80,0	-53,3	80,0	-53,3	80,0	-53,3	80,0	-53,3	80,0		
	225	-53,8	80,0	-53,8	80,0	-54,7	80,0	-54,7	80,0	-54,7	80,0	-54,7	80,0		
	230	-55,3	80,0	-55,3	80,0	-56,2	80,0	-56,2	80,0	-56,2	80,0	-56,2	80,0		
	235	-56,7	80,0	-56,7	80,0	-57,7	80,0	-57,7	80,0	-57,7	80,0	-57,7	80,0		
	240	-58,2	80,0	-58,2	80,0	-59,2	80,0	-59,2	80,0	-59,2	80,0	-59,2	80,0		
	245	-59,7	80,0	-59,7	80,0	-60,6	80,0	-60,6	80,0	-60,6	80,0	-60,6	80,0		
	250	-61,2	80,0	-61,2	80,0	-62,1	80,0	-62,1	80,0	-62,1	80,0	-62,1	80,0		
	255	-62,6	80,0	-62,6	80,0	-63,6	80,0	-63,6	80,0	-63,6	80,0	-63,6	80,0		
	260	-64,1	80,0	-64,1	80,0	-65,1	80,0	-65,1	80,0	-65,1	80,0	-65,1	80,0		
	265	-65,6	80,0	-65,6	80,0	-66,5	80,0	-66,5	80,0	-66,5	80,0	-66,5	80,0		
	270	-67,1	80,0	-67,1	80,0	-68,0	80,0	-68,0	80,0	-68,0	80,0	-68,0	80,0		
275	-68,5	80,0	-68,5	80,0	-69,5	80,0	-69,5	80,0	-69,5	80,0	-69,5	80,0			
280	-70,0	80,0	-70,0	80,0	-71,0	80,0	-71,0	80,0	-71,0	80,0	-71,0	80,0			
285	-71,5	80,0	-71,5	80,0	-72,4	80,0	-72,4	80,0	-72,4	80,0	-72,4	80,0			
290	-73,0	80,0	-73,0	80,0	-73,9	80,0	-73,9	80,0	-73,9	80,0	-73,9	80,0			
295	-74,4	80,0	-74,4	80,0	-75,4	80,0	-75,4	80,0	-75,4	80,0	-75,4	80,0			
300	-75,9	80,0	-75,9	80,0	-76,9	80,0	-76,9	80,0	-76,9	80,0	-76,9	80,0			
c _{nom} = 30mm	310	-73,0	80,0	-73,0	80,0	-79,8	80,0	-79,8	80,0	-79,8	80,0	-79,8	80,0		
	320	-75,7	80,0	-75,7	80,0	-82,8	80,0	-82,8	80,0	-82,8	80,0	-82,8	80,0		
c _{nom} = 35mm	305	-71,7	80,0	-71,7	80,0	-78,3	80,0	-78,3	80,0	-78,3	80,0	-78,3	80,0		
	315	-74,4	80,0	-74,4	80,0	-81,3	80,0	-81,3	80,0	-81,3	80,0	-81,3	80,0		

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

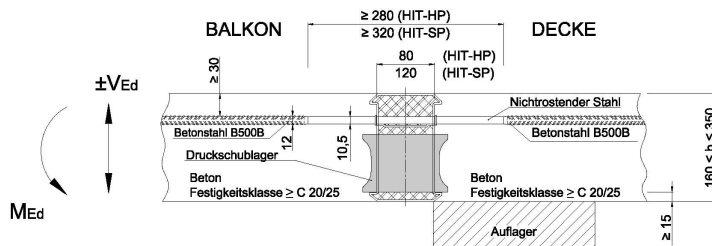


HIT-HP MVX-0705-hh-100-cc														
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37				
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		
		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]		
		A _{s,req}	0,30	0,74	2,58		0,30	0,81	2,65		0,30	0,81	2,65	
		A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13	
A _{s,prov}	Ø8	Ø6/25	Ø8/19,5		Ø8	Ø6/25	Ø8/18,5		Ø8	Ø6/25	Ø8/18,5			
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
		[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-27,1	80,0	-27,1	80,0	-28,4	80,0	-28,4	80,0	-28,4	80,0	-28,4	80,0	
	130	-28,8	80,0	-28,8	80,0	-30,1	80,0	-30,1	80,0	-30,1	80,0	-30,1	80,0	
	135	-30,5	80,0	-30,5	80,0	-31,8	80,0	-31,8	80,0	-31,8	80,0	-31,8	80,0	
	140	-32,2	80,0	-32,2	80,0	-33,5	80,0	-33,5	80,0	-33,5	80,0	-33,5	80,0	
	145	-34,0	80,0	-34,0	80,0	-35,2	80,0	-35,2	80,0	-35,2	80,0	-35,2	80,0	
	150	-35,7	80,0	-35,7	80,0	-37,0	80,0	-37,0	80,0	-37,0	80,0	-37,0	80,0	
	155	-37,4	80,0	-37,4	80,0	-38,7	80,0	-38,7	80,0	-38,7	80,0	-38,7	80,0	
	160	-39,1	80,0	-39,1	80,0	-40,4	80,0	-40,4	80,0	-40,4	80,0	-40,4	80,0	
	165	-40,9	80,0	-40,9	80,0	-42,1	80,0	-42,1	80,0	-42,1	80,0	-42,1	80,0	
	170	-42,6	80,0	-42,6	80,0	-43,9	80,0	-43,9	80,0	-43,9	80,0	-43,9	80,0	
	175	-44,3	80,0	-44,3	80,0	-45,6	80,0	-45,6	80,0	-45,6	80,0	-45,6	80,0	
	180	-46,0	80,0	-46,0	80,0	-47,3	80,0	-47,3	80,0	-47,3	80,0	-47,3	80,0	
	185	-47,7	80,0	-47,7	80,0	-49,0	80,0	-49,0	80,0	-49,0	80,0	-49,0	80,0	
	190	-49,5	80,0	-49,5	80,0	-50,7	80,0	-50,7	80,0	-50,7	80,0	-50,7	80,0	
	195	-51,2	80,0	-51,2	80,0	-52,5	80,0	-52,5	80,0	-52,5	80,0	-52,5	80,0	
	200	-52,9	80,0	-52,9	80,0	-54,2	80,0	-54,2	80,0	-54,2	80,0	-54,2	80,0	
	205	-54,6	80,0	-54,6	80,0	-55,9	80,0	-55,9	80,0	-55,9	80,0	-55,9	80,0	
	210	-56,3	80,0	-56,3	80,0	-57,6	80,0	-57,6	80,0	-57,6	80,0	-57,6	80,0	
	215	-58,1	80,0	-58,1	80,0	-59,3	80,0	-59,3	80,0	-59,3	80,0	-59,3	80,0	
	220	-59,8	80,0	-59,8	80,0	-61,1	80,0	-61,1	80,0	-61,1	80,0	-61,1	80,0	
	225	-61,5	80,0	-61,5	80,0	-62,8	80,0	-62,8	80,0	-62,8	80,0	-62,8	80,0	
	230	-63,2	80,0	-63,2	80,0	-64,5	80,0	-64,5	80,0	-64,5	80,0	-64,5	80,0	
	235	-64,9	80,0	-64,9	80,0	-66,2	80,0	-66,2	80,0	-66,2	80,0	-66,2	80,0	
	240	-66,7	80,0	-66,7	80,0	-67,9	80,0	-67,9	80,0	-67,9	80,0	-67,9	80,0	
	245	-68,4	80,0	-68,4	80,0	-69,7	80,0	-69,7	80,0	-69,7	80,0	-69,7	80,0	
	250	-70,1	80,0	-70,1	80,0	-71,4	80,0	-71,4	80,0	-71,4	80,0	-71,4	80,0	
	255	-71,8	80,0	-71,8	80,0	-73,1	80,0	-73,1	80,0	-73,1	80,0	-73,1	80,0	
	260	-73,6	80,0	-73,6	80,0	-74,8	80,0	-74,8	80,0	-74,8	80,0	-74,8	80,0	
	265	-75,3	80,0	-75,3	80,0	-76,6	80,0	-76,6	80,0	-76,6	80,0	-76,6	80,0	
	270	-77,0	80,0	-77,0	80,0	-78,3	80,0	-78,3	80,0	-78,3	80,0	-78,3	80,0	
275	-78,7	80,0	-78,7	80,0	-80,0	80,0	-80,0	80,0	-80,0	80,0	-80,0	80,0		
280	-80,4	80,0	-80,4	80,0	-81,7	80,0	-81,7	80,0	-81,7	80,0	-81,7	80,0		
285	-82,2	80,0	-82,2	80,0	-83,4	80,0	-83,4	80,0	-83,4	80,0	-83,4	80,0		
290	-83,9	80,0	-83,9	80,0	-85,2	80,0	-85,2	80,0	-85,2	80,0	-85,2	80,0		
295	-85,6	80,0	-85,6	80,0	-86,9	80,0	-86,9	80,0	-86,9	80,0	-86,9	80,0		
300	-87,3	80,0	-87,3	80,0	-88,6	80,0	-88,6	80,0	-88,6	80,0	-88,6	80,0		
c _{nom} = 30mm	310	-85,0	80,0	-85,0	80,0	-92,0	80,0	-92,0	80,0	-92,0	80,0	-92,0	80,0	
	320	-88,2	80,0	-88,2	80,0	-95,5	80,0	-95,5	80,0	-95,5	80,0	-95,5	80,0	
c _{nom} = 35mm	305	-83,4	80,0	-83,4	80,0	-90,3	80,0	-90,3	80,0	-90,3	80,0	-90,3	80,0	
	315	-86,6	80,0	-86,6	80,0	-93,8	80,0	-93,8	80,0	-93,8	80,0	-93,8	80,0	

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

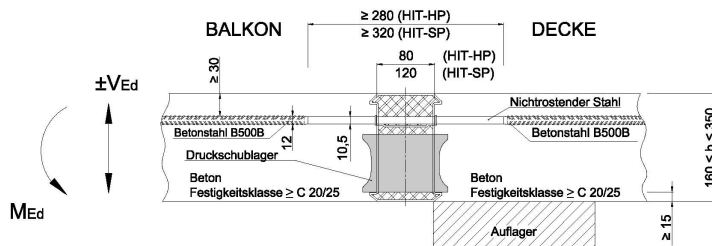


HIT-HP MVX-0805-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]	
		A _{s,req}	0,34	0,77	2,61		0,34	0,86	2,70		0,34	0,86	2,70
		A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13
A _{s,prov}	Ø8	Ø6/25	Ø8/19		Ø8	Ø6/25	Ø8/18,5		Ø8	Ø6/25	Ø8/18,5		
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
		[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-29,5	80,0	-29,5	80,0	-31,2	80,0	-31,2	80,0	-31,2	80,0	-31,2	80,0
	130	-31,5	80,0	-31,5	80,0	-33,2	80,0	-33,2	80,0	-33,2	80,0	-33,2	80,0
	135	-33,5	80,0	-33,5	80,0	-35,1	80,0	-35,1	80,0	-35,1	80,0	-35,1	80,0
	140	-35,4	80,0	-35,4	80,0	-37,1	80,0	-37,1	80,0	-37,1	80,0	-37,1	80,0
	145	-37,4	80,0	-37,4	80,0	-39,1	80,0	-39,1	80,0	-39,1	80,0	-39,1	80,0
	150	-39,4	80,0	-39,4	80,0	-41,0	80,0	-41,0	80,0	-41,0	80,0	-41,0	80,0
	155	-41,3	80,0	-41,3	80,0	-43,0	80,0	-43,0	80,0	-43,0	80,0	-43,0	80,0
	160	-43,3	80,0	-43,3	80,0	-45,0	80,0	-45,0	80,0	-45,0	80,0	-45,0	80,0
	165	-45,3	80,0	-45,3	80,0	-46,9	80,0	-46,9	80,0	-46,9	80,0	-46,9	80,0
	170	-47,2	80,0	-47,2	80,0	-48,9	80,0	-48,9	80,0	-48,9	80,0	-48,9	80,0
	175	-49,2	80,0	-49,2	80,0	-50,9	80,0	-50,9	80,0	-50,9	80,0	-50,9	80,0
	180	-51,2	80,0	-51,2	80,0	-52,8	80,0	-52,8	80,0	-52,8	80,0	-52,8	80,0
	185	-53,1	80,0	-53,1	80,0	-54,8	80,0	-54,8	80,0	-54,8	80,0	-54,8	80,0
	190	-55,1	80,0	-55,1	80,0	-56,8	80,0	-56,8	80,0	-56,8	80,0	-56,8	80,0
	195	-57,1	80,0	-57,1	80,0	-58,7	80,0	-58,7	80,0	-58,7	80,0	-58,7	80,0
	200	-59,0	80,0	-59,0	80,0	-60,7	80,0	-60,7	80,0	-60,7	80,0	-60,7	80,0
	205	-61,0	80,0	-61,0	80,0	-62,7	80,0	-62,7	80,0	-62,7	80,0	-62,7	80,0
	210	-63,0	80,0	-63,0	80,0	-64,6	80,0	-64,6	80,0	-64,6	80,0	-64,6	80,0
	215	-64,9	80,0	-64,9	80,0	-66,6	80,0	-66,6	80,0	-66,6	80,0	-66,6	80,0
	220	-66,9	80,0	-66,9	80,0	-68,6	80,0	-68,6	80,0	-68,6	80,0	-68,6	80,0
	225	-68,9	80,0	-68,9	80,0	-70,5	80,0	-70,5	80,0	-70,5	80,0	-70,5	80,0
	230	-70,8	80,0	-70,8	80,0	-72,5	80,0	-72,5	80,0	-72,5	80,0	-72,5	80,0
	235	-72,8	80,0	-72,8	80,0	-74,5	80,0	-74,5	80,0	-74,5	80,0	-74,5	80,0
	240	-74,8	80,0	-74,8	80,0	-76,4	80,0	-76,4	80,0	-76,4	80,0	-76,4	80,0
	245	-76,7	80,0	-76,7	80,0	-78,4	80,0	-78,4	80,0	-78,4	80,0	-78,4	80,0
	250	-78,7	80,0	-78,7	80,0	-80,4	80,0	-80,4	80,0	-80,4	80,0	-80,4	80,0
	255	-80,7	80,0	-80,7	80,0	-82,3	80,0	-82,3	80,0	-82,3	80,0	-82,3	80,0
	260	-82,6	80,0	-82,6	80,0	-84,3	80,0	-84,3	80,0	-84,3	80,0	-84,3	80,0
	265	-84,6	80,0	-84,6	80,0	-86,3	80,0	-86,3	80,0	-86,3	80,0	-86,3	80,0
	270	-86,6	80,0	-86,6	80,0	-88,2	80,0	-88,2	80,0	-88,2	80,0	-88,2	80,0
275	-88,5	80,0	-88,5	80,0	-90,2	80,0	-90,2	80,0	-90,2	80,0	-90,2	80,0	
280	-90,5	80,0	-90,5	80,0	-92,2	80,0	-92,2	80,0	-92,2	80,0	-92,2	80,0	
285	-92,5	80,0	-92,5	80,0	-94,1	80,0	-94,1	80,0	-94,1	80,0	-94,1	80,0	
290	-94,4	80,0	-94,4	80,0	-96,1	80,0	-96,1	80,0	-96,1	80,0	-96,1	80,0	
295	-96,4	80,0	-96,4	80,0	-98,1	80,0	-98,1	80,0	-98,1	80,0	-98,1	80,0	
300	-98,4	80,0	-98,4	80,0	-100,0	80,0	-100,0	80,0	-100,0	80,0	-100,0	80,0	
c _{nom} = 30mm	310	-95,9	80,0	-95,9	80,0	-104,0	80,0	-104,0	80,0	-104,0	80,0	-104,0	80,0
	320	-99,5	80,0	-99,5	80,0	-107,9	80,0	-107,9	80,0	-107,9	80,0	-107,9	80,0
c _{nom} = 35mm	305	-94,1	80,0	-94,1	80,0	-102,0	80,0	-102,0	80,0	-102,0	80,0	-102,0	80,0
	315	-97,7	80,0	-97,7	80,0	-105,9	80,0	-105,9	80,0	-105,9	80,0	-105,9	80,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

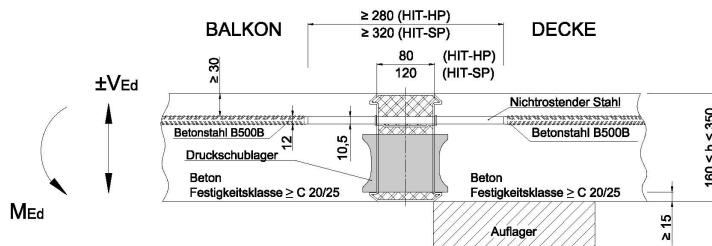


HIT-HP MVX-0905-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,38	0,80	2,63		0,38	0,89	2,73		0,38	0,89	2,73
		A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13
A _{s,prov}	Ø8	Ø6/25	Ø8/19		Ø8	Ø6/25	Ø8/18		Ø8	Ø6/25	Ø8/18		
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
		[mm]	[kNm/m]	[kNm]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeit im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-30,8	80,0	-31,6	72,1	-33,7	80,0	-33,7	80,0	-33,7	80,0	-33,7	80,0
	130	-32,9	80,0	-33,8	72,1	-36,0	80,0	-36,0	80,0	-36,0	80,0	-36,0	80,0
	135	-35,0	80,0	-36,1	72,1	-38,2	80,0	-38,2	80,0	-38,2	80,0	-38,2	80,0
	140	-37,1	80,0	-38,3	72,1	-40,4	80,0	-40,4	80,0	-40,4	80,0	-40,4	80,0
	145	-39,2	80,0	-40,5	72,1	-42,6	80,0	-42,6	80,0	-42,6	80,0	-42,6	80,0
	150	-41,3	80,0	-42,7	72,1	-44,8	80,0	-44,8	80,0	-44,8	80,0	-44,8	80,0
	155	-43,4	80,0	-44,9	72,1	-47,0	80,0	-47,0	80,0	-47,0	80,0	-47,0	80,0
	160	-45,5	80,0	-47,1	72,1	-49,2	80,0	-49,2	80,0	-49,2	80,0	-49,2	80,0
	165	-47,7	80,0	-49,3	72,1	-51,4	80,0	-51,4	80,0	-51,4	80,0	-51,4	80,0
	170	-49,8	80,0	-51,5	72,1	-53,7	80,0	-53,7	80,0	-53,7	80,0	-53,7	80,0
	175	-51,9	80,0	-53,8	72,1	-55,9	80,0	-55,9	80,0	-55,9	80,0	-55,9	80,0
	180	-54,0	80,0	-56,0	72,1	-58,1	80,0	-58,1	80,0	-58,1	80,0	-58,1	80,0
	185	-56,1	80,0	-58,2	72,1	-60,3	80,0	-60,3	80,0	-60,3	80,0	-60,3	80,0
	190	-58,2	80,0	-60,4	72,1	-62,5	80,0	-62,5	80,0	-62,5	80,0	-62,5	80,0
	195	-60,3	80,0	-62,6	72,1	-64,7	80,0	-64,7	80,0	-64,7	80,0	-64,7	80,0
	200	-62,4	80,0	-64,8	72,1	-66,9	80,0	-66,9	80,0	-66,9	80,0	-66,9	80,0
	205	-64,5	80,0	-67,0	72,1	-69,1	80,0	-69,1	80,0	-69,1	80,0	-69,1	80,0
	210	-66,6	80,0	-69,2	72,1	-71,4	80,0	-71,4	80,0	-71,4	80,0	-71,4	80,0
	215	-68,7	80,0	-71,5	72,1	-73,6	80,0	-73,6	80,0	-73,6	80,0	-73,6	80,0
	220	-70,9	80,0	-73,7	72,1	-75,8	80,0	-75,8	80,0	-75,8	80,0	-75,8	80,0
	225	-73,0	80,0	-75,9	72,1	-78,0	80,0	-78,0	80,0	-78,0	80,0	-78,0	80,0
	230	-75,1	80,0	-78,1	72,1	-80,2	80,0	-80,2	80,0	-80,2	80,0	-80,2	80,0
	235	-77,2	80,0	-80,3	72,1	-82,4	80,0	-82,4	80,0	-82,4	80,0	-82,4	80,0
	240	-79,3	80,0	-82,5	72,1	-84,6	80,0	-84,6	80,0	-84,6	80,0	-84,6	80,0
	245	-81,4	80,0	-84,7	72,1	-86,8	80,0	-86,8	80,0	-86,8	80,0	-86,8	80,0
	250	-83,5	80,0	-86,9	72,1	-89,1	80,0	-89,1	80,0	-89,1	80,0	-89,1	80,0
	255	-85,6	80,0	-89,2	72,1	-91,3	80,0	-91,3	80,0	-91,3	80,0	-91,3	80,0
	260	-87,7	80,0	-91,4	72,1	-93,5	80,0	-93,5	80,0	-93,5	80,0	-93,5	80,0
	265	-89,8	80,0	-93,4	72,5	-95,7	80,0	-95,7	80,0	-95,7	80,0	-95,7	80,0
	270	-91,9	80,0	-95,3	73,2	-97,9	80,0	-97,9	80,0	-97,9	80,0	-97,9	80,0
275	-94,0	80,0	-97,3	73,8	-100,1	80,0	-100,1	80,0	-100,1	80,0	-100,1	80,0	
280	-96,2	80,0	-99,2	74,3	-102,3	80,0	-102,3	80,0	-102,3	80,0	-102,3	80,0	
285	-98,3	80,0	-101,1	74,9	-104,5	80,0	-104,5	80,0	-104,5	80,0	-104,5	80,0	
290	-100,4	80,0	-103,0	75,4	-106,8	80,0	-106,8	80,0	-106,8	80,0	-106,8	80,0	
295	-102,5	80,0	-105,0	75,8	-109,0	80,0	-109,0	80,0	-109,0	80,0	-109,0	80,0	
300	-104,6	80,0	-106,9	76,3	-111,2	80,0	-111,2	80,0	-111,2	80,0	-111,2	80,0	
c _{nom} = 30mm	310	-79,2	80,0	-79,2	80,0	-92,3	80,0	-92,3	80,0	-102,0	80,0	-102,0	80,0
	320	-82,2	80,0	-82,2	80,0	-95,7	80,0	-95,7	80,0	-105,8	80,0	-105,8	80,0
c _{nom} = 35mm	305	-77,7	80,0	-77,7	80,0	-90,6	80,0	-90,6	80,0	-100,0	80,0	-100,0	80,0
	315	-80,7	80,0	-80,7	80,0	-94,0	80,0	-94,0	80,0	-103,9	80,0	-103,9	80,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

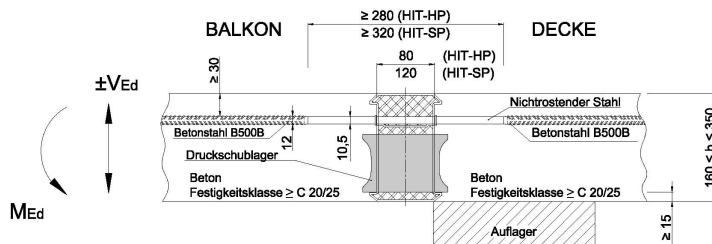


HIT-HP MVX-1005-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]	
		A _{s,req}	0,42	0,83	2,63		0,42	0,93	2,76		0,42	0,93	2,77
		A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13
A _{s,prov}	Ø8	Ø6/25	Ø8/19		Ø8	Ø6/25	Ø8/18		Ø8	Ø6/25	Ø8/18		
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
		[mm]	[kNm/m]	[kNm]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-30,8	80,0	-33,4	47,8	-35,8	80,0	-36,0	79,3	-36,0	80,0	-36,0	80,0
	130	-32,9	80,0	-35,8	47,8	-38,3	80,0	-38,4	79,3	-38,4	80,0	-38,4	80,0
	135	-35,1	80,0	-38,3	47,8	-40,7	80,0	-40,9	79,3	-40,9	80,0	-40,9	80,0
	140	-37,2	80,0	-40,7	47,8	-43,2	80,0	-43,3	79,3	-43,3	80,0	-43,3	80,0
	145	-39,3	80,0	-43,2	47,8	-45,6	80,0	-45,8	79,3	-45,8	80,0	-45,8	80,0
	150	-41,4	80,0	-45,7	47,8	-48,1	80,0	-48,3	79,3	-48,3	80,0	-48,3	80,0
	155	-43,5	80,0	-48,1	47,8	-50,5	80,0	-50,7	79,3	-50,7	80,0	-50,7	80,0
	160	-45,6	80,0	-50,6	47,8	-52,9	80,0	-53,2	79,3	-53,2	80,0	-53,2	80,0
	165	-47,7	80,0	-53,0	47,8	-55,4	80,0	-55,6	79,3	-55,6	80,0	-55,6	80,0
	170	-49,9	80,0	-55,5	47,8	-57,8	80,0	-58,1	79,3	-58,1	80,0	-58,1	80,0
	175	-52,0	80,0	-57,9	47,8	-60,3	80,0	-60,6	79,3	-60,6	80,0	-60,6	80,0
	180	-54,1	80,0	-60,4	47,8	-62,7	80,0	-63,0	79,3	-63,0	80,0	-63,0	80,0
	185	-56,2	80,0	-62,9	47,8	-65,2	80,0	-65,5	79,3	-65,5	80,0	-65,5	80,0
	190	-58,3	80,0	-65,3	47,8	-67,6	80,0	-67,9	79,3	-67,9	80,0	-67,9	80,0
	195	-60,4	80,0	-67,8	47,8	-70,1	80,0	-70,4	79,3	-70,4	80,0	-70,4	80,0
	200	-62,5	80,0	-70,2	47,8	-72,5	80,0	-72,9	79,3	-72,9	80,0	-72,9	80,0
	205	-64,7	80,0	-72,7	47,8	-74,9	80,0	-75,3	79,3	-75,3	80,0	-75,3	80,0
	210	-66,8	80,0	-75,2	47,8	-77,4	80,0	-77,8	79,3	-77,8	80,0	-77,8	80,0
	215	-68,9	80,0	-77,6	47,8	-79,8	80,0	-80,2	79,3	-80,2	80,0	-80,2	80,0
	220	-71,0	80,0	-80,1	47,8	-82,3	80,0	-82,7	79,3	-82,7	80,0	-82,7	80,0
	225	-73,1	80,0	-82,5	47,8	-84,7	80,0	-85,1	79,3	-85,1	80,0	-85,1	80,0
	230	-75,2	80,0	-85,0	47,8	-87,2	80,0	-87,6	79,3	-87,6	80,0	-87,6	80,0
	235	-77,4	80,0	-87,5	47,8	-89,6	80,0	-90,1	79,3	-90,1	80,0	-90,1	80,0
	240	-79,5	80,0	-89,9	47,8	-92,0	80,0	-92,5	79,3	-92,5	80,0	-92,5	80,0
	245	-81,6	80,0	-92,4	47,8	-94,5	80,0	-95,0	79,3	-95,0	80,0	-95,0	80,0
	250	-83,7	80,0	-94,8	47,8	-96,9	80,0	-97,4	79,3	-97,4	80,0	-97,4	80,0
	255	-85,8	80,0	-97,3	47,8	-99,4	80,0	-99,9	79,3	-99,9	80,0	-99,9	80,0
	260	-87,9	80,0	-99,7	47,8	-101,8	80,0	-102,4	79,3	-102,4	80,0	-102,4	80,0
	265	-90,0	80,0	-102,2	47,8	-104,3	80,0	-104,8	79,3	-104,8	80,0	-104,8	80,0
	270	-92,2	80,0	-104,7	47,8	-106,7	80,0	-107,3	79,3	-107,3	80,0	-107,3	80,0
275	-94,3	80,0	-107,1	47,8	-109,2	80,0	-109,7	79,3	-109,7	80,0	-109,7	80,0	
280	-96,4	80,0	-109,4	48,3	-111,6	80,0	-112,2	79,3	-112,2	80,0	-112,2	80,0	
285	-98,5	80,0	-111,5	49,2	-114,0	80,0	-114,6	79,3	-114,6	80,0	-114,6	80,0	
290	-100,6	80,0	-113,7	50,1	-116,5	80,0	-117,1	79,3	-117,1	80,0	-117,1	80,0	
295	-102,7	80,0	-115,8	50,9	-118,9	80,0	-119,6	79,3	-119,6	80,0	-119,6	80,0	
300	-104,8	80,0	-118,0	51,6	-121,4	80,0	-122,0	79,3	-122,0	80,0	-122,0	80,0	
c _{nom} = 30mm	310	-87,2	80,0	-87,2	80,0	-101,6	80,0	-101,6	80,0	-112,2	80,0	-112,2	80,0
	320	-90,5	80,0	-90,5	80,0	-105,5	80,0	-105,5	80,0	-116,4	80,0	-116,4	80,0
c _{nom} = 35mm	305	-85,6	80,0	-85,6	80,0	-99,7	80,0	-99,7	80,0	-110,0	80,0	-110,0	80,0
	315	-88,9	80,0	-88,9	80,0	-103,5	80,0	-103,5	80,0	-114,3	80,0	-114,3	80,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

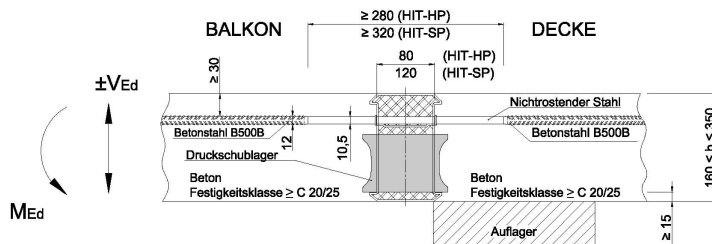


HIT-HP MVX-1105-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]			
		A _{s,req}	0,47	0,85	2,63	0,47	0,95	2,76	0,47	0,95	2,79		
		A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13		
A _{s,prov}	Ø8	Ø6/25	Ø8/19	Ø8	Ø6/25	Ø8/18	Ø8	Ø6/25	Ø8/18				
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)					
	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	[mm]												
	125	-30,8	80,0	-34,7	17,0	-35,8	80,0	-37,9	67,0	-37,4	80,0	-37,9	74,4
	130	-32,9	80,0	-37,4	17,0	-38,3	80,0	-40,6	67,0	-40,0	80,0	-40,6	74,4
	135	-35,1	80,0	-40,1	17,0	-40,7	80,0	-43,3	67,0	-42,6	80,0	-43,3	74,4
	140	-37,2	80,0	-42,9	17,0	-43,2	80,0	-46,0	67,0	-45,3	80,0	-46,0	74,4
	145	-39,3	80,0	-45,6	17,0	-45,6	80,0	-48,7	67,0	-47,9	80,0	-48,7	74,4
	150	-41,4	80,0	-48,3	17,0	-48,1	80,0	-51,4	67,0	-50,5	80,0	-51,4	74,4
	155	-43,5	80,0	-51,0	17,0	-50,5	80,0	-54,1	67,0	-53,2	80,0	-54,1	74,4
	160	-45,6	80,0	-53,7	17,0	-52,9	80,0	-56,8	67,0	-55,8	80,0	-56,8	74,4
	165	-47,7	80,0	-56,4	17,0	-55,4	80,0	-59,5	67,0	-58,4	80,0	-59,5	74,4
	170	-49,9	80,0	-59,1	17,0	-57,8	80,0	-62,2	67,0	-61,1	80,0	-62,2	74,4
	175	-52,0	80,0	-61,8	17,0	-60,3	80,0	-64,9	67,0	-63,7	80,0	-64,9	74,4
	180	-54,1	80,0	-64,5	17,0	-62,7	80,0	-67,6	67,0	-66,3	80,0	-67,6	74,4
	185	-56,2	80,0	-67,2	17,0	-65,2	80,0	-70,4	67,0	-69,0	80,0	-70,4	74,4
	190	-58,3	80,0	-69,9	17,0	-67,6	80,0	-73,1	67,0	-71,6	80,0	-73,1	74,4
	195	-60,4	80,0	-72,6	17,0	-70,1	80,0	-75,8	67,0	-74,2	80,0	-75,8	74,4
	200	-62,5	80,0	-75,3	17,0	-72,5	80,0	-78,5	67,0	-76,8	80,0	-78,5	74,4
	205	-64,7	80,0	-78,0	17,0	-74,9	80,0	-81,2	67,0	-79,5	80,0	-81,2	74,4
	210	-66,8	80,0	-80,7	17,0	-77,4	80,0	-83,9	67,0	-82,1	80,0	-83,9	74,4
	215	-68,9	80,0	-83,4	17,0	-79,8	80,0	-86,6	67,0	-84,7	80,0	-86,6	74,4
	220	-71,0	80,0	-86,1	17,0	-82,3	80,0	-89,3	67,0	-87,4	80,0	-89,3	74,4
	225	-73,1	80,0	-88,8	17,0	-84,7	80,0	-92,0	67,0	-90,0	80,0	-92,0	74,4
	230	-75,2	80,0	-91,5	17,0	-87,2	80,0	-94,7	67,0	-92,6	80,0	-94,7	74,4
	235	-77,4	80,0	-94,2	17,0	-89,6	80,0	-97,4	67,0	-95,3	80,0	-97,4	74,4
	240	-79,5	80,0	-96,9	17,0	-92,0	80,0	-100,1	67,0	-97,9	80,0	-100,1	74,4
	245	-81,6	80,0	-99,6	17,0	-94,5	80,0	-102,8	67,0	-100,5	80,0	-102,8	74,4
	250	-83,7	80,0	-102,4	17,0	-96,9	80,0	-105,5	67,0	-103,2	80,0	-105,5	74,4
	255	-85,8	80,0	-105,1	17,0	-99,4	80,0	-108,2	67,0	-105,8	80,0	-108,2	74,4
	260	-87,9	80,0	-107,8	17,0	-101,8	80,0	-110,9	67,0	-108,4	80,0	-110,9	74,4
	265	-90,0	80,0	-110,5	17,0	-104,3	80,0	-113,6	67,0	-111,1	80,0	-113,6	74,4
270	-92,2	80,0	-113,2	17,0	-106,7	80,0	-116,3	67,0	-113,7	80,0	-116,3	74,4	
275	-94,3	80,0	-115,9	17,0	-109,2	80,0	-119,0	67,0	-116,3	80,0	-119,0	74,4	
280	-96,4	80,0	-118,6	17,0	-111,6	80,0	-121,7	67,0	-119,0	80,0	-121,7	74,4	
285	-98,5	80,0	-121,3	17,0	-114,0	80,0	-124,4	67,0	-121,6	80,0	-124,4	74,4	
290	-100,6	80,0	-124,0	17,0	-116,5	80,0	-127,1	67,0	-124,2	80,0	-127,1	74,4	
295	-102,7	80,0	-126,5	17,0	-118,9	80,0	-129,9	67,0	-126,9	80,0	-129,9	74,4	
300	-104,8	80,0	-128,9	18,8	-121,4	80,0	-132,6	67,0	-129,5	80,0	-132,6	74,4	
c _{nom} = 30mm	310	-95,1	80,0	-95,1	80,0	-110,8	80,0	-110,8	80,0	-123,3	80,0	-123,3	80,0
	320	-98,7	80,0	-98,7	80,0	-115,0	80,0	-115,0	80,0	-128,1	80,0	-128,1	80,0
c _{nom} = 35mm	305	-93,3	80,0	-93,3	80,0	-108,7	80,0	-108,7	80,0	-121,0	80,0	-121,0	80,0
	315	-96,9	80,0	-96,9	80,0	-112,9	80,0	-112,9	80,0	-125,7	80,0	-125,7	80,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

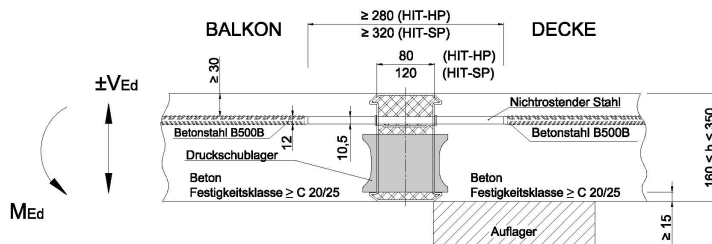


HIT-HP MVX-0406-hh-100-cc													
HIT-HP MVX-0203-hh-050-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]	
		A _{s,req}	0,14	0,63	2,84		0,14	0,67	2,88		0,14	0,67	2,88
		A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

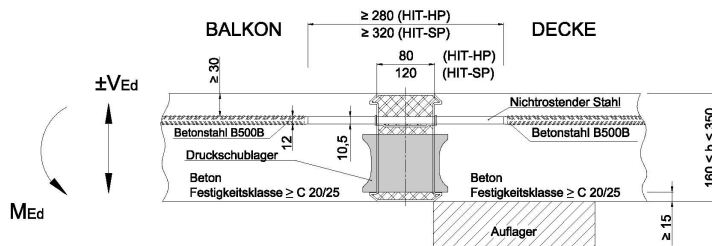


HIT-HP MVX-0506-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]	
		A _{s,req}	0,18	0,71	2,91		0,18	0,76	2,97		0,18	0,76	2,97
		A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13
A _{s,prov}	Ø8	Ø6/25	Ø8/17		Ø8	Ø6/25	Ø8/16,5		Ø8	Ø6/25	Ø8/16,5		
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
		[mm]	[kNm/m]	[kNm]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-21,9	96,0	-21,9	96,0	-22,4	96,0	-22,4	96,0	-22,4	96,0	-22,4	96,0
	130	-23,1	96,0	-23,1	96,0	-23,6	96,0	-23,6	96,0	-23,6	96,0	-23,6	96,0
	135	-24,3	96,0	-24,3	96,0	-24,9	96,0	-24,9	96,0	-24,9	96,0	-24,9	96,0
	140	-25,6	96,0	-25,6	96,0	-26,1	96,0	-26,1	96,0	-26,1	96,0	-26,1	96,0
	145	-26,8	96,0	-26,8	96,0	-27,3	96,0	-27,3	96,0	-27,3	96,0	-27,3	96,0
	150	-28,0	96,0	-28,0	96,0	-28,6	96,0	-28,6	96,0	-28,6	96,0	-28,6	96,0
	155	-29,2	96,0	-29,2	96,0	-29,8	96,0	-29,8	96,0	-29,8	96,0	-29,8	96,0
	160	-30,5	96,0	-30,5	96,0	-31,0	96,0	-31,0	96,0	-31,0	96,0	-31,0	96,0
	165	-31,7	96,0	-31,7	96,0	-32,2	96,0	-32,2	96,0	-32,2	96,0	-32,2	96,0
	170	-32,9	96,0	-32,9	96,0	-33,5	96,0	-33,5	96,0	-33,5	96,0	-33,5	96,0
	175	-34,2	96,0	-34,2	96,0	-34,7	96,0	-34,7	96,0	-34,7	96,0	-34,7	96,0
	180	-35,4	96,0	-35,4	96,0	-35,9	96,0	-35,9	96,0	-35,9	96,0	-35,9	96,0
	185	-36,6	96,0	-36,6	96,0	-37,2	96,0	-37,2	96,0	-37,2	96,0	-37,2	96,0
	190	-37,8	96,0	-37,8	96,0	-38,4	96,0	-38,4	96,0	-38,4	96,0	-38,4	96,0
	195	-39,1	96,0	-39,1	96,0	-39,6	96,0	-39,6	96,0	-39,6	96,0	-39,6	96,0
	200	-40,3	96,0	-40,3	96,0	-40,8	96,0	-40,8	96,0	-40,8	96,0	-40,8	96,0
	205	-41,5	96,0	-41,5	96,0	-42,1	96,0	-42,1	96,0	-42,1	96,0	-42,1	96,0
	210	-42,8	96,0	-42,8	96,0	-43,3	96,0	-43,3	96,0	-43,3	96,0	-43,3	96,0
	215	-44,0	96,0	-44,0	96,0	-44,5	96,0	-44,5	96,0	-44,5	96,0	-44,5	96,0
	220	-45,2	96,0	-45,2	96,0	-45,8	96,0	-45,8	96,0	-45,8	96,0	-45,8	96,0
	225	-46,5	96,0	-46,5	96,0	-47,0	96,0	-47,0	96,0	-47,0	96,0	-47,0	96,0
	230	-47,7	96,0	-47,7	96,0	-48,2	96,0	-48,2	96,0	-48,2	96,0	-48,2	96,0
	235	-48,9	96,0	-48,9	96,0	-49,5	96,0	-49,5	96,0	-49,5	96,0	-49,5	96,0
	240	-50,1	96,0	-50,1	96,0	-50,7	96,0	-50,7	96,0	-50,7	96,0	-50,7	96,0
	245	-51,4	96,0	-51,4	96,0	-51,9	96,0	-51,9	96,0	-51,9	96,0	-51,9	96,0
	250	-52,6	96,0	-52,6	96,0	-53,1	96,0	-53,1	96,0	-53,1	96,0	-53,1	96,0
	255	-53,8	96,0	-53,8	96,0	-54,4	96,0	-54,4	96,0	-54,4	96,0	-54,4	96,0
	260	-55,1	96,0	-55,1	96,0	-55,6	96,0	-55,6	96,0	-55,6	96,0	-55,6	96,0
	265	-56,3	96,0	-56,3	96,0	-56,8	96,0	-56,8	96,0	-56,8	96,0	-56,8	96,0
	270	-57,5	96,0	-57,5	96,0	-58,1	96,0	-58,1	96,0	-58,1	96,0	-58,1	96,0
275	-58,7	96,0	-58,7	96,0	-59,3	96,0	-59,3	96,0	-59,3	96,0	-59,3	96,0	
280	-60,0	96,0	-60,0	96,0	-60,5	96,0	-60,5	96,0	-60,5	96,0	-60,5	96,0	
285	-61,2	96,0	-61,2	96,0	-61,7	96,0	-61,7	96,0	-61,7	96,0	-61,7	96,0	
290	-62,4	96,0	-62,4	96,0	-63,0	96,0	-63,0	96,0	-63,0	96,0	-63,0	96,0	
295	-63,7	96,0	-63,7	96,0	-64,2	96,0	-64,2	96,0	-64,2	96,0	-64,2	96,0	
300	-64,9	96,0	-64,9	96,0	-65,4	96,0	-65,4	96,0	-65,4	96,0	-65,4	96,0	
c _{nom} = 30mm	310	-61,6	96,0	-61,6	96,0	-67,9	96,0	-67,9	96,0	-67,9	96,0	-67,9	96,0
	320	-63,8	96,0	-63,8	96,0	-70,4	96,0	-70,4	96,0	-70,4	96,0	-70,4	96,0
c _{nom} = 35mm	305	-60,5	96,0	-60,5	96,0	-66,7	96,0	-66,7	96,0	-66,7	96,0	-66,7	96,0
	315	-62,7	96,0	-62,7	96,0	-69,1	96,0	-69,1	96,0	-69,1	96,0	-69,1	96,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

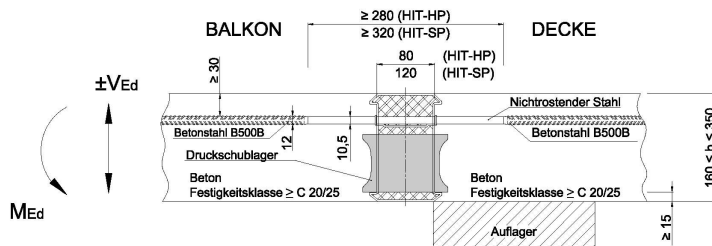


HIT-HP MVX-0606-hh-100-cc													
HIT-HP MVX-0303-hh-050-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,21	0,77	2,98		0,21	0,84	3,04		0,21	0,84	3,04
		A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13
A _{s,prov}	Ø8	Ø6/25	Ø8/16,5		Ø8	Ø6/25	Ø8/16,5		Ø8	Ø6/25	Ø8/16,5		
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
		[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeit im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-25,4	96,0	-25,4	96,0	-26,1	96,0	-26,1	96,0	-26,1	96,0	-26,1	96,0
	130	-26,8	96,0	-26,8	96,0	-27,6	96,0	-27,6	96,0	-27,6	96,0	-27,6	96,0
	135	-28,3	96,0	-28,3	96,0	-29,1	96,0	-29,1	96,0	-29,1	96,0	-29,1	96,0
	140	-29,8	96,0	-29,8	96,0	-30,6	96,0	-30,6	96,0	-30,6	96,0	-30,6	96,0
	145	-31,3	96,0	-31,3	96,0	-32,0	96,0	-32,0	96,0	-32,0	96,0	-32,0	96,0
	150	-32,7	96,0	-32,7	96,0	-33,5	96,0	-33,5	96,0	-33,5	96,0	-33,5	96,0
	155	-34,2	96,0	-34,2	96,0	-35,0	96,0	-35,0	96,0	-35,0	96,0	-35,0	96,0
	160	-35,7	96,0	-35,7	96,0	-36,5	96,0	-36,5	96,0	-36,5	96,0	-36,5	96,0
	165	-37,2	96,0	-37,2	96,0	-37,9	96,0	-37,9	96,0	-37,9	96,0	-37,9	96,0
	170	-38,6	96,0	-38,6	96,0	-39,4	96,0	-39,4	96,0	-39,4	96,0	-39,4	96,0
	175	-40,1	96,0	-40,1	96,0	-40,9	96,0	-40,9	96,0	-40,9	96,0	-40,9	96,0
	180	-41,6	96,0	-41,6	96,0	-42,4	96,0	-42,4	96,0	-42,4	96,0	-42,4	96,0
	185	-43,1	96,0	-43,1	96,0	-43,8	96,0	-43,8	96,0	-43,8	96,0	-43,8	96,0
	190	-44,5	96,0	-44,5	96,0	-45,3	96,0	-45,3	96,0	-45,3	96,0	-45,3	96,0
	195	-46,0	96,0	-46,0	96,0	-46,8	96,0	-46,8	96,0	-46,8	96,0	-46,8	96,0
	200	-47,5	96,0	-47,5	96,0	-48,3	96,0	-48,3	96,0	-48,3	96,0	-48,3	96,0
	205	-49,0	96,0	-49,0	96,0	-49,7	96,0	-49,7	96,0	-49,7	96,0	-49,7	96,0
	210	-50,4	96,0	-50,4	96,0	-51,2	96,0	-51,2	96,0	-51,2	96,0	-51,2	96,0
	215	-51,9	96,0	-51,9	96,0	-52,7	96,0	-52,7	96,0	-52,7	96,0	-52,7	96,0
	220	-53,4	96,0	-53,4	96,0	-54,2	96,0	-54,2	96,0	-54,2	96,0	-54,2	96,0
	225	-54,9	96,0	-54,9	96,0	-55,6	96,0	-55,6	96,0	-55,6	96,0	-55,6	96,0
	230	-56,3	96,0	-56,3	96,0	-57,1	96,0	-57,1	96,0	-57,1	96,0	-57,1	96,0
	235	-57,8	96,0	-57,8	96,0	-58,6	96,0	-58,6	96,0	-58,6	96,0	-58,6	96,0
	240	-59,3	96,0	-59,3	96,0	-60,1	96,0	-60,1	96,0	-60,1	96,0	-60,1	96,0
	245	-60,8	96,0	-60,8	96,0	-61,5	96,0	-61,5	96,0	-61,5	96,0	-61,5	96,0
	250	-62,2	96,0	-62,2	96,0	-63,0	96,0	-63,0	96,0	-63,0	96,0	-63,0	96,0
	255	-63,7	96,0	-63,7	96,0	-64,5	96,0	-64,5	96,0	-64,5	96,0	-64,5	96,0
	260	-65,2	96,0	-65,2	96,0	-66,0	96,0	-66,0	96,0	-66,0	96,0	-66,0	96,0
	265	-66,7	96,0	-66,7	96,0	-67,4	96,0	-67,4	96,0	-67,4	96,0	-67,4	96,0
	270	-68,1	96,0	-68,1	96,0	-68,9	96,0	-68,9	96,0	-68,9	96,0	-68,9	96,0
275	-69,6	96,0	-69,6	96,0	-70,4	96,0	-70,4	96,0	-70,4	96,0	-70,4	96,0	
280	-71,1	96,0	-71,1	96,0	-71,9	96,0	-71,9	96,0	-71,9	96,0	-71,9	96,0	
285	-72,6	96,0	-72,6	96,0	-73,3	96,0	-73,3	96,0	-73,3	96,0	-73,3	96,0	
290	-74,0	96,0	-74,0	96,0	-74,8	96,0	-74,8	96,0	-74,8	96,0	-74,8	96,0	
295	-75,5	96,0	-75,5	96,0	-76,3	96,0	-76,3	96,0	-76,3	96,0	-76,3	96,0	
300	-77,0	96,0	-77,0	96,0	-77,8	96,0	-77,8	96,0	-77,8	96,0	-77,8	96,0	
c _{nom} = 30mm	310	-73,2	96,0	-73,2	96,0	-80,7	96,0	-80,7	96,0	-80,7	96,0	-80,7	96,0
	320	-75,9	96,0	-75,9	96,0	-83,7	96,0	-83,7	96,0	-83,7	96,0	-83,7	96,0
c _{nom} = 35mm	305	-71,8	96,0	-71,8	96,0	-79,2	96,0	-79,2	96,0	-79,2	96,0	-79,2	96,0
	315	-74,5	96,0	-74,5	96,0	-82,2	96,0	-82,2	96,0	-82,2	96,0	-82,2	96,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

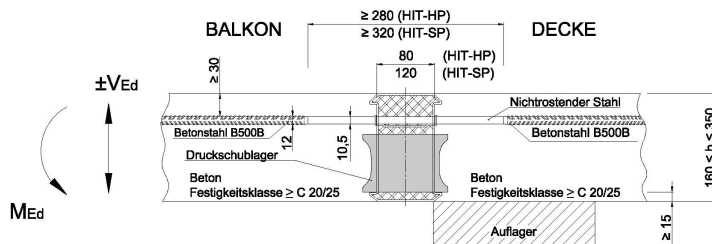


HIT-HP MVX-0706-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]	
		A _{s,req}	0,25	0,82	3,03		0,25	0,90	3,11		0,25	0,90	3,11
		A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13
A _{s,prov}	Ø8	Ø6/25	Ø8/16,5		Ø8	Ø6/25	Ø8/16		Ø8	Ø6/25	Ø8/16		
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
		[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-28,5	96,0	-28,5	96,0	-29,6	96,0	-29,6	96,0	-29,6	96,0	-29,6	96,0
	130	-30,3	96,0	-30,3	96,0	-31,3	96,0	-31,3	96,0	-31,3	96,0	-31,3	96,0
	135	-32,0	96,0	-32,0	96,0	-33,0	96,0	-33,0	96,0	-33,0	96,0	-33,0	96,0
	140	-33,7	96,0	-33,7	96,0	-34,8	96,0	-34,8	96,0	-34,8	96,0	-34,8	96,0
	145	-35,4	96,0	-35,4	96,0	-36,5	96,0	-36,5	96,0	-36,5	96,0	-36,5	96,0
	150	-37,1	96,0	-37,1	96,0	-38,2	96,0	-38,2	96,0	-38,2	96,0	-38,2	96,0
	155	-38,9	96,0	-38,9	96,0	-39,9	96,0	-39,9	96,0	-39,9	96,0	-39,9	96,0
	160	-40,6	96,0	-40,6	96,0	-41,7	96,0	-41,7	96,0	-41,7	96,0	-41,7	96,0
	165	-42,3	96,0	-42,3	96,0	-43,4	96,0	-43,4	96,0	-43,4	96,0	-43,4	96,0
	170	-44,0	96,0	-44,0	96,0	-45,1	96,0	-45,1	96,0	-45,1	96,0	-45,1	96,0
	175	-45,7	96,0	-45,7	96,0	-46,8	96,0	-46,8	96,0	-46,8	96,0	-46,8	96,0
	180	-47,5	96,0	-47,5	96,0	-48,5	96,0	-48,5	96,0	-48,5	96,0	-48,5	96,0
	185	-49,2	96,0	-49,2	96,0	-50,3	96,0	-50,3	96,0	-50,3	96,0	-50,3	96,0
	190	-50,9	96,0	-50,9	96,0	-52,0	96,0	-52,0	96,0	-52,0	96,0	-52,0	96,0
	195	-52,6	96,0	-52,6	96,0	-53,7	96,0	-53,7	96,0	-53,7	96,0	-53,7	96,0
	200	-54,4	96,0	-54,4	96,0	-55,4	96,0	-55,4	96,0	-55,4	96,0	-55,4	96,0
	205	-56,1	96,0	-56,1	96,0	-57,1	96,0	-57,1	96,0	-57,1	96,0	-57,1	96,0
	210	-57,8	96,0	-57,8	96,0	-58,9	96,0	-58,9	96,0	-58,9	96,0	-58,9	96,0
	215	-59,5	96,0	-59,5	96,0	-60,6	96,0	-60,6	96,0	-60,6	96,0	-60,6	96,0
	220	-61,2	96,0	-61,2	96,0	-62,3	96,0	-62,3	96,0	-62,3	96,0	-62,3	96,0
	225	-63,0	96,0	-63,0	96,0	-64,0	96,0	-64,0	96,0	-64,0	96,0	-64,0	96,0
	230	-64,7	96,0	-64,7	96,0	-65,7	96,0	-65,7	96,0	-65,7	96,0	-65,7	96,0
	235	-66,4	96,0	-66,4	96,0	-67,5	96,0	-67,5	96,0	-67,5	96,0	-67,5	96,0
	240	-68,1	96,0	-68,1	96,0	-69,2	96,0	-69,2	96,0	-69,2	96,0	-69,2	96,0
	245	-69,8	96,0	-69,8	96,0	-70,9	96,0	-70,9	96,0	-70,9	96,0	-70,9	96,0
	250	-71,6	96,0	-71,6	96,0	-72,6	96,0	-72,6	96,0	-72,6	96,0	-72,6	96,0
	255	-73,3	96,0	-73,3	96,0	-74,4	96,0	-74,4	96,0	-74,4	96,0	-74,4	96,0
	260	-75,0	96,0	-75,0	96,0	-76,1	96,0	-76,1	96,0	-76,1	96,0	-76,1	96,0
	265	-76,7	96,0	-76,7	96,0	-77,8	96,0	-77,8	96,0	-77,8	96,0	-77,8	96,0
	270	-78,4	96,0	-78,4	96,0	-79,5	96,0	-79,5	96,0	-79,5	96,0	-79,5	96,0
275	-80,2	96,0	-80,2	96,0	-81,2	96,0	-81,2	96,0	-81,2	96,0	-81,2	96,0	
280	-81,9	96,0	-81,9	96,0	-83,0	96,0	-83,0	96,0	-83,0	96,0	-83,0	96,0	
285	-83,6	96,0	-83,6	96,0	-84,7	96,0	-84,7	96,0	-84,7	96,0	-84,7	96,0	
290	-85,3	96,0	-85,3	96,0	-86,4	96,0	-86,4	96,0	-86,4	96,0	-86,4	96,0	
295	-87,1	96,0	-87,1	96,0	-88,1	96,0	-88,1	96,0	-88,1	96,0	-88,1	96,0	
300	-88,8	96,0	-88,8	96,0	-89,8	96,0	-89,8	96,0	-89,8	96,0	-89,8	96,0	
c _{nom} = 30mm	310	-85,4	96,0	-85,4	96,0	-93,3	96,0	-93,3	96,0	-93,3	96,0	-93,3	96,0
	320	-88,5	96,0	-88,5	96,0	-96,7	96,0	-96,7	96,0	-96,7	96,0	-96,7	96,0
c _{nom} = 35mm	305	-83,8	96,0	-83,8	96,0	-91,6	96,0	-91,6	96,0	-91,6	96,0	-91,6	96,0
	315	-87,0	96,0	-87,0	96,0	-95,0	96,0	-95,0	96,0	-95,0	96,0	-95,0	96,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

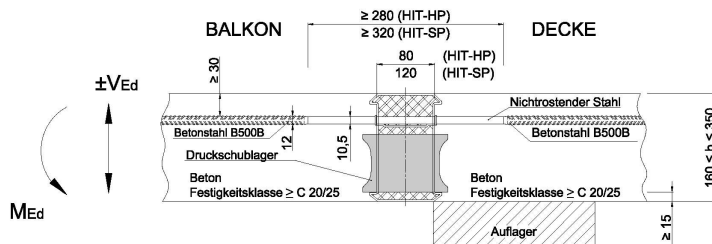


HIT-HP MVX-0806-hh-100-cc														
HIT-HP MVX-0403-hh-050-cc														
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37				
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		
		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]		
		A _{s,req}	0,28	0,87	3,08		0,28	0,95	3,16		0,28	0,95	3,16	
		A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13	
A _{s,prov}	Ø8	Ø6/25	Ø8/16		Ø8	Ø6/25	Ø8/15,5		Ø8	Ø6/25	Ø8/15,5			
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
		[mm]	[kNm/m]	[kNm]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
Tragfähigkeit im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-31,4	96,0	-31,4	96,0	-32,8	96,0	-32,8	96,0	-32,8	96,0	-32,8	96,0	
	130	-33,4	96,0	-33,4	96,0	-34,8	96,0	-34,8	96,0	-34,8	96,0	-34,8	96,0	
	135	-35,4	96,0	-35,4	96,0	-36,8	96,0	-36,8	96,0	-36,8	96,0	-36,8	96,0	
	140	-37,3	96,0	-37,3	96,0	-38,7	96,0	-38,7	96,0	-38,7	96,0	-38,7	96,0	
	145	-39,3	96,0	-39,3	96,0	-40,7	96,0	-40,7	96,0	-40,7	96,0	-40,7	96,0	
	150	-41,3	96,0	-41,3	96,0	-42,7	96,0	-42,7	96,0	-42,7	96,0	-42,7	96,0	
	155	-43,2	96,0	-43,2	96,0	-44,6	96,0	-44,6	96,0	-44,6	96,0	-44,6	96,0	
	160	-45,2	96,0	-45,2	96,0	-46,6	96,0	-46,6	96,0	-46,6	96,0	-46,6	96,0	
	165	-47,2	96,0	-47,2	96,0	-48,6	96,0	-48,6	96,0	-48,6	96,0	-48,6	96,0	
	170	-49,1	96,0	-49,1	96,0	-50,5	96,0	-50,5	96,0	-50,5	96,0	-50,5	96,0	
	175	-51,1	96,0	-51,1	96,0	-52,5	96,0	-52,5	96,0	-52,5	96,0	-52,5	96,0	
	180	-53,1	96,0	-53,1	96,0	-54,5	96,0	-54,5	96,0	-54,5	96,0	-54,5	96,0	
	185	-55,0	96,0	-55,0	96,0	-56,4	96,0	-56,4	96,0	-56,4	96,0	-56,4	96,0	
	190	-57,0	96,0	-57,0	96,0	-58,4	96,0	-58,4	96,0	-58,4	96,0	-58,4	96,0	
	195	-59,0	96,0	-59,0	96,0	-60,4	96,0	-60,4	96,0	-60,4	96,0	-60,4	96,0	
	200	-60,9	96,0	-60,9	96,0	-62,3	96,0	-62,3	96,0	-62,3	96,0	-62,3	96,0	
	205	-62,9	96,0	-62,9	96,0	-64,3	96,0	-64,3	96,0	-64,3	96,0	-64,3	96,0	
	210	-64,9	96,0	-64,9	96,0	-66,3	96,0	-66,3	96,0	-66,3	96,0	-66,3	96,0	
	215	-66,8	96,0	-66,8	96,0	-68,2	96,0	-68,2	96,0	-68,2	96,0	-68,2	96,0	
	220	-68,8	96,0	-68,8	96,0	-70,2	96,0	-70,2	96,0	-70,2	96,0	-70,2	96,0	
	225	-70,8	96,0	-70,8	96,0	-72,2	96,0	-72,2	96,0	-72,2	96,0	-72,2	96,0	
	230	-72,7	96,0	-72,7	96,0	-74,1	96,0	-74,1	96,0	-74,1	96,0	-74,1	96,0	
	235	-74,7	96,0	-74,7	96,0	-76,1	96,0	-76,1	96,0	-76,1	96,0	-76,1	96,0	
	240	-76,7	96,0	-76,7	96,0	-78,1	96,0	-78,1	96,0	-78,1	96,0	-78,1	96,0	
	245	-78,6	96,0	-78,6	96,0	-80,0	96,0	-80,0	96,0	-80,0	96,0	-80,0	96,0	
	250	-80,6	96,0	-80,6	96,0	-82,0	96,0	-82,0	96,0	-82,0	96,0	-82,0	96,0	
	255	-82,6	96,0	-82,6	96,0	-84,0	96,0	-84,0	96,0	-84,0	96,0	-84,0	96,0	
	260	-84,5	96,0	-84,5	96,0	-85,9	96,0	-85,9	96,0	-85,9	96,0	-85,9	96,0	
	265	-86,5	96,0	-86,5	96,0	-87,9	96,0	-87,9	96,0	-87,9	96,0	-87,9	96,0	
	270	-88,5	96,0	-88,5	96,0	-89,9	96,0	-89,9	96,0	-89,9	96,0	-89,9	96,0	
275	-90,4	96,0	-90,4	96,0	-91,8	96,0	-91,8	96,0	-91,8	96,0	-91,8	96,0		
280	-92,4	96,0	-92,4	96,0	-93,8	96,0	-93,8	96,0	-93,8	96,0	-93,8	96,0		
285	-94,4	96,0	-94,4	96,0	-95,8	96,0	-95,8	96,0	-95,8	96,0	-95,8	96,0		
290	-96,3	96,0	-96,3	96,0	-97,7	96,0	-97,7	96,0	-97,7	96,0	-97,7	96,0		
295	-98,3	96,0	-98,3	96,0	-99,7	96,0	-99,7	96,0	-99,7	96,0	-99,7	96,0		
300	-100,3	96,0	-100,3	96,0	-101,7	96,0	-101,7	96,0	-101,7	96,0	-101,7	96,0		
c _{nom} = 30mm	310	-96,6	96,0	-96,6	96,0	-105,6	96,0	-105,6	96,0	-105,6	96,0	-105,6	96,0	
	320	-100,2	96,0	-100,2	96,0	-109,5	96,0	-109,5	96,0	-109,5	96,0	-109,5	96,0	
c _{nom} = 35mm	305	-94,8	96,0	-94,8	96,0	-103,6	96,0	-103,6	96,0	-103,6	96,0	-103,6	96,0	
	315	-98,4	96,0	-98,4	96,0	-107,6	96,0	-107,6	96,0	-107,6	96,0	-107,6	96,0	

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

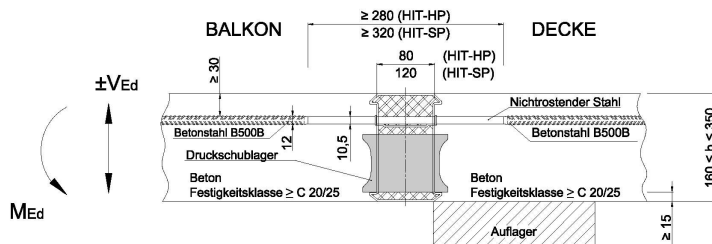


HIT-HP MVX-0906-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]	
		A _{s,req}	0,32	0,91	3,11		0,32	1,00	3,21		0,32	1,00	3,21
	A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13	
	A _{s,prov}	Ø8	Ø6/25	Ø8/16		Ø8	Ø6/25	Ø8/15,5		Ø8	Ø6/25	Ø8/15,5	
h-c _{nom}	h-c _{nom}	Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
	[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-34,0	96,0	-34,0	96,0	-35,8	96,0	-35,8	96,0	-35,8	96,0	-35,8	96,0
	130	-36,2	96,0	-36,2	96,0	-38,0	96,0	-38,0	96,0	-38,0	96,0	-38,0	96,0
	135	-38,5	96,0	-38,5	96,0	-40,2	96,0	-40,2	96,0	-40,2	96,0	-40,2	96,0
	140	-40,7	96,0	-40,7	96,0	-42,4	96,0	-42,4	96,0	-42,4	96,0	-42,4	96,0
	145	-42,9	96,0	-42,9	96,0	-44,6	96,0	-44,6	96,0	-44,6	96,0	-44,6	96,0
	150	-45,1	96,0	-45,1	96,0	-46,9	96,0	-46,9	96,0	-46,9	96,0	-46,9	96,0
	155	-47,3	96,0	-47,3	96,0	-49,1	96,0	-49,1	96,0	-49,1	96,0	-49,1	96,0
	160	-49,5	96,0	-49,5	96,0	-51,3	96,0	-51,3	96,0	-51,3	96,0	-51,3	96,0
	165	-51,7	96,0	-51,7	96,0	-53,5	96,0	-53,5	96,0	-53,5	96,0	-53,5	96,0
	170	-53,9	96,0	-53,9	96,0	-55,7	96,0	-55,7	96,0	-55,7	96,0	-55,7	96,0
	175	-56,2	96,0	-56,2	96,0	-57,9	96,0	-57,9	96,0	-57,9	96,0	-57,9	96,0
	180	-58,4	96,0	-58,4	96,0	-60,1	96,0	-60,1	96,0	-60,1	96,0	-60,1	96,0
	185	-60,6	96,0	-60,6	96,0	-62,3	96,0	-62,3	96,0	-62,3	96,0	-62,3	96,0
	190	-62,8	96,0	-62,8	96,0	-64,6	96,0	-64,6	96,0	-64,6	96,0	-64,6	96,0
	195	-65,0	96,0	-65,0	96,0	-66,8	96,0	-66,8	96,0	-66,8	96,0	-66,8	96,0
	200	-67,2	96,0	-67,2	96,0	-69,0	96,0	-69,0	96,0	-69,0	96,0	-69,0	96,0
	205	-69,4	96,0	-69,4	96,0	-71,2	96,0	-71,2	96,0	-71,2	96,0	-71,2	96,0
	210	-71,6	96,0	-71,6	96,0	-73,4	96,0	-73,4	96,0	-73,4	96,0	-73,4	96,0
	215	-73,9	96,0	-73,9	96,0	-75,6	96,0	-75,6	96,0	-75,6	96,0	-75,6	96,0
	220	-76,0	96,0	-76,0	96,0	-77,8	96,0	-77,8	96,0	-77,8	96,0	-77,8	96,0
	225	-78,0	96,0	-78,0	96,0	-80,0	96,0	-80,0	96,0	-80,0	96,0	-80,0	96,0
	230	-79,9	96,0	-79,9	96,0	-82,3	96,0	-82,3	96,0	-82,3	96,0	-82,3	96,0
	235	-81,8	96,0	-81,8	96,0	-84,5	96,0	-84,5	96,0	-84,5	96,0	-84,5	96,0
	240	-83,7	96,0	-83,7	96,0	-86,7	96,0	-86,7	96,0	-86,7	96,0	-86,7	96,0
	245	-85,7	96,0	-85,7	96,0	-88,9	96,0	-88,9	96,0	-88,9	96,0	-88,9	96,0
	250	-87,6	96,0	-87,6	96,0	-91,1	96,0	-91,1	96,0	-91,1	96,0	-91,1	96,0
	255	-89,5	96,0	-89,5	96,0	-93,3	96,0	-93,3	96,0	-93,3	96,0	-93,3	96,0
	260	-91,5	96,0	-91,5	96,0	-95,5	96,0	-95,5	96,0	-95,5	96,0	-95,5	96,0
	265	-93,4	96,0	-93,4	96,0	-97,7	96,0	-97,7	96,0	-97,7	96,0	-97,7	96,0
	270	-95,3	96,0	-95,3	96,0	-100,0	96,0	-100,0	96,0	-100,0	96,0	-100,0	96,0
275	-97,3	96,0	-97,3	96,0	-102,2	96,0	-102,2	96,0	-102,2	96,0	-102,2	96,0	
280	-99,2	96,0	-99,2	96,0	-104,4	96,0	-104,4	96,0	-104,4	96,0	-104,4	96,0	
285	-101,1	96,0	-101,1	96,0	-106,6	96,0	-106,6	96,0	-106,6	96,0	-106,6	96,0	
290	-103,0	96,0	-103,0	96,0	-108,8	96,0	-108,8	96,0	-108,8	96,0	-108,8	96,0	
295	-105,0	96,0	-105,0	96,0	-111,0	96,0	-111,0	96,0	-111,0	96,0	-111,0	96,0	
300	-106,9	96,0	-106,9	96,0	-113,2	96,0	-113,2	96,0	-113,2	96,0	-113,2	96,0	
c _{nom} = 30mm	310	-78,1	96,0	-78,1	96,0	-92,4	96,0	-92,4	96,0	-102,4	96,0	-102,4	96,0
	320	-80,9	96,0	-80,9	96,0	-95,8	96,0	-95,8	96,0	-106,2	96,0	-106,2	96,0
c _{nom} = 35mm	305	-76,6	96,0	-76,6	96,0	-90,7	96,0	-90,7	96,0	-100,5	96,0	-100,5	96,0
	315	-79,5	96,0	-79,5	96,0	-94,1	96,0	-94,1	96,0	-104,3	96,0	-104,3	96,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

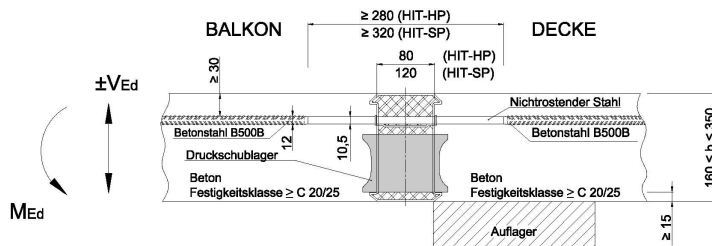


HIT-HP MVX-1006-hh-100-cc													
HIT-HP MVX-0503-hh-050-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,35	0,94	3,15		0,35	1,04	3,25		0,35	1,04	3,25
		A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13
A _{s,prov}	Ø8	Ø6/25	Ø8/15,5		Ø8	Ø6/25	Ø8/15		Ø8	Ø6/25	Ø8/15		
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
		[mm]	[kNm/m]	[kNm]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-36,3	96,0	-36,3	96,0	-38,5	96,0	-38,5	96,0	-38,5	96,0	-38,5	96,0
	130	-38,8	96,0	-38,8	96,0	-41,0	96,0	-41,0	96,0	-41,0	96,0	-41,0	96,0
	135	-41,2	96,0	-41,2	96,0	-43,4	96,0	-43,4	96,0	-43,4	96,0	-43,4	96,0
	140	-43,7	96,0	-43,7	96,0	-45,9	96,0	-45,9	96,0	-45,9	96,0	-45,9	96,0
	145	-46,2	96,0	-46,2	96,0	-48,3	96,0	-48,3	96,0	-48,3	96,0	-48,3	96,0
	150	-48,6	96,0	-48,6	96,0	-50,8	96,0	-50,8	96,0	-50,8	96,0	-50,8	96,0
	155	-51,1	96,0	-51,1	96,0	-53,3	96,0	-53,3	96,0	-53,3	96,0	-53,3	96,0
	160	-53,5	96,0	-53,5	96,0	-55,7	96,0	-55,7	96,0	-55,7	96,0	-55,7	96,0
	165	-56,0	96,0	-56,0	96,0	-58,2	96,0	-58,2	96,0	-58,2	96,0	-58,2	96,0
	170	-58,5	96,0	-58,5	96,0	-60,6	96,0	-60,6	96,0	-60,6	96,0	-60,6	96,0
	175	-60,9	96,0	-60,9	96,0	-63,1	96,0	-63,1	96,0	-63,1	96,0	-63,1	96,0
	180	-63,4	96,0	-63,4	96,0	-65,5	96,0	-65,5	96,0	-65,5	96,0	-65,5	96,0
	185	-65,8	96,0	-65,8	96,0	-68,0	96,0	-68,0	96,0	-68,0	96,0	-68,0	96,0
	190	-68,3	96,0	-68,3	96,0	-70,5	96,0	-70,5	96,0	-70,5	96,0	-70,5	96,0
	195	-70,7	96,0	-70,7	96,0	-72,9	96,0	-72,9	96,0	-72,9	96,0	-72,9	96,0
	200	-73,2	96,0	-73,2	96,0	-75,4	96,0	-75,4	96,0	-75,4	96,0	-75,4	96,0
	205	-75,7	96,0	-75,7	96,0	-77,8	96,0	-77,8	96,0	-77,8	96,0	-77,8	96,0
	210	-78,1	96,0	-78,1	96,0	-80,3	96,0	-80,3	96,0	-80,3	96,0	-80,3	96,0
	215	-80,6	96,0	-80,6	96,0	-82,8	96,0	-82,8	96,0	-82,8	96,0	-82,8	96,0
	220	-83,0	96,0	-83,0	96,0	-85,2	96,0	-85,2	96,0	-85,2	96,0	-85,2	96,0
	225	-85,5	96,0	-85,5	96,0	-87,7	96,0	-87,7	96,0	-87,7	96,0	-87,7	96,0
	230	-88,0	96,0	-88,0	96,0	-90,1	96,0	-90,1	96,0	-90,1	96,0	-90,1	96,0
	235	-90,1	96,0	-90,1	96,0	-92,6	96,0	-92,6	96,0	-92,6	96,0	-92,6	96,0
	240	-92,2	96,0	-92,2	96,0	-95,0	96,0	-95,0	96,0	-95,0	96,0	-95,0	96,0
	245	-94,4	96,0	-94,4	96,0	-97,5	96,0	-97,5	96,0	-97,5	96,0	-97,5	96,0
	250	-96,5	96,0	-96,5	96,0	-100,0	96,0	-100,0	96,0	-100,0	96,0	-100,0	96,0
	255	-98,7	96,0	-98,7	96,0	-102,4	96,0	-102,4	96,0	-102,4	96,0	-102,4	96,0
	260	-100,8	96,0	-100,8	96,0	-104,9	96,0	-104,9	96,0	-104,9	96,0	-104,9	96,0
	265	-103,0	96,0	-103,0	96,0	-107,3	96,0	-107,3	96,0	-107,3	96,0	-107,3	96,0
	270	-105,1	96,0	-105,1	96,0	-109,8	96,0	-109,8	96,0	-109,8	96,0	-109,8	96,0
275	-107,2	96,0	-107,2	96,0	-112,3	96,0	-112,3	96,0	-112,3	96,0	-112,3	96,0	
280	-109,4	96,0	-109,4	96,0	-114,7	96,0	-114,7	96,0	-114,7	96,0	-114,7	96,0	
285	-111,5	96,0	-111,5	96,0	-117,2	96,0	-117,2	96,0	-117,2	96,0	-117,2	96,0	
290	-113,7	96,0	-113,7	96,0	-119,6	96,0	-119,6	96,0	-119,6	96,0	-119,6	96,0	
295	-115,8	96,0	-115,8	96,0	-122,1	96,0	-122,1	96,0	-122,1	96,0	-122,1	96,0	
300	-118,0	96,0	-118,0	96,0	-124,6	96,0	-124,6	96,0	-124,6	96,0	-124,6	96,0	
c _{nom} = 30mm	310	-87,3	96,0	-87,3	96,0	-101,9	96,0	-101,9	96,0	-112,9	96,0	-112,9	96,0
	320	-90,6	96,0	-90,6	96,0	-105,7	96,0	-105,7	96,0	-117,1	96,0	-117,1	96,0
c _{nom} = 35mm	305	-85,7	96,0	-85,7	96,0	-100,0	96,0	-100,0	96,0	-110,8	96,0	-110,8	96,0
	315	-89,0	96,0	-89,0	96,0	-103,8	96,0	-103,8	96,0	-115,0	96,0	-115,0	96,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

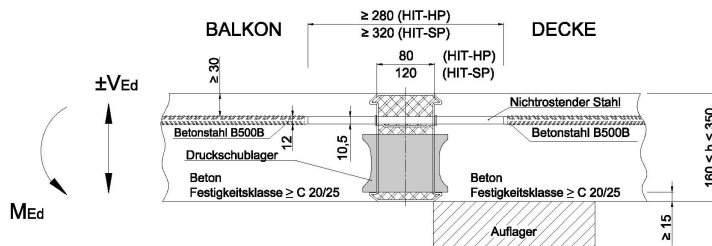


HIT-HP MVX-1106-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]	
		A _{s,req}	0,39	0,97	3,16		0,39	1,08	3,29		0,39	1,08	3,29
		A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13
A _{s,prov}	Ø8	Ø6/25	Ø8/15,5		Ø8	Ø6/25	Ø8/15		Ø8	Ø6/25	Ø8/15		
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
		[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-37,0	96,0	-38,3	82,2	-41,0	96,0	-41,0	96,0	-41,0	96,0	-41,0	96,0
	130	-39,5	96,0	-41,0	82,2	-43,7	96,0	-43,7	96,0	-43,7	96,0	-43,7	96,0
	135	-42,1	96,0	-43,7	82,2	-46,4	96,0	-46,4	96,0	-46,4	96,0	-46,4	96,0
	140	-44,6	96,0	-46,4	82,2	-49,1	96,0	-49,1	96,0	-49,1	96,0	-49,1	96,0
	145	-47,1	96,0	-49,1	82,2	-51,8	96,0	-51,8	96,0	-51,8	96,0	-51,8	96,0
	150	-49,7	96,0	-51,8	82,2	-54,5	96,0	-54,5	96,0	-54,5	96,0	-54,5	96,0
	155	-52,2	96,0	-54,6	82,2	-57,2	96,0	-57,2	96,0	-57,2	96,0	-57,2	96,0
	160	-54,8	96,0	-57,3	82,2	-59,9	96,0	-59,9	96,0	-59,9	96,0	-59,9	96,0
	165	-57,3	96,0	-60,0	82,2	-62,6	96,0	-62,6	96,0	-62,6	96,0	-62,6	96,0
	170	-59,8	96,0	-62,7	82,2	-65,3	96,0	-65,3	96,0	-65,3	96,0	-65,3	96,0
	175	-62,4	96,0	-65,4	82,2	-68,0	96,0	-68,0	96,0	-68,0	96,0	-68,0	96,0
	180	-64,9	96,0	-68,1	82,2	-70,7	96,0	-70,7	96,0	-70,7	96,0	-70,7	96,0
	185	-67,4	96,0	-70,8	82,2	-73,4	96,0	-73,4	96,0	-73,4	96,0	-73,4	96,0
	190	-70,0	96,0	-73,5	82,2	-76,1	96,0	-76,1	96,0	-76,1	96,0	-76,1	96,0
	195	-72,5	96,0	-76,2	82,2	-78,8	96,0	-78,8	96,0	-78,8	96,0	-78,8	96,0
	200	-75,1	96,0	-78,9	82,2	-81,5	96,0	-81,5	96,0	-81,5	96,0	-81,5	96,0
	205	-77,6	96,0	-81,6	82,2	-84,2	96,0	-84,2	96,0	-84,2	96,0	-84,2	96,0
	210	-80,1	96,0	-84,3	82,2	-86,9	96,0	-86,9	96,0	-86,9	96,0	-86,9	96,0
	215	-82,7	96,0	-87,0	82,2	-89,6	96,0	-89,6	96,0	-89,6	96,0	-89,6	96,0
	220	-85,2	96,0	-89,7	82,2	-92,3	96,0	-92,3	96,0	-92,3	96,0	-92,3	96,0
	225	-87,7	96,0	-92,4	82,2	-95,0	96,0	-95,0	96,0	-95,0	96,0	-95,0	96,0
	230	-90,3	96,0	-95,1	82,2	-97,8	96,0	-97,8	96,0	-97,8	96,0	-97,8	96,0
	235	-92,8	96,0	-97,8	82,2	-100,5	96,0	-100,5	96,0	-100,5	96,0	-100,5	96,0
	240	-95,4	96,0	-100,5	82,2	-103,2	96,0	-103,2	96,0	-103,2	96,0	-103,2	96,0
	245	-97,9	96,0	-102,9	83,1	-105,9	96,0	-105,9	96,0	-105,9	96,0	-105,9	96,0
	250	-100,4	96,0	-105,3	84,0	-108,6	96,0	-108,6	96,0	-108,6	96,0	-108,6	96,0
	255	-103,0	96,0	-107,6	84,8	-111,3	96,0	-111,3	96,0	-111,3	96,0	-111,3	96,0
	260	-105,5	96,0	-110,0	85,6	-114,0	96,0	-114,0	96,0	-114,0	96,0	-114,0	96,0
	265	-108,0	96,0	-112,4	86,4	-116,7	96,0	-116,7	96,0	-116,7	96,0	-116,7	96,0
	270	-110,6	96,0	-114,7	87,0	-119,4	96,0	-119,4	96,0	-119,4	96,0	-119,4	96,0
	275	-113,1	96,0	-117,1	87,7	-122,1	96,0	-122,1	96,0	-122,1	96,0	-122,1	96,0
	280	-115,7	96,0	-119,4	88,3	-124,8	96,0	-124,8	96,0	-124,8	96,0	-124,8	96,0
	285	-118,2	96,0	-121,8	88,9	-127,5	96,0	-127,5	96,0	-127,5	96,0	-127,5	96,0
	290	-120,7	96,0	-124,2	89,4	-130,2	96,0	-130,2	96,0	-130,2	96,0	-130,2	96,0
	295	-123,3	96,0	-126,5	89,9	-132,9	96,0	-132,9	96,0	-132,9	96,0	-132,9	96,0
	300	-125,8	96,0	-128,9	90,4	-135,6	96,0	-135,6	96,0	-135,6	96,0	-135,6	96,0
c _{nom} = 30mm	310	-95,4	96,0	-95,4	96,0	-111,3	96,0	-111,3	96,0	-124,4	96,0	-124,4	96,0
	320	-98,9	96,0	-98,9	96,0	-115,5	96,0	-115,5	96,0	-129,1	96,0	-129,1	96,0
c _{nom} = 35mm	305	-93,6	96,0	-93,6	96,0	-109,2	96,0	-109,2	96,0	-122,1	96,0	-122,1	96,0
	315	-97,1	96,0	-97,1	96,0	-113,4	96,0	-113,4	96,0	-126,8	96,0	-126,8	96,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

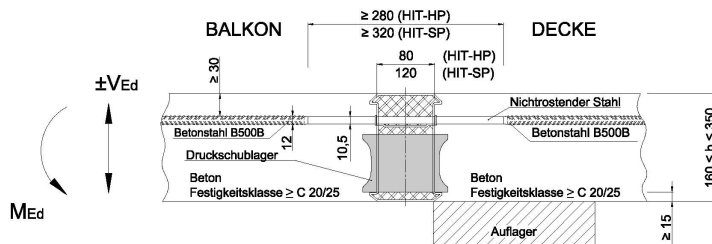


HIT-HP MVX-1206-hh-100-cc													
HIT-HP MVX-0603-hh-050-cc													
Spaltzug- und Aufhängeweibung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]	
		A _{s,req}	0,42	0,99	3,16		0,42	1,11	3,32		0,42	1,11	3,32
	A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13	
A _{s,prov}	Ø8	Ø6/25	Ø8/15,5		Ø8	Ø6/25	Ø8/15		Ø8	Ø6/25	Ø8/15		
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	h-c _{nom}	Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
	[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
	125	-37,0	96,0	-40,0	57,3	-43,0	96,0	-43,2	95,1	-43,2	96,0	-43,2	96,0
	130	-39,5	96,0	-43,0	57,3	-45,9	96,0	-46,1	95,1	-46,1	96,0	-46,1	96,0
	135	-42,1	96,0	-45,9	57,3	-48,9	96,0	-49,1	95,1	-49,1	96,0	-49,1	96,0
	140	-44,6	96,0	-48,9	57,3	-51,8	96,0	-52,0	95,1	-52,0	96,0	-52,0	96,0
	145	-47,1	96,0	-51,8	57,3	-54,7	96,0	-55,0	95,1	-55,0	96,0	-55,0	96,0
	150	-49,7	96,0	-54,8	57,3	-57,7	96,0	-57,9	95,1	-57,9	96,0	-57,9	96,0
	155	-52,2	96,0	-57,7	57,3	-60,6	96,0	-60,9	95,1	-60,9	96,0	-60,9	96,0
	160	-54,8	96,0	-60,7	57,3	-63,5	96,0	-63,8	95,1	-63,8	96,0	-63,8	96,0
	165	-57,3	96,0	-63,6	57,3	-66,5	96,0	-66,8	95,1	-66,8	96,0	-66,8	96,0
	170	-59,8	96,0	-66,6	57,3	-69,4	96,0	-69,7	95,1	-69,7	96,0	-69,7	96,0
	175	-62,4	96,0	-69,5	57,3	-72,3	96,0	-72,7	95,1	-72,7	96,0	-72,7	96,0
	180	-64,9	96,0	-72,5	57,3	-75,3	96,0	-75,6	95,1	-75,6	96,0	-75,6	96,0
	185	-67,4	96,0	-75,4	57,3	-78,2	96,0	-78,6	95,1	-78,6	96,0	-78,6	96,0
	190	-70,0	96,0	-78,4	57,3	-81,1	96,0	-81,5	95,1	-81,5	96,0	-81,5	96,0
	195	-72,5	96,0	-81,3	57,3	-84,1	96,0	-84,5	95,1	-84,5	96,0	-84,5	96,0
	200	-75,1	96,0	-84,3	57,3	-87,0	96,0	-87,4	95,1	-87,4	96,0	-87,4	96,0
	205	-77,6	96,0	-87,2	57,3	-89,9	96,0	-90,4	95,1	-90,4	96,0	-90,4	96,0
	210	-80,1	96,0	-90,2	57,3	-92,9	96,0	-93,3	95,1	-93,3	96,0	-93,3	96,0
	215	-82,7	96,0	-93,1	57,3	-95,8	96,0	-96,3	95,1	-96,3	96,0	-96,3	96,0
	220	-85,2	96,0	-96,1	57,3	-98,7	96,0	-99,2	95,1	-99,2	96,0	-99,2	96,0
	225	-87,7	96,0	-99,0	57,3	-101,7	96,0	-102,2	95,1	-102,2	96,0	-102,2	96,0
	230	-90,3	96,0	-102,0	57,3	-104,6	96,0	-105,1	95,1	-105,1	96,0	-105,1	96,0
	235	-92,8	96,0	-104,9	57,3	-107,5	96,0	-108,1	95,1	-108,1	96,0	-108,1	96,0
	240	-95,4	96,0	-107,9	57,3	-110,5	96,0	-111,0	95,1	-111,0	96,0	-111,0	96,0
	245	-97,9	96,0	-110,8	57,3	-113,4	96,0	-114,0	95,1	-114,0	96,0	-114,0	96,0
	250	-100,4	96,0	-113,8	57,3	-116,3	96,0	-116,9	95,1	-116,9	96,0	-116,9	96,0
	255	-103,0	96,0	-116,5	58,3	-119,3	96,0	-119,9	95,1	-119,9	96,0	-119,9	96,0
	260	-105,5	96,0	-119,0	59,5	-122,2	96,0	-122,8	95,1	-122,8	96,0	-122,8	96,0
	265	-108,0	96,0	-121,6	60,7	-125,1	96,0	-125,8	95,1	-125,8	96,0	-125,8	96,0
270	-110,6	96,0	-124,2	61,7	-128,1	96,0	-128,7	95,1	-128,7	96,0	-128,7	96,0	
275	-113,1	96,0	-126,8	62,7	-131,0	96,0	-131,7	95,1	-131,7	96,0	-131,7	96,0	
280	-115,7	96,0	-129,3	63,7	-133,9	96,0	-134,6	95,1	-134,6	96,0	-134,6	96,0	
285	-118,2	96,0	-131,9	64,5	-136,9	96,0	-137,6	95,1	-137,6	96,0	-137,6	96,0	
290	-120,7	96,0	-134,5	65,4	-139,8	96,0	-140,5	95,1	-140,5	96,0	-140,5	96,0	
295	-123,3	96,0	-137,0	66,2	-142,7	96,0	-143,5	95,1	-143,5	96,0	-143,5	96,0	
300	-125,8	96,0	-139,6	66,9	-145,6	96,0	-146,4	95,1	-146,4	96,0	-146,4	96,0	
c _{nom} = 30mm	310	-103,3	96,0	-103,3	96,0	-120,5	96,0	-120,5	96,0	-134,6	96,0	-134,6	96,0
320	-107,2	96,0	-107,2	96,0	-125,1	96,0	-125,1	96,0	-139,7	96,0	-139,7	96,0	
c _{nom} = 35mm	305	-101,3	96,0	-101,3	96,0	-118,2	96,0	-118,2	96,0	-132,0	96,0	-132,0	96,0
315	-105,2	96,0	-105,2	96,0	-122,8	96,0	-122,8	96,0	-137,2	96,0	-137,2	96,0	

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

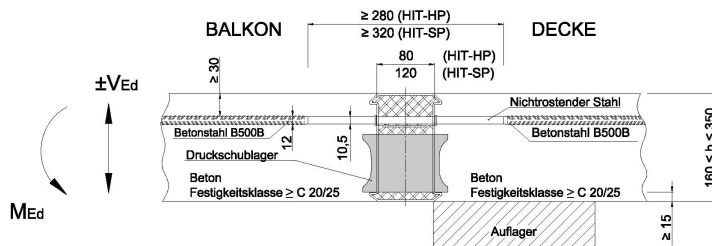


HIT-HP MVX-1306-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]			
		A _{s,req}	0,46	1,02	3,16	0,46	1,14	3,32	0,46	1,14	3,34		
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13			
A _{s,prov}	Ø8	Ø6/25	Ø8/15,5	Ø8	Ø6/24,5	Ø8/15	Ø8	Ø6/24,5	Ø8/15				
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	h-c _{nom}	Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
	[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
	125	-37,0	96,0	-41,4	27,1	-43,0	96,0	-45,1	82,8	-44,8	96,0	-45,1	93,9
	130	-39,5	96,0	-44,6	27,1	-45,9	96,0	-48,3	82,8	-48,0	96,0	-48,3	93,9
	135	-42,1	96,0	-47,8	27,1	-48,9	96,0	-51,5	82,8	-51,2	96,0	-51,5	93,9
	140	-44,6	96,0	-51,0	27,1	-51,8	96,0	-54,7	82,8	-54,3	96,0	-54,7	93,9
	145	-47,1	96,0	-54,2	27,1	-54,7	96,0	-57,9	82,8	-57,5	96,0	-57,9	93,9
	150	-49,7	96,0	-57,4	27,1	-57,7	96,0	-61,1	82,8	-60,6	96,0	-61,1	93,9
	155	-52,2	96,0	-60,6	27,1	-60,6	96,0	-64,3	82,8	-63,8	96,0	-64,3	93,9
	160	-54,8	96,0	-63,8	27,1	-63,5	96,0	-67,5	82,8	-66,9	96,0	-67,5	93,9
	165	-57,3	96,0	-67,0	27,1	-66,5	96,0	-70,7	82,8	-70,1	96,0	-70,7	93,9
	170	-59,8	96,0	-70,2	27,1	-69,4	96,0	-73,9	82,8	-73,3	96,0	-73,9	93,9
	175	-62,4	96,0	-73,4	27,1	-72,3	96,0	-77,1	82,8	-76,4	96,0	-77,1	93,9
	180	-64,9	96,0	-76,6	27,1	-75,3	96,0	-80,3	82,8	-79,6	96,0	-80,3	93,9
	185	-67,4	96,0	-79,8	27,1	-78,2	96,0	-83,5	82,8	-82,7	96,0	-83,5	93,9
	190	-70,0	96,0	-83,0	27,1	-81,1	96,0	-86,7	82,8	-85,9	96,0	-86,7	93,9
	195	-72,5	96,0	-86,2	27,1	-84,1	96,0	-89,9	82,8	-89,1	96,0	-89,9	93,9
	200	-75,1	96,0	-89,4	27,1	-87,0	96,0	-93,1	82,8	-92,2	96,0	-93,1	93,9
	205	-77,6	96,0	-92,6	27,1	-89,9	96,0	-96,3	82,8	-95,4	96,0	-96,3	93,9
	210	-80,1	96,0	-95,8	27,1	-92,9	96,0	-99,5	82,8	-98,5	96,0	-99,5	93,9
	215	-82,7	96,0	-99,0	27,1	-95,8	96,0	-102,7	82,8	-101,7	96,0	-102,7	93,9
	220	-85,2	96,0	-102,2	27,1	-98,7	96,0	-105,8	82,8	-104,9	96,0	-105,8	93,9
	225	-87,7	96,0	-105,4	27,1	-101,7	96,0	-109,0	82,8	-108,0	96,0	-109,0	93,9
	230	-90,3	96,0	-108,6	27,1	-104,6	96,0	-112,2	82,8	-111,2	96,0	-112,2	93,9
	235	-92,8	96,0	-111,8	27,1	-107,5	96,0	-115,4	82,8	-114,3	96,0	-115,4	93,9
	240	-95,4	96,0	-115,0	27,1	-110,5	96,0	-118,6	82,8	-117,5	96,0	-118,6	93,9
	245	-97,9	96,0	-118,2	27,1	-113,4	96,0	-121,8	82,8	-120,6	96,0	-121,8	93,9
	250	-100,4	96,0	-121,3	27,1	-116,3	96,0	-125,0	82,8	-123,8	96,0	-125,0	93,9
	255	-103,0	96,0	-124,5	27,1	-119,3	96,0	-128,2	82,8	-127,0	96,0	-128,2	93,9
	260	-105,5	96,0	-127,7	27,1	-122,2	96,0	-131,4	82,8	-130,1	96,0	-131,4	93,9
265	-108,0	96,0	-130,7	28,1	-125,1	96,0	-134,6	82,8	-133,3	96,0	-134,6	93,9	
270	-110,6	96,0	-133,5	29,7	-128,1	96,0	-137,8	82,8	-136,4	96,0	-137,8	93,9	
275	-113,1	96,0	-136,3	31,1	-131,0	96,0	-141,0	82,8	-139,6	96,0	-141,0	93,9	
280	-115,7	96,0	-139,0	32,5	-133,9	96,0	-144,2	82,8	-142,8	96,0	-144,2	93,9	
285	-118,2	96,0	-141,8	33,8	-136,9	96,0	-147,4	82,8	-145,9	96,0	-147,4	93,9	
290	-120,7	96,0	-144,6	35,0	-139,8	96,0	-150,6	82,8	-149,1	96,0	-150,6	93,9	
295	-123,3	96,0	-147,4	36,1	-142,7	96,0	-153,8	82,8	-152,2	96,0	-153,8	93,9	
300	-125,8	96,0	-150,2	37,2	-145,6	96,0	-157,0	82,8	-155,4	96,0	-157,0	93,9	
c _{nom} = 30mm	310	-111,0	96,0	-111,0	96,0	-129,6	96,0	-129,6	96,0	-146,0	96,0	-146,0	96,0
320	-115,2	96,0	-115,2	96,0	-134,5	96,0	-134,5	96,0	-151,7	96,0	-151,7	96,0	
c _{nom} = 35mm	305	-108,9	96,0	-108,9	96,0	-127,1	96,0	-127,1	96,0	-143,2	96,0	-143,2	96,0
315	-113,1	96,0	-113,1	96,0	-132,0	96,0	-132,0	96,0	-148,8	96,0	-148,8	96,0	

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

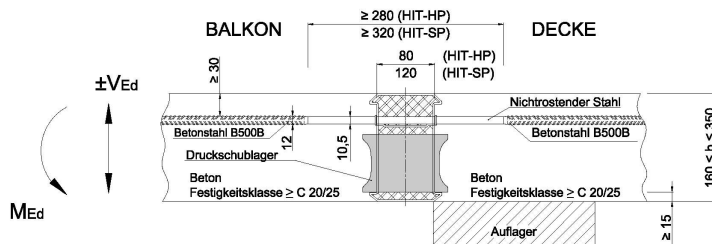


¹⁾ "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

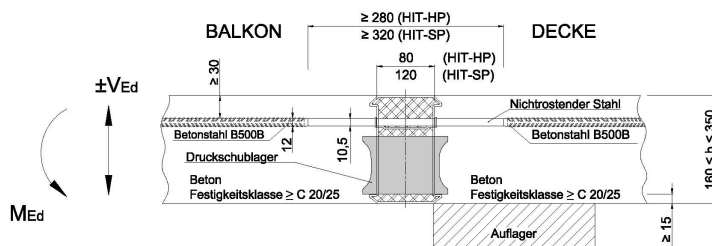


HIT-HP MVX-0507-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]			
		A _{s,req}	0,15	0,76	3,34	0,15	0,82	3,39	0,15	0,82		3,39	
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13			
A _{s,prov}	Ø8	Ø6/25	Ø8/15	Ø8	Ø6/25	Ø8/14,5	Ø8	Ø6/25	Ø8/14,5				
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)					
	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
	[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm]	
Tragfähigkeit im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-22,4	112,0	-22,4	112,0	-22,9	112,0	-22,9	112,0	-22,9	112,0	-22,9	112,0
	130	-23,6	112,0	-23,6	112,0	-24,1	112,0	-24,1	112,0	-24,1	112,0	-24,1	112,0
	135	-24,9	112,0	-24,9	112,0	-25,3	112,0	-25,3	112,0	-25,3	112,0	-25,3	112,0
	140	-26,1	112,0	-26,1	112,0	-26,5	112,0	-26,5	112,0	-26,5	112,0	-26,5	112,0
	145	-27,3	112,0	-27,3	112,0	-27,8	112,0	-27,8	112,0	-27,8	112,0	-27,8	112,0
	150	-28,5	112,0	-28,5	112,0	-29,0	112,0	-29,0	112,0	-29,0	112,0	-29,0	112,0
	155	-29,8	112,0	-29,8	112,0	-30,2	112,0	-30,2	112,0	-30,2	112,0	-30,2	112,0
	160	-31,0	112,0	-31,0	112,0	-31,5	112,0	-31,5	112,0	-31,5	112,0	-31,5	112,0
	165	-32,2	112,0	-32,2	112,0	-32,7	112,0	-32,7	112,0	-32,7	112,0	-32,7	112,0
	170	-33,5	112,0	-33,5	112,0	-33,9	112,0	-33,9	112,0	-33,9	112,0	-33,9	112,0
	175	-34,7	112,0	-34,7	112,0	-35,2	112,0	-35,2	112,0	-35,2	112,0	-35,2	112,0
	180	-35,9	112,0	-35,9	112,0	-36,4	112,0	-36,4	112,0	-36,4	112,0	-36,4	112,0
	185	-37,1	112,0	-37,1	112,0	-37,6	112,0	-37,6	112,0	-37,6	112,0	-37,6	112,0
	190	-38,4	112,0	-38,4	112,0	-38,8	112,0	-38,8	112,0	-38,8	112,0	-38,8	112,0
	195	-39,6	112,0	-39,6	112,0	-40,1	112,0	-40,1	112,0	-40,1	112,0	-40,1	112,0
	200	-40,8	112,0	-40,8	112,0	-41,3	112,0	-41,3	112,0	-41,3	112,0	-41,3	112,0
	205	-42,1	112,0	-42,1	112,0	-42,5	112,0	-42,5	112,0	-42,5	112,0	-42,5	112,0
	210	-43,3	112,0	-43,3	112,0	-43,8	112,0	-43,8	112,0	-43,8	112,0	-43,8	112,0
	215	-44,5	112,0	-44,5	112,0	-45,0	112,0	-45,0	112,0	-45,0	112,0	-45,0	112,0
	220	-45,8	112,0	-45,8	112,0	-46,2	112,0	-46,2	112,0	-46,2	112,0	-46,2	112,0
	225	-47,0	112,0	-47,0	112,0	-47,4	112,0	-47,4	112,0	-47,4	112,0	-47,4	112,0
	230	-48,2	112,0	-48,2	112,0	-48,7	112,0	-48,7	112,0	-48,7	112,0	-48,7	112,0
	235	-49,4	112,0	-49,4	112,0	-49,9	112,0	-49,9	112,0	-49,9	112,0	-49,9	112,0
	240	-50,7	112,0	-50,7	112,0	-51,1	112,0	-51,1	112,0	-51,1	112,0	-51,1	112,0
	245	-51,9	112,0	-51,9	112,0	-52,4	112,0	-52,4	112,0	-52,4	112,0	-52,4	112,0
	250	-53,1	112,0	-53,1	112,0	-53,6	112,0	-53,6	112,0	-53,6	112,0	-53,6	112,0
	255	-54,4	112,0	-54,4	112,0	-54,8	112,0	-54,8	112,0	-54,8	112,0	-54,8	112,0
260	-55,6	112,0	-55,6	112,0	-56,1	112,0	-56,1	112,0	-56,1	112,0	-56,1	112,0	
265	-56,8	112,0	-56,8	112,0	-57,3	112,0	-57,3	112,0	-57,3	112,0	-57,3	112,0	
270	-58,0	112,0	-58,0	112,0	-58,5	112,0	-58,5	112,0	-58,5	112,0	-58,5	112,0	
275	-59,3	112,0	-59,3	112,0	-59,7	112,0	-59,7	112,0	-59,7	112,0	-59,7	112,0	
280	-60,5	112,0	-60,5	112,0	-61,0	112,0	-61,0	112,0	-61,0	112,0	-61,0	112,0	
285	-61,7	112,0	-61,7	112,0	-62,2	112,0	-62,2	112,0	-62,2	112,0	-62,2	112,0	
290	-63,0	112,0	-63,0	112,0	-63,4	112,0	-63,4	112,0	-63,4	112,0	-63,4	112,0	
295	-64,2	112,0	-64,2	112,0	-64,7	112,0	-64,7	112,0	-64,7	112,0	-64,7	112,0	
300	-65,4	112,0	-65,4	112,0	-65,9	112,0	-65,9	112,0	-65,9	112,0	-65,9	112,0	
c _{nom} = 30mm	310	-61,4	112,0	-61,4	112,0	-68,3	112,0	-68,3	112,0	-68,3	112,0	-68,3	112,0
	320	-63,6	112,0	-63,6	112,0	-70,8	112,0	-70,8	112,0	-70,8	112,0	-70,8	112,0
c _{nom} = 35mm	305	-60,3	112,0	-60,3	112,0	-67,1	112,0	-67,1	112,0	-67,1	112,0	-67,1	112,0
	315	-62,5	112,0	-62,5	112,0	-69,6	112,0	-69,6	112,0	-69,6	112,0	-69,6	112,0

1) “hh” – Elementhöhe h in [cm] ; “cc” – Betondeckung [mm]

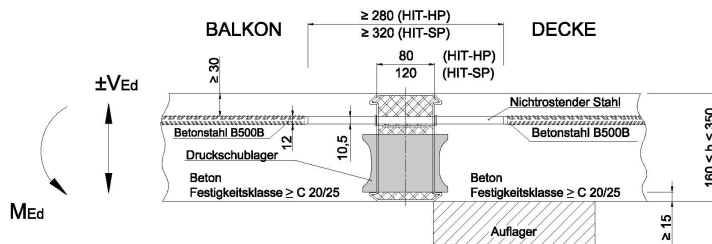


HIT-HP MVX-0607-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]			
		A _{s,req}	0,18	0,83	3,41	0,18	0,90	3,48	0,18	0,90		3,48	
A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13				
A _{s,prov}	Ø8	Ø6/25	Ø8/14,5	Ø8	Ø6/25	Ø8/14	Ø8	Ø6/25	Ø8/14				
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
	[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-26,1	112,0	-26,1	112,0	-26,8	112,0	-26,8	112,0	-26,8	112,0	-26,8	112,0
	130	-27,6	112,0	-27,6	112,0	-28,3	112,0	-28,3	112,0	-28,3	112,0	-28,3	112,0
	135	-29,1	112,0	-29,1	112,0	-29,7	112,0	-29,7	112,0	-29,7	112,0	-29,7	112,0
	140	-30,5	112,0	-30,5	112,0	-31,2	112,0	-31,2	112,0	-31,2	112,0	-31,2	112,0
	145	-32,0	112,0	-32,0	112,0	-32,7	112,0	-32,7	112,0	-32,7	112,0	-32,7	112,0
	150	-33,5	112,0	-33,5	112,0	-34,2	112,0	-34,2	112,0	-34,2	112,0	-34,2	112,0
	155	-35,0	112,0	-35,0	112,0	-35,6	112,0	-35,6	112,0	-35,6	112,0	-35,6	112,0
	160	-36,4	112,0	-36,4	112,0	-37,1	112,0	-37,1	112,0	-37,1	112,0	-37,1	112,0
	165	-37,9	112,0	-37,9	112,0	-38,6	112,0	-38,6	112,0	-38,6	112,0	-38,6	112,0
	170	-39,4	112,0	-39,4	112,0	-40,1	112,0	-40,1	112,0	-40,1	112,0	-40,1	112,0
	175	-40,9	112,0	-40,9	112,0	-41,5	112,0	-41,5	112,0	-41,5	112,0	-41,5	112,0
	180	-42,3	112,0	-42,3	112,0	-43,0	112,0	-43,0	112,0	-43,0	112,0	-43,0	112,0
	185	-43,8	112,0	-43,8	112,0	-44,5	112,0	-44,5	112,0	-44,5	112,0	-44,5	112,0
	190	-45,3	112,0	-45,3	112,0	-46,0	112,0	-46,0	112,0	-46,0	112,0	-46,0	112,0
	195	-46,8	112,0	-46,8	112,0	-47,4	112,0	-47,4	112,0	-47,4	112,0	-47,4	112,0
	200	-48,2	112,0	-48,2	112,0	-48,9	112,0	-48,9	112,0	-48,9	112,0	-48,9	112,0
	205	-49,7	112,0	-49,7	112,0	-50,4	112,0	-50,4	112,0	-50,4	112,0	-50,4	112,0
	210	-51,2	112,0	-51,2	112,0	-51,9	112,0	-51,9	112,0	-51,9	112,0	-51,9	112,0
	215	-52,7	112,0	-52,7	112,0	-53,3	112,0	-53,3	112,0	-53,3	112,0	-53,3	112,0
	220	-54,1	112,0	-54,1	112,0	-54,8	112,0	-54,8	112,0	-54,8	112,0	-54,8	112,0
	225	-55,6	112,0	-55,6	112,0	-56,3	112,0	-56,3	112,0	-56,3	112,0	-56,3	112,0
	230	-57,1	112,0	-57,1	112,0	-57,8	112,0	-57,8	112,0	-57,8	112,0	-57,8	112,0
	235	-58,6	112,0	-58,6	112,0	-59,2	112,0	-59,2	112,0	-59,2	112,0	-59,2	112,0
	240	-60,0	112,0	-60,0	112,0	-60,7	112,0	-60,7	112,0	-60,7	112,0	-60,7	112,0
	245	-61,5	112,0	-61,5	112,0	-62,2	112,0	-62,2	112,0	-62,2	112,0	-62,2	112,0
	250	-63,0	112,0	-63,0	112,0	-63,7	112,0	-63,7	112,0	-63,7	112,0	-63,7	112,0
	255	-64,5	112,0	-64,5	112,0	-65,1	112,0	-65,1	112,0	-65,1	112,0	-65,1	112,0
	260	-65,9	112,0	-65,9	112,0	-66,6	112,0	-66,6	112,0	-66,6	112,0	-66,6	112,0
	265	-67,4	112,0	-67,4	112,0	-68,1	112,0	-68,1	112,0	-68,1	112,0	-68,1	112,0
	270	-68,9	112,0	-68,9	112,0	-69,6	112,0	-69,6	112,0	-69,6	112,0	-69,6	112,0
275	-70,4	112,0	-70,4	112,0	-71,0	112,0	-71,0	112,0	-71,0	112,0	-71,0	112,0	
280	-71,8	112,0	-71,8	112,0	-72,5	112,0	-72,5	112,0	-72,5	112,0	-72,5	112,0	
285	-73,3	112,0	-73,3	112,0	-74,0	112,0	-74,0	112,0	-74,0	112,0	-74,0	112,0	
290	-74,8	112,0	-74,8	112,0	-75,5	112,0	-75,5	112,0	-75,5	112,0	-75,5	112,0	
295	-76,3	112,0	-76,3	112,0	-76,9	112,0	-76,9	112,0	-76,9	112,0	-76,9	112,0	
300	-77,7	112,0	-77,7	112,0	-78,4	112,0	-78,4	112,0	-78,4	112,0	-78,4	112,0	
c _{nom} = 30mm	310	-73,0	112,0	-73,0	112,0	-81,4	112,0	-81,4	112,0	-81,4	112,0	-81,4	112,0
	320	-75,7	112,0	-75,7	112,0	-84,3	112,0	-84,3	112,0	-84,3	112,0	-84,3	112,0
c _{nom} = 35mm	305	-71,7	112,0	-71,7	112,0	-79,9	112,0	-79,9	112,0	-79,9	112,0	-79,9	112,0
	315	-74,4	112,0	-74,4	112,0	-82,8	112,0	-82,8	112,0	-82,8	112,0	-82,8	112,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

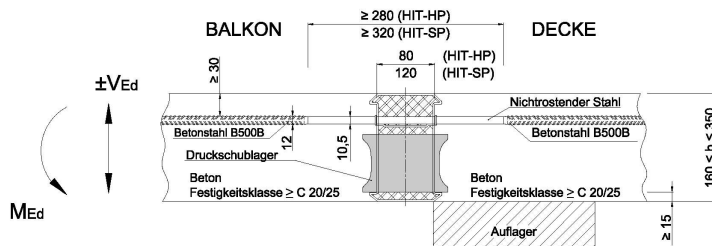


HIT-HP MVX-0707-hh-100-cc													
Spaltzug- und Aufhängewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]			
		A _{s,req}	0,21	0,90	3,47	0,21	0,98	3,55	0,21	0,98	3,55		
		A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13		
A _{s,prov}	Ø8	Ø6/25	Ø8/14	Ø8	Ø6/25	Ø8/14	Ø8	Ø6/25	Ø8/14				
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)					
		M _{Rd,1}	±V _{Rd,1}		M _{Rd,2}	±V _{Rd,2}		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}		
		[mm]	[kNm/m]		[kNm]	[kNm/m]		[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-29,6	112,0	-29,6	112,0	-30,5	112,0	-30,5	112,0	-30,5	112,0	-30,5	112,0
	130	-31,3	112,0	-31,3	112,0	-32,2	112,0	-32,2	112,0	-32,2	112,0	-32,2	112,0
	135	-33,0	112,0	-33,0	112,0	-33,9	112,0	-33,9	112,0	-33,9	112,0	-33,9	112,0
	140	-34,7	112,0	-34,7	112,0	-35,7	112,0	-35,7	112,0	-35,7	112,0	-35,7	112,0
	145	-36,5	112,0	-36,5	112,0	-37,4	112,0	-37,4	112,0	-37,4	112,0	-37,4	112,0
	150	-38,2	112,0	-38,2	112,0	-39,1	112,0	-39,1	112,0	-39,1	112,0	-39,1	112,0
	155	-39,9	112,0	-39,9	112,0	-40,8	112,0	-40,8	112,0	-40,8	112,0	-40,8	112,0
	160	-41,6	112,0	-41,6	112,0	-42,5	112,0	-42,5	112,0	-42,5	112,0	-42,5	112,0
	165	-43,3	112,0	-43,3	112,0	-44,3	112,0	-44,3	112,0	-44,3	112,0	-44,3	112,0
	170	-45,1	112,0	-45,1	112,0	-46,0	112,0	-46,0	112,0	-46,0	112,0	-46,0	112,0
	175	-46,8	112,0	-46,8	112,0	-47,7	112,0	-47,7	112,0	-47,7	112,0	-47,7	112,0
	180	-48,5	112,0	-48,5	112,0	-49,4	112,0	-49,4	112,0	-49,4	112,0	-49,4	112,0
	185	-50,2	112,0	-50,2	112,0	-51,1	112,0	-51,1	112,0	-51,1	112,0	-51,1	112,0
	190	-51,9	112,0	-51,9	112,0	-52,9	112,0	-52,9	112,0	-52,9	112,0	-52,9	112,0
	195	-53,7	112,0	-53,7	112,0	-54,6	112,0	-54,6	112,0	-54,6	112,0	-54,6	112,0
	200	-55,4	112,0	-55,4	112,0	-56,3	112,0	-56,3	112,0	-56,3	112,0	-56,3	112,0
	205	-57,1	112,0	-57,1	112,0	-58,0	112,0	-58,0	112,0	-58,0	112,0	-58,0	112,0
	210	-58,8	112,0	-58,8	112,0	-59,7	112,0	-59,7	112,0	-59,7	112,0	-59,7	112,0
	215	-60,6	112,0	-60,6	112,0	-61,5	112,0	-61,5	112,0	-61,5	112,0	-61,5	112,0
	220	-62,3	112,0	-62,3	112,0	-63,2	112,0	-63,2	112,0	-63,2	112,0	-63,2	112,0
	225	-64,0	112,0	-64,0	112,0	-64,9	112,0	-64,9	112,0	-64,9	112,0	-64,9	112,0
	230	-65,7	112,0	-65,7	112,0	-66,6	112,0	-66,6	112,0	-66,6	112,0	-66,6	112,0
	235	-67,4	112,0	-67,4	112,0	-68,4	112,0	-68,4	112,0	-68,4	112,0	-68,4	112,0
	240	-69,2	112,0	-69,2	112,0	-70,1	112,0	-70,1	112,0	-70,1	112,0	-70,1	112,0
	245	-70,9	112,0	-70,9	112,0	-71,8	112,0	-71,8	112,0	-71,8	112,0	-71,8	112,0
	250	-72,6	112,0	-72,6	112,0	-73,5	112,0	-73,5	112,0	-73,5	112,0	-73,5	112,0
	255	-74,3	112,0	-74,3	112,0	-75,2	112,0	-75,2	112,0	-75,2	112,0	-75,2	112,0
	260	-76,0	112,0	-76,0	112,0	-77,0	112,0	-77,0	112,0	-77,0	112,0	-77,0	112,0
265	-77,8	112,0	-77,8	112,0	-78,7	112,0	-78,7	112,0	-78,7	112,0	-78,7	112,0	
270	-79,5	112,0	-79,5	112,0	-80,4	112,0	-80,4	112,0	-80,4	112,0	-80,4	112,0	
275	-81,2	112,0	-81,2	112,0	-82,1	112,0	-82,1	112,0	-82,1	112,0	-82,1	112,0	
280	-82,9	112,0	-82,9	112,0	-83,8	112,0	-83,8	112,0	-83,8	112,0	-83,8	112,0	
285	-84,6	112,0	-84,6	112,0	-85,6	112,0	-85,6	112,0	-85,6	112,0	-85,6	112,0	
290	-86,4	112,0	-86,4	112,0	-87,3	112,0	-87,3	112,0	-87,3	112,0	-87,3	112,0	
295	-88,1	112,0	-88,1	112,0	-89,0	112,0	-89,0	112,0	-89,0	112,0	-89,0	112,0	
300	-89,8	112,0	-89,8	112,0	-90,7	112,0	-90,7	112,0	-90,7	112,0	-90,7	112,0	
c _{nom} = 30mm	310	-85,4	112,0	-85,4	112,0	-94,2	112,0	-94,2	112,0	-94,2	112,0	-94,2	112,0
	320	-88,5	112,0	-88,5	112,0	-97,6	112,0	-97,6	112,0	-97,6	112,0	-97,6	112,0
c _{nom} = 35mm	305	-83,8	112,0	-83,8	112,0	-92,4	112,0	-92,4	112,0	-92,4	112,0	-92,4	112,0
	315	-86,9	112,0	-86,9	112,0	-95,9	112,0	-95,9	112,0	-95,9	112,0	-95,9	112,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

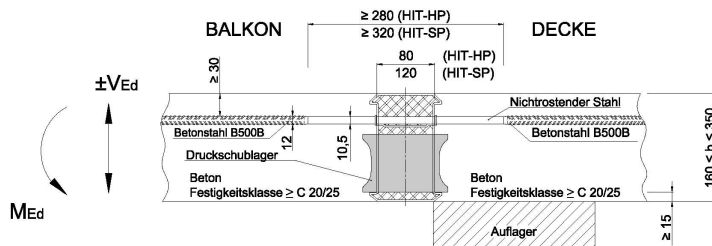


HIT-HP MVX-0807-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]			
		A _{s,req}	0,24	0,95	3,53	0,24	1,04	3,62	0,24	1,04	3,62		
		A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13		
A _{s,prov}	Ø8	Ø6/25	Ø8/14	Ø8	Ø6/25	Ø8/13,5	Ø8	Ø6/25	Ø8/13,5				
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)	Punkt 1 (max V)	Punkt 2 (max M)	Punkt 1 (max V)	Punkt 2 (max M)	Punkt 1 (max V)	Punkt 2 (max M)					
	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-32,8	112,0	-32,8	112,0	-34,0	112,0	-34,0	112,0	-34,0	112,0	-34,0	112,0
	130	-34,8	112,0	-34,8	112,0	-35,9	112,0	-35,9	112,0	-35,9	112,0	-35,9	112,0
	135	-36,7	112,0	-36,7	112,0	-37,9	112,0	-37,9	112,0	-37,9	112,0	-37,9	112,0
	140	-38,7	112,0	-38,7	112,0	-39,9	112,0	-39,9	112,0	-39,9	112,0	-39,9	112,0
	145	-40,7	112,0	-40,7	112,0	-41,8	112,0	-41,8	112,0	-41,8	112,0	-41,8	112,0
	150	-42,6	112,0	-42,6	112,0	-43,8	112,0	-43,8	112,0	-43,8	112,0	-43,8	112,0
	155	-44,6	112,0	-44,6	112,0	-45,8	112,0	-45,8	112,0	-45,8	112,0	-45,8	112,0
	160	-46,6	112,0	-46,6	112,0	-47,7	112,0	-47,7	112,0	-47,7	112,0	-47,7	112,0
	165	-48,5	112,0	-48,5	112,0	-49,7	112,0	-49,7	112,0	-49,7	112,0	-49,7	112,0
	170	-50,5	112,0	-50,5	112,0	-51,7	112,0	-51,7	112,0	-51,7	112,0	-51,7	112,0
	175	-52,5	112,0	-52,5	112,0	-53,6	112,0	-53,6	112,0	-53,6	112,0	-53,6	112,0
	180	-54,4	112,0	-54,4	112,0	-55,6	112,0	-55,6	112,0	-55,6	112,0	-55,6	112,0
	185	-56,4	112,0	-56,4	112,0	-57,6	112,0	-57,6	112,0	-57,6	112,0	-57,6	112,0
	190	-58,4	112,0	-58,4	112,0	-59,5	112,0	-59,5	112,0	-59,5	112,0	-59,5	112,0
	195	-60,3	112,0	-60,3	112,0	-61,5	112,0	-61,5	112,0	-61,5	112,0	-61,5	112,0
	200	-62,3	112,0	-62,3	112,0	-63,5	112,0	-63,5	112,0	-63,5	112,0	-63,5	112,0
	205	-64,3	112,0	-64,3	112,0	-65,4	112,0	-65,4	112,0	-65,4	112,0	-65,4	112,0
	210	-66,2	112,0	-66,2	112,0	-67,4	112,0	-67,4	112,0	-67,4	112,0	-67,4	112,0
	215	-68,2	112,0	-68,2	112,0	-69,4	112,0	-69,4	112,0	-69,4	112,0	-69,4	112,0
	220	-70,2	112,0	-70,2	112,0	-71,3	112,0	-71,3	112,0	-71,3	112,0	-71,3	112,0
	225	-72,1	112,0	-72,1	112,0	-73,3	112,0	-73,3	112,0	-73,3	112,0	-73,3	112,0
	230	-74,1	112,0	-74,1	112,0	-75,3	112,0	-75,3	112,0	-75,3	112,0	-75,3	112,0
	235	-76,1	112,0	-76,1	112,0	-77,2	112,0	-77,2	112,0	-77,2	112,0	-77,2	112,0
	240	-78,0	112,0	-78,0	112,0	-79,2	112,0	-79,2	112,0	-79,2	112,0	-79,2	112,0
	245	-80,0	112,0	-80,0	112,0	-81,2	112,0	-81,2	112,0	-81,2	112,0	-81,2	112,0
	250	-82,0	112,0	-82,0	112,0	-83,1	112,0	-83,2	112,0	-83,2	112,0	-83,2	112,0
	255	-83,9	112,0	-83,9	112,0	-85,1	112,0	-85,1	112,0	-85,1	112,0	-85,1	112,0
	260	-85,9	112,0	-85,9	112,0	-87,1	112,0	-87,1	112,0	-87,1	112,0	-87,1	112,0
	265	-87,9	112,0	-87,9	112,0	-89,1	112,0	-89,1	112,0	-89,1	112,0	-89,1	112,0
	270	-89,8	112,0	-89,8	112,0	-91,0	112,0	-91,0	112,0	-91,0	112,0	-91,0	112,0
	275	-91,8	112,0	-91,8	112,0	-93,0	112,0	-93,0	112,0	-93,0	112,0	-93,0	112,0
	280	-93,8	112,0	-93,8	112,0	-95,0	112,0	-95,0	112,0	-95,0	112,0	-95,0	112,0
	285	-95,7	112,0	-95,7	112,0	-96,9	112,0	-96,9	112,0	-96,9	112,0	-96,9	112,0
	290	-97,7	112,0	-97,7	112,0	-98,9	112,0	-98,9	112,0	-98,9	112,0	-98,9	112,0
	295	-99,7	112,0	-99,7	112,0	-100,9	112,0	-100,9	112,0	-100,9	112,0	-100,9	112,0
	300	-101,6	112,0	-101,6	112,0	-102,8	112,0	-102,8	112,0	-102,8	112,0	-102,8	112,0
c _{nom} = 30mm	310	-96,7	112,0	-96,7	112,0	-106,8	112,0	-106,8	112,0	-106,8	112,0	-106,8	112,0
	320	-100,3	112,0	-100,3	112,0	-110,7	112,0	-110,7	112,0	-110,7	112,0	-110,7	112,0
c _{nom} = 35mm	305	-94,9	112,0	-94,9	112,0	-104,8	112,0	-104,8	112,0	-104,8	112,0	-104,8	112,0
	315	-98,5	112,0	-98,5	112,0	-108,7	112,0	-108,7	112,0	-108,7	112,0	-108,7	112,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

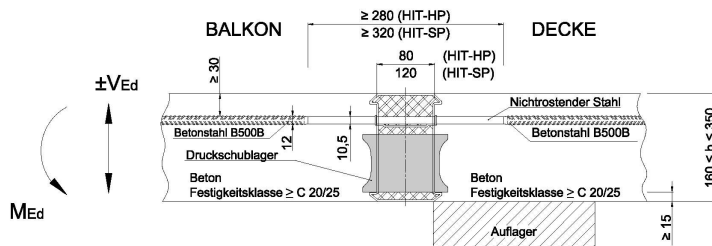


HIT-HP MVX-1007-hh-100-cc													
Spaltzug- und Aufhängewebung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]			
		A _{s,req}	0,30	1,04	3,61	0,30	1,15	3,72	0,30	1,15	3,72		
		A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13		
A _{s,prov}	Ø8	Ø6/25	Ø8/13,5	Ø8	Ø6/24,5	Ø8/13,5	Ø8	Ø6/24,5	Ø8/13,5				
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
	[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-38,4	112,0	-38,4	112,0	-40,3	112,0	-40,3	112,0	-40,3	112,0	-40,3	112,0
	130	-40,9	112,0	-40,9	112,0	-42,8	112,0	-42,8	112,0	-42,8	112,0	-42,8	112,0
	135	-43,4	112,0	-43,4	112,0	-45,2	112,0	-45,2	112,0	-45,2	112,0	-45,2	112,0
	140	-45,8	112,0	-45,8	112,0	-47,7	112,0	-47,7	112,0	-47,7	112,0	-47,7	112,0
	145	-48,3	112,0	-48,3	112,0	-50,1	112,0	-50,1	112,0	-50,1	112,0	-50,1	112,0
	150	-50,7	112,0	-50,7	112,0	-52,6	112,0	-52,6	112,0	-52,6	112,0	-52,6	112,0
	155	-53,2	112,0	-53,2	112,0	-55,1	112,0	-55,1	112,0	-55,1	112,0	-55,1	112,0
	160	-55,7	112,0	-55,7	112,0	-57,5	112,0	-57,5	112,0	-57,5	112,0	-57,5	112,0
	165	-58,1	112,0	-58,1	112,0	-60,0	112,0	-60,0	112,0	-60,0	112,0	-60,0	112,0
	170	-60,6	112,0	-60,6	112,0	-62,4	112,0	-62,4	112,0	-62,4	112,0	-62,4	112,0
	175	-63,0	112,0	-63,0	112,0	-64,9	112,0	-64,9	112,0	-64,9	112,0	-64,9	112,0
	180	-65,5	112,0	-65,5	112,0	-67,3	112,0	-67,3	112,0	-67,3	112,0	-67,3	112,0
	185	-67,9	112,0	-67,9	112,0	-69,8	112,0	-69,8	112,0	-69,8	112,0	-69,8	112,0
	190	-70,4	112,0	-70,4	112,0	-72,3	112,0	-72,3	112,0	-72,3	112,0	-72,3	112,0
	195	-72,9	112,0	-72,9	112,0	-74,7	112,0	-74,7	112,0	-74,7	112,0	-74,7	112,0
	200	-75,1	112,0	-75,1	112,0	-77,2	112,0	-77,2	112,0	-77,2	112,0	-77,2	112,0
	205	-77,2	112,0	-77,2	112,0	-79,6	112,0	-79,6	112,0	-79,6	112,0	-79,6	112,0
	210	-79,4	112,0	-79,4	112,0	-82,1	112,0	-82,1	112,0	-82,1	112,0	-82,1	112,0
	215	-81,5	112,0	-81,5	112,0	-84,6	112,0	-84,6	112,0	-84,6	112,0	-84,6	112,0
	220	-83,7	112,0	-83,7	112,0	-87,0	112,0	-87,0	112,0	-87,0	112,0	-87,0	112,0
	225	-85,8	112,0	-85,8	112,0	-89,5	112,0	-89,5	112,0	-89,5	112,0	-89,5	112,0
	230	-88,0	112,0	-88,0	112,0	-91,9	112,0	-91,9	112,0	-91,9	112,0	-91,9	112,0
	235	-90,1	112,0	-90,1	112,0	-94,4	112,0	-94,4	112,0	-94,4	112,0	-94,4	112,0
	240	-92,2	112,0	-92,2	112,0	-96,9	112,0	-96,9	112,0	-96,9	112,0	-96,9	112,0
	245	-94,4	112,0	-94,4	112,0	-99,3	112,0	-99,3	112,0	-99,3	112,0	-99,3	112,0
	250	-96,5	112,0	-96,5	112,0	-101,8	112,0	-101,8	112,0	-101,8	112,0	-101,8	112,0
	255	-98,7	112,0	-98,7	112,0	-104,2	112,0	-104,2	112,0	-104,2	112,0	-104,2	112,0
	260	-100,8	112,0	-100,8	112,0	-106,7	112,0	-106,7	112,0	-106,7	112,0	-106,7	112,0
	265	-103,0	112,0	-103,0	112,0	-109,1	112,0	-109,1	112,0	-109,1	112,0	-109,1	112,0
	270	-105,1	112,0	-105,1	112,0	-111,6	112,0	-111,6	112,0	-111,6	112,0	-111,6	112,0
	275	-107,2	112,0	-107,2	112,0	-114,1	112,0	-114,1	112,0	-114,1	112,0	-114,1	112,0
	280	-109,4	112,0	-109,4	112,0	-116,5	112,0	-116,5	112,0	-116,5	112,0	-116,5	112,0
	285	-111,5	112,0	-111,5	112,0	-119,0	112,0	-119,0	112,0	-119,0	112,0	-119,0	112,0
	290	-113,7	112,0	-113,7	112,0	-121,4	112,0	-121,4	112,0	-121,4	112,0	-121,4	112,0
	295	-115,8	112,0	-115,8	112,0	-123,9	112,0	-123,9	112,0	-123,9	112,0	-123,9	112,0
	300	-118,0	112,0	-118,0	112,0	-126,4	112,0	-126,4	112,0	-126,4	112,0	-126,4	112,0
c _{nom} = 30mm	310	-87,0	112,0	-87,0	112,0	-101,7	112,0	-101,7	112,0	-113,0	112,0	-113,0	112,0
	320	-90,2	112,0	-90,2	112,0	-105,5	112,0	-105,5	112,0	-117,1	112,0	-117,1	112,0
c _{nom} = 35mm	305	-85,4	112,0	-85,4	112,0	-99,9	112,0	-99,9	112,0	-110,9	112,0	-110,9	112,0
	315	-88,6	112,0	-88,6	112,0	-103,6	112,0	-103,6	112,0	-115,1	112,0	-115,1	112,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

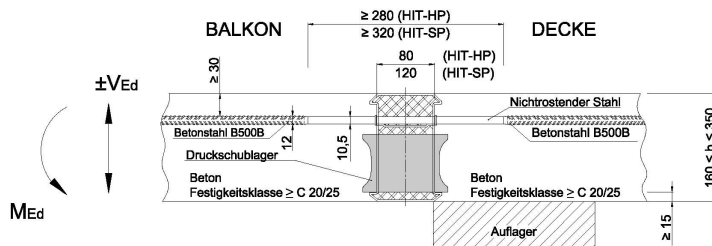


HIT-HP MVX-1107-hh-100-cc													
Spaltzug- und Aufhängewebung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]			
		A _{s,req}	0,33	1,07	3,65	0,33	1,19	3,76	0,33	1,19	3,76		
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13			
A _{s,prov}	Ø8	Ø6/25	Ø8/13,5	Ø8	Ø6/23,5	Ø8/13	Ø8	Ø6/23,5	Ø8/13				
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)					
	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
	[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm]	
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-40,9	112,0	-40,9	112,0	-43,1	112,0	-43,1	112,0	-43,1	112,0	-43,1	112,0
	130	-43,6	112,0	-43,6	112,0	-45,8	112,0	-45,8	112,0	-45,8	112,0	-45,8	112,0
	135	-46,3	112,0	-46,3	112,0	-48,6	112,0	-48,6	112,0	-48,6	112,0	-48,6	112,0
	140	-49,0	112,0	-49,0	112,0	-51,3	112,0	-51,3	112,0	-51,3	112,0	-51,3	112,0
	145	-51,7	112,0	-51,7	112,0	-54,0	112,0	-54,0	112,0	-54,0	112,0	-54,0	112,0
	150	-54,4	112,0	-54,4	112,0	-56,7	112,0	-56,7	112,0	-56,7	112,0	-56,7	112,0
	155	-57,1	112,0	-57,1	112,0	-59,4	112,0	-59,4	112,0	-59,4	112,0	-59,4	112,0
	160	-59,8	112,0	-59,8	112,0	-62,1	112,0	-62,1	112,0	-62,1	112,0	-62,1	112,0
	165	-62,5	112,0	-62,5	112,0	-64,8	112,0	-64,8	112,0	-64,8	112,0	-64,8	112,0
	170	-65,2	112,0	-65,2	112,0	-67,5	112,0	-67,5	112,0	-67,5	112,0	-67,5	112,0
	175	-67,9	112,0	-67,9	112,0	-70,2	112,0	-70,2	112,0	-70,2	112,0	-70,2	112,0
	180	-70,6	112,0	-70,6	112,0	-72,9	112,0	-72,9	112,0	-72,9	112,0	-72,9	112,0
	185	-73,3	112,0	-73,3	112,0	-75,6	112,0	-75,6	112,0	-75,6	112,0	-75,6	112,0
	190	-76,0	112,0	-76,0	112,0	-78,3	112,0	-78,3	112,0	-78,3	112,0	-78,3	112,0
	195	-78,8	112,0	-78,8	112,0	-81,0	112,0	-81,0	112,0	-81,0	112,0	-81,0	112,0
	200	-81,5	112,0	-81,5	112,0	-83,7	112,0	-83,7	112,0	-83,7	112,0	-83,7	112,0
	205	-84,1	112,0	-84,1	112,0	-86,4	112,0	-86,4	112,0	-86,4	112,0	-86,4	112,0
	210	-86,4	112,0	-86,4	112,0	-89,1	112,0	-89,1	112,0	-89,1	112,0	-89,1	112,0
	215	-88,8	112,0	-88,8	112,0	-91,8	112,0	-91,8	112,0	-91,8	112,0	-91,8	112,0
	220	-91,1	112,0	-91,1	112,0	-94,5	112,0	-94,5	112,0	-94,5	112,0	-94,5	112,0
	225	-93,5	112,0	-93,5	112,0	-97,2	112,0	-97,2	112,0	-97,2	112,0	-97,2	112,0
	230	-95,9	112,0	-95,9	112,0	-99,9	112,0	-99,9	112,0	-99,9	112,0	-99,9	112,0
	235	-98,2	112,0	-98,2	112,0	-102,6	112,0	-102,6	112,0	-102,6	112,0	-102,6	112,0
	240	-100,6	112,0	-100,6	112,0	-105,3	112,0	-105,3	112,0	-105,3	112,0	-105,3	112,0
	245	-102,9	112,0	-102,9	112,0	-108,1	112,0	-108,1	112,0	-108,1	112,0	-108,1	112,0
	250	-105,3	112,0	-105,3	112,0	-110,8	112,0	-110,8	112,0	-110,8	112,0	-110,8	112,0
	255	-107,6	112,0	-107,6	112,0	-113,5	112,0	-113,5	112,0	-113,5	112,0	-113,5	112,0
	260	-110,0	112,0	-110,0	112,0	-116,2	112,0	-116,2	112,0	-116,2	112,0	-116,2	112,0
	265	-112,4	112,0	-112,4	112,0	-118,9	112,0	-118,9	112,0	-118,9	112,0	-118,9	112,0
	270	-114,7	112,0	-114,7	112,0	-121,6	112,0	-121,6	112,0	-121,6	112,0	-121,6	112,0
	275	-117,1	112,0	-117,1	112,0	-124,3	112,0	-124,3	112,0	-124,3	112,0	-124,3	112,0
	280	-119,4	112,0	-119,4	112,0	-127,0	112,0	-127,0	112,0	-127,0	112,0	-127,0	112,0
	285	-121,8	112,0	-121,8	112,0	-129,7	112,0	-129,7	112,0	-129,7	112,0	-129,7	112,0
	290	-124,2	112,0	-124,2	112,0	-132,4	112,0	-132,4	112,0	-132,4	112,0	-132,4	112,0
	295	-126,5	112,0	-126,5	112,0	-135,1	112,0	-135,1	112,0	-135,1	112,0	-135,1	112,0
	300	-128,9	112,0	-128,9	112,0	-137,8	112,0	-137,8	112,0	-137,8	112,0	-137,8	112,0
c _{nom} = 30mm	310	-95,1	112,0	-95,1	112,0	-111,2	112,0	-111,2	112,0	-124,7	112,0	-124,7	112,0
	320	-98,6	112,0	-98,6	112,0	-115,3	112,0	-115,3	112,0	-129,4	112,0	-129,4	112,0
c _{nom} = 35mm	305	-93,4	112,0	-93,4	112,0	-109,2	112,0	-109,2	112,0	-122,4	112,0	-122,4	112,0
	315	-96,9	112,0	-96,9	112,0	-113,3	112,0	-113,3	112,0	-127,1	112,0	-127,1	112,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

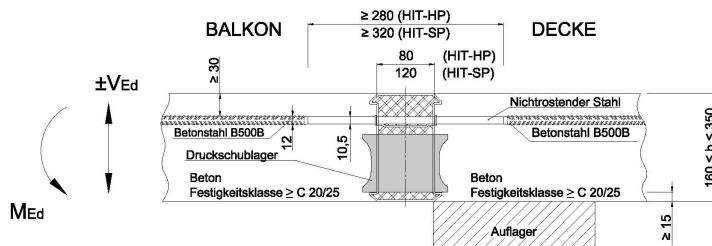


HIT-HP MVX-1207-hh-100-cc														
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37				
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		
		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]		
		A _{s,req}	0,36	1,11	3,68		0,36	1,23	3,80		0,36	1,23	3,80	
		A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13	
A _{s,prov}	Ø8	Ø6/25	Ø8/13,5		Ø8	Ø6/23	Ø8/13		Ø8	Ø6/23	Ø8/13			
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
		[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	[mm]	125	-43,1	112,0	-43,1	112,0	-45,8	112,0	-45,8	112,0	-45,8	112,0	-45,8	112,0
	130	-46,0	112,0	-46,0	112,0	-48,7	112,0	-48,7	112,0	-48,7	112,0	-48,7	112,0	
	135	-49,0	112,0	-49,0	112,0	-51,7	112,0	-51,7	112,0	-51,7	112,0	-51,7	112,0	
	140	-51,9	112,0	-51,9	112,0	-54,6	112,0	-54,6	112,0	-54,6	112,0	-54,6	112,0	
	145	-54,9	112,0	-54,9	112,0	-57,6	112,0	-57,6	112,0	-57,6	112,0	-57,6	112,0	
	150	-57,8	112,0	-57,8	112,0	-60,5	112,0	-60,5	112,0	-60,5	112,0	-60,5	112,0	
	155	-60,8	112,0	-60,8	112,0	-63,5	112,0	-63,5	112,0	-63,5	112,0	-63,5	112,0	
	160	-63,7	112,0	-63,7	112,0	-66,4	112,0	-66,4	112,0	-66,4	112,0	-66,4	112,0	
	165	-66,7	112,0	-66,7	112,0	-69,4	112,0	-69,4	112,0	-69,4	112,0	-69,4	112,0	
	170	-69,6	112,0	-69,6	112,0	-72,3	112,0	-72,3	112,0	-72,3	112,0	-72,3	112,0	
	175	-72,6	112,0	-72,6	112,0	-75,3	112,0	-75,3	112,0	-75,3	112,0	-75,3	112,0	
	180	-75,5	112,0	-75,5	112,0	-78,2	112,0	-78,2	112,0	-78,2	112,0	-78,2	112,0	
	185	-78,5	112,0	-78,5	112,0	-81,2	112,0	-81,2	112,0	-81,2	112,0	-81,2	112,0	
	190	-81,4	112,0	-81,4	112,0	-84,1	112,0	-84,1	112,0	-84,1	112,0	-84,1	112,0	
	195	-84,4	112,0	-84,4	112,0	-87,1	112,0	-87,1	112,0	-87,1	112,0	-87,1	112,0	
	200	-87,3	112,0	-87,3	112,0	-90,0	112,0	-90,0	112,0	-90,0	112,0	-90,0	112,0	
	205	-90,3	112,0	-90,3	112,0	-93,0	112,0	-93,0	112,0	-93,0	112,0	-93,0	112,0	
	210	-93,2	112,0	-93,2	112,0	-95,9	112,0	-95,9	112,0	-95,9	112,0	-95,9	112,0	
	215	-95,9	112,0	-95,9	112,0	-98,9	112,0	-98,9	112,0	-98,9	112,0	-98,9	112,0	
	220	-98,4	112,0	-98,4	112,0	-101,8	112,0	-101,8	112,0	-101,8	112,0	-101,8	112,0	
	225	-101,0	112,0	-101,0	112,0	-104,8	112,0	-104,8	112,0	-104,8	112,0	-104,8	112,0	
	230	-103,6	112,0	-103,6	112,0	-107,7	112,0	-107,7	112,0	-107,7	112,0	-107,7	112,0	
	235	-106,2	112,0	-106,2	112,0	-110,7	112,0	-110,7	112,0	-110,7	112,0	-110,7	112,0	
	240	-108,7	112,0	-108,7	112,0	-113,6	112,0	-113,6	112,0	-113,6	112,0	-113,6	112,0	
	245	-111,3	112,0	-111,3	112,0	-116,6	112,0	-116,6	112,0	-116,6	112,0	-116,6	112,0	
	250	-113,9	112,0	-113,9	112,0	-119,5	112,0	-119,5	112,0	-119,5	112,0	-119,5	112,0	
	255	-116,5	112,0	-116,5	112,0	-122,5	112,0	-122,5	112,0	-122,5	112,0	-122,5	112,0	
	260	-119,0	112,0	-119,0	112,0	-125,4	112,0	-125,4	112,0	-125,4	112,0	-125,4	112,0	
	265	-121,6	112,0	-121,6	112,0	-128,4	112,0	-128,4	112,0	-128,4	112,0	-128,4	112,0	
	270	-124,2	112,0	-124,2	112,0	-131,3	112,0	-131,3	112,0	-131,3	112,0	-131,3	112,0	
	275	-126,8	112,0	-126,8	112,0	-134,3	112,0	-134,3	112,0	-134,3	112,0	-134,3	112,0	
	280	-129,3	112,0	-129,3	112,0	-137,2	112,0	-137,2	112,0	-137,2	112,0	-137,2	112,0	
	285	-131,9	112,0	-131,9	112,0	-140,2	112,0	-140,2	112,0	-140,2	112,0	-140,2	112,0	
	290	-134,5	112,0	-134,5	112,0	-143,1	112,0	-143,1	112,0	-143,1	112,0	-143,1	112,0	
	295	-137,0	112,0	-137,0	112,0	-146,1	112,0	-146,1	112,0	-146,1	112,0	-146,1	112,0	
	300	-139,6	112,0	-139,6	112,0	-149,0	112,0	-149,0	112,0	-149,0	112,0	-149,0	112,0	
c _{nom} = 30mm	310	-103,1	112,0	-103,1	112,0	-120,6	112,0	-120,6	112,0	-135,1	112,0	-135,1	112,0	
	320	-107,0	112,0	-107,0	112,0	-125,1	112,0	-125,1	112,0	-140,2	112,0	-140,2	112,0	
c _{nom} = 35mm	305	-101,2	112,0	-101,2	112,0	-118,3	112,0	-118,3	112,0	-132,6	112,0	-132,6	112,0	
	315	-105,0	112,0	-105,0	112,0	-122,8	112,0	-122,8	112,0	-137,7	112,0	-137,7	112,0	

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

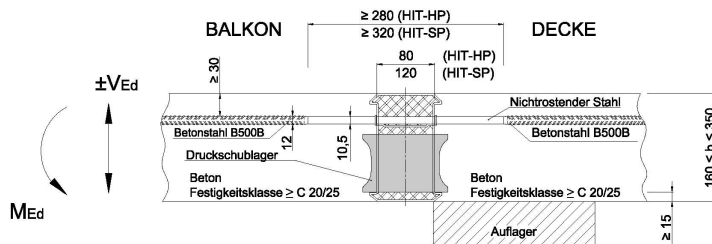


HIT-HP MVX-1307-hh-100-cc													
Spaltzug- und Aufhängewebung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]			
		A _{s,req}	0,39	1,14	3,68	0,39	1,26	3,84	0,39	1,26	3,84		
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13			
A _{s,prov}	Ø8	Ø6/24,5	Ø8/13,5	Ø8	Ø6/22	Ø8/13	Ø8	Ø6/22	Ø8/13				
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)					
	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
	[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm]	
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-43,2	112,0	-45,0	92,1	-48,2	112,0	-48,2	112,0	-48,2	112,0	-48,2	112,0
	130	-46,1	112,0	-48,2	92,1	-51,4	112,0	-51,4	112,0	-51,4	112,0	-51,4	112,0
	135	-49,1	112,0	-51,4	92,1	-54,6	112,0	-54,6	112,0	-54,6	112,0	-54,6	112,0
	140	-52,0	112,0	-54,6	92,1	-57,8	112,0	-57,8	112,0	-57,8	112,0	-57,8	112,0
	145	-55,0	112,0	-57,8	92,1	-61,0	112,0	-61,0	112,0	-61,0	112,0	-61,0	112,0
	150	-58,0	112,0	-61,0	92,1	-64,2	112,0	-64,2	112,0	-64,2	112,0	-64,2	112,0
	155	-60,9	112,0	-64,2	92,1	-67,3	112,0	-67,3	112,0	-67,3	112,0	-67,3	112,0
	160	-63,9	112,0	-67,4	92,1	-70,5	112,0	-70,5	112,0	-70,5	112,0	-70,5	112,0
	165	-66,8	112,0	-70,6	92,1	-73,7	112,0	-73,7	112,0	-73,7	112,0	-73,7	112,0
	170	-69,8	112,0	-73,8	92,1	-76,9	112,0	-76,9	112,0	-76,9	112,0	-76,9	112,0
	175	-72,8	112,0	-77,0	92,1	-80,1	112,0	-80,1	112,0	-80,1	112,0	-80,1	112,0
	180	-75,7	112,0	-80,2	92,1	-83,3	112,0	-83,3	112,0	-83,3	112,0	-83,3	112,0
	185	-78,7	112,0	-83,4	92,1	-86,5	112,0	-86,5	112,0	-86,5	112,0	-86,5	112,0
	190	-81,6	112,0	-86,6	92,1	-89,7	112,0	-89,7	112,0	-89,7	112,0	-89,7	112,0
	195	-84,6	112,0	-89,8	92,1	-92,9	112,0	-92,9	112,0	-92,9	112,0	-92,9	112,0
	200	-87,6	112,0	-93,0	92,1	-96,1	112,0	-96,1	112,0	-96,1	112,0	-96,1	112,0
	205	-90,5	112,0	-96,2	92,1	-99,3	112,0	-99,3	112,0	-99,3	112,0	-99,3	112,0
	210	-93,5	112,0	-99,4	92,1	-102,5	112,0	-102,5	112,0	-102,5	112,0	-102,5	112,0
	215	-96,4	112,0	-102,6	92,1	-105,7	112,0	-105,7	112,0	-105,7	112,0	-105,7	112,0
	220	-99,4	112,0	-105,6	92,1	-108,9	112,0	-108,9	112,0	-108,9	112,0	-108,9	112,0
	225	-102,4	112,0	-108,4	94,0	-112,1	112,0	-112,1	112,0	-112,1	112,0	-112,1	112,0
	230	-105,3	112,0	-111,2	95,3	-115,3	112,0	-115,3	112,0	-115,3	112,0	-115,3	112,0
	235	-108,3	112,0	-114,0	96,4	-118,5	112,0	-118,5	112,0	-118,5	112,0	-118,5	112,0
	240	-111,3	112,0	-116,7	97,5	-121,7	112,0	-121,7	112,0	-121,7	112,0	-121,7	112,0
	245	-114,2	112,0	-119,5	98,4	-124,9	112,0	-124,9	112,0	-124,9	112,0	-124,9	112,0
	250	-117,2	112,0	-122,3	99,3	-128,1	112,0	-128,1	112,0	-128,1	112,0	-128,1	112,0
	255	-120,1	112,0	-125,1	100,2	-131,3	112,0	-131,3	112,0	-131,3	112,0	-131,3	112,0
	260	-123,1	112,0	-127,9	101,0	-134,5	112,0	-134,5	112,0	-134,5	112,0	-134,5	112,0
	265	-126,1	112,0	-130,7	101,7	-137,7	112,0	-137,7	112,0	-137,7	112,0	-137,7	112,0
	270	-129,0	112,0	-133,5	102,4	-140,9	112,0	-140,9	112,0	-140,9	112,0	-140,9	112,0
	275	-132,0	112,0	-136,3	103,1	-144,1	112,0	-144,1	112,0	-144,1	112,0	-144,1	112,0
	280	-134,9	112,0	-139,0	103,7	-147,3	112,0	-147,3	112,0	-147,3	112,0	-147,3	112,0
	285	-137,9	112,0	-141,8	104,2	-150,4	112,0	-150,4	112,0	-150,4	112,0	-150,4	112,0
	290	-140,9	112,0	-144,6	104,8	-153,6	112,0	-153,6	112,0	-153,6	112,0	-153,6	112,0
	295	-143,8	112,0	-147,4	105,3	-156,8	112,0	-156,8	112,0	-156,8	112,0	-156,8	112,0
	300	-146,8	112,0	-150,2	105,8	-160,0	112,0	-160,0	112,0	-160,0	112,0	-160,0	112,0
c _{nom} = 30mm	310	-111,0	112,0	-111,0	112,0	-129,8	112,0	-129,8	112,0	-145,3	112,0	-145,3	112,0
	320	-115,2	112,0	-115,2	112,0	-134,7	112,0	-134,7	112,0	-150,8	112,0	-150,8	112,0
c _{nom} = 35mm	305	-108,9	112,0	-108,9	112,0	-127,4	112,0	-127,4	112,0	-142,6	112,0	-142,6	112,0
	315	-113,1	112,0	-113,1	112,0	-132,3	112,0	-132,3	112,0	-148,1	112,0	-148,1	112,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

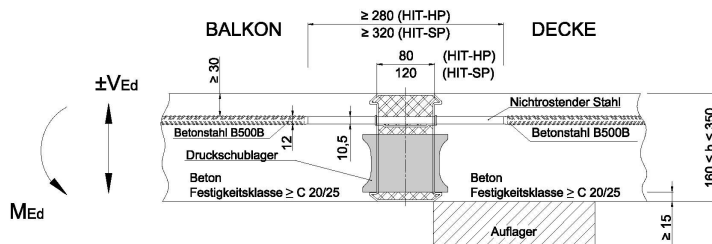


HIT-HP MVX-1407-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]	
		A _{s,req}	0,42	1,16	3,68		0,42	1,30	3,87		0,42	1,30	3,87
A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13		
A _{s,prov}	Ø8	Ø6/24	Ø8/13,5		Ø8	Ø6/21,5	Ø8/12,5		Ø8	Ø6/21,5	Ø8/12,5		
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
	[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-43,2	112,0	-46,7	66,9	-50,2	112,0	-50,4	111,0	-50,4	112,0	-50,4	112,0
	130	-46,1	112,0	-50,1	66,9	-53,6	112,0	-53,8	111,0	-53,8	112,0	-53,8	112,0
	135	-49,1	112,0	-53,6	66,9	-57,0	112,0	-57,2	111,0	-57,2	112,0	-57,2	112,0
	140	-52,0	112,0	-57,0	66,9	-60,4	112,0	-60,7	111,0	-60,7	112,0	-60,7	112,0
	145	-55,0	112,0	-60,5	66,9	-63,9	112,0	-64,1	111,0	-64,1	112,0	-64,1	112,0
	150	-58,0	112,0	-63,9	66,9	-67,3	112,0	-67,6	111,0	-67,6	112,0	-67,6	112,0
	155	-60,9	112,0	-67,4	66,9	-70,7	112,0	-71,0	111,0	-71,0	112,0	-71,0	112,0
	160	-63,9	112,0	-70,8	66,9	-74,1	112,0	-74,5	111,0	-74,5	112,0	-74,5	112,0
	165	-66,8	112,0	-74,2	66,9	-77,6	112,0	-77,9	111,0	-77,9	112,0	-77,9	112,0
	170	-69,8	112,0	-77,7	66,9	-81,0	112,0	-81,3	111,0	-81,3	112,0	-81,3	112,0
	175	-72,8	112,0	-81,1	66,9	-84,4	112,0	-84,8	111,0	-84,8	112,0	-84,8	112,0
	180	-75,7	112,0	-84,6	66,9	-87,8	112,0	-88,2	111,0	-88,2	112,0	-88,2	112,0
	185	-78,7	112,0	-88,0	66,9	-91,2	112,0	-91,7	111,0	-91,7	112,0	-91,7	112,0
	190	-81,6	112,0	-91,5	66,9	-94,7	112,0	-95,1	111,0	-95,1	112,0	-95,1	112,0
	195	-84,6	112,0	-94,9	66,9	-98,1	112,0	-98,5	111,0	-98,5	112,0	-98,5	112,0
	200	-87,6	112,0	-98,3	66,9	-101,5	112,0	-102,0	111,0	-102,0	112,0	-102,0	112,0
	205	-90,5	112,0	-101,8	66,9	-104,9	112,0	-105,4	111,0	-105,4	112,0	-105,4	112,0
	210	-93,5	112,0	-105,2	66,9	-108,3	112,0	-108,9	111,0	-108,9	112,0	-108,9	112,0
	215	-96,4	112,0	-108,7	66,9	-111,8	112,0	-112,3	111,0	-112,3	112,0	-112,3	112,0
	220	-99,4	112,0	-112,1	66,9	-115,2	112,0	-115,8	111,0	-115,8	112,0	-115,8	112,0
	225	-102,4	112,0	-115,5	66,9	-118,6	112,0	-119,2	111,0	-119,2	112,0	-119,2	112,0
	230	-105,3	112,0	-118,6	68,5	-122,0	112,0	-122,6	111,0	-122,6	112,0	-122,6	112,0
	235	-108,3	112,0	-121,6	70,2	-125,4	112,0	-126,1	111,0	-126,1	112,0	-126,1	112,0
	240	-111,3	112,0	-124,6	71,7	-128,9	112,0	-129,5	111,0	-129,5	112,0	-129,5	112,0
	245	-114,2	112,0	-127,6	73,1	-132,3	112,0	-133,0	111,0	-133,0	112,0	-133,0	112,0
	250	-117,2	112,0	-130,6	74,4	-135,7	112,0	-136,4	111,0	-136,4	112,0	-136,4	112,0
	255	-120,1	112,0	-133,6	75,6	-139,1	112,0	-139,9	111,0	-139,9	112,0	-139,9	112,0
	260	-123,1	112,0	-136,6	76,7	-142,6	112,0	-143,3	111,0	-143,3	112,0	-143,3	112,0
	265	-126,1	112,0	-139,6	77,8	-146,0	112,0	-146,7	111,0	-146,7	112,0	-146,7	112,0
	270	-129,0	112,0	-142,6	78,8	-149,4	112,0	-150,2	111,0	-150,2	112,0	-150,2	112,0
	275	-132,0	112,0	-145,6	79,7	-152,8	112,0	-153,6	111,0	-153,6	112,0	-153,6	112,0
	280	-134,9	112,0	-148,6	80,6	-156,2	112,0	-157,1	111,0	-157,1	112,0	-157,1	112,0
	285	-137,9	112,0	-151,6	81,4	-159,7	112,0	-160,5	111,0	-160,5	112,0	-160,5	112,0
	290	-140,9	112,0	-154,6	82,2	-163,1	112,0	-163,9	111,0	-163,9	112,0	-163,9	112,0
	295	-143,8	112,0	-157,6	82,9	-166,5	112,0	-167,4	111,0	-167,4	112,0	-167,4	112,0
	300	-146,8	112,0	-160,6	83,6	-169,9	112,0	-170,8	111,0	-170,8	112,0	-170,8	112,0
c _{nom} = 30mm	310	-118,8	112,0	-118,8	112,0	-138,9	112,0	-138,9	112,0	-155,4	112,0	-155,4	112,0
	320	-123,3	112,0	-123,3	112,0	-144,2	112,0	-144,2	112,0	-161,3	112,0	-161,3	112,0
c _{nom} = 35mm	305	-116,6	112,0	-116,6	112,0	-136,3	112,0	-136,3	112,0	-152,4	112,0	-152,4	112,0
	315	-121,0	112,0	-121,0	112,0	-141,6	112,0	-141,6	112,0	-158,4	112,0	-158,4	112,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

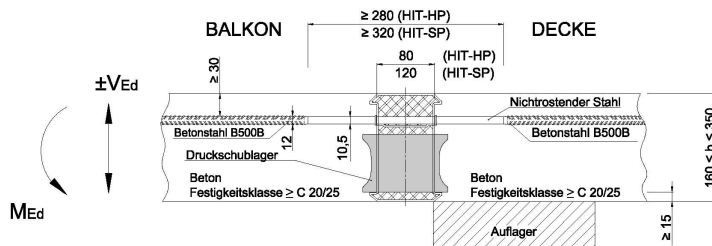


HIT-HP MVX-1607-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]	
		A _{s,req}	0,48	1,20	3,68		0,48	1,35	3,87		0,48	1,35	3,90
		A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13
A _{s,prov}	Ø8	Ø6/23	Ø8/13,5		Ø8	Ø6/20,5	Ø8/12,5		Ø8	Ø6/20,5	Ø8/12,5		
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
		[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
[mm]													
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-43,2	112,0	-49,3	2,6	-50,2	112,0	-54,1	86,4	-52,3	112,0	-54,1	89,3
	130	-46,1	112,0	-53,2	2,6	-53,6	112,0	-58,0	86,4	-56,0	112,0	-58,0	89,3
	135	-49,1	112,0	-57,2	2,6	-57,0	112,0	-62,0	86,4	-59,7	112,0	-62,0	89,3
	140	-52,0	112,0	-61,1	2,6	-60,4	112,0	-65,9	86,4	-63,4	112,0	-65,9	89,3
	145	-55,0	112,0	-65,0	2,6	-63,9	112,0	-69,8	86,4	-67,1	112,0	-69,8	89,3
	150	-58,0	112,0	-69,0	2,6	-67,3	112,0	-73,8	86,4	-70,7	112,0	-73,8	89,3
	155	-60,9	112,0	-72,9	2,6	-70,7	112,0	-77,7	86,4	-74,4	112,0	-77,7	89,3
	160	-63,9	112,0	-76,8	2,6	-74,1	112,0	-81,6	86,4	-78,1	112,0	-81,6	89,3
	165	-66,8	112,0	-80,8	2,6	-77,6	112,0	-85,6	86,4	-81,8	112,0	-85,6	89,3
	170	-69,8	112,0	-84,7	2,6	-81,0	112,0	-89,5	86,4	-85,5	112,0	-89,5	89,3
	175	-72,8	112,0	-88,7	2,6	-84,4	112,0	-93,4	86,4	-89,2	112,0	-93,4	89,3
	180	-75,7	112,0	-92,6	2,6	-87,8	112,0	-97,4	86,4	-92,8	112,0	-97,4	89,3
	185	-78,7	112,0	-96,5	2,6	-91,2	112,0	-101,3	86,4	-96,5	112,0	-101,3	89,3
	190	-81,6	112,0	-100,5	2,6	-94,7	112,0	-105,2	86,4	-100,2	112,0	-105,2	89,3
	195	-84,6	112,0	-104,4	2,6	-98,1	112,0	-109,2	86,4	-103,9	112,0	-109,2	89,3
	200	-87,6	112,0	-108,3	2,6	-101,5	112,0	-113,1	86,4	-107,6	112,0	-113,1	89,3
	205	-90,5	112,0	-112,3	2,6	-104,9	112,0	-117,0	86,4	-111,3	112,0	-117,0	89,3
	210	-93,5	112,0	-116,2	2,6	-108,3	112,0	-121,0	86,4	-115,0	112,0	-121,0	89,3
	215	-96,4	112,0	-120,1	2,6	-111,8	112,0	-124,9	86,4	-118,6	112,0	-124,9	89,3
	220	-99,4	112,0	-124,1	2,6	-115,2	112,0	-128,8	86,4	-122,3	112,0	-128,8	89,3
	225	-102,4	112,0	-128,0	2,6	-118,6	112,0	-132,8	86,4	-126,0	112,0	-132,8	89,3
	230	-105,3	112,0	-131,9	2,6	-122,0	112,0	-136,7	86,4	-129,7	112,0	-136,7	89,3
	235	-108,3	112,0	-135,9	2,6	-125,4	112,0	-140,6	86,4	-133,4	112,0	-140,6	89,3
	240	-111,3	112,0	-139,8	2,6	-128,9	112,0	-144,6	86,4	-137,1	112,0	-144,6	89,3
	245	-114,2	112,0	-143,2	5,2	-132,3	112,0	-148,5	86,4	-140,8	112,0	-148,5	89,3
	250	-117,2	112,0	-146,7	7,6	-135,7	112,0	-152,4	86,4	-144,4	112,0	-152,4	89,3
	255	-120,1	112,0	-150,1	9,9	-139,1	112,0	-156,4	86,4	-148,1	112,0	-156,4	89,3
	260	-123,1	112,0	-153,5	12,0	-142,6	112,0	-160,3	86,4	-151,8	112,0	-160,3	89,3
	265	-126,1	112,0	-156,9	13,9	-146,0	112,0	-164,2	86,4	-155,5	112,0	-164,2	89,3
	270	-129,0	112,0	-160,4	15,7	-149,4	112,0	-168,2	86,4	-159,2	112,0	-168,2	89,3
275	-132,0	112,0	-163,8	17,4	-152,8	112,0	-172,1	86,4	-162,9	112,0	-172,1	89,3	
280	-134,9	112,0	-167,2	19,0	-156,2	112,0	-176,0	86,4	-166,6	112,0	-176,0	89,3	
285	-137,9	112,0	-170,7	20,5	-159,7	112,0	-180,0	86,4	-170,2	112,0	-180,0	89,3	
290	-140,9	112,0	-174,1	21,9	-163,1	112,0	-183,9	86,4	-173,9	112,0	-183,9	89,3	
295	-143,8	112,0	-177,5	23,2	-166,5	112,0	-187,8	86,4	-177,6	112,0	-187,8	89,3	
300	-146,8	112,0	-181,0	24,5	-169,9	112,0	-191,8	86,4	-181,3	112,0	-191,8	89,3	
c _{nom} = 30mm	310	-135,9	112,0	-135,9	112,0	-158,6	112,0	-158,6	112,0	-176,8	112,0	-176,8	112,0
	320	-141,1	112,0	-141,1	112,0	-164,7	112,0	-164,7	112,0	-183,7	112,0	-183,7	112,0
c _{nom} = 35mm	305	-133,3	112,0	-133,3	112,0	-155,6	112,0	-155,6	112,0	-173,4	112,0	-173,4	112,0
	315	-138,5	112,0	-138,5	112,0	-161,7	112,0	-161,7	112,0	-180,2	112,0	-180,2	112,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

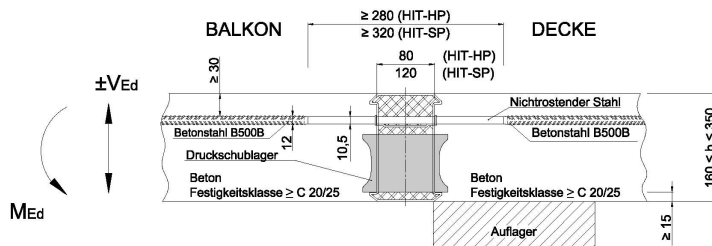


HIT-HP MVX-0408-hh-100-cc											
HIT-HP MVX-0204-hh-050-cc											
HIT-HP MVX-0102-hh-025-cc											
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37			
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	
		[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]	
		A _{s,req}	0,11	0,71	3,38	0,11	0,75	3,53	0,11	0,75	3,53
		A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13
A _{s,prov}	Ø8	Ø6/25	Ø8/14,5	Ø8	Ø6/25	Ø8/14	Ø8	Ø6/25	Ø8/14		
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}
		[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	[mm]										
	125	-18,7	116,1	-18,7	116,1	-18,9	120,9	-18,9	120,9	-18,9	120,9
	130	-19,7	116,1	-19,7	116,1	-19,9	120,9	-19,9	120,9	-19,9	120,9
	135	-20,6	116,1	-20,6	116,1	-20,9	120,9	-20,9	120,9	-20,9	120,9
	140	-21,6	116,1	-21,6	116,1	-21,9	120,9	-21,9	120,9	-21,9	120,9
	145	-22,6	116,1	-22,6	116,1	-22,9	120,9	-22,9	120,9	-22,9	120,9
	150	-23,6	116,1	-23,6	116,1	-23,9	120,9	-23,9	120,9	-23,9	120,9
	155	-24,6	116,1	-24,6	116,1	-24,8	120,9	-24,8	120,9	-24,8	120,9
	160	-25,6	116,1	-25,6	116,1	-25,8	120,9	-25,8	120,9	-25,8	120,9
	165	-26,5	116,1	-26,5	116,1	-26,8	120,9	-26,8	120,9	-26,8	120,9
	170	-27,5	116,1	-27,5	116,1	-27,8	120,9	-27,8	120,9	-27,8	120,9
	175	-28,5	116,1	-28,5	116,1	-28,8	120,9	-28,8	120,9	-28,8	120,9
	180	-29,5	116,1	-29,5	116,1	-29,8	120,9	-29,8	120,9	-29,8	120,9
	185	-30,5	116,1	-30,5	116,1	-30,7	120,9	-30,7	120,9	-30,7	120,9
	190	-31,5	116,1	-31,5	116,1	-31,7	120,9	-31,7	120,9	-31,7	120,9
	195	-32,4	116,1	-32,4	116,1	-32,7	120,9	-32,7	120,9	-32,7	120,9
	200	-33,4	116,1	-33,4	116,1	-33,7	120,9	-33,7	120,9	-33,7	120,9
	205	-34,4	116,1	-34,4	116,1	-34,7	120,9	-34,7	120,9	-34,7	120,9
	210	-35,4	116,1	-35,4	116,1	-35,7	120,9	-35,7	120,9	-35,7	120,9
	215	-36,4	116,1	-36,4	116,1	-36,6	120,9	-36,6	120,9	-36,6	120,9
	220	-37,4	116,1	-37,4	116,1	-37,6	120,9	-37,6	120,9	-37,6	120,9
	225	-38,3	116,1	-38,3	116,1	-38,6	120,9	-38,6	120,9	-38,6	120,9
	230	-39,3	116,1	-39,3	116,1	-39,6	120,9	-39,6	120,9	-39,6	120,9
	235	-40,3	116,1	-40,3	116,1	-40,6	120,9	-40,6	120,9	-40,6	120,9
	240	-41,3	116,1	-41,3	116,1	-41,6	120,9	-41,6	120,9	-41,6	120,9
	245	-42,3	116,1	-42,3	116,1	-42,5	120,9	-42,5	120,9	-42,5	120,9
	250	-43,3	116,1	-43,3	116,1	-43,5	120,9	-43,5	120,9	-43,5	120,9
	255	-44,2	116,1	-44,2	116,1	-44,5	120,9	-44,5	120,9	-44,5	120,9
	260	-45,2	116,1	-45,2	116,1	-45,5	120,9	-45,5	120,9	-45,5	120,9
	265	-46,2	116,1	-46,2	116,1	-46,5	120,9	-46,5	120,9	-46,5	120,9
270	-47,2	116,1	-47,2	116,1	-47,5	120,9	-47,5	120,9	-47,5	120,9	
275	-48,2	116,1	-48,2	116,1	-48,4	120,9	-48,4	120,9	-48,4	120,9	
280	-49,2	116,1	-49,2	116,1	-49,4	120,9	-49,4	120,9	-49,4	120,9	
285	-50,1	116,1	-50,1	116,1	-50,4	120,9	-50,4	120,9	-50,4	120,9	
290	-51,1	116,1	-51,1	116,1	-51,4	120,9	-51,4	120,9	-51,4	120,9	
295	-52,1	116,1	-52,1	116,1	-52,4	120,9	-52,4	120,9	-52,4	120,9	
300	-53,1	116,1	-53,1	116,1	-53,4	120,9	-53,4	120,9	-53,4	120,9	
c _{nom} = 30mm	310	-49,7	107,4	-49,7	107,4	-55,3	120,9	-55,3	120,9	-55,3	120,9
	320	-51,5	107,4	-51,5	107,4	-57,3	120,9	-57,3	120,9	-57,3	120,9
c _{nom} = 35mm	305	-48,8	107,4	-48,8	107,4	-54,3	120,9	-54,3	120,9	-54,3	120,9
	315	-50,6	107,4	-50,6	107,4	-56,3	120,9	-56,3	120,9	-56,3	120,9

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

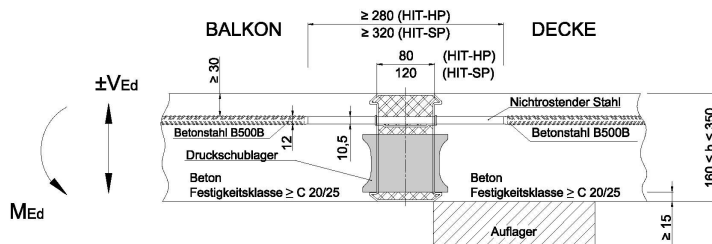


HIT-HP MVX-0508-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]			
		A _{s,req}	0,13	0,81	3,75	0,13	0,86	3,80	0,13	0,86		3,80	
		A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13		1,13	
A _{s,prov}	Ø8	Ø6/25	Ø8/13	Ø8	Ø6/25	Ø8/13	Ø8	Ø6/25	Ø8/13				
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]
125	-22,8	128,0	-22,8	128,0	-23,2	128,0	-23,2	128,0	-23,2	128,0	-23,2	128,0	
130	-24,0	128,0	-24,0	128,0	-24,4	128,0	-24,4	128,0	-24,4	128,0	-24,4	128,0	
135	-25,3	128,0	-25,3	128,0	-25,7	128,0	-25,7	128,0	-25,7	128,0	-25,7	128,0	
140	-26,5	128,0	-26,5	128,0	-26,9	128,0	-26,9	128,0	-26,9	128,0	-26,9	128,0	
145	-27,7	128,0	-27,7	128,0	-28,1	128,0	-28,1	128,0	-28,1	128,0	-28,1	128,0	
150	-28,9	128,0	-28,9	128,0	-29,3	128,0	-29,3	128,0	-29,3	128,0	-29,3	128,0	
155	-30,2	128,0	-30,2	128,0	-30,6	128,0	-30,6	128,0	-30,6	128,0	-30,6	128,0	
160	-31,4	128,0	-31,4	128,0	-31,8	128,0	-31,8	128,0	-31,8	128,0	-31,8	128,0	
165	-32,6	128,0	-32,6	128,0	-33,0	128,0	-33,0	128,0	-33,0	128,0	-33,0	128,0	
170	-33,9	128,0	-33,9	128,0	-34,3	128,0	-34,3	128,0	-34,3	128,0	-34,3	128,0	
175	-35,1	128,0	-35,1	128,0	-35,5	128,0	-35,5	128,0	-35,5	128,0	-35,5	128,0	
180	-36,3	128,0	-36,3	128,0	-36,7	128,0	-36,7	128,0	-36,7	128,0	-36,7	128,0	
185	-37,5	128,0	-37,5	128,0	-38,0	128,0	-38,0	128,0	-38,0	128,0	-38,0	128,0	
190	-38,8	128,0	-38,8	128,0	-39,2	128,0	-39,2	128,0	-39,2	128,0	-39,2	128,0	
195	-40,0	128,0	-40,0	128,0	-40,4	128,0	-40,4	128,0	-40,4	128,0	-40,4	128,0	
200	-41,2	128,0	-41,2	128,0	-41,6	128,0	-41,6	128,0	-41,6	128,0	-41,6	128,0	
205	-42,5	128,0	-42,5	128,0	-42,9	128,0	-42,9	128,0	-42,9	128,0	-42,9	128,0	
210	-43,7	128,0	-43,7	128,0	-44,1	128,0	-44,1	128,0	-44,1	128,0	-44,1	128,0	
215	-44,9	128,0	-44,9	128,0	-45,3	128,0	-45,3	128,0	-45,3	128,0	-45,3	128,0	
220	-46,1	128,0	-46,1	128,0	-46,6	128,0	-46,6	128,0	-46,6	128,0	-46,6	128,0	
225	-47,4	128,0	-47,4	128,0	-47,8	128,0	-47,8	128,0	-47,8	128,0	-47,8	128,0	
230	-48,6	128,0	-48,6	128,0	-49,0	128,0	-49,0	128,0	-49,0	128,0	-49,0	128,0	
235	-49,8	128,0	-49,8	128,0	-50,2	128,0	-50,2	128,0	-50,2	128,0	-50,2	128,0	
240	-51,1	128,0	-51,1	128,0	-51,5	128,0	-51,5	128,0	-51,5	128,0	-51,5	128,0	
245	-52,3	128,0	-52,3	128,0	-52,7	128,0	-52,7	128,0	-52,7	128,0	-52,7	128,0	
250	-53,5	128,0	-53,5	128,0	-53,9	128,0	-53,9	128,0	-53,9	128,0	-53,9	128,0	
255	-54,8	128,0	-54,8	128,0	-55,2	128,0	-55,2	128,0	-55,2	128,0	-55,2	128,0	
260	-56,0	128,0	-56,0	128,0	-56,4	128,0	-56,4	128,0	-56,4	128,0	-56,4	128,0	
265	-57,2	128,0	-57,2	128,0	-57,6	128,0	-57,6	128,0	-57,6	128,0	-57,6	128,0	
270	-58,4	128,0	-58,4	128,0	-58,8	128,0	-58,8	128,0	-58,8	128,0	-58,8	128,0	
275	-59,7	128,0	-59,7	128,0	-60,1	128,0	-60,1	128,0	-60,1	128,0	-60,1	128,0	
280	-60,9	128,0	-60,9	128,0	-61,3	128,0	-61,3	128,0	-61,3	128,0	-61,3	128,0	
285	-62,1	128,0	-62,1	128,0	-62,5	128,0	-62,5	128,0	-62,5	128,0	-62,5	128,0	
290	-63,4	128,0	-63,4	128,0	-63,8	128,0	-63,8	128,0	-63,8	128,0	-63,8	128,0	
295	-64,6	128,0	-64,6	128,0	-65,0	128,0	-65,0	128,0	-65,0	128,0	-65,0	128,0	
300	-65,8	128,0	-65,8	128,0	-66,2	128,0	-66,2	128,0	-66,2	128,0	-66,2	128,0	
c _{nom} = 30mm	310	-61,7	126,1	-61,7	126,1	-68,7	128,0	-68,7	128,0	-68,7	128,0	-68,7	128,0
	320	-63,9	126,1	-63,9	126,1	-71,1	128,0	-71,1	128,0	-71,1	128,0	-71,1	128,0
c _{nom} = 35mm	305	-60,6	126,1	-60,6	126,1	-67,5	128,0	-67,5	128,0	-67,5	128,0	-67,5	128,0
	315	-62,8	126,1	-62,8	126,1	-69,9	128,0	-69,9	128,0	-69,9	128,0	-69,9	128,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

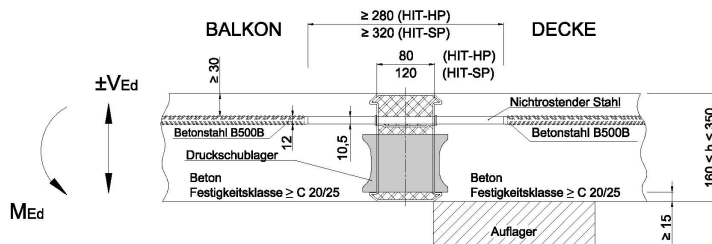


HIT-HP MVX-0608-hh-100-cc											
HIT-HP MVX-0304-hh-050-cc											
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37			
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,16	0,89	3,84	0,16	0,96	3,90	0,16	0,96	3,90
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13	
	A _{s,prov}	Ø8	Ø6/2,5	Ø8/13	Ø8	Ø6/2,5	Ø8/12,5	Ø8	Ø6/2,5	Ø8/12,5	
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}
		[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
	[mm]										
125		-26,7	128,0	-26,7	128,0	-27,3	128,0	-27,3	128,0	-27,3	128,0
130		-28,2	128,0	-28,2	128,0	-28,7	128,0	-28,7	128,0	-28,7	128,0
135		-29,6	128,0	-29,6	128,0	-30,2	128,0	-30,2	128,0	-30,2	128,0
140		-31,1	128,0	-31,1	128,0	-31,7	128,0	-31,7	128,0	-31,7	128,0
145		-32,6	128,0	-32,6	128,0	-33,2	128,0	-33,2	128,0	-33,2	128,0
150		-34,1	128,0	-34,1	128,0	-34,6	128,0	-34,6	128,0	-34,6	128,0
155		-35,5	128,0	-35,5	128,0	-36,1	128,0	-36,1	128,0	-36,1	128,0
160		-37,0	128,0	-37,0	128,0	-37,6	128,0	-37,6	128,0	-37,6	128,0
165		-38,5	128,0	-38,5	128,0	-39,1	128,0	-39,1	128,0	-39,1	128,0
170		-40,0	128,0	-40,0	128,0	-40,5	128,0	-40,5	128,0	-40,5	128,0
175		-41,4	128,0	-41,4	128,0	-42,0	128,0	-42,0	128,0	-42,0	128,0
180		-42,9	128,0	-42,9	128,0	-43,5	128,0	-43,5	128,0	-43,5	128,0
185		-44,4	128,0	-44,4	128,0	-45,0	128,0	-45,0	128,0	-45,0	128,0
190		-45,9	128,0	-45,9	128,0	-46,4	128,0	-46,4	128,0	-46,4	128,0
195		-47,3	128,0	-47,3	128,0	-47,9	128,0	-47,9	128,0	-47,9	128,0
200		-48,8	128,0	-48,8	128,0	-49,4	128,0	-49,4	128,0	-49,4	128,0
205		-50,3	128,0	-50,3	128,0	-50,9	128,0	-50,9	128,0	-50,9	128,0
210		-51,8	128,0	-51,8	128,0	-52,3	128,0	-52,3	128,0	-52,3	128,0
215		-53,2	128,0	-53,2	128,0	-53,8	128,0	-53,8	128,0	-53,8	128,0
220		-54,7	128,0	-54,7	128,0	-55,3	128,0	-55,3	128,0	-55,3	128,0
225		-56,2	128,0	-56,2	128,0	-56,8	128,0	-56,8	128,0	-56,8	128,0
230		-57,7	128,0	-57,7	128,0	-58,2	128,0	-58,2	128,0	-58,2	128,0
235		-59,1	128,0	-59,1	128,0	-59,7	128,0	-59,7	128,0	-59,7	128,0
240		-60,6	128,0	-60,6	128,0	-61,2	128,0	-61,2	128,0	-61,2	128,0
245		-62,1	128,0	-62,1	128,0	-62,7	128,0	-62,7	128,0	-62,7	128,0
250		-63,6	128,0	-63,6	128,0	-64,2	128,0	-64,2	128,0	-64,2	128,0
255		-65,0	128,0	-65,0	128,0	-65,6	128,0	-65,6	128,0	-65,6	128,0
260		-66,5	128,0	-66,5	128,0	-67,1	128,0	-67,1	128,0	-67,1	128,0
265		-68,0	128,0	-68,0	128,0	-68,6	128,0	-68,6	128,0	-68,6	128,0
270		-69,5	128,0	-69,5	128,0	-70,1	128,0	-70,1	128,0	-70,1	128,0
275		-70,9	128,0	-70,9	128,0	-71,5	128,0	-71,5	128,0	-71,5	128,0
280		-72,4	128,0	-72,4	128,0	-73,0	128,0	-73,0	128,0	-73,0	128,0
285		-73,9	128,0	-73,9	128,0	-74,5	128,0	-74,5	128,0	-74,5	128,0
290		-75,4	128,0	-75,4	128,0	-76,0	128,0	-76,0	128,0	-76,0	128,0
295		-76,8	128,0	-76,8	128,0	-77,4	128,0	-77,4	128,0	-77,4	128,0
300		-78,3	128,0	-78,3	128,0	-78,9	128,0	-78,9	128,0	-78,9	128,0
c _{nom} =30mm		310	-73,5	128,0	-73,5	128,0	-81,9	128,0	-81,9	128,0	128,0
30mm		320	-76,2	128,0	-76,2	128,0	-84,8	128,0	-84,8	128,0	128,0
c _{nom} =35mm		305	-72,2	128,0	-72,2	128,0	-80,4	128,0	-80,4	128,0	128,0
35mm		315	-74,8	128,0	-74,8	128,0	-83,3	128,0	-83,3	128,0	128,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

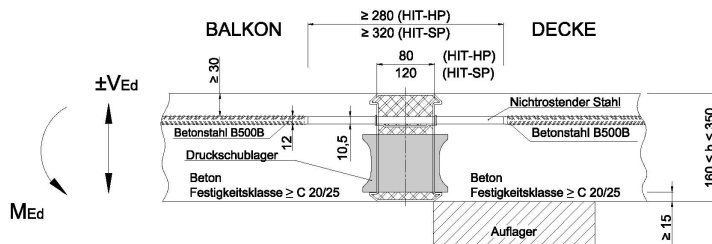


HIT-HP MVX-0708-hh-100-cc											
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37			
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,19	0,96	3,91	0,19	1,04	3,99	0,19	1,04	3,99
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13	
	A _{s,prov}	Ø8	Ø6/25	Ø8/12,5	Ø8	Ø6/25	Ø8/12,5	Ø8	Ø6/25	Ø8/12,5	
h-c _{nom}	h-c _{nom}	Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}
		[mm]	[kNm/m]	[kNm/m]	[kNm/m]	[mm]	[kNm/m]	[kNm/m]	[kNm/m]	[mm]	[kNm/m]
125	125	-30,4	128,0	-30,4	128,0	-31,2	128,0	-31,2	128,0	-31,2	128,0
130	130	-32,1	128,0	-32,1	128,0	-32,9	128,0	-32,9	128,0	-32,9	128,0
135	135	-33,8	128,0	-33,8	128,0	-34,6	128,0	-34,6	128,0	-34,6	128,0
140	140	-35,5	128,0	-35,5	128,0	-36,3	128,0	-36,3	128,0	-36,3	128,0
145	145	-37,2	128,0	-37,2	128,0	-38,0	128,0	-38,0	128,0	-38,0	128,0
150	150	-39,0	128,0	-39,0	128,0	-39,8	128,0	-39,8	128,0	-39,8	128,0
155	155	-40,7	128,0	-40,7	128,0	-41,5	128,0	-41,5	128,0	-41,5	128,0
160	160	-42,4	128,0	-42,4	128,0	-43,2	128,0	-43,2	128,0	-43,2	128,0
165	165	-44,1	128,0	-44,1	128,0	-44,9	128,0	-44,9	128,0	-44,9	128,0
170	170	-45,8	128,0	-45,8	128,0	-46,6	128,0	-46,6	128,0	-46,6	128,0
175	175	-47,6	128,0	-47,6	128,0	-48,4	128,0	-48,4	128,0	-48,4	128,0
180	180	-49,3	128,0	-49,3	128,0	-50,1	128,0	-50,1	128,0	-50,1	128,0
185	185	-51,0	128,0	-51,0	128,0	-51,8	128,0	-51,8	128,0	-51,8	128,0
190	190	-52,7	128,0	-52,7	128,0	-53,5	128,0	-53,5	128,0	-53,5	128,0
195	195	-54,4	128,0	-54,4	128,0	-55,2	128,0	-55,2	128,0	-55,2	128,0
200	200	-56,2	128,0	-56,2	128,0	-57,0	128,0	-57,0	128,0	-57,0	128,0
205	205	-57,9	128,0	-57,9	128,0	-58,7	128,0	-58,7	128,0	-58,7	128,0
210	210	-59,6	128,0	-59,6	128,0	-60,4	128,0	-60,4	128,0	-60,4	128,0
215	215	-61,3	128,0	-61,3	128,0	-62,1	128,0	-62,1	128,0	-62,1	128,0
220	220	-63,1	128,0	-63,1	128,0	-63,9	128,0	-63,9	128,0	-63,9	128,0
225	225	-64,8	128,0	-64,8	128,0	-65,6	128,0	-65,6	128,0	-65,6	128,0
230	230	-66,5	128,0	-66,5	128,0	-67,3	128,0	-67,3	128,0	-67,3	128,0
235	235	-68,2	128,0	-68,2	128,0	-69,0	128,0	-69,0	128,0	-69,0	128,0
240	240	-69,9	128,0	-69,9	128,0	-70,7	128,0	-70,7	128,0	-70,7	128,0
245	245	-71,7	128,0	-71,7	128,0	-72,5	128,0	-72,5	128,0	-72,5	128,0
250	250	-73,4	128,0	-73,4	128,0	-74,2	128,0	-74,2	128,0	-74,2	128,0
255	255	-75,1	128,0	-75,1	128,0	-75,9	128,0	-75,9	128,0	-75,9	128,0
260	260	-76,8	128,0	-76,8	128,0	-77,6	128,0	-77,6	128,0	-77,6	128,0
265	265	-78,5	128,0	-78,5	128,0	-79,3	128,0	-79,3	128,0	-79,3	128,0
270	270	-80,3	128,0	-80,3	128,0	-81,1	128,0	-81,1	128,0	-81,1	128,0
275	275	-82,0	128,0	-82,0	128,0	-82,8	128,0	-82,8	128,0	-82,8	128,0
280	280	-83,7	128,0	-83,7	128,0	-84,5	128,0	-84,5	128,0	-84,5	128,0
285	285	-85,4	128,0	-85,4	128,0	-86,2	128,0	-86,2	128,0	-86,2	128,0
290	290	-87,1	128,0	-87,1	128,0	-87,9	128,0	-87,9	128,0	-87,9	128,0
295	295	-88,9	128,0	-88,9	128,0	-89,7	128,0	-89,7	128,0	-89,7	128,0
300	300	-90,6	128,0	-90,6	128,0	-91,4	128,0	-91,4	128,0	-91,4	128,0
C _{nom} = 30mm	310	-85,1	128,0	-85,1	128,0	-94,8	128,0	-94,8	128,0	-94,8	128,0
	320	-88,2	128,0	-88,2	128,0	-98,3	128,0	-98,3	128,0	-98,3	128,0
C _{nom} = 35mm	305	-83,6	128,0	-83,6	128,0	-93,1	128,0	-93,1	128,0	-93,1	128,0
	315	-86,7	128,0	-86,7	128,0	-96,6	128,0	-96,6	128,0	-96,6	128,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

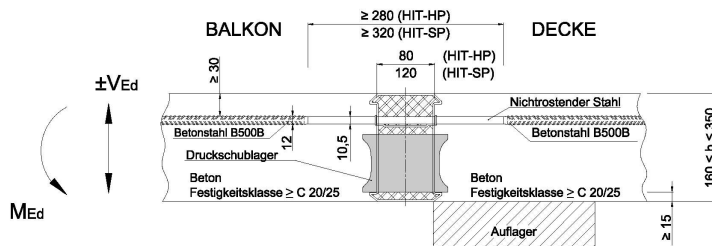


HIT-HP MVX-0808-hh-100-cc											
HIT-HP MVX-0404-hh-050-cc											
HIT-HP MVX-0202-hh-025-cc											
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37			
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,21	1,03	3,97	0,21	1,12	4,06	0,21	1,12	4,06
h-c _{nom}	h-c _{nom}	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13
		A _{s,prov}	Ø8	Ø6/2,5	Ø8/12,5	Ø8	Ø6/2,5	Ø8/12	Ø8	Ø6/2,5	Ø8/12
		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}
		[mm]	[kNm/m]	[kNm]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-33,8	128,0	-33,8	128,0	-34,8	128,0	-34,8	128,0	-34,8	128,0
	130	-35,8	128,0	-35,8	128,0	-36,8	128,0	-36,8	128,0	-36,8	128,0
	135	-37,7	128,0	-37,7	128,0	-38,8	128,0	-38,8	128,0	-38,8	128,0
	140	-39,7	128,0	-39,7	128,0	-40,7	128,0	-40,7	128,0	-40,7	128,0
	145	-41,7	128,0	-41,7	128,0	-42,7	128,0	-42,7	128,0	-42,7	128,0
	150	-43,6	128,0	-43,6	128,0	-44,7	128,0	-44,7	128,0	-44,7	128,0
	155	-45,6	128,0	-45,6	128,0	-46,6	128,0	-46,6	128,0	-46,6	128,0
	160	-47,6	128,0	-47,6	128,0	-48,6	128,0	-48,6	128,0	-48,6	128,0
	165	-49,5	128,0	-49,5	128,0	-50,6	128,0	-50,6	128,0	-50,6	128,0
	170	-51,5	128,0	-51,5	128,0	-52,5	128,0	-52,5	128,0	-52,5	128,0
	175	-53,5	128,0	-53,5	128,0	-54,5	128,0	-54,5	128,0	-54,5	128,0
	180	-55,4	128,0	-55,4	128,0	-56,5	128,0	-56,5	128,0	-56,5	128,0
	185	-57,4	128,0	-57,4	128,0	-58,4	128,0	-58,4	128,0	-58,4	128,0
	190	-59,4	128,0	-59,4	128,0	-60,4	128,0	-60,4	128,0	-60,4	128,0
	195	-61,3	128,0	-61,3	128,0	-62,4	128,0	-62,4	128,0	-62,4	128,0
	200	-63,3	128,0	-63,3	128,0	-64,3	128,0	-64,3	128,0	-64,3	128,0
	205	-65,3	128,0	-65,3	128,0	-66,3	128,0	-66,3	128,0	-66,3	128,0
	210	-67,2	128,0	-67,2	128,0	-68,3	128,0	-68,3	128,0	-68,3	128,0
	215	-69,2	128,0	-69,2	128,0	-70,2	128,0	-70,2	128,0	-70,2	128,0
	220	-71,2	128,0	-71,2	128,0	-72,2	128,0	-72,2	128,0	-72,2	128,0
	225	-73,1	128,0	-73,1	128,0	-74,2	128,0	-74,2	128,0	-74,2	128,0
	230	-75,1	128,0	-75,1	128,0	-76,1	128,0	-76,1	128,0	-76,1	128,0
	235	-77,1	128,0	-77,1	128,0	-78,1	128,0	-78,1	128,0	-78,1	128,0
	240	-79,0	128,0	-79,0	128,0	-80,1	128,0	-80,1	128,0	-80,1	128,0
	245	-81,0	128,0	-81,0	128,0	-82,0	128,0	-82,0	128,0	-82,0	128,0
	250	-83,0	128,0	-83,0	128,0	-84,0	128,0	-84,0	128,0	-84,0	128,0
	255	-84,9	128,0	-84,9	128,0	-86,0	128,0	-86,0	128,0	-86,0	128,0
	260	-86,9	128,0	-86,9	128,0	-88,0	128,0	-88,0	128,0	-88,0	128,0
	265	-88,9	128,0	-88,9	128,0	-89,9	128,0	-89,9	128,0	-89,9	128,0
	270	-90,8	128,0	-90,8	128,0	-91,9	128,0	-91,9	128,0	-91,9	128,0
	275	-92,8	128,0	-92,8	128,0	-93,9	128,0	-93,9	128,0	-93,9	128,0
	280	-94,8	128,0	-94,8	128,0	-95,8	128,0	-95,8	128,0	-95,8	128,0
	285	-96,7	128,0	-96,7	128,0	-97,8	128,0	-97,8	128,0	-97,8	128,0
	290	-98,7	128,0	-98,7	128,0	-99,8	128,0	-99,8	128,0	-99,8	128,0
	295	-100,7	128,0	-100,7	128,0	-101,7	128,0	-101,7	128,0	-101,7	128,0
	300	-102,6	128,0	-102,6	128,0	-103,7	128,0	-103,7	128,0	-103,7	128,0
c _{nom} = 30mm	310	-96,6	128,0	-96,6	128,0	-107,6	128,0	-107,6	128,0	-107,6	128,0
	320	-100,1	128,0	-100,1	128,0	-111,6	128,0	-111,6	128,0	-111,6	128,0
c _{nom} = 35mm	305	-94,8	128,0	-94,8	128,0	-105,7	128,0	-105,7	128,0	-105,7	128,0
	315	-98,3	128,0	-98,3	128,0	-109,6	128,0	-109,6	128,0	-109,6	128,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

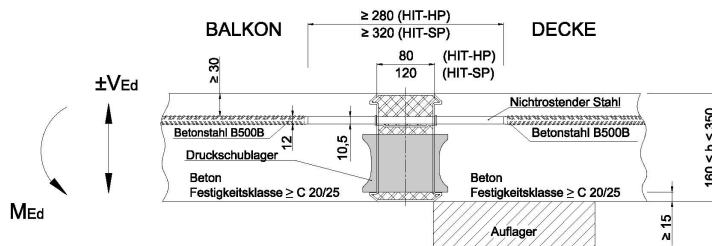


HIT-HP MVX-0908-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]	
		A _{s,req}	0,24	1,08	4,02		0,24	1,18	4,12		0,24	1,18	4,12
		A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13
A _{s,prov}	Ø8	Ø6/2,5	Ø8/12		Ø8	Ø6/2,3,5	Ø8/12		Ø8	Ø6/2,3,5	Ø8/12		
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
		[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeit im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-37,0	128,0	-37,0	128,0	-38,3	128,0	-38,3	128,0	-38,3	128,0	-38,3	128,0
	130	-39,2	128,0	-39,2	128,0	-40,6	128,0	-40,6	128,0	-40,6	128,0	-40,6	128,0
	135	-41,5	128,0	-41,5	128,0	-42,8	128,0	-42,8	128,0	-42,8	128,0	-42,8	128,0
	140	-43,7	128,0	-43,7	128,0	-45,0	128,0	-45,0	128,0	-45,0	128,0	-45,0	128,0
	145	-45,9	128,0	-45,9	128,0	-47,2	128,0	-47,2	128,0	-47,2	128,0	-47,2	128,0
	150	-48,1	128,0	-48,1	128,0	-49,4	128,0	-49,4	128,0	-49,4	128,0	-49,4	128,0
	155	-50,3	128,0	-50,3	128,0	-51,6	128,0	-51,6	128,0	-51,6	128,0	-51,6	128,0
	160	-52,5	128,0	-52,5	128,0	-53,8	128,0	-53,8	128,0	-53,8	128,0	-53,8	128,0
	165	-54,7	128,0	-54,7	128,0	-56,0	128,0	-56,0	128,0	-56,0	128,0	-56,0	128,0
	170	-56,7	128,0	-56,7	128,0	-58,3	128,0	-58,3	128,0	-58,3	128,0	-58,3	128,0
	175	-58,7	128,0	-58,7	128,0	-60,5	128,0	-60,5	128,0	-60,5	128,0	-60,5	128,0
	180	-60,6	128,0	-60,6	128,0	-62,7	128,0	-62,7	128,0	-62,7	128,0	-62,7	128,0
	185	-62,5	128,0	-62,5	128,0	-64,9	128,0	-64,9	128,0	-64,9	128,0	-64,9	128,0
	190	-64,4	128,0	-64,4	128,0	-67,1	128,0	-67,1	128,0	-67,1	128,0	-67,1	128,0
	195	-66,4	128,0	-66,4	128,0	-69,3	128,0	-69,3	128,0	-69,3	128,0	-69,3	128,0
	200	-68,3	128,0	-68,3	128,0	-71,5	128,0	-71,5	128,0	-71,5	128,0	-71,5	128,0
	205	-70,2	128,0	-70,2	128,0	-73,8	128,0	-73,8	128,0	-73,8	128,0	-73,8	128,0
	210	-72,2	128,0	-72,2	128,0	-76,0	128,0	-76,0	128,0	-76,0	128,0	-76,0	128,0
	215	-74,1	128,0	-74,1	128,0	-78,2	128,0	-78,2	128,0	-78,2	128,0	-78,2	128,0
	220	-76,0	128,0	-76,0	128,0	-80,4	128,0	-80,4	128,0	-80,4	128,0	-80,4	128,0
	225	-78,0	128,0	-78,0	128,0	-82,6	128,0	-82,6	128,0	-82,6	128,0	-82,6	128,0
	230	-79,9	128,0	-79,9	128,0	-84,8	128,0	-84,8	128,0	-84,8	128,0	-84,8	128,0
	235	-81,8	128,0	-81,8	128,0	-87,0	128,0	-87,0	128,0	-87,0	128,0	-87,0	128,0
	240	-83,7	128,0	-83,7	128,0	-89,2	128,0	-89,2	128,0	-89,2	128,0	-89,2	128,0
	245	-85,7	128,0	-85,7	128,0	-91,5	128,0	-91,5	128,0	-91,5	128,0	-91,5	128,0
	250	-87,6	128,0	-87,6	128,0	-93,7	128,0	-93,7	128,0	-93,7	128,0	-93,7	128,0
	255	-89,5	128,0	-89,5	128,0	-95,9	128,0	-95,9	128,0	-95,9	128,0	-95,9	128,0
	260	-91,5	128,0	-91,5	128,0	-98,1	128,0	-98,1	128,0	-98,1	128,0	-98,1	128,0
	265	-93,4	128,0	-93,4	128,0	-100,3	128,0	-100,3	128,0	-100,3	128,0	-100,3	128,0
	270	-95,3	128,0	-95,3	128,0	-102,5	128,0	-102,5	128,0	-102,5	128,0	-102,5	128,0
275	-97,3	128,0	-97,3	128,0	-104,7	128,0	-104,7	128,0	-104,7	128,0	-104,7	128,0	
280	-99,2	128,0	-99,2	128,0	-106,9	128,0	-106,9	128,0	-106,9	128,0	-106,9	128,0	
285	-101,1	128,0	-101,1	128,0	-109,2	128,0	-109,2	128,0	-109,2	128,0	-109,2	128,0	
290	-103,0	128,0	-103,0	128,0	-111,4	128,0	-111,4	128,0	-111,4	128,0	-111,4	128,0	
295	-105,0	128,0	-105,0	128,0	-113,6	128,0	-113,6	128,0	-113,6	128,0	-113,6	128,0	
300	-106,9	128,0	-106,9	128,0	-115,8	128,0	-115,8	128,0	-115,8	128,0	-115,8	128,0	
c _{nom} = 30mm	310	-78,2	128,0	-78,2	128,0	-91,6	128,0	-91,6	128,0	-102,0	128,0	-102,0	128,0
	320	-81,0	128,0	-81,0	128,0	-94,9	128,0	-94,9	128,0	-105,7	128,0	-105,7	128,0
c _{nom} = 35mm	305	-76,8	128,0	-76,8	128,0	-89,9	128,0	-89,9	128,0	-100,2	128,0	-100,2	128,0
	315	-79,6	128,0	-79,6	128,0	-93,3	128,0	-93,3	128,0	-103,9	128,0	-103,9	128,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

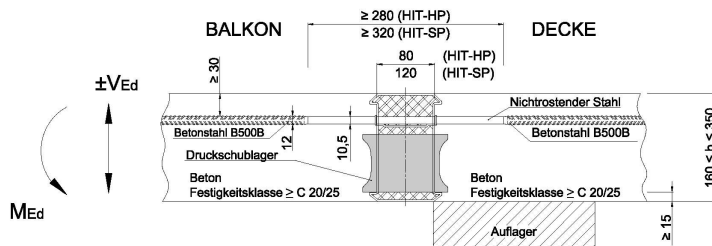


HIT-HP MVX-1008-hh-100-cc													
HIT-HP MVX-0504-hh-050-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,27	1,13	4,07		0,27	1,24	4,18		0,27	1,24	4,18
		A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13
A _{s,prov}	Ø8	Ø6/2,5	Ø8/12		Ø8	Ø6/22,5	Ø8/12		Ø8	Ø6/22,5	Ø8/12		
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)			Punkt 1 (max V)	Punkt 2 (max M)			Punkt 1 (max V)	Punkt 2 (max M)			
	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
125		-40,0	128,0		-41,7	128,0		-41,7	128,0		-41,7	128,0	
130		-42,5	128,0		-44,1	128,0		-44,1	128,0		-44,1	128,0	
135		-44,9	128,0		-46,6	128,0		-46,6	128,0		-46,6	128,0	
140		-47,4	128,0		-49,0	128,0		-49,0	128,0		-49,0	128,0	
145		-49,9	128,0		-51,5	128,0		-51,5	128,0		-51,5	128,0	
150		-52,3	128,0		-54,0	128,0		-54,0	128,0		-54,0	128,0	
155		-54,8	128,0		-56,4	128,0		-56,4	128,0		-56,4	128,0	
160		-57,2	128,0		-58,9	128,0		-58,9	128,0		-58,9	128,0	
165		-59,7	128,0		-61,3	128,0		-61,3	128,0		-61,3	128,0	
170		-62,2	128,0		-63,8	128,0		-63,8	128,0		-63,8	128,0	
175		-64,4	128,0		-66,2	128,0		-66,2	128,0		-66,2	128,0	
180		-66,5	128,0		-68,7	128,0		-68,7	128,0		-68,7	128,0	
185		-68,7	128,0		-71,2	128,0		-71,2	128,0		-71,2	128,0	
190		-70,8	128,0		-73,6	128,0		-73,6	128,0		-73,6	128,0	
195		-72,9	128,0		-76,1	128,0		-76,1	128,0		-76,1	128,0	
200		-75,1	128,0		-78,5	128,0		-78,5	128,0		-78,5	128,0	
205		-77,2	128,0		-81,0	128,0		-81,0	128,0		-81,0	128,0	
210		-79,4	128,0		-83,5	128,0		-83,5	128,0		-83,5	128,0	
215		-81,5	128,0		-85,9	128,0		-85,9	128,0		-85,9	128,0	
220		-83,7	128,0		-88,4	128,0		-88,4	128,0		-88,4	128,0	
225		-85,8	128,0		-90,8	128,0		-90,8	128,0		-90,8	128,0	
230		-88,0	128,0		-93,3	128,0		-93,3	128,0		-93,3	128,0	
235		-90,1	128,0		-95,7	128,0		-95,7	128,0		-95,7	128,0	
240		-92,2	128,0		-98,2	128,0		-98,2	128,0		-98,2	128,0	
245		-94,4	128,0		-100,7	128,0		-100,7	128,0		-100,7	128,0	
250		-96,5	128,0		-103,1	128,0		-103,1	128,0		-103,1	128,0	
255		-98,7	128,0		-105,6	128,0		-105,6	128,0		-105,6	128,0	
260		-100,8	128,0		-108,0	128,0		-108,0	128,0		-108,0	128,0	
265		-103,0	128,0		-110,5	128,0		-110,5	128,0		-110,5	128,0	
270		-105,1	128,0		-113,0	128,0		-113,0	128,0		-113,0	128,0	
275		-107,2	128,0		-115,4	128,0		-115,4	128,0		-115,4	128,0	
280		-109,4	128,0		-117,9	128,0		-117,9	128,0		-117,9	128,0	
285		-111,5	128,0		-120,3	128,0		-120,3	128,0		-120,3	128,0	
290		-113,7	128,0		-122,8	128,0		-122,8	128,0		-122,8	128,0	
295		-115,8	128,0		-125,3	128,0		-125,3	128,0		-125,3	128,0	
300		-118,0	128,0		-127,7	128,0		-127,7	128,0		-127,7	128,0	
c _{nom} = 30mm	310	-86,4	128,0		-101,2	128,0		-101,2	128,0		-113,9	128,0	
	320	-89,5	128,0		-104,9	128,0		-104,9	128,0		-118,1	128,0	
c _{nom} = 35mm	305	-84,8	128,0		-99,4	128,0		-99,4	128,0		-111,9	128,0	
	315	-88,0	128,0		-103,1	128,0		-103,1	128,0		-116,0	128,0	

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

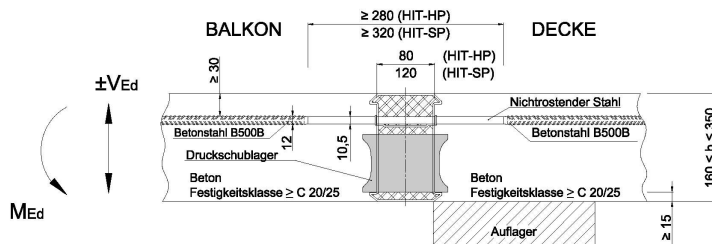


HIT-HP MVX-1108-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,29	1,17	4,11		0,29	1,29	4,23		0,29	1,29	4,23
		A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13
A _{s,prov}	Ø8	Ø6/24	Ø8/12		Ø8	Ø6/21,5	Ø8/11,5		Ø8	Ø6/21,5	Ø8/11,5		
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)			Punkt 1 (max V)	Punkt 2 (max M)			Punkt 1 (max V)	Punkt 2 (max M)			
	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-42,8	128,0	-42,8	128,0	-44,8	128,0	-44,8	128,0	-44,8	128,0	-44,8	128,0
	130	-45,5	128,0	-45,5	128,0	-47,5	128,0	-47,5	128,0	-47,5	128,0	-47,5	128,0
	135	-48,2	128,0	-48,2	128,0	-50,2	128,0	-50,2	128,0	-50,2	128,0	-50,2	128,0
	140	-50,9	128,0	-50,9	128,0	-52,9	128,0	-52,9	128,0	-52,9	128,0	-52,9	128,0
	145	-53,6	128,0	-53,6	128,0	-55,6	128,0	-55,6	128,0	-55,6	128,0	-55,6	128,0
	150	-56,3	128,0	-56,3	128,0	-58,3	128,0	-58,3	128,0	-58,3	128,0	-58,3	128,0
	155	-59,0	128,0	-59,0	128,0	-61,0	128,0	-61,0	128,0	-61,0	128,0	-61,0	128,0
	160	-61,7	128,0	-61,7	128,0	-63,7	128,0	-63,7	128,0	-63,7	128,0	-63,7	128,0
	165	-64,4	128,0	-64,4	128,0	-66,4	128,0	-66,4	128,0	-66,4	128,0	-66,4	128,0
	170	-67,1	128,0	-67,1	128,0	-69,1	128,0	-69,1	128,0	-69,1	128,0	-69,1	128,0
	175	-69,9	128,0	-69,9	128,0	-71,8	128,0	-71,8	128,0	-71,8	128,0	-71,8	128,0
	180	-72,3	128,0	-72,3	128,0	-74,5	128,0	-74,5	128,0	-74,5	128,0	-74,5	128,0
	185	-74,6	128,0	-74,6	128,0	-77,2	128,0	-77,2	128,0	-77,2	128,0	-77,2	128,0
	190	-77,0	128,0	-77,0	128,0	-79,9	128,0	-79,9	128,0	-79,9	128,0	-79,9	128,0
	195	-79,3	128,0	-79,3	128,0	-82,6	128,0	-82,6	128,0	-82,6	128,0	-82,6	128,0
	200	-81,7	128,0	-81,7	128,0	-85,3	128,0	-85,3	128,0	-85,3	128,0	-85,3	128,0
	205	-84,1	128,0	-84,1	128,0	-88,1	128,0	-88,1	128,0	-88,1	128,0	-88,1	128,0
	210	-86,4	128,0	-86,4	128,0	-90,8	128,0	-90,8	128,0	-90,8	128,0	-90,8	128,0
	215	-88,8	128,0	-88,8	128,0	-93,5	128,0	-93,5	128,0	-93,5	128,0	-93,5	128,0
	220	-91,1	128,0	-91,1	128,0	-96,2	128,0	-96,2	128,0	-96,2	128,0	-96,2	128,0
	225	-93,5	128,0	-93,5	128,0	-98,9	128,0	-98,9	128,0	-98,9	128,0	-98,9	128,0
	230	-95,9	128,0	-95,9	128,0	-101,6	128,0	-101,6	128,0	-101,6	128,0	-101,6	128,0
	235	-98,2	128,0	-98,2	128,0	-104,3	128,0	-104,3	128,0	-104,3	128,0	-104,3	128,0
	240	-100,6	128,0	-100,6	128,0	-107,0	128,0	-107,0	128,0	-107,0	128,0	-107,0	128,0
	245	-102,9	128,0	-102,9	128,0	-109,7	128,0	-109,7	128,0	-109,7	128,0	-109,7	128,0
	250	-105,3	128,0	-105,3	128,0	-112,4	128,0	-112,4	128,0	-112,4	128,0	-112,4	128,0
	255	-107,6	128,0	-107,6	128,0	-115,1	128,0	-115,1	128,0	-115,1	128,0	-115,1	128,0
	260	-110,0	128,0	-110,0	128,0	-117,8	128,0	-117,8	128,0	-117,8	128,0	-117,8	128,0
	265	-112,4	128,0	-112,4	128,0	-120,5	128,0	-120,5	128,0	-120,5	128,0	-120,5	128,0
	270	-114,7	128,0	-114,7	128,0	-123,2	128,0	-123,2	128,0	-123,2	128,0	-123,2	128,0
	275	-117,1	128,0	-117,1	128,0	-125,9	128,0	-125,9	128,0	-125,9	128,0	-125,9	128,0
	280	-119,4	128,0	-119,4	128,0	-128,6	128,0	-128,6	128,0	-128,6	128,0	-128,6	128,0
	285	-121,8	128,0	-121,8	128,0	-131,3	128,0	-131,3	128,0	-131,3	128,0	-131,3	128,0
	290	-124,2	128,0	-124,2	128,0	-134,0	128,0	-134,0	128,0	-134,0	128,0	-134,0	128,0
	295	-126,5	128,0	-126,5	128,0	-136,7	128,0	-136,7	128,0	-136,7	128,0	-136,7	128,0
	300	-128,9	128,0	-128,9	128,0	-139,4	128,0	-139,4	128,0	-139,4	128,0	-139,4	128,0
c _{nom} = 30mm	310	-95,9	128,0	-95,9	128,0	-110,8	128,0	-110,8	128,0	-124,6	128,0	-124,6	128,0
	320	-99,4	128,0	-99,4	128,0	-114,8	128,0	-114,8	128,0	-129,2	128,0	-129,2	128,0
c _{nom} = 35mm	305	-94,2	128,0	-94,2	128,0	-108,8	128,0	-108,8	128,0	-122,3	128,0	-122,3	128,0
	315	-97,7	128,0	-97,7	128,0	-112,8	128,0	-112,8	128,0	-126,9	128,0	-126,9	128,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

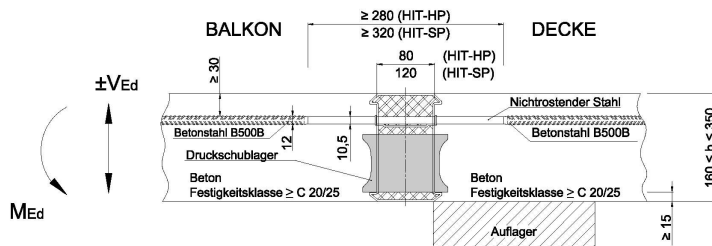


HIT-HP MVX-1208-hh-100-cc													
HIT-HP MVX-0604-hh-050-cc													
HIT-HP MVX-0302-hh-025-cc													
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]			
		A _{s,req}	0,32	1,21	4,15	0,32	1,33	4,28	0,32	1,33		4,28	
A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13				
A _{s,prov}	Ø8	Ø6/23	Ø8/12	Ø8	Ø6/21	Ø8/11,5	Ø8	Ø6/21	Ø8/11,5				
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
		[mm]	[kNm/m]	[kNm/m]	[kNm/m]	[mm]	[kNm/m]	[kNm/m]	[kNm/m]	[mm]	[kNm/m]	[kNm/m]	[kNm/m]
Tragfähigkeit im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-45,4	128,0	-45,4	128,0	-47,7	128,0	-47,7	128,0	-47,7	128,0	-47,7	128,0
	130	-48,3	128,0	-48,3	128,0	-50,7	128,0	-50,7	128,0	-50,7	128,0	-50,7	128,0
	135	-51,3	128,0	-51,3	128,0	-53,6	128,0	-53,6	128,0	-53,6	128,0	-53,6	128,0
	140	-54,2	128,0	-54,2	128,0	-56,6	128,0	-56,6	128,0	-56,6	128,0	-56,6	128,0
	145	-57,2	128,0	-57,2	128,0	-59,5	128,0	-59,5	128,0	-59,5	128,0	-59,5	128,0
	150	-60,1	128,0	-60,1	128,0	-62,5	128,0	-62,5	128,0	-62,5	128,0	-62,5	128,0
	155	-63,1	128,0	-63,1	128,0	-65,4	128,0	-65,4	128,0	-65,4	128,0	-65,4	128,0
	160	-66,0	128,0	-66,0	128,0	-68,4	128,0	-68,4	128,0	-68,4	128,0	-68,4	128,0
	165	-69,0	128,0	-69,0	128,0	-71,3	128,0	-71,3	128,0	-71,3	128,0	-71,3	128,0
	170	-71,9	128,0	-71,9	128,0	-74,3	128,0	-74,3	128,0	-74,3	128,0	-74,3	128,0
	175	-74,9	128,0	-74,9	128,0	-77,2	128,0	-77,2	128,0	-77,2	128,0	-77,2	128,0
	180	-77,8	128,0	-77,8	128,0	-80,2	128,0	-80,2	128,0	-80,2	128,0	-80,2	128,0
	185	-80,4	128,0	-80,4	128,0	-83,1	128,0	-83,1	128,0	-83,1	128,0	-83,1	128,0
	190	-83,0	128,0	-83,0	128,0	-86,1	128,0	-86,1	128,0	-86,1	128,0	-86,1	128,0
	195	-85,6	128,0	-85,6	128,0	-89,0	128,0	-89,0	128,0	-89,0	128,0	-89,0	128,0
	200	-88,2	128,0	-88,2	128,0	-92,0	128,0	-92,0	128,0	-92,0	128,0	-92,0	128,0
	205	-90,7	128,0	-90,7	128,0	-94,9	128,0	-94,9	128,0	-94,9	128,0	-94,9	128,0
	210	-93,3	128,0	-93,3	128,0	-97,9	128,0	-97,9	128,0	-97,9	128,0	-97,9	128,0
	215	-95,9	128,0	-95,9	128,0	-100,8	128,0	-100,8	128,0	-100,8	128,0	-100,8	128,0
	220	-98,4	128,0	-98,4	128,0	-103,8	128,0	-103,8	128,0	-103,8	128,0	-103,8	128,0
	225	-101,0	128,0	-101,0	128,0	-106,7	128,0	-106,7	128,0	-106,7	128,0	-106,7	128,0
	230	-103,6	128,0	-103,6	128,0	-109,7	128,0	-109,7	128,0	-109,7	128,0	-109,7	128,0
	235	-106,2	128,0	-106,2	128,0	-112,6	128,0	-112,6	128,0	-112,6	128,0	-112,6	128,0
	240	-108,7	128,0	-108,7	128,0	-115,6	128,0	-115,6	128,0	-115,6	128,0	-115,6	128,0
	245	-111,3	128,0	-111,3	128,0	-118,5	128,0	-118,5	128,0	-118,5	128,0	-118,5	128,0
	250	-113,9	128,0	-113,9	128,0	-121,5	128,0	-121,5	128,0	-121,5	128,0	-121,5	128,0
	255	-116,5	128,0	-116,5	128,0	-124,4	128,0	-124,4	128,0	-124,4	128,0	-124,4	128,0
	260	-119,0	128,0	-119,0	128,0	-127,4	128,0	-127,4	128,0	-127,4	128,0	-127,4	128,0
	265	-121,6	128,0	-121,6	128,0	-130,3	128,0	-130,3	128,0	-130,3	128,0	-130,3	128,0
	270	-124,2	128,0	-124,2	128,0	-133,3	128,0	-133,3	128,0	-133,3	128,0	-133,3	128,0
275	-126,8	128,0	-126,8	128,0	-136,2	128,0	-136,2	128,0	-136,2	128,0	-136,2	128,0	
280	-129,3	128,0	-129,3	128,0	-139,2	128,0	-139,2	128,0	-139,2	128,0	-139,2	128,0	
285	-131,9	128,0	-131,9	128,0	-142,1	128,0	-142,1	128,0	-142,1	128,0	-142,1	128,0	
290	-134,5	128,0	-134,5	128,0	-145,1	128,0	-145,1	128,0	-145,1	128,0	-145,1	128,0	
295	-137,0	128,0	-137,0	128,0	-148,0	128,0	-148,0	128,0	-148,0	128,0	-148,0	128,0	
300	-139,6	128,0	-139,6	128,0	-151,0	128,0	-151,0	128,0	-151,0	128,0	-151,0	128,0	
c _{nom} = 30mm	310	-104,1	128,0	-104,1	128,0	-120,2	128,0	-120,2	128,0	-135,1	128,0	-135,1	128,0
	320	-107,9	128,0	-107,9	128,0	-124,6	128,0	-124,6	128,0	-140,1	128,0	-140,1	128,0
c _{nom} = 35mm	305	-102,2	128,0	-102,2	128,0	-118,0	128,0	-118,0	128,0	-132,6	128,0	-132,6	128,0
	315	-106,0	128,0	-106,0	128,0	-122,4	128,0	-122,4	128,0	-137,6	128,0	-137,6	128,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

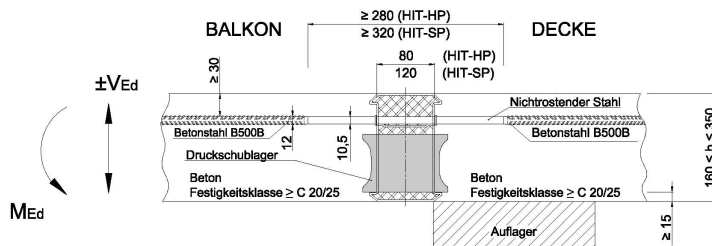


HIT-HP MVX-1308-hh-100-cc													
Spaltzug- und Aufhängewehrung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]			
		A _{s,req}	0,34	1,24	4,16	0,34	1,38	4,32	0,34	1,38		4,32	
		A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13		1,13	
A _{s,prov}	Ø8	Ø6/22,5	Ø8/12	Ø8	Ø6/20,5	Ø8/11,5	Ø8	Ø6/20,5	Ø8/11,5				
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)					
	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-46,1	128,0	-47,7	119,3	-50,5	128,0	-50,5	128,0	-50,5	128,0	-50,5	128,0
	130	-49,1	128,0	-50,9	119,3	-53,7	128,0	-53,7	128,0	-53,7	128,0	-53,7	128,0
	135	-52,1	128,0	-54,1	119,3	-56,9	128,0	-56,9	128,0	-56,9	128,0	-56,9	128,0
	140	-55,1	128,0	-57,3	119,3	-60,0	128,0	-60,0	128,0	-60,0	128,0	-60,0	128,0
	145	-58,2	128,0	-60,5	119,3	-63,2	128,0	-63,2	128,0	-63,2	128,0	-63,2	128,0
	150	-61,2	128,0	-63,7	119,3	-66,4	128,0	-66,4	128,0	-66,4	128,0	-66,4	128,0
	155	-64,2	128,0	-66,9	119,3	-69,6	128,0	-69,6	128,0	-69,6	128,0	-69,6	128,0
	160	-67,2	128,0	-70,1	119,3	-72,8	128,0	-72,8	128,0	-72,8	128,0	-72,8	128,0
	165	-70,3	128,0	-73,3	119,3	-76,0	128,0	-76,0	128,0	-76,0	128,0	-76,0	128,0
	170	-73,3	128,0	-76,5	119,3	-79,2	128,0	-79,2	128,0	-79,2	128,0	-79,2	128,0
	175	-76,3	128,0	-79,7	119,3	-82,4	128,0	-82,4	128,0	-82,4	128,0	-82,4	128,0
	180	-79,3	128,0	-82,9	119,3	-85,6	128,0	-85,6	128,0	-85,6	128,0	-85,6	128,0
	185	-82,4	128,0	-86,1	119,3	-88,8	128,0	-88,8	128,0	-88,8	128,0	-88,8	128,0
	190	-85,4	128,0	-88,9	120,2	-92,0	128,0	-92,0	128,0	-92,0	128,0	-92,0	128,0
	195	-88,4	128,0	-91,7	121,0	-95,2	128,0	-95,2	128,0	-95,2	128,0	-95,2	128,0
	200	-91,4	128,0	-94,4	121,8	-98,4	128,0	-98,4	128,0	-98,4	128,0	-98,4	128,0
	205	-94,4	128,0	-97,2	122,5	-101,6	128,0	-101,6	128,0	-101,6	128,0	-101,6	128,0
	210	-97,5	128,0	-100,0	123,2	-104,8	128,0	-104,8	128,0	-104,8	128,0	-104,8	128,0
	215	-100,5	128,0	-102,8	123,8	-108,0	128,0	-108,0	128,0	-108,0	128,0	-108,0	128,0
	220	-103,5	128,0	-105,6	124,4	-111,2	128,0	-111,2	128,0	-111,2	128,0	-111,2	128,0
	225	-106,5	128,0	-108,4	124,9	-114,4	128,0	-114,4	128,0	-114,4	128,0	-114,4	128,0
	230	-109,6	128,0	-111,2	125,4	-117,6	128,0	-117,6	128,0	-117,6	128,0	-117,6	128,0
	235	-112,6	128,0	-114,0	125,8	-120,8	128,0	-120,8	128,0	-120,8	128,0	-120,8	128,0
	240	-115,6	128,0	-116,7	126,3	-124,0	128,0	-124,0	128,0	-124,0	128,0	-124,0	128,0
	245	-118,6	128,0	-119,5	126,7	-127,2	128,0	-127,2	128,0	-127,2	128,0	-127,2	128,0
	250	-121,7	128,0	-122,3	127,0	-130,4	128,0	-130,4	128,0	-130,4	128,0	-130,4	128,0
	255	-124,7	128,0	-125,1	127,4	-133,6	128,0	-133,6	128,0	-133,6	128,0	-133,6	128,0
	260	-127,7	128,0	-127,9	127,7	-136,8	128,0	-136,8	128,0	-136,8	128,0	-136,8	128,0
	265	-130,7	128,0	-130,7	128,0	-140,0	128,0	-140,0	128,0	-140,0	128,0	-140,0	128,0
	270	-133,5	128,0	-133,5	128,0	-143,1	128,0	-143,1	128,0	-143,1	128,0	-143,1	128,0
275	-136,3	128,0	-136,3	128,0	-146,3	128,0	-146,3	128,0	-146,3	128,0	-146,3	128,0	
280	-139,0	128,0	-139,0	128,0	-149,5	128,0	-149,5	128,0	-149,5	128,0	-149,5	128,0	
285	-141,8	128,0	-141,8	128,0	-152,7	128,0	-152,7	128,0	-152,7	128,0	-152,7	128,0	
290	-144,6	128,0	-144,6	128,0	-155,9	128,0	-155,9	128,0	-155,9	128,0	-155,9	128,0	
295	-147,4	128,0	-147,4	128,0	-159,1	128,0	-159,1	128,0	-159,1	128,0	-159,1	128,0	
300	-150,2	128,0	-150,2	128,0	-162,3	128,0	-162,3	128,0	-162,3	128,0	-162,3	128,0	
c _{nom} = 30mm	310	-112,1	128,0	-112,1	128,0	-131,1	128,0	-131,1	128,0	-145,5	128,0	-145,5	128,0
	320	-116,3	128,0	-116,3	128,0	-136,0	128,0	-136,0	128,0	-150,9	128,0	-150,9	128,0
c _{nom} = 35mm	305	-110,1	128,0	-110,1	128,0	-128,7	128,0	-128,7	128,0	-142,7	128,0	-142,7	128,0
	315	-114,2	128,0	-114,2	128,0	-133,6	128,0	-133,6	128,0	-148,2	128,0	-148,2	128,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

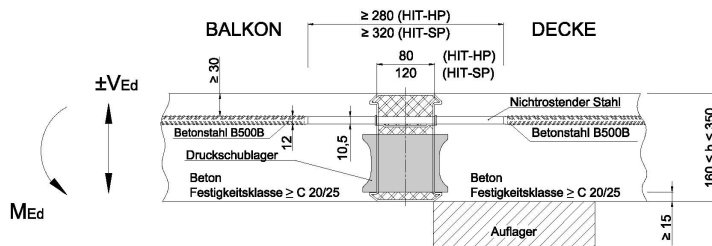


¹⁾ "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

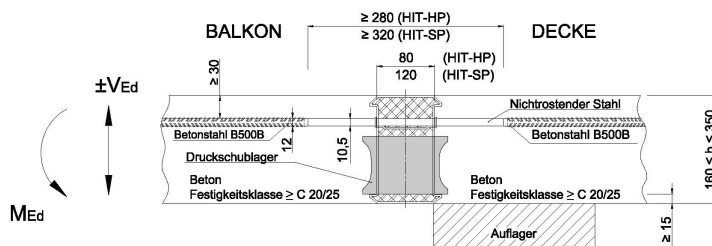


HIT-HP MVX-1608-hh-100-cc													
HIT-HP MVX-0804-hh-050-cc													
HIT-HP MVX-0402-hh-025-cc													
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]			
		A _{s,req}	0,42	1,33	4,16	0,42	1,48	4,34	0,42	1,48		4,38	
A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13				
A _{s,prov}	Ø8	Ø6/21	Ø8/12	Ø8	Ø6/19	Ø8/11,5	Ø8	Ø6/19	Ø8/11				
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	h-c _{nom}	Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
	[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
	125	-46,1	128,0	-53,4	76,4	-52,0	128,0	-57,6	98,5	-54,7	128,0	-57,6	112,2
	130	-49,1	128,0	-57,3	76,4	-55,4	128,0	-61,5	98,5	-58,3	128,0	-61,5	112,2
	135	-52,1	128,0	-61,2	76,4	-58,7	128,0	-65,4	98,5	-62,0	128,0	-65,4	112,2
	140	-55,1	128,0	-65,2	76,4	-62,0	128,0	-69,4	98,5	-65,6	128,0	-69,4	112,2
	145	-58,2	128,0	-69,1	76,4	-65,4	128,0	-73,3	98,5	-69,2	128,0	-73,3	112,2
	150	-61,2	128,0	-73,0	76,4	-68,7	128,0	-77,2	98,5	-72,8	128,0	-77,2	112,2
	155	-64,2	128,0	-77,0	76,4	-72,1	128,0	-81,2	98,5	-76,4	128,0	-81,2	112,2
	160	-67,2	128,0	-80,9	76,4	-75,4	128,0	-85,1	98,5	-80,1	128,0	-85,1	112,2
	165	-70,3	128,0	-84,8	76,4	-78,8	128,0	-89,0	98,5	-83,7	128,0	-89,0	112,2
	170	-73,3	128,0	-88,8	76,4	-82,1	128,0	-93,0	98,5	-87,3	128,0	-93,0	112,2
	175	-76,3	128,0	-92,7	76,4	-85,4	128,0	-96,9	98,5	-90,9	128,0	-96,9	112,2
	180	-79,3	128,0	-96,6	76,4	-88,8	128,0	-100,8	98,5	-94,5	128,0	-100,8	112,2
	185	-82,4	128,0	-100,6	76,4	-92,1	128,0	-104,8	98,5	-98,2	128,0	-104,8	112,2
	190	-85,4	128,0	-104,5	76,4	-95,5	128,0	-108,7	98,5	-101,8	128,0	-108,7	112,2
	195	-88,4	128,0	-108,5	76,4	-98,8	128,0	-112,6	98,5	-105,4	128,0	-112,6	112,2
	200	-91,4	128,0	-112,3	76,6	-102,2	128,0	-116,6	98,5	-109,0	128,0	-116,6	112,2
	205	-94,4	128,0	-115,8	79,1	-105,5	128,0	-120,5	98,5	-112,6	128,0	-120,5	112,2
	210	-97,5	128,0	-119,2	81,4	-108,8	128,0	-124,4	98,5	-116,2	128,0	-124,4	112,2
	215	-100,5	128,0	-122,6	83,4	-112,2	128,0	-128,4	98,5	-119,9	128,0	-128,4	112,2
	220	-103,5	128,0	-126,1	85,2	-115,5	128,0	-132,3	98,5	-123,5	128,0	-132,3	112,2
	225	-106,5	128,0	-129,5	86,9	-118,9	128,0	-136,2	98,5	-127,1	128,0	-136,2	112,2
	230	-109,6	128,0	-132,9	88,0	-122,2	128,0	-140,2	98,5	-130,7	128,0	-140,2	112,2
	235	-112,6	128,0	-136,4	88,7	-125,6	128,0	-144,1	98,5	-134,3	128,0	-144,1	112,2
	240	-115,6	128,0	-139,8	89,3	-128,9	128,0	-148,0	98,5	-138,0	128,0	-148,0	112,2
	245	-118,6	128,0	-143,2	89,9	-132,2	128,0	-152,0	98,5	-141,6	128,0	-152,0	112,2
	250	-121,7	128,0	-146,7	90,5	-135,6	128,0	-155,9	98,5	-145,2	128,0	-155,9	112,2
	255	-124,7	128,0	-150,1	91,0	-138,9	128,0	-159,8	98,5	-148,8	128,0	-159,8	112,2
	260	-127,7	128,0	-153,5	91,5	-142,3	128,0	-163,8	98,5	-152,4	128,0	-163,8	112,2
	265	-130,7	128,0	-156,9	91,9	-145,6	128,0	-167,7	98,5	-156,0	128,0	-167,7	112,2
	270	-133,7	128,0	-160,4	92,4	-149,0	128,0	-171,6	98,5	-159,7	128,0	-171,6	112,2
	275	-136,8	128,0	-163,8	92,8	-152,3	128,0	-175,6	98,5	-163,3	128,0	-175,6	112,2
	280	-139,8	128,0	-167,2	93,2	-155,6	128,0	-179,5	98,5	-166,9	128,0	-179,5	112,2
	285	-142,8	128,0	-170,7	93,5	-159,0	128,0	-183,4	98,5	-170,5	128,0	-183,4	112,2
	290	-145,8	128,0	-174,1	93,9	-162,3	128,0	-187,4	98,5	-174,1	128,0	-187,4	112,2
	295	-148,9	128,0	-177,5	94,2	-165,7	128,0	-191,3	98,5	-177,8	128,0	-191,3	112,2
	300	-151,9	128,0	-181,0	94,5	-169,0	128,0	-195,2	98,5	-181,4	128,0	-195,2	112,2
	c _{nom} = 30mm	310	-135,8	128,0	-135,8	128,0	-158,8	128,0	-158,8	128,0	-177,6	128,0	-177,6
320	-140,9	128,0	-140,9	128,0	-164,8	128,0	-164,8	128,0	-184,4	128,0	-184,4	128,0	
c _{nom} = 35mm	305	-133,2	128,0	-133,2	128,0	-155,8	128,0	-155,8	128,0	-174,2	128,0	-174,2	128,0
315	-138,3	128,0	-138,3	128,0	-161,8	128,0	-161,8	128,0	-181,0	128,0	-181,0	128,0	

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

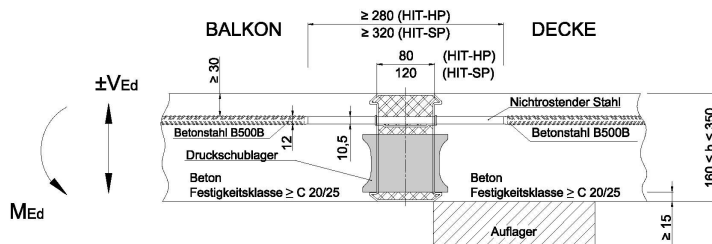


HIT-HP MVX-1808-hh-100-cc													
HIT-HP MVX-0904-hh-050-cc													
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]			
		A _{s,req}	0,48	1,37	4,16	0,48	1,54	4,34	0,48	1,54	4,38		
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13			
A _{s,prov}	Ø8	Ø6/20,5	Ø8/12	Ø8	Ø6/18	Ø8/11,5	Ø8	Ø6/18	Ø8/11				
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
		[mm]	[kNm/m]	[kNm]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeit im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-46,1	128,0	-56,0	13,3	-52,0	128,0	-61,3	73,9	-54,7	128,0	-61,3	87,6
	130	-49,1	128,0	-60,5	13,3	-55,4	128,0	-65,8	73,9	-58,3	128,0	-65,8	87,6
	135	-52,1	128,0	-64,9	13,3	-58,7	128,0	-70,2	73,9	-62,0	128,0	-70,2	87,6
	140	-55,1	128,0	-69,3	13,3	-62,0	128,0	-74,6	73,9	-65,6	128,0	-74,6	87,6
	145	-58,2	128,0	-73,8	13,3	-65,4	128,0	-79,0	73,9	-69,2	128,0	-79,0	87,6
	150	-61,2	128,0	-78,2	13,3	-68,7	128,0	-83,5	73,9	-72,8	128,0	-83,5	87,6
	155	-64,2	128,0	-82,6	13,3	-72,1	128,0	-87,9	73,9	-76,4	128,0	-87,9	87,6
	160	-67,2	128,0	-87,0	13,3	-75,4	128,0	-92,3	73,9	-80,1	128,0	-92,3	87,6
	165	-70,3	128,0	-91,5	13,3	-78,8	128,0	-96,7	73,9	-83,7	128,0	-96,7	87,6
	170	-73,3	128,0	-95,9	13,3	-82,1	128,0	-101,2	73,9	-87,3	128,0	-101,2	87,6
	175	-76,3	128,0	-100,3	13,3	-85,4	128,0	-105,6	73,9	-90,9	128,0	-105,6	87,6
	180	-79,3	128,0	-104,7	13,3	-88,8	128,0	-110,0	73,9	-94,5	128,0	-110,0	87,6
	185	-82,4	128,0	-109,2	13,3	-92,1	128,0	-114,4	73,9	-98,2	128,0	-114,4	87,6
	190	-85,4	128,0	-113,6	13,3	-95,5	128,0	-118,9	73,9	-101,8	128,0	-118,9	87,6
	195	-88,4	128,0	-118,0	13,3	-98,8	128,0	-123,3	73,9	-105,4	128,0	-123,3	87,6
	200	-91,4	128,0	-122,4	13,3	-102,2	128,0	-127,7	73,9	-109,0	128,0	-127,7	87,6
	205	-94,4	128,0	-126,9	13,3	-105,5	128,0	-132,1	73,9	-112,6	128,0	-132,1	87,6
	210	-97,5	128,0	-131,2	13,9	-108,8	128,0	-136,6	73,9	-116,2	128,0	-136,6	87,6
	215	-100,5	128,0	-135,0	17,5	-112,2	128,0	-141,0	73,9	-119,9	128,0	-141,0	87,6
	220	-103,5	128,0	-138,9	20,7	-115,5	128,0	-145,4	73,9	-123,5	128,0	-145,4	87,6
	225	-106,5	128,0	-142,8	23,6	-118,9	128,0	-149,8	73,9	-127,1	128,0	-149,8	87,6
	230	-109,6	128,0	-146,6	26,3	-122,2	128,0	-154,3	73,9	-130,7	128,0	-154,3	87,6
	235	-112,6	128,0	-150,5	28,7	-125,6	128,0	-158,7	73,9	-134,3	128,0	-158,7	87,6
	240	-115,6	128,0	-154,3	31,0	-128,9	128,0	-163,1	73,9	-138,0	128,0	-163,1	87,6
	245	-118,6	128,0	-158,2	33,0	-132,2	128,0	-167,5	73,9	-141,6	128,0	-167,5	87,6
	250	-121,7	128,0	-162,1	34,9	-135,6	128,0	-172,0	73,9	-145,2	128,0	-172,0	87,6
	255	-124,7	128,0	-165,9	36,7	-138,9	128,0	-176,4	73,9	-148,8	128,0	-176,4	87,6
	260	-127,7	128,0	-169,8	38,3	-142,3	128,0	-180,8	73,9	-152,4	128,0	-180,8	87,6
	265	-130,7	128,0	-173,6	39,9	-145,6	128,0	-185,2	73,9	-156,0	128,0	-185,2	87,6
	270	-133,7	128,0	-177,5	41,3	-149,0	128,0	-189,7	73,9	-159,7	128,0	-189,7	87,6
275	-136,8	128,0	-181,4	42,7	-152,3	128,0	-194,1	73,9	-163,3	128,0	-194,1	87,6	
280	-139,8	128,0	-185,2	43,9	-155,6	128,0	-198,5	73,9	-166,9	128,0	-198,5	87,6	
285	-142,8	128,0	-189,1	45,1	-159,0	128,0	-203,0	73,9	-170,5	128,0	-203,0	87,6	
290	-145,8	128,0	-192,9	46,2	-162,3	128,0	-207,4	73,9	-174,1	128,0	-207,4	87,6	
295	-148,9	128,0	-196,8	47,3	-165,7	128,0	-211,8	73,9	-177,8	128,0	-211,8	87,6	
300	-151,9	128,0	-200,7	48,3	-169,0	128,0	-216,2	73,9	-181,4	128,0	-216,2	87,6	
c _{nom} = 30mm	310	-151,1	128,0	-151,1	128,0	-175,7	128,0	-176,7	127,0	-188,6	128,0	-197,3	118,6
	320	-156,8	128,0	-156,8	128,0	-182,4	128,0	-183,4	127,0	-195,9	128,0	-204,9	118,6
c _{nom} = 35mm	305	-148,2	128,0	-148,2	128,0	-172,4	128,0	-173,3	127,0	-185,0	128,0	-193,5	118,6
	315	-153,9	128,0	-153,9	128,0	-179,1	128,0	-180,0	127,0	-192,2	128,0	-201,1	118,6

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

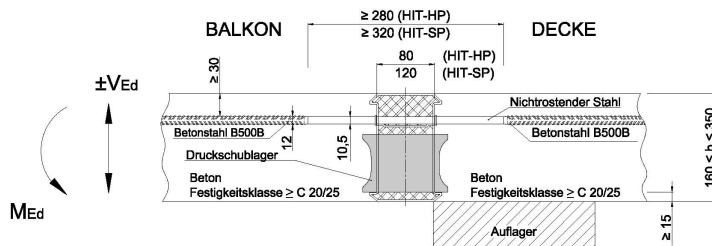


HIT-HP MVX-0509-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		$A_{s,Sp,h}$		$A_{s,v}$		$A_{s,Sp,h}$		$A_{s,v}$		$A_{s,Sp,h}$		$A_{s,v}$	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]	
		$A_{s,req}$	0,12	0,85	4,08		0,12	0,90	4,21		0,12	0,90	4,21
	$A_{s,min}$	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13	
$A_{s,prov}$	Ø8	Ø6/25	Ø8/12		Ø8	Ø6/25	Ø8/11,5		Ø8	Ø6/25	Ø8/11,5		
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)			Punkt 1 (max V)	Punkt 2 (max M)			Punkt 1 (max V)	Punkt 2 (max M)			
	$M_{Rd,1}$	$\pm V_{Rd,1}$	$M_{Rd,2}$	$\pm V_{Rd,2}$	$M_{Rd,1}$	$\pm V_{Rd,1}$	$M_{Rd,2}$	$\pm V_{Rd,2}$	$M_{Rd,1}$	$\pm V_{Rd,1}$	$M_{Rd,2}$	$\pm V_{Rd,2}$	
[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-23,1	140,6	-23,1	140,6	-23,5	144,0	-23,5	144,0	-23,5	144,0	-23,5	144,0
	130	-24,3	140,6	-24,3	140,6	-24,7	144,0	-24,7	144,0	-24,7	144,0	-24,7	144,0
	135	-25,6	140,6	-25,6	140,6	-25,9	144,0	-25,9	144,0	-25,9	144,0	-25,9	144,0
	140	-26,8	140,6	-26,8	140,6	-27,2	144,0	-27,2	144,0	-27,2	144,0	-27,2	144,0
	145	-28,0	140,6	-28,0	140,6	-28,4	144,0	-28,4	144,0	-28,4	144,0	-28,4	144,0
	150	-29,2	140,6	-29,2	140,6	-29,6	144,0	-29,6	144,0	-29,6	144,0	-29,6	144,0
	155	-30,5	140,6	-30,5	140,6	-30,8	144,0	-30,8	144,0	-30,8	144,0	-30,8	144,0
	160	-31,7	140,6	-31,7	140,6	-32,1	144,0	-32,1	144,0	-32,1	144,0	-32,1	144,0
	165	-32,9	140,6	-32,9	140,6	-33,3	144,0	-33,3	144,0	-33,3	144,0	-33,3	144,0
	170	-34,2	140,6	-34,2	140,6	-34,5	144,0	-34,5	144,0	-34,5	144,0	-34,5	144,0
	175	-35,4	140,6	-35,4	140,6	-35,8	144,0	-35,8	144,0	-35,8	144,0	-35,8	144,0
	180	-36,6	140,6	-36,6	140,6	-37,0	144,0	-37,0	144,0	-37,0	144,0	-37,0	144,0
	185	-37,9	140,6	-37,9	140,6	-38,2	144,0	-38,2	144,0	-38,2	144,0	-38,2	144,0
	190	-39,1	140,6	-39,1	140,6	-39,4	144,0	-39,4	144,0	-39,4	144,0	-39,4	144,0
	195	-40,3	140,6	-40,3	140,6	-40,7	144,0	-40,7	144,0	-40,7	144,0	-40,7	144,0
	200	-41,5	140,6	-41,5	140,6	-41,9	144,0	-41,9	144,0	-41,9	144,0	-41,9	144,0
	205	-42,8	140,6	-42,8	140,6	-43,1	144,0	-43,1	144,0	-43,1	144,0	-43,1	144,0
	210	-44,0	140,6	-44,0	140,6	-44,4	144,0	-44,4	144,0	-44,4	144,0	-44,4	144,0
	215	-45,2	140,6	-45,2	140,6	-45,6	144,0	-45,6	144,0	-45,6	144,0	-45,6	144,0
	220	-46,5	140,6	-46,5	140,6	-46,8	144,0	-46,8	144,0	-46,8	144,0	-46,8	144,0
	225	-47,7	140,6	-47,7	140,6	-48,0	144,0	-48,0	144,0	-48,0	144,0	-48,0	144,0
	230	-48,9	140,6	-48,9	140,6	-49,3	144,0	-49,3	144,0	-49,3	144,0	-49,3	144,0
	235	-50,1	140,6	-50,1	140,6	-50,5	144,0	-50,5	144,0	-50,5	144,0	-50,5	144,0
	240	-51,4	140,6	-51,4	140,6	-51,7	144,0	-51,7	144,0	-51,7	144,0	-51,7	144,0
	245	-52,6	140,6	-52,6	140,6	-53,0	144,0	-53,0	144,0	-53,0	144,0	-53,0	144,0
	250	-53,8	140,6	-53,8	140,6	-54,2	144,0	-54,2	144,0	-54,2	144,0	-54,2	144,0
	255	-55,1	140,6	-55,1	140,6	-55,4	144,0	-55,4	144,0	-55,4	144,0	-55,4	144,0
	260	-56,3	140,6	-56,3	140,6	-56,7	144,0	-56,7	144,0	-56,7	144,0	-56,7	144,0
	265	-57,5	140,6	-57,5	140,6	-57,9	144,0	-57,9	144,0	-57,9	144,0	-57,9	144,0
	270	-58,8	140,6	-58,8	140,6	-59,1	144,0	-59,1	144,0	-59,1	144,0	-59,1	144,0
275	-60,0	140,6	-60,0	140,6	-60,3	144,0	-60,3	144,0	-60,3	144,0	-60,3	144,0	
280	-61,2	140,6	-61,2	140,6	-61,6	144,0	-61,6	144,0	-61,6	144,0	-61,6	144,0	
285	-62,4	140,6	-62,4	140,6	-62,8	144,0	-62,8	144,0	-62,8	144,0	-62,8	144,0	
290	-63,7	140,6	-63,7	140,6	-64,0	144,0	-64,0	144,0	-64,0	144,0	-64,0	144,0	
295	-64,9	140,6	-64,9	140,6	-65,3	144,0	-65,3	144,0	-65,3	144,0	-65,3	144,0	
300	-66,1	140,6	-66,1	140,6	-66,5	144,0	-66,5	144,0	-66,5	144,0	-66,5	144,0	
c _{nom} = 30mm	310	-61,3	129,5	-61,3	129,5	-68,9	144,0	-68,9	144,0	-68,9	144,0	-68,9	144,0
	320	-63,5	129,5	-63,5	129,5	-71,4	144,0	-71,4	144,0	-71,4	144,0	-71,4	144,0
c _{nom} = 35mm	305	-60,2	129,5	-60,2	129,5	-67,7	144,0	-67,7	144,0	-67,7	144,0	-67,7	144,0
	315	-62,4	129,5	-62,4	129,5	-70,2	144,0	-70,2	144,0	-70,2	144,0	-70,2	144,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

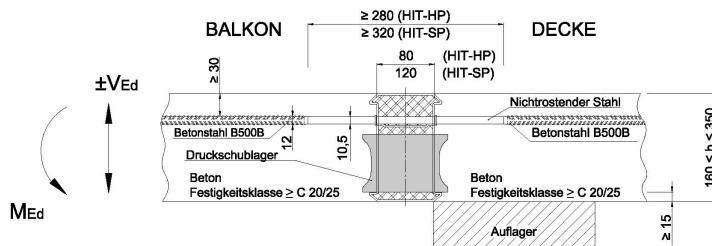


HIT-HP MVX-0609-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]	
		A _{s,req}	0,14	0,94	4,25		0,14	1,01	4,32		0,14	1,01	4,32
A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13		
A _{s,prov}	Ø8	Ø6/25	Ø8/11,5		Ø8	Ø6/25	Ø8/11,5		Ø8	Ø6/25	Ø8/11,5		
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)					
		M _{Rd,1}	±V _{Rd,1}		M _{Rd,2}	±V _{Rd,2}		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}		
		[mm]	[kNm/m]		[kNm/m]	[kNm/m]		[mm]	[kNm/m]	[kNm/m]	[kNm/m]		
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-27,1	144,0	-27,1	144,0	-27,6	144,0	-27,6	144,0	-27,6	144,0	-27,6	144,0
	130	-28,6	144,0	-28,6	144,0	-29,1	144,0	-29,1	144,0	-29,1	144,0	-29,1	144,0
	135	-30,1	144,0	-30,1	144,0	-30,6	144,0	-30,6	144,0	-30,6	144,0	-30,6	144,0
	140	-31,6	144,0	-31,6	144,0	-32,1	144,0	-32,1	144,0	-32,1	144,0	-32,1	144,0
	145	-33,0	144,0	-33,0	144,0	-33,6	144,0	-33,6	144,0	-33,6	144,0	-33,6	144,0
	150	-34,5	144,0	-34,5	144,0	-35,0	144,0	-35,0	144,0	-35,0	144,0	-35,0	144,0
	155	-36,0	144,0	-36,0	144,0	-36,5	144,0	-36,5	144,0	-36,5	144,0	-36,5	144,0
	160	-37,5	144,0	-37,5	144,0	-38,0	144,0	-38,0	144,0	-38,0	144,0	-38,0	144,0
	165	-38,9	144,0	-38,9	144,0	-39,5	144,0	-39,5	144,0	-39,5	144,0	-39,5	144,0
	170	-40,4	144,0	-40,4	144,0	-40,9	144,0	-40,9	144,0	-40,9	144,0	-40,9	144,0
	175	-41,9	144,0	-41,9	144,0	-42,4	144,0	-42,4	144,0	-42,4	144,0	-42,4	144,0
	180	-43,4	144,0	-43,4	144,0	-43,9	144,0	-43,9	144,0	-43,9	144,0	-43,9	144,0
	185	-44,8	144,0	-44,8	144,0	-45,4	144,0	-45,4	144,0	-45,4	144,0	-45,4	144,0
	190	-46,3	144,0	-46,3	144,0	-46,8	144,0	-46,8	144,0	-46,8	144,0	-46,8	144,0
	195	-47,8	144,0	-47,8	144,0	-48,3	144,0	-48,3	144,0	-48,3	144,0	-48,3	144,0
	200	-49,3	144,0	-49,3	144,0	-49,8	144,0	-49,8	144,0	-49,8	144,0	-49,8	144,0
	205	-50,7	144,0	-50,7	144,0	-51,3	144,0	-51,3	144,0	-51,3	144,0	-51,3	144,0
	210	-52,2	144,0	-52,2	144,0	-52,7	144,0	-52,7	144,0	-52,7	144,0	-52,7	144,0
	215	-53,7	144,0	-53,7	144,0	-54,2	144,0	-54,2	144,0	-54,2	144,0	-54,2	144,0
	220	-55,2	144,0	-55,2	144,0	-55,7	144,0	-55,7	144,0	-55,7	144,0	-55,7	144,0
	225	-56,6	144,0	-56,6	144,0	-57,2	144,0	-57,2	144,0	-57,2	144,0	-57,2	144,0
	230	-58,1	144,0	-58,1	144,0	-58,6	144,0	-58,6	144,0	-58,6	144,0	-58,6	144,0
	235	-59,6	144,0	-59,6	144,0	-60,1	144,0	-60,1	144,0	-60,1	144,0	-60,1	144,0
	240	-61,1	144,0	-61,1	144,0	-61,6	144,0	-61,6	144,0	-61,6	144,0	-61,6	144,0
	245	-62,5	144,0	-62,5	144,0	-63,1	144,0	-63,1	144,0	-63,1	144,0	-63,1	144,0
	250	-64,0	144,0	-64,0	144,0	-64,5	144,0	-64,5	144,0	-64,5	144,0	-64,5	144,0
	255	-65,5	144,0	-65,5	144,0	-66,0	144,0	-66,0	144,0	-66,0	144,0	-66,0	144,0
	260	-67,0	144,0	-67,0	144,0	-67,5	144,0	-67,5	144,0	-67,5	144,0	-67,5	144,0
	265	-68,4	144,0	-68,4	144,0	-69,0	144,0	-69,0	144,0	-69,0	144,0	-69,0	144,0
	270	-69,9	144,0	-69,9	144,0	-70,4	144,0	-70,4	144,0	-70,4	144,0	-70,4	144,0
275	-71,4	144,0	-71,4	144,0	-71,9	144,0	-71,9	144,0	-71,9	144,0	-71,9	144,0	
280	-72,9	144,0	-72,9	144,0	-73,4	144,0	-73,4	144,0	-73,4	144,0	-73,4	144,0	
285	-74,3	144,0	-74,3	144,0	-74,9	144,0	-74,9	144,0	-74,9	144,0	-74,9	144,0	
290	-75,8	144,0	-75,8	144,0	-76,3	144,0	-76,3	144,0	-76,3	144,0	-76,3	144,0	
295	-77,3	144,0	-77,3	144,0	-77,8	144,0	-77,8	144,0	-77,8	144,0	-77,8	144,0	
300	-78,8	144,0	-78,8	144,0	-79,3	144,0	-79,3	144,0	-79,3	144,0	-79,3	144,0	
c _{nom} = 30mm	310	-73,1	144,0	-73,1	144,0	-82,2	144,0	-82,2	144,0	-82,2	144,0	-82,2	144,0
	320	-75,7	144,0	-75,7	144,0	-85,2	144,0	-85,2	144,0	-85,2	144,0	-85,2	144,0
c _{nom} = 35mm	305	-71,8	144,0	-71,8	144,0	-80,8	144,0	-80,8	144,0	-80,8	144,0	-80,8	144,0
	315	-74,4	144,0	-74,4	144,0	-83,7	144,0	-83,7	144,0	-83,7	144,0	-83,7	144,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

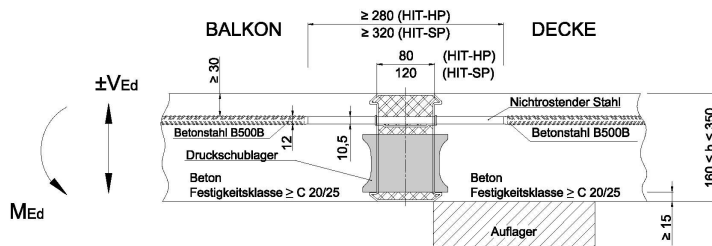


HIT-HP MVX-0709-hh-100-cc											
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37			
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,16	1,02	4,33	0,16	1,10	4,41	0,16	1,10	4,41
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13	
	A _{s,prov}	Ø8	Ø6/25	Ø8/11,5	Ø8	Ø6/25	Ø8/11	Ø8	Ø6/25	Ø8/11	
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}
		[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
	[mm]										
125		-31,0	144,0	-31,0	144,0	-31,7	144,0	-31,7	144,0	-31,7	144,0
130		-32,7	144,0	-32,7	144,0	-33,4	144,0	-33,4	144,0	-33,4	144,0
135		-34,4	144,0	-34,4	144,0	-35,1	144,0	-35,1	144,0	-35,1	144,0
140		-36,1	144,0	-36,1	144,0	-36,8	144,0	-36,8	144,0	-36,8	144,0
145		-37,8	144,0	-37,8	144,0	-38,6	144,0	-38,6	144,0	-38,6	144,0
150		-39,6	144,0	-39,6	144,0	-40,3	144,0	-40,3	144,0	-40,3	144,0
155		-41,3	144,0	-41,3	144,0	-42,0	144,0	-42,0	144,0	-42,0	144,0
160		-43,0	144,0	-43,0	144,0	-43,7	144,0	-43,7	144,0	-43,7	144,0
165		-44,7	144,0	-44,7	144,0	-45,4	144,0	-45,4	144,0	-45,4	144,0
170		-46,4	144,0	-46,4	144,0	-47,2	144,0	-47,2	144,0	-47,2	144,0
175		-48,2	144,0	-48,2	144,0	-48,9	144,0	-48,9	144,0	-48,9	144,0
180		-49,9	144,0	-49,9	144,0	-50,6	144,0	-50,6	144,0	-50,6	144,0
185		-51,6	144,0	-51,6	144,0	-52,3	144,0	-52,3	144,0	-52,3	144,0
190		-53,3	144,0	-53,3	144,0	-54,0	144,0	-54,0	144,0	-54,0	144,0
195		-55,1	144,0	-55,1	144,0	-55,8	144,0	-55,8	144,0	-55,8	144,0
200		-56,8	144,0	-56,8	144,0	-57,5	144,0	-57,5	144,0	-57,5	144,0
205		-58,5	144,0	-58,5	144,0	-59,2	144,0	-59,2	144,0	-59,2	144,0
210		-60,2	144,0	-60,2	144,0	-60,9	144,0	-60,9	144,0	-60,9	144,0
215		-61,9	144,0	-61,9	144,0	-62,6	144,0	-62,6	144,0	-62,6	144,0
220		-63,7	144,0	-63,7	144,0	-64,4	144,0	-64,4	144,0	-64,4	144,0
225		-65,4	144,0	-65,4	144,0	-66,1	144,0	-66,1	144,0	-66,1	144,0
230		-67,1	144,0	-67,1	144,0	-67,8	144,0	-67,8	144,0	-67,8	144,0
235		-68,8	144,0	-68,8	144,0	-69,5	144,0	-69,5	144,0	-69,5	144,0
240		-70,5	144,0	-70,5	144,0	-71,3	144,0	-71,3	144,0	-71,3	144,0
245		-72,3	144,0	-72,3	144,0	-73,0	144,0	-73,0	144,0	-73,0	144,0
250		-74,0	144,0	-74,0	144,0	-74,7	144,0	-74,7	144,0	-74,7	144,0
255		-75,7	144,0	-75,7	144,0	-76,4	144,0	-76,4	144,0	-76,4	144,0
260		-77,4	144,0	-77,4	144,0	-78,1	144,0	-78,1	144,0	-78,1	144,0
265		-79,1	144,0	-79,1	144,0	-79,9	144,0	-79,9	144,0	-79,9	144,0
270		-80,9	144,0	-80,9	144,0	-81,6	144,0	-81,6	144,0	-81,6	144,0
275		-82,6	144,0	-82,6	144,0	-83,3	144,0	-83,3	144,0	-83,3	144,0
280		-84,3	144,0	-84,3	144,0	-85,0	144,0	-85,0	144,0	-85,0	144,0
285		-86,0	144,0	-86,0	144,0	-86,7	144,0	-86,7	144,0	-86,7	144,0
290		-87,8	144,0	-87,8	144,0	-88,5	144,0	-88,5	144,0	-88,5	144,0
295		-89,5	144,0	-89,5	144,0	-90,2	144,0	-90,2	144,0	-90,2	144,0
300		-91,2	144,0	-91,2	144,0	-91,9	144,0	-91,9	144,0	-91,9	144,0
c _{nom} = 30mm	310	-84,7	144,0	-84,7	144,0	-95,3	144,0	-95,3	144,0	-95,3	144,0
	320	-87,8	144,0	-87,8	144,0	-98,8	144,0	-98,8	144,0	-98,8	144,0
c _{nom} = 35mm	305	-83,2	144,0	-83,2	144,0	-93,6	144,0	-93,6	144,0	-93,6	144,0
	315	-86,2	144,0	-86,2	144,0	-97,1	144,0	-97,1	144,0	-97,1	144,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

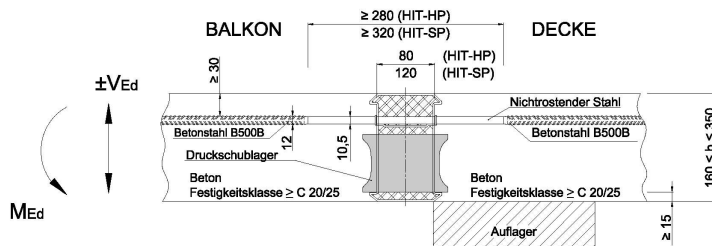

HIT-HP MVX-0809-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]	
		A _{s,req}	0,19	1,09	4,40		0,19	1,18	4,49		0,19	1,18	4,49
A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13		
A _{s,prov}	Ø8	Ø6/25	Ø8/11		Ø8	Ø6/23,5	Ø8/11		Ø8	Ø6/23,5	Ø8/11		
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
		[mm]	[kNm/m]	[kNm]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-34,6	144,0	-34,6	144,0	-35,5	144,0	-35,5	144,0	-35,5	144,0	-35,5	144,0
	130	-36,6	144,0	-36,6	144,0	-37,5	144,0	-37,5	144,0	-37,5	144,0	-37,5	144,0
	135	-38,5	144,0	-38,5	144,0	-39,5	144,0	-39,5	144,0	-39,5	144,0	-39,5	144,0
	140	-40,5	144,0	-40,5	144,0	-41,4	144,0	-41,4	144,0	-41,4	144,0	-41,4	144,0
	145	-42,5	144,0	-42,5	144,0	-43,4	144,0	-43,4	144,0	-43,4	144,0	-43,4	144,0
	150	-44,4	144,0	-44,4	144,0	-45,4	144,0	-45,4	144,0	-45,4	144,0	-45,4	144,0
	155	-46,4	144,0	-46,4	144,0	-47,3	144,0	-47,3	144,0	-47,3	144,0	-47,3	144,0
	160	-48,4	144,0	-48,4	144,0	-49,3	144,0	-49,3	144,0	-49,3	144,0	-49,3	144,0
	165	-50,3	144,0	-50,3	144,0	-51,3	144,0	-51,3	144,0	-51,3	144,0	-51,3	144,0
	170	-52,3	144,0	-52,3	144,0	-53,2	144,0	-53,2	144,0	-53,2	144,0	-53,2	144,0
	175	-54,3	144,0	-54,3	144,0	-55,2	144,0	-55,2	144,0	-55,2	144,0	-55,2	144,0
	180	-56,2	144,0	-56,2	144,0	-57,2	144,0	-57,2	144,0	-57,2	144,0	-57,2	144,0
	185	-58,2	144,0	-58,2	144,0	-59,1	144,0	-59,1	144,0	-59,1	144,0	-59,1	144,0
	190	-60,2	144,0	-60,2	144,0	-61,1	144,0	-61,1	144,0	-61,1	144,0	-61,1	144,0
	195	-62,1	144,0	-62,1	144,0	-63,1	144,0	-63,1	144,0	-63,1	144,0	-63,1	144,0
	200	-64,1	144,0	-64,1	144,0	-65,0	144,0	-65,0	144,0	-65,0	144,0	-65,0	144,0
	205	-66,1	144,0	-66,1	144,0	-67,0	144,0	-67,0	144,0	-67,0	144,0	-67,0	144,0
	210	-68,0	144,0	-68,0	144,0	-69,0	144,0	-69,0	144,0	-69,0	144,0	-69,0	144,0
	215	-70,0	144,0	-70,0	144,0	-70,9	144,0	-70,9	144,0	-70,9	144,0	-70,9	144,0
	220	-72,0	144,0	-72,0	144,0	-72,9	144,0	-72,9	144,0	-72,9	144,0	-72,9	144,0
	225	-73,9	144,0	-73,9	144,0	-74,9	144,0	-74,9	144,0	-74,9	144,0	-74,9	144,0
	230	-75,9	144,0	-75,9	144,0	-76,8	144,0	-76,8	144,0	-76,8	144,0	-76,8	144,0
	235	-77,9	144,0	-77,9	144,0	-78,8	144,0	-78,8	144,0	-78,8	144,0	-78,8	144,0
	240	-79,8	144,0	-79,8	144,0	-80,8	144,0	-80,8	144,0	-80,8	144,0	-80,8	144,0
	245	-81,8	144,0	-81,8	144,0	-82,7	144,0	-82,7	144,0	-82,7	144,0	-82,7	144,0
	250	-83,8	144,0	-83,8	144,0	-84,7	144,0	-84,7	144,0	-84,7	144,0	-84,7	144,0
	255	-85,7	144,0	-85,7	144,0	-86,7	144,0	-86,7	144,0	-86,7	144,0	-86,7	144,0
	260	-87,7	144,0	-87,7	144,0	-88,6	144,0	-88,6	144,0	-88,6	144,0	-88,6	144,0
	265	-89,7	144,0	-89,7	144,0	-90,6	144,0	-90,6	144,0	-90,6	144,0	-90,6	144,0
	270	-91,6	144,0	-91,6	144,0	-92,6	144,0	-92,6	144,0	-92,6	144,0	-92,6	144,0
275	-93,6	144,0	-93,6	144,0	-94,5	144,0	-94,5	144,0	-94,5	144,0	-94,5	144,0	
280	-95,6	144,0	-95,6	144,0	-96,5	144,0	-96,5	144,0	-96,5	144,0	-96,5	144,0	
285	-97,5	144,0	-97,5	144,0	-98,5	144,0	-98,5	144,0	-98,5	144,0	-98,5	144,0	
290	-99,5	144,0	-99,5	144,0	-100,4	144,0	-100,4	144,0	-100,4	144,0	-100,4	144,0	
295	-101,5	144,0	-101,5	144,0	-102,4	144,0	-102,4	144,0	-102,4	144,0	-102,4	144,0	
300	-103,4	144,0	-103,4	144,0	-104,4	144,0	-104,4	144,0	-104,4	144,0	-104,4	144,0	
c _{nom} = 30mm	310	-96,2	144,0	-96,2	144,0	-108,3	144,0	-108,3	144,0	-108,3	144,0	-108,3	144,0
	320	-99,7	144,0	-99,7	144,0	-112,2	144,0	-112,2	144,0	-112,2	144,0	-112,2	144,0
c _{nom} = 35mm	305	-94,4	144,0	-94,4	144,0	-106,3	144,0	-106,3	144,0	-106,3	144,0	-106,3	144,0
	315	-97,9	144,0	-97,9	144,0	-110,3	144,0	-110,3	144,0	-110,3	144,0	-110,3	144,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

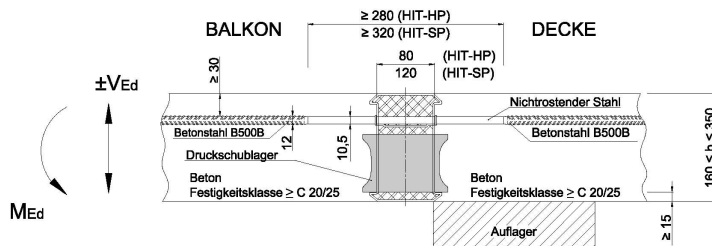


¹⁾ "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]



Anlage 1_66


HIT-HP MVX-1009-hh-100-cc											
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37			
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,24	1,21	4,52	0,24	1,32	4,63	0,24	1,32	4,63
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13	
	A _{s,prov}	Ø8	Ø6/23	Ø8/11	Ø8	Ø6/21	Ø8/10,5	Ø8	Ø6/21	Ø8/10,5	
h-c _{nom}	h-c _{nom}	Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}
		[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Werte paare für c _{nom} =30 - 50mm	125	-41,3	144,0	-41,3	144,0	-42,7	144,0	-42,7	144,0	-42,7	144,0
	130	-43,7	144,0	-43,7	144,0	-45,2	144,0	-45,2	144,0	-45,2	144,0
	135	-46,2	144,0	-46,2	144,0	-47,6	144,0	-47,6	144,0	-47,6	144,0
	140	-48,6	144,0	-48,6	144,0	-50,1	144,0	-50,1	144,0	-50,1	144,0
	145	-51,1	144,0	-51,1	144,0	-52,5	144,0	-52,5	144,0	-52,5	144,0
	150	-53,6	144,0	-53,6	144,0	-55,0	144,0	-55,0	144,0	-55,0	144,0
	155	-55,8	144,0	-55,8	144,0	-57,5	144,0	-57,5	144,0	-57,5	144,0
	160	-57,9	144,0	-57,9	144,0	-59,9	144,0	-59,9	144,0	-59,9	144,0
	165	-60,1	144,0	-60,1	144,0	-62,4	144,0	-62,4	144,0	-62,4	144,0
	170	-62,2	144,0	-62,2	144,0	-64,8	144,0	-64,8	144,0	-64,8	144,0
	175	-64,4	144,0	-64,4	144,0	-67,3	144,0	-67,3	144,0	-67,3	144,0
	180	-66,5	144,0	-66,5	144,0	-69,8	144,0	-69,8	144,0	-69,8	144,0
	185	-68,7	144,0	-68,7	144,0	-72,2	144,0	-72,2	144,0	-72,2	144,0
	190	-70,8	144,0	-70,8	144,0	-74,7	144,0	-74,7	144,0	-74,7	144,0
	195	-72,9	144,0	-72,9	144,0	-77,1	144,0	-77,1	144,0	-77,1	144,0
	200	-75,1	144,0	-75,1	144,0	-79,6	144,0	-79,6	144,0	-79,6	144,0
	205	-77,2	144,0	-77,2	144,0	-82,1	144,0	-82,1	144,0	-82,1	144,0
	210	-79,4	144,0	-79,4	144,0	-84,5	144,0	-84,5	144,0	-84,5	144,0
	215	-81,5	144,0	-81,5	144,0	-87,0	144,0	-87,0	144,0	-87,0	144,0
	220	-83,7	144,0	-83,7	144,0	-89,4	144,0	-89,4	144,0	-89,4	144,0
	225	-85,8	144,0	-85,8	144,0	-91,9	144,0	-91,9	144,0	-91,9	144,0
	230	-88,0	144,0	-88,0	144,0	-94,3	144,0	-94,3	144,0	-94,3	144,0
	235	-90,1	144,0	-90,1	144,0	-96,8	144,0	-96,8	144,0	-96,8	144,0
	240	-92,2	144,0	-92,2	144,0	-99,3	144,0	-99,3	144,0	-99,3	144,0
	245	-94,4	144,0	-94,4	144,0	-101,7	144,0	-101,7	144,0	-101,7	144,0
	250	-96,5	144,0	-96,5	144,0	-104,2	144,0	-104,2	144,0	-104,2	144,0
	255	-98,7	144,0	-98,7	144,0	-106,6	144,0	-106,6	144,0	-106,6	144,0
	260	-100,8	144,0	-100,8	144,0	-109,1	144,0	-109,1	144,0	-109,1	144,0
	265	-103,0	144,0	-103,0	144,0	-111,6	144,0	-111,6	144,0	-111,6	144,0
	270	-105,1	144,0	-105,1	144,0	-114,0	144,0	-114,0	144,0	-114,0	144,0
	275	-107,2	144,0	-107,2	144,0	-116,5	144,0	-116,5	144,0	-116,5	144,0
	280	-109,4	144,0	-109,4	144,0	-118,9	144,0	-118,9	144,0	-118,9	144,0
	285	-111,5	144,0	-111,5	144,0	-121,4	144,0	-121,4	144,0	-121,4	144,0
	290	-113,7	144,0	-113,7	144,0	-123,8	144,0	-123,8	144,0	-123,8	144,0
	295	-115,8	144,0	-115,8	144,0	-126,3	144,0	-126,3	144,0	-126,3	144,0
	300	-118,0	144,0	-118,0	144,0	-128,8	144,0	-128,8	144,0	-128,8	144,0
c _{nom} = 30mm	310	-86,9	144,0	-86,9	144,0	-101,8	144,0	-101,8	144,0	-113,4	144,0
	320	-90,1	144,0	-90,1	144,0	-105,5	144,0	-105,5	144,0	-117,6	144,0
c _{nom} = 35mm	305	-85,3	144,0	-85,3	144,0	-100,0	144,0	-100,0	144,0	-111,4	144,0
	315	-88,5	144,0	-88,5	144,0	-103,7	144,0	-103,7	144,0	-115,5	144,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

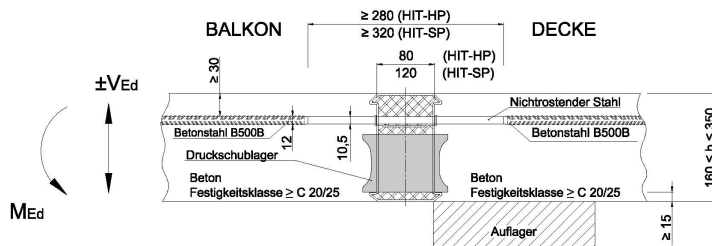


HIT-HP MVX-1109-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,26	1,26	4,57		0,26	1,38	4,69		0,26	1,38	4,69
		A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13
A _{s,prov}	Ø8	Ø6/22	Ø8/10,5		Ø8	Ø6/20,5	Ø8/10,5		Ø8	Ø6/20,5	Ø8/10,5		
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)			
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
		[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	[mm]												
	125	-44,3	144,0	-44,3	144,0	-46,1	144,0	-46,1	144,0	-46,1	144,0	-46,1	144,0
	130	-47,0	144,0	-47,0	144,0	-48,8	144,0	-48,8	144,0	-48,8	144,0	-48,8	144,0
	135	-49,7	144,0	-49,7	144,0	-51,5	144,0	-51,5	144,0	-51,5	144,0	-51,5	144,0
	140	-52,4	144,0	-52,4	144,0	-54,2	144,0	-54,2	144,0	-54,2	144,0	-54,2	144,0
	145	-55,1	144,0	-55,1	144,0	-56,9	144,0	-56,9	144,0	-56,9	144,0	-56,9	144,0
	150	-57,8	144,0	-57,8	144,0	-59,6	144,0	-59,6	144,0	-59,6	144,0	-59,6	144,0
	155	-60,5	144,0	-60,5	144,0	-62,3	144,0	-62,3	144,0	-62,3	144,0	-62,3	144,0
	160	-62,8	144,0	-62,8	144,0	-65,0	144,0	-65,0	144,0	-65,0	144,0	-65,0	144,0
	165	-65,2	144,0	-65,2	144,0	-67,7	144,0	-67,7	144,0	-67,7	144,0	-67,7	144,0
	170	-67,5	144,0	-67,5	144,0	-70,4	144,0	-70,4	144,0	-70,4	144,0	-70,4	144,0
	175	-69,9	144,0	-69,9	144,0	-73,1	144,0	-73,1	144,0	-73,1	144,0	-73,1	144,0
	180	-72,3	144,0	-72,3	144,0	-75,8	144,0	-75,8	144,0	-75,8	144,0	-75,8	144,0
	185	-74,6	144,0	-74,6	144,0	-78,5	144,0	-78,5	144,0	-78,5	144,0	-78,5	144,0
	190	-77,0	144,0	-77,0	144,0	-81,2	144,0	-81,2	144,0	-81,2	144,0	-81,2	144,0
	195	-79,3	144,0	-79,3	144,0	-83,9	144,0	-83,9	144,0	-83,9	144,0	-83,9	144,0
	200	-81,7	144,0	-81,7	144,0	-86,6	144,0	-86,6	144,0	-86,6	144,0	-86,6	144,0
	205	-84,1	144,0	-84,1	144,0	-89,3	144,0	-89,3	144,0	-89,3	144,0	-89,3	144,0
	210	-86,4	144,0	-86,4	144,0	-92,0	144,0	-92,0	144,0	-92,0	144,0	-92,0	144,0
	215	-88,8	144,0	-88,8	144,0	-94,7	144,0	-94,7	144,0	-94,7	144,0	-94,7	144,0
	220	-91,1	144,0	-91,1	144,0	-97,4	144,0	-97,4	144,0	-97,4	144,0	-97,4	144,0
	225	-93,5	144,0	-93,5	144,0	-100,1	144,0	-100,1	144,0	-100,1	144,0	-100,1	144,0
	230	-95,9	144,0	-95,9	144,0	-102,9	144,0	-102,9	144,0	-102,9	144,0	-102,9	144,0
	235	-98,2	144,0	-98,2	144,0	-105,6	144,0	-105,6	144,0	-105,6	144,0	-105,6	144,0
	240	-100,6	144,0	-100,6	144,0	-108,3	144,0	-108,3	144,0	-108,3	144,0	-108,3	144,0
	245	-102,9	144,0	-102,9	144,0	-111,0	144,0	-111,0	144,0	-111,0	144,0	-111,0	144,0
	250	-105,3	144,0	-105,3	144,0	-113,7	144,0	-113,7	144,0	-113,7	144,0	-113,7	144,0
	255	-107,6	144,0	-107,6	144,0	-116,4	144,0	-116,4	144,0	-116,4	144,0	-116,4	144,0
	260	-110,0	144,0	-110,0	144,0	-119,1	144,0	-119,1	144,0	-119,1	144,0	-119,1	144,0
	265	-112,4	144,0	-112,4	144,0	-121,8	144,0	-121,8	144,0	-121,8	144,0	-121,8	144,0
270	-114,7	144,0	-114,7	144,0	-124,5	144,0	-124,5	144,0	-124,5	144,0	-124,5	144,0	
275	-117,1	144,0	-117,1	144,0	-127,2	144,0	-127,2	144,0	-127,2	144,0	-127,2	144,0	
280	-119,4	144,0	-119,4	144,0	-129,9	144,0	-129,9	144,0	-129,9	144,0	-129,9	144,0	
285	-121,8	144,0	-121,8	144,0	-132,6	144,0	-132,6	144,0	-132,6	144,0	-132,6	144,0	
290	-124,2	144,0	-124,2	144,0	-135,3	144,0	-135,3	144,0	-135,3	144,0	-135,3	144,0	
295	-126,5	144,0	-126,5	144,0	-138,0	144,0	-138,0	144,0	-138,0	144,0	-138,0	144,0	
300	-128,9	144,0	-128,9	144,0	-140,7	144,0	-140,7	144,0	-140,7	144,0	-140,7	144,0	
c _{nom} = 30mm	310	-95,1	144,0	-95,1	144,0	-111,5	144,0	-111,5	144,0	-124,1	144,0	-124,1	144,0
	320	-98,6	144,0	-98,6	144,0	-115,6	144,0	-115,6	144,0	-128,7	144,0	-128,7	144,0
c _{nom} = 35mm	305	-93,4	144,0	-93,4	144,0	-109,5	144,0	-109,5	144,0	-121,8	144,0	-121,8	144,0
	315	-96,9	144,0	-96,9	144,0	-113,5	144,0	-113,5	144,0	-126,4	144,0	-126,4	144,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

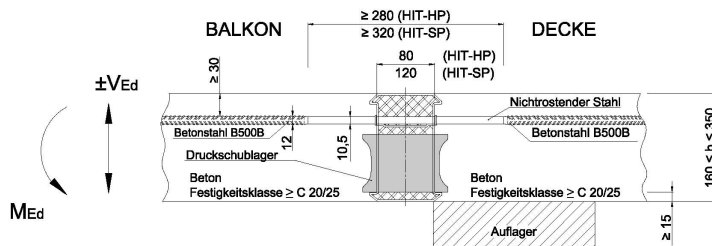


HIT-HP MVX-1209-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,28	1,30	4,57		0,28	1,43	4,74		0,28	1,43	4,74
A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13		
A _{s,prov}	Ø8	Ø6/21,5	Ø8/11		Ø8	Ø6/19,5	Ø8/10,5		Ø8	Ø6/19,5	Ø8/10,5		
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)			
	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
125	-44,3	144,0	-47,1	131,6	-49,2	144,0	-49,2	144,0	-49,2	144,0	-49,2	144,0	
130	-47,0	144,0	-50,1	131,6	-52,2	144,0	-52,2	144,0	-52,2	144,0	-52,2	144,0	
135	-49,7	144,0	-53,0	131,6	-55,1	144,0	-55,1	144,0	-55,1	144,0	-55,1	144,0	
140	-52,4	144,0	-56,0	131,6	-58,1	144,0	-58,1	144,0	-58,1	144,0	-58,1	144,0	
145	-55,1	144,0	-58,9	131,6	-61,0	144,0	-61,0	144,0	-61,0	144,0	-61,0	144,0	
150	-57,8	144,0	-61,9	131,6	-64,0	144,0	-64,0	144,0	-64,0	144,0	-64,0	144,0	
155	-60,5	144,0	-64,8	131,6	-66,9	144,0	-66,9	144,0	-66,9	144,0	-66,9	144,0	
160	-63,2	144,0	-67,6	132,3	-69,9	144,0	-69,9	144,0	-69,9	144,0	-69,9	144,0	
165	-65,9	144,0	-70,1	133,2	-72,8	144,0	-72,8	144,0	-72,8	144,0	-72,8	144,0	
170	-68,6	144,0	-72,7	134,1	-75,8	144,0	-75,8	144,0	-75,8	144,0	-75,8	144,0	
175	-71,3	144,0	-75,3	134,8	-78,7	144,0	-78,7	144,0	-78,7	144,0	-78,7	144,0	
180	-74,0	144,0	-77,9	135,5	-81,7	144,0	-81,7	144,0	-81,7	144,0	-81,7	144,0	
185	-76,7	144,0	-80,4	136,2	-84,6	144,0	-84,6	144,0	-84,6	144,0	-84,6	144,0	
190	-79,4	144,0	-83,0	136,7	-87,6	144,0	-87,6	144,0	-87,6	144,0	-87,6	144,0	
195	-82,1	144,0	-85,6	137,3	-90,5	144,0	-90,5	144,0	-90,5	144,0	-90,5	144,0	
200	-84,8	144,0	-88,2	137,8	-93,5	144,0	-93,5	144,0	-93,5	144,0	-93,5	144,0	
205	-87,5	144,0	-90,7	138,2	-96,4	144,0	-96,4	144,0	-96,4	144,0	-96,4	144,0	
210	-90,2	144,0	-93,3	138,7	-99,4	144,0	-99,4	144,0	-99,4	144,0	-99,4	144,0	
215	-92,9	144,0	-95,9	139,1	-102,3	144,0	-102,3	144,0	-102,3	144,0	-102,3	144,0	
220	-95,6	144,0	-98,4	139,4	-105,3	144,0	-105,3	144,0	-105,3	144,0	-105,3	144,0	
225	-98,3	144,0	-101,0	139,8	-108,2	144,0	-108,2	144,0	-108,2	144,0	-108,2	144,0	
230	-101,0	144,0	-103,6	140,1	-111,2	144,0	-111,2	144,0	-111,2	144,0	-111,2	144,0	
235	-103,7	144,0	-106,2	140,4	-114,1	144,0	-114,1	144,0	-114,1	144,0	-114,1	144,0	
240	-106,5	144,0	-108,7	140,7	-117,1	144,0	-117,1	144,0	-117,1	144,0	-117,1	144,0	
245	-109,2	144,0	-111,3	141,0	-120,0	144,0	-120,0	144,0	-120,0	144,0	-120,0	144,0	
250	-111,9	144,0	-113,9	141,2	-123,0	144,0	-123,0	144,0	-123,0	144,0	-123,0	144,0	
255	-114,6	144,0	-116,5	141,5	-125,9	144,0	-125,9	144,0	-125,9	144,0	-125,9	144,0	
260	-117,3	144,0	-119,0	141,7	-128,9	144,0	-128,9	144,0	-128,9	144,0	-128,9	144,0	
265	-120,0	144,0	-121,6	141,9	-131,8	144,0	-131,8	144,0	-131,8	144,0	-131,8	144,0	
270	-122,7	144,0	-124,2	142,2	-134,8	144,0	-134,8	144,0	-134,8	144,0	-134,8	144,0	
275	-125,4	144,0	-126,8	142,4	-137,7	144,0	-137,7	144,0	-137,7	144,0	-137,7	144,0	
280	-128,1	144,0	-129,3	142,5	-140,7	144,0	-140,7	144,0	-140,7	144,0	-140,7	144,0	
285	-130,8	144,0	-131,9	142,7	-143,6	144,0	-143,6	144,0	-143,6	144,0	-143,6	144,0	
290	-133,5	144,0	-134,5	142,9	-146,6	144,0	-146,6	144,0	-146,6	144,0	-146,6	144,0	
295	-136,2	144,0	-137,0	143,1	-149,5	144,0	-149,5	144,0	-149,5	144,0	-149,5	144,0	
300	-138,9	144,0	-139,6	143,2	-152,5	144,0	-152,5	144,0	-152,5	144,0	-152,5	144,0	
c _{nom} = 30mm	310	-103,3	144,0	-103,3	144,0	-121,1	144,0	-121,1	144,0	-134,7	144,0	-134,7	144,0
	320	-107,1	144,0	-107,1	144,0	-125,5	144,0	-125,5	144,0	-139,6	144,0	-139,6	144,0
c _{nom} = 35mm	305	-101,4	144,0	-101,4	144,0	-118,9	144,0	-118,9	144,0	-132,2	144,0	-132,2	144,0
	315	-105,2	144,0	-105,2	144,0	-123,3	144,0	-123,3	144,0	-137,2	144,0	-137,2	144,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

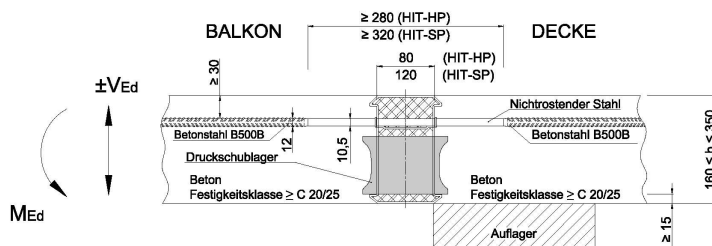


HIT-HP MVX-1309-hh-100-cc														
Spaltzug- und Aufhängewehrung		C20/25			C25/30			C30/37						
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}				
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt				
		[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]				
		A _{s,req}	0,31	1,34	4,57	0,31	1,48	4,76	0,31	1,48		4,79		
		A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13		1,13		
A _{s,prov}	Ø8	Ø6/21	Ø8/11	Ø8	Ø6/19	Ø8/10,5	Ø8	Ø6/19	Ø8/10					
h-c _{nom}	h-c _{nom}	Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
		[mm]	[kNm/m]	[kNm]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-44,3	144,0	-49,8	119,3	-50,1	144,0	-52,2	135,3	-52,2	144,0	-52,2	144,0	
	130	-47,0	144,0	-53,0	119,3	-53,2	144,0	-55,4	135,3	-55,4	144,0	-55,4	144,0	
	135	-49,7	144,0	-56,2	119,3	-56,2	144,0	-58,6	135,3	-58,6	144,0	-58,6	144,0	
	140	-52,4	144,0	-59,4	119,3	-59,2	144,0	-61,8	135,3	-61,8	144,0	-61,8	144,0	
	145	-55,1	144,0	-62,6	119,3	-62,2	144,0	-65,0	135,3	-65,0	144,0	-65,0	144,0	
	150	-57,8	144,0	-65,8	119,3	-65,3	144,0	-68,2	135,3	-68,2	144,0	-68,2	144,0	
	155	-60,5	144,0	-69,0	119,3	-68,3	144,0	-71,4	135,3	-71,4	144,0	-71,4	144,0	
	160	-63,2	144,0	-72,1	119,4	-71,3	144,0	-74,6	135,3	-74,6	144,0	-74,6	144,0	
	165	-65,9	144,0	-74,9	120,5	-74,3	144,0	-77,8	135,3	-77,8	144,0	-77,8	144,0	
	170	-68,6	144,0	-77,7	121,5	-77,3	144,0	-81,0	135,3	-81,0	144,0	-81,0	144,0	
	175	-71,3	144,0	-80,5	122,4	-80,4	144,0	-84,2	135,3	-84,2	144,0	-84,2	144,0	
	180	-74,0	144,0	-83,3	123,2	-83,4	144,0	-87,4	135,3	-87,4	144,0	-87,4	144,0	
	185	-76,7	144,0	-86,1	123,9	-86,4	144,0	-90,6	135,3	-90,6	144,0	-90,6	144,0	
	190	-79,4	144,0	-88,9	124,6	-89,4	144,0	-93,8	135,3	-93,8	144,0	-93,8	144,0	
	195	-82,1	144,0	-91,7	125,2	-92,5	144,0	-97,0	135,3	-97,0	144,0	-97,0	144,0	
	200	-84,8	144,0	-94,4	125,8	-95,5	144,0	-100,2	135,3	-100,2	144,0	-100,2	144,0	
	205	-87,5	144,0	-97,2	126,3	-98,5	144,0	-103,4	135,3	-103,4	144,0	-103,4	144,0	
	210	-90,2	144,0	-100,0	126,8	-101,5	144,0	-106,6	135,3	-106,6	144,0	-106,6	144,0	
	215	-92,9	144,0	-102,8	127,2	-104,6	144,0	-109,8	135,3	-109,8	144,0	-109,8	144,0	
	220	-95,6	144,0	-105,6	127,6	-107,6	144,0	-113,0	135,3	-113,0	144,0	-113,0	144,0	
	225	-98,3	144,0	-108,4	128,0	-110,6	144,0	-116,2	135,3	-116,2	144,0	-116,2	144,0	
	230	-101,0	144,0	-111,2	128,4	-113,6	144,0	-119,4	135,3	-119,4	144,0	-119,4	144,0	
	235	-103,7	144,0	-114,0	128,7	-116,7	144,0	-122,6	135,3	-122,6	144,0	-122,6	144,0	
	240	-106,5	144,0	-116,7	129,1	-119,7	144,0	-125,8	135,3	-125,8	144,0	-125,8	144,0	
	245	-109,2	144,0	-119,5	129,4	-122,7	144,0	-128,9	135,3	-128,9	144,0	-128,9	144,0	
	250	-111,9	144,0	-122,3	129,7	-125,7	144,0	-132,1	135,3	-132,1	144,0	-132,1	144,0	
	255	-114,6	144,0	-125,1	129,9	-128,7	144,0	-135,3	135,3	-135,3	144,0	-135,3	144,0	
	260	-117,3	144,0	-127,9	130,2	-131,8	144,0	-138,5	135,3	-138,5	144,0	-138,5	144,0	
	265	-120,0	144,0	-130,7	130,4	-134,8	144,0	-141,7	135,3	-141,7	144,0	-141,7	144,0	
	270	-122,7	144,0	-133,5	130,7	-137,8	144,0	-144,9	135,3	-144,9	144,0	-144,9	144,0	
	275	-125,4	144,0	-136,3	130,9	-140,8	144,0	-148,1	135,3	-148,1	144,0	-148,1	144,0	
	280	-128,1	144,0	-139,0	131,1	-143,9	144,0	-151,3	135,3	-151,3	144,0	-151,3	144,0	
	285	-130,8	144,0	-141,8	131,3	-146,9	144,0	-154,5	135,3	-154,5	144,0	-154,5	144,0	
	290	-133,5	144,0	-144,6	131,5	-149,9	144,0	-157,7	135,3	-157,7	144,0	-157,7	144,0	
	295	-136,2	144,0	-147,4	131,7	-152,9	144,0	-160,9	135,3	-160,9	144,0	-160,9	144,0	
	300	-138,9	144,0	-150,2	131,9	-156,0	144,0	-164,1	135,3	-164,1	144,0	-164,1	144,0	
c _{nom} =30mm		310	-111,4	144,0	-111,4	144,0	-130,5	144,0	-130,5	144,0	-145,1	144,0	-145,1	144,0
c _{nom} =35mm		320	-115,5	144,0	-115,5	144,0	-135,3	144,0	-135,3	144,0	-150,5	144,0	-150,5	144,0
c _{nom} =35mm		305	-109,4	144,0	-109,4	144,0	-128,1	144,0	-128,1	144,0	-142,4	144,0	-142,4	144,0
c _{nom} =35mm		315	-113,4	144,0	-113,4	144,0	-132,9	144,0	-132,9	144,0	-147,8	144,0	-147,8	144,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

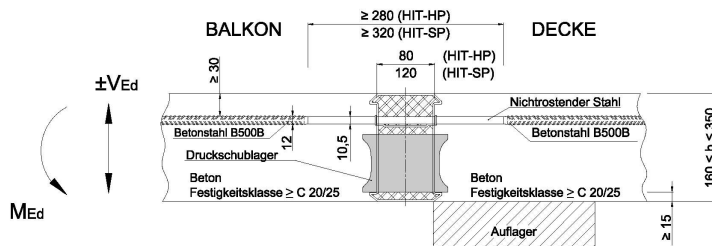


¹⁾ "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

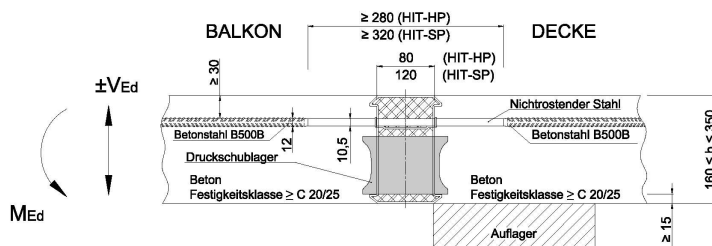


HIT-HP MVX-1609-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]			
		A _{s,req}	0,38	1,44	4,57	0,38	1,60	4,76	0,38	1,60	4,81		
		A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13		
A _{s,prov}	Ø8	Ø6/19,5	Ø8/11	Ø8	Ø6/17,5	Ø8/10,5	Ø8	Ø6/17,5	Ø8/10				
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)					
	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
	[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm]	
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-44,3	144,0	-56,5	82,5	-50,1	144,0	-60,2	98,5	-53,4	144,0	-60,2	112,2
	130	-47,0	144,0	-60,5	82,5	-53,2	144,0	-64,2	98,5	-56,7	144,0	-64,2	112,2
	135	-49,7	144,0	-64,4	82,5	-56,2	144,0	-68,1	98,5	-60,0	144,0	-68,1	112,2
	140	-52,4	144,0	-68,3	82,5	-59,2	144,0	-72,1	98,5	-63,3	144,0	-72,1	112,2
	145	-55,1	144,0	-72,3	82,5	-62,2	144,0	-76,0	98,5	-66,6	144,0	-76,0	112,2
	150	-57,8	144,0	-76,2	82,5	-65,3	144,0	-79,9	98,5	-69,9	144,0	-79,9	112,2
	155	-60,5	144,0	-80,1	82,5	-68,3	144,0	-83,9	98,5	-73,2	144,0	-83,9	112,2
	160	-63,2	144,0	-84,1	82,5	-71,3	144,0	-87,8	98,5	-76,5	144,0	-87,8	112,2
	165	-65,9	144,0	-88,0	82,5	-74,3	144,0	-91,7	98,5	-79,8	144,0	-91,7	112,2
	170	-68,6	144,0	-91,8	83,0	-77,3	144,0	-95,7	98,5	-83,1	144,0	-95,7	112,2
	175	-71,3	144,0	-95,2	84,4	-80,4	144,0	-99,6	98,5	-86,4	144,0	-99,6	112,2
	180	-74,0	144,0	-98,6	85,6	-83,4	144,0	-103,5	98,5	-89,7	144,0	-103,5	112,2
	185	-76,7	144,0	-102,1	86,7	-86,4	144,0	-107,5	98,5	-93,0	144,0	-107,5	112,2
	190	-79,4	144,0	-105,5	87,6	-89,4	144,0	-111,4	98,5	-96,3	144,0	-111,4	112,2
	195	-82,1	144,0	-108,9	88,5	-92,5	144,0	-115,3	98,5	-99,6	144,0	-115,3	112,2
	200	-84,8	144,0	-112,3	89,4	-95,5	144,0	-119,3	98,5	-102,9	144,0	-119,3	112,2
	205	-87,5	144,0	-115,8	90,1	-98,5	144,0	-123,2	98,5	-106,2	144,0	-123,2	112,2
	210	-90,2	144,0	-119,2	90,8	-101,5	144,0	-127,1	98,5	-109,5	144,0	-127,1	112,2
	215	-92,9	144,0	-122,6	91,4	-104,6	144,0	-131,1	98,5	-112,8	144,0	-131,1	112,2
	220	-95,6	144,0	-126,1	92,0	-107,6	144,0	-135,0	98,5	-116,1	144,0	-135,0	112,2
	225	-98,3	144,0	-129,5	92,6	-110,6	144,0	-138,9	98,5	-119,4	144,0	-138,9	112,2
	230	-101,0	144,0	-132,9	93,1	-113,6	144,0	-142,9	98,5	-122,7	144,0	-142,9	112,2
	235	-103,7	144,0	-136,4	93,5	-116,7	144,0	-146,8	98,5	-126,0	144,0	-146,8	112,2
	240	-106,5	144,0	-139,8	94,0	-119,7	144,0	-150,7	98,5	-129,3	144,0	-150,7	112,2
	245	-109,2	144,0	-143,2	94,4	-122,7	144,0	-154,7	98,5	-132,6	144,0	-154,7	112,2
	250	-111,9	144,0	-146,7	94,8	-125,7	144,0	-158,6	98,5	-135,9	144,0	-158,6	112,2
	255	-114,6	144,0	-150,1	95,2	-128,7	144,0	-162,5	98,5	-139,2	144,0	-162,5	112,2
	260	-117,3	144,0	-153,5	95,5	-131,8	144,0	-166,5	98,5	-142,5	144,0	-166,5	112,2
	265	-120,0	144,0	-156,9	95,8	-134,8	144,0	-170,4	98,5	-145,8	144,0	-170,4	112,2
	270	-122,7	144,0	-160,4	96,1	-137,8	144,0	-174,3	98,5	-149,1	144,0	-174,3	112,2
275	-125,4	144,0	-163,8	96,4	-140,8	144,0	-178,3	98,5	-152,4	144,0	-178,3	112,2	
280	-128,1	144,0	-167,2	96,7	-143,9	144,0	-182,2	98,5	-155,7	144,0	-182,2	112,2	
285	-130,8	144,0	-170,7	97,0	-146,9	144,0	-186,1	98,5	-159,0	144,0	-186,1	112,2	
290	-133,5	144,0	-174,1	97,2	-149,9	144,0	-190,1	98,5	-162,3	144,0	-190,1	112,2	
295	-136,2	144,0	-177,5	97,5	-152,9	144,0	-194,0	98,5	-165,6	144,0	-194,0	112,2	
300	-138,9	144,0	-181,0	97,7	-156,0	144,0	-197,9	98,5	-168,9	144,0	-197,9	112,2	
c _{nom} = 30mm	310	-135,2	144,0	-135,2	144,0	-158,4	144,0	-158,4	144,0	-175,5	144,0	-175,8	143,7
	320	-140,2	144,0	-140,2	144,0	-164,3	144,0	-164,3	144,0	-182,1	144,0	-182,4	143,7
c _{nom} = 35mm	305	-132,6	144,0	-132,6	144,0	-155,4	144,0	-155,4	144,0	-172,2	144,0	-172,5	143,7
	315	-137,7	144,0	-137,7	144,0	-161,3	144,0	-161,3	144,0	-178,8	144,0	-179,1	143,7

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

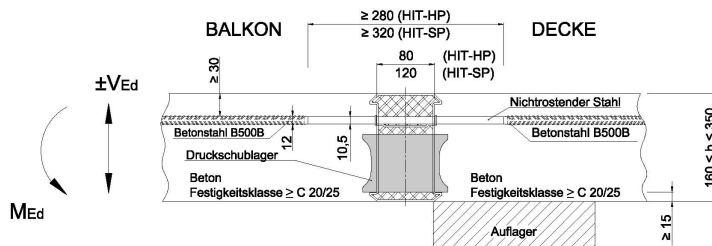


HIT-HP MVX-1809-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]	
		A _{s,req}	0,42	1,49	4,57		0,42	1,67	4,76		0,42	1,67	4,81
		A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13
A _{s,prov}	Ø8	Ø6/18,5	Ø8/11		Ø8	Ø6/16,5	Ø8/10,5		Ø8	Ø6/16,5	Ø8/10		
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
		[mm]	[kNm/m]	[kNm]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-44,3	144,0	-60,0	57,9	-50,1	144,0	-64,7	73,9	-53,4	144,0	-64,7	87,6
	130	-47,0	144,0	-64,5	57,9	-53,2	144,0	-69,2	73,9	-56,7	144,0	-69,2	87,6
	135	-49,7	144,0	-68,9	57,9	-56,2	144,0	-73,6	73,9	-60,0	144,0	-73,6	87,6
	140	-52,4	144,0	-73,3	57,9	-59,2	144,0	-78,0	73,9	-63,3	144,0	-78,0	87,6
	145	-55,1	144,0	-77,8	57,9	-62,2	144,0	-82,4	73,9	-66,6	144,0	-82,4	87,6
	150	-57,8	144,0	-82,2	57,9	-65,3	144,0	-86,9	73,9	-69,9	144,0	-86,9	87,6
	155	-60,5	144,0	-86,6	57,9	-68,3	144,0	-91,3	73,9	-73,2	144,0	-91,3	87,6
	160	-63,2	144,0	-91,0	57,9	-71,3	144,0	-95,7	73,9	-76,5	144,0	-95,7	87,6
	165	-65,9	144,0	-95,5	57,9	-74,3	144,0	-100,2	73,9	-79,8	144,0	-100,2	87,6
	170	-68,6	144,0	-99,9	57,9	-77,3	144,0	-104,6	73,9	-83,1	144,0	-104,6	87,6
	175	-71,3	144,0	-104,2	58,3	-80,4	144,0	-109,0	73,9	-86,4	144,0	-109,0	87,6
	180	-74,0	144,0	-108,0	59,9	-83,4	144,0	-113,4	73,9	-89,7	144,0	-113,4	87,6
	185	-76,7	144,0	-111,9	61,3	-86,4	144,0	-117,9	73,9	-93,0	144,0	-117,9	87,6
	190	-79,4	144,0	-115,7	62,6	-89,4	144,0	-122,3	73,9	-96,3	144,0	-122,3	87,6
	195	-82,1	144,0	-119,6	63,7	-92,5	144,0	-126,7	73,9	-99,6	144,0	-126,7	87,6
	200	-84,8	144,0	-123,5	64,7	-95,5	144,0	-131,1	73,9	-102,9	144,0	-131,1	87,6
	205	-87,5	144,0	-127,3	65,7	-98,5	144,0	-135,6	73,9	-106,2	144,0	-135,6	87,6
	210	-90,2	144,0	-131,2	66,5	-101,5	144,0	-140,0	73,9	-109,5	144,0	-140,0	87,6
	215	-92,9	144,0	-135,0	67,3	-104,6	144,0	-144,4	73,9	-112,8	144,0	-144,4	87,6
	220	-95,6	144,0	-138,9	68,0	-107,6	144,0	-148,8	73,9	-116,1	144,0	-148,8	87,6
	225	-98,3	144,0	-142,8	68,7	-110,6	144,0	-153,3	73,9	-119,4	144,0	-153,3	87,6
	230	-101,0	144,0	-146,6	69,3	-113,6	144,0	-157,7	73,9	-122,7	144,0	-157,7	87,6
	235	-103,7	144,0	-150,5	69,9	-116,7	144,0	-162,1	73,9	-126,0	144,0	-162,1	87,6
	240	-106,5	144,0	-154,3	70,5	-119,7	144,0	-166,5	73,9	-129,3	144,0	-166,5	87,6
	245	-109,2	144,0	-158,2	71,0	-122,7	144,0	-171,0	73,9	-132,6	144,0	-171,0	87,6
	250	-111,9	144,0	-162,1	71,4	-125,7	144,0	-175,4	73,9	-135,9	144,0	-175,4	87,6
	255	-114,6	144,0	-165,9	71,9	-128,7	144,0	-179,8	73,9	-139,2	144,0	-179,8	87,6
260	-117,3	144,0	-169,8	72,3	-131,8	144,0	-184,2	73,9	-142,5	144,0	-184,2	87,6	
265	-120,0	144,0	-173,6	72,7	-134,8	144,0	-188,7	73,9	-145,8	144,0	-188,7	87,6	
270	-122,7	144,0	-177,5	73,1	-137,8	144,0	-193,1	73,9	-149,1	144,0	-193,1	87,6	
275	-125,4	144,0	-181,4	73,4	-140,8	144,0	-197,5	73,9	-152,4	144,0	-197,5	87,6	
280	-128,1	144,0	-185,2	73,7	-143,9	144,0	-201,9	73,9	-155,7	144,0	-201,9	87,6	
285	-130,8	144,0	-189,1	74,1	-146,9	144,0	-206,4	73,9	-159,0	144,0	-206,4	87,6	
290	-133,5	144,0	-192,9	74,4	-149,9	144,0	-210,8	73,9	-162,3	144,0	-210,8	87,6	
295	-136,2	144,0	-196,8	74,6	-152,9	144,0	-215,2	73,9	-165,6	144,0	-215,2	87,6	
300	-138,9	144,0	-200,7	74,9	-156,0	144,0	-219,6	73,9	-168,9	144,0	-219,6	87,6	
c _{nom} = 30mm	310	-144,3	144,0	-150,6	137,5	-162,0	144,0	-176,5	129,2	-175,5	144,0	-197,7	120,8
	320	-149,7	144,0	-156,3	137,5	-168,0	144,0	-183,1	129,2	-182,1	144,0	-205,2	120,8
c _{nom} = 35mm	305	-141,6	144,0	-147,8	137,5	-159,0	144,0	-173,2	129,2	-172,2	144,0	-193,9	120,8
	315	-147,0	144,0	-153,4	137,5	-165,0	144,0	-179,8	129,2	-178,8	144,0	-201,5	120,8

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

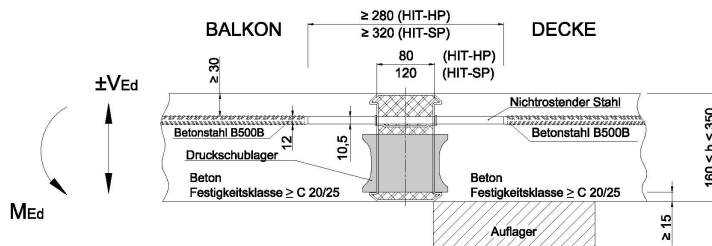


HIT-HP MVX-0610-hh-100-cc													
HIT-HP MVX-0305-hh-050-cc													
Spaltzug- und Aufhängewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]			
		A _{s,req}	0,13	0,98	4,66	0,13	1,05	4,73	0,13	1,05	4,73		
		A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13		
A _{s,prov}	Ø8	Ø6/2,5	Ø8/10,5	Ø8	Ø6/2,5	Ø8/10,5	Ø8	Ø6/2,5	Ø8/10,5				
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)					
	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
125	-27,5	160,0	-27,5	160,0	-28,0	160,0	-28,0	160,0	-28,0	160,0	-28,0	160,0	
130	-29,0	160,0	-29,0	160,0	-29,4	160,0	-29,4	160,0	-29,4	160,0	-29,4	160,0	
135	-30,4	160,0	-30,4	160,0	-30,9	160,0	-30,9	160,0	-30,9	160,0	-30,9	160,0	
140	-31,9	160,0	-31,9	160,0	-32,4	160,0	-32,4	160,0	-32,4	160,0	-32,4	160,0	
145	-33,4	160,0	-33,4	160,0	-33,9	160,0	-33,9	160,0	-33,9	160,0	-33,9	160,0	
150	-34,9	160,0	-34,9	160,0	-35,3	160,0	-35,3	160,0	-35,3	160,0	-35,3	160,0	
155	-36,3	160,0	-36,3	160,0	-36,8	160,0	-36,8	160,0	-36,8	160,0	-36,8	160,0	
160	-37,8	160,0	-37,8	160,0	-38,3	160,0	-38,3	160,0	-38,3	160,0	-38,3	160,0	
165	-39,3	160,0	-39,3	160,0	-39,8	160,0	-39,8	160,0	-39,8	160,0	-39,8	160,0	
170	-40,8	160,0	-40,8	160,0	-41,2	160,0	-41,2	160,0	-41,2	160,0	-41,2	160,0	
175	-42,2	160,0	-42,2	160,0	-42,7	160,0	-42,7	160,0	-42,7	160,0	-42,7	160,0	
180	-43,7	160,0	-43,7	160,0	-44,2	160,0	-44,2	160,0	-44,2	160,0	-44,2	160,0	
185	-45,2	160,0	-45,2	160,0	-45,7	160,0	-45,7	160,0	-45,7	160,0	-45,7	160,0	
190	-46,7	160,0	-46,7	160,0	-47,1	160,0	-47,1	160,0	-47,1	160,0	-47,1	160,0	
195	-48,1	160,0	-48,1	160,0	-48,6	160,0	-48,6	160,0	-48,6	160,0	-48,6	160,0	
200	-49,6	160,0	-49,6	160,0	-50,1	160,0	-50,1	160,0	-50,1	160,0	-50,1	160,0	
205	-51,1	160,0	-51,1	160,0	-51,6	160,0	-51,6	160,0	-51,6	160,0	-51,6	160,0	
210	-52,6	160,0	-52,6	160,0	-53,0	160,0	-53,0	160,0	-53,0	160,0	-53,0	160,0	
215	-54,0	160,0	-54,0	160,0	-54,5	160,0	-54,5	160,0	-54,5	160,0	-54,5	160,0	
220	-55,5	160,0	-55,5	160,0	-56,0	160,0	-56,0	160,0	-56,0	160,0	-56,0	160,0	
225	-57,0	160,0	-57,0	160,0	-57,5	160,0	-57,5	160,0	-57,5	160,0	-57,5	160,0	
230	-58,5	160,0	-58,5	160,0	-58,9	160,0	-58,9	160,0	-58,9	160,0	-58,9	160,0	
235	-59,9	160,0	-59,9	160,0	-60,4	160,0	-60,4	160,0	-60,4	160,0	-60,4	160,0	
240	-61,4	160,0	-61,4	160,0	-61,9	160,0	-61,9	160,0	-61,9	160,0	-61,9	160,0	
245	-62,9	160,0	-62,9	160,0	-63,4	160,0	-63,4	160,0	-63,4	160,0	-63,4	160,0	
250	-64,4	160,0	-64,4	160,0	-64,8	160,0	-64,8	160,0	-64,8	160,0	-64,8	160,0	
255	-65,8	160,0	-65,8	160,0	-66,3	160,0	-66,3	160,0	-66,3	160,0	-66,3	160,0	
260	-67,3	160,0	-67,3	160,0	-67,8	160,0	-67,8	160,0	-67,8	160,0	-67,8	160,0	
265	-68,8	160,0	-68,8	160,0	-69,3	160,0	-69,3	160,0	-69,3	160,0	-69,3	160,0	
270	-70,3	160,0	-70,3	160,0	-70,7	160,0	-70,7	160,0	-70,7	160,0	-70,7	160,0	
275	-71,7	160,0	-71,7	160,0	-72,2	160,0	-72,2	160,0	-72,2	160,0	-72,2	160,0	
280	-73,2	160,0	-73,2	160,0	-73,7	160,0	-73,7	160,0	-73,7	160,0	-73,7	160,0	
285	-74,7	160,0	-74,7	160,0	-75,2	160,0	-75,2	160,0	-75,2	160,0	-75,2	160,0	
290	-76,2	160,0	-76,2	160,0	-76,6	160,0	-76,6	160,0	-76,6	160,0	-76,6	160,0	
295	-77,6	160,0	-77,6	160,0	-78,1	160,0	-78,1	160,0	-78,1	160,0	-78,1	160,0	
300	-79,1	160,0	-79,1	160,0	-79,6	160,0	-79,6	160,0	-79,6	160,0	-79,6	160,0	
c _{nom} = 30mm	310	-73,4	152,0	-73,4	152,0	-82,5	160,0	-82,5	160,0	-82,5	160,0	-82,5	160,0
	320	-76,0	152,0	-76,0	152,0	-85,5	160,0	-85,5	160,0	-85,5	160,0	-85,5	160,0
c _{nom} = 35mm	305	-72,0	152,0	-72,0	152,0	-81,1	160,0	-81,1	160,0	-81,1	160,0	-81,1	160,0
	315	-74,7	152,0	-74,7	152,0	-84,0	160,0	-84,0	160,0	-84,0	160,0	-84,0	160,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

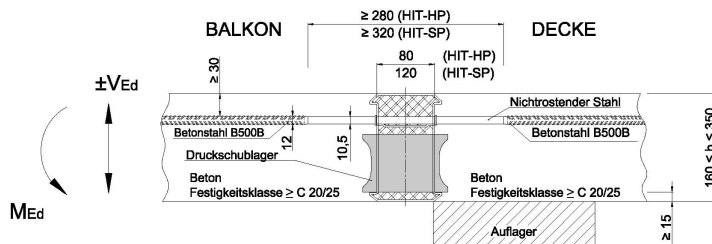


HIT-HP MVX-0710-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]			
		A _{s,req}	0,15	1,07	4,75	0,15	1,15	4,83	0,15	1,15		4,83	
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13			
A _{s,prov}	Ø8	Ø6/25	Ø8/10,5	Ø8	Ø6/24,5	Ø8/10	Ø8	Ø6/24,5	Ø8/10				
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	h-c _{nom}	Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
	[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
	125	-31,4	160,0	-31,4	160,0	-32,1	160,0	-32,1	160,0	-32,1	160,0	-32,1	160,0
	130	-33,2	160,0	-33,2	160,0	-33,8	160,0	-33,8	160,0	-33,8	160,0	-33,8	160,0
	135	-34,9	160,0	-34,9	160,0	-35,5	160,0	-35,5	160,0	-35,5	160,0	-35,5	160,0
	140	-36,6	160,0	-36,6	160,0	-37,2	160,0	-37,2	160,0	-37,2	160,0	-37,2	160,0
	145	-38,3	160,0	-38,3	160,0	-39,0	160,0	-39,0	160,0	-39,0	160,0	-39,0	160,0
	150	-40,0	160,0	-40,0	160,0	-40,7	160,0	-40,7	160,0	-40,7	160,0	-40,7	160,0
	155	-41,8	160,0	-41,8	160,0	-42,4	160,0	-42,4	160,0	-42,4	160,0	-42,4	160,0
	160	-43,5	160,0	-43,5	160,0	-44,1	160,0	-44,1	160,0	-44,1	160,0	-44,1	160,0
	165	-45,2	160,0	-45,2	160,0	-45,8	160,0	-45,8	160,0	-45,8	160,0	-45,8	160,0
	170	-46,9	160,0	-46,9	160,0	-47,6	160,0	-47,6	160,0	-47,6	160,0	-47,6	160,0
	175	-48,7	160,0	-48,7	160,0	-49,3	160,0	-49,3	160,0	-49,3	160,0	-49,3	160,0
	180	-50,4	160,0	-50,4	160,0	-51,0	160,0	-51,0	160,0	-51,0	160,0	-51,0	160,0
	185	-52,1	160,0	-52,1	160,0	-52,7	160,0	-52,7	160,0	-52,7	160,0	-52,7	160,0
	190	-53,8	160,0	-53,8	160,0	-54,5	160,0	-54,5	160,0	-54,5	160,0	-54,5	160,0
	195	-55,5	160,0	-55,5	160,0	-56,2	160,0	-56,2	160,0	-56,2	160,0	-56,2	160,0
	200	-57,3	160,0	-57,3	160,0	-57,9	160,0	-57,9	160,0	-57,9	160,0	-57,9	160,0
	205	-59,0	160,0	-59,0	160,0	-59,6	160,0	-59,6	160,0	-59,6	160,0	-59,6	160,0
	210	-60,7	160,0	-60,7	160,0	-61,3	160,0	-61,3	160,0	-61,3	160,0	-61,3	160,0
	215	-62,4	160,0	-62,4	160,0	-63,1	160,0	-63,1	160,0	-63,1	160,0	-63,1	160,0
	220	-64,1	160,0	-64,1	160,0	-64,8	160,0	-64,8	160,0	-64,8	160,0	-64,8	160,0
	225	-65,9	160,0	-65,9	160,0	-66,5	160,0	-66,5	160,0	-66,5	160,0	-66,5	160,0
	230	-67,6	160,0	-67,6	160,0	-68,2	160,0	-68,2	160,0	-68,2	160,0	-68,2	160,0
	235	-69,3	160,0	-69,3	160,0	-69,9	160,0	-69,9	160,0	-69,9	160,0	-69,9	160,0
	240	-71,0	160,0	-71,0	160,0	-71,7	160,0	-71,7	160,0	-71,7	160,0	-71,7	160,0
	245	-72,7	160,0	-72,7	160,0	-73,4	160,0	-73,4	160,0	-73,4	160,0	-73,4	160,0
	250	-74,5	160,0	-74,5	160,0	-75,1	160,0	-75,1	160,0	-75,1	160,0	-75,1	160,0
	255	-76,2	160,0	-76,2	160,0	-76,8	160,0	-76,8	160,0	-76,8	160,0	-76,8	160,0
260	-77,9	160,0	-77,9	160,0	-78,5	160,0	-78,5	160,0	-78,5	160,0	-78,5	160,0	
265	-79,6	160,0	-79,6	160,0	-80,3	160,0	-80,3	160,0	-80,3	160,0	-80,3	160,0	
270	-81,4	160,0	-81,4	160,0	-82,0	160,0	-82,0	160,0	-82,0	160,0	-82,0	160,0	
275	-83,1	160,0	-83,1	160,0	-83,7	160,0	-83,7	160,0	-83,7	160,0	-83,7	160,0	
280	-84,8	160,0	-84,8	160,0	-85,4	160,0	-85,4	160,0	-85,4	160,0	-85,4	160,0	
285	-86,5	160,0	-86,5	160,0	-87,2	160,0	-87,2	160,0	-87,2	160,0	-87,2	160,0	
290	-88,2	160,0	-88,2	160,0	-88,9	160,0	-88,9	160,0	-88,9	160,0	-88,9	160,0	
295	-90,0	160,0	-90,0	160,0	-90,6	160,0	-90,6	160,0	-90,6	160,0	-90,6	160,0	
300	-91,7	160,0	-91,7	160,0	-92,3	160,0	-92,3	160,0	-92,3	160,0	-92,3	160,0	
c _{nom} = 30mm	310	-85,1	160,0	-85,1	160,0	-95,8	160,0	-95,8	160,0	-95,8	160,0	-95,8	160,0
	320	-88,1	160,0	-88,1	160,0	-99,2	160,0	-99,2	160,0	-99,2	160,0	-99,2	160,0
c _{nom} = 35mm	305	-83,6	160,0	-83,6	160,0	-94,0	160,0	-94,0	160,0	-94,0	160,0	-94,0	160,0
	315	-86,6	160,0	-86,6	160,0	-97,5	160,0	-97,5	160,0	-97,5	160,0	-97,5	160,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

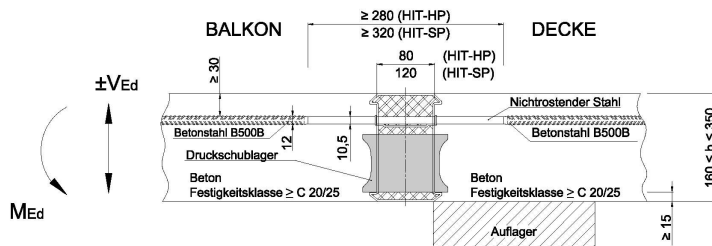


HIT-HP MVX-0810-hh-100-cc											
HIT-HP MVX-0405-hh-050-cc											
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37			
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,17	1,15	4,83	0,17	1,24	4,92	0,17	1,24	4,92
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13	
	A _{s,prov}	Ø8	Ø6/24,5	Ø8/10	Ø8	Ø6/22,5	Ø8/10	Ø8	Ø6/22,5	Ø8/10	
h-c _{nom}	h-c _{nom}	Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}
		[mm]	[kNm/m]	[kNm/m]	[kNm/m]	[mm]	[kNm/m]	[kNm/m]	[kNm/m]	[mm]	[kNm/m]
125	125	-35,2	160,0	-35,2	160,0	-36,1	160,0	-36,1	160,0	-36,1	160,0
130	130	-37,2	160,0	-37,2	160,0	-38,0	160,0	-38,0	160,0	-38,0	160,0
135	135	-39,2	160,0	-39,2	160,0	-40,0	160,0	-40,0	160,0	-40,0	160,0
140	140	-41,1	160,0	-41,1	160,0	-42,0	160,0	-42,0	160,0	-42,0	160,0
145	145	-43,1	160,0	-43,1	160,0	-43,9	160,0	-43,9	160,0	-43,9	160,0
150	150	-45,1	160,0	-45,1	160,0	-45,9	160,0	-45,9	160,0	-45,9	160,0
155	155	-47,0	160,0	-47,0	160,0	-47,9	160,0	-47,9	160,0	-47,9	160,0
160	160	-49,0	160,0	-49,0	160,0	-49,8	160,0	-49,8	160,0	-49,8	160,0
165	165	-51,0	160,0	-51,0	160,0	-51,8	160,0	-51,8	160,0	-51,8	160,0
170	170	-52,9	160,0	-52,9	160,0	-53,8	160,0	-53,8	160,0	-53,8	160,0
175	175	-54,9	160,0	-54,9	160,0	-55,7	160,0	-55,7	160,0	-55,7	160,0
180	180	-56,9	160,0	-56,9	160,0	-57,7	160,0	-57,7	160,0	-57,7	160,0
185	185	-58,8	160,0	-58,8	160,0	-59,7	160,0	-59,7	160,0	-59,7	160,0
190	190	-60,8	160,0	-60,8	160,0	-61,6	160,0	-61,6	160,0	-61,6	160,0
195	195	-62,8	160,0	-62,8	160,0	-63,6	160,0	-63,6	160,0	-63,6	160,0
200	200	-64,7	160,0	-64,7	160,0	-65,6	160,0	-65,6	160,0	-65,6	160,0
205	205	-66,7	160,0	-66,7	160,0	-67,5	160,0	-67,5	160,0	-67,5	160,0
210	210	-68,7	160,0	-68,7	160,0	-69,5	160,0	-69,5	160,0	-69,5	160,0
215	215	-70,6	160,0	-70,6	160,0	-71,5	160,0	-71,5	160,0	-71,5	160,0
220	220	-72,6	160,0	-72,6	160,0	-73,4	160,0	-73,4	160,0	-73,4	160,0
225	225	-74,6	160,0	-74,6	160,0	-75,4	160,0	-75,4	160,0	-75,4	160,0
230	230	-76,5	160,0	-76,5	160,0	-77,4	160,0	-77,4	160,0	-77,4	160,0
235	235	-78,5	160,0	-78,5	160,0	-79,3	160,0	-79,3	160,0	-79,3	160,0
240	240	-80,5	160,0	-80,5	160,0	-81,3	160,0	-81,3	160,0	-81,3	160,0
245	245	-82,4	160,0	-82,4	160,0	-83,3	160,0	-83,3	160,0	-83,3	160,0
250	250	-84,4	160,0	-84,4	160,0	-85,2	160,0	-85,2	160,0	-85,2	160,0
255	255	-86,4	160,0	-86,4	160,0	-87,2	160,0	-87,2	160,0	-87,2	160,0
260	260	-88,3	160,0	-88,3	160,0	-89,2	160,0	-89,2	160,0	-89,2	160,0
265	265	-90,3	160,0	-90,3	160,0	-91,1	160,0	-91,1	160,0	-91,1	160,0
270	270	-92,3	160,0	-92,3	160,0	-93,1	160,0	-93,1	160,0	-93,1	160,0
275	275	-94,2	160,0	-94,2	160,0	-95,1	160,0	-95,1	160,0	-95,1	160,0
280	280	-96,2	160,0	-96,2	160,0	-97,0	160,0	-97,0	160,0	-97,0	160,0
285	285	-98,2	160,0	-98,2	160,0	-99,0	160,0	-99,0	160,0	-99,0	160,0
290	290	-100,1	160,0	-100,1	160,0	-101,0	160,0	-101,0	160,0	-101,0	160,0
295	295	-102,1	160,0	-102,1	160,0	-102,9	160,0	-102,9	160,0	-102,9	160,0
300	300	-104,1	160,0	-104,1	160,0	-104,9	160,0	-104,9	160,0	-104,9	160,0
C _{nom} = 30mm	310	-96,7	160,0	-96,7	160,0	-108,8	160,0	-108,8	160,0	-108,8	160,0
	320	-100,2	160,0	-100,2	160,0	-112,8	160,0	-112,8	160,0	-112,8	160,0
C _{nom} = 35mm	305	-94,9	160,0	-94,9	160,0	-106,9	160,0	-106,9	160,0	-106,9	160,0
	315	-98,4	160,0	-98,4	160,0	-110,8	160,0	-110,8	160,0	-110,8	160,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

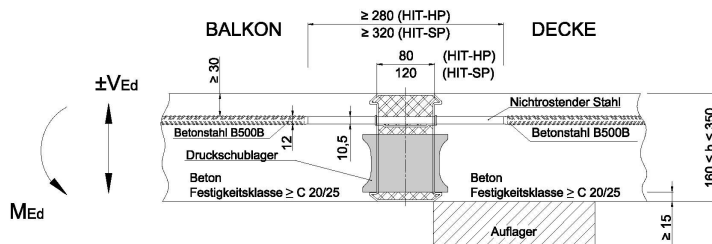


HIT-HP MVX-0910-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]			
		A _{s,req}	0,19	1,22	4,90	0,19	1,32	5,00	0,19	1,32		5,00	
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13			
A _{s,prov}	Ø8	Ø6/23	Ø8/10	Ø8	Ø6/21	Ø8/10	Ø8	Ø6/21	Ø8/10				
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)					
	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-38,8	160,0	-38,8	160,0	-39,9	160,0	-39,9	160,0	-39,9	160,0	-39,9	160,0
	130	-41,0	160,0	-41,0	160,0	-42,1	160,0	-42,1	160,0	-42,1	160,0	-42,1	160,0
	135	-43,2	160,0	-43,2	160,0	-44,3	160,0	-44,3	160,0	-44,3	160,0	-44,3	160,0
	140	-45,1	160,0	-45,1	160,0	-46,5	160,0	-46,5	160,0	-46,5	160,0	-46,5	160,0
	145	-47,1	160,0	-47,1	160,0	-48,7	160,0	-48,7	160,0	-48,7	160,0	-48,7	160,0
	150	-49,0	160,0	-49,0	160,0	-50,9	160,0	-50,9	160,0	-50,9	160,0	-50,9	160,0
	155	-50,9	160,0	-50,9	160,0	-53,2	160,0	-53,2	160,0	-53,2	160,0	-53,2	160,0
	160	-52,9	160,0	-52,9	160,0	-55,4	160,0	-55,4	160,0	-55,4	160,0	-55,4	160,0
	165	-54,8	160,0	-54,8	160,0	-57,6	160,0	-57,6	160,0	-57,6	160,0	-57,6	160,0
	170	-56,7	160,0	-56,7	160,0	-59,8	160,0	-59,8	160,0	-59,8	160,0	-59,8	160,0
	175	-58,7	160,0	-58,7	160,0	-62,0	160,0	-62,0	160,0	-62,0	160,0	-62,0	160,0
	180	-60,6	160,0	-60,6	160,0	-64,2	160,0	-64,2	160,0	-64,2	160,0	-64,2	160,0
	185	-62,5	160,0	-62,5	160,0	-66,4	160,0	-66,4	160,0	-66,4	160,0	-66,4	160,0
	190	-64,4	160,0	-64,4	160,0	-68,6	160,0	-68,6	160,0	-68,6	160,0	-68,6	160,0
	195	-66,4	160,0	-66,4	160,0	-70,9	160,0	-70,9	160,0	-70,9	160,0	-70,9	160,0
	200	-68,3	160,0	-68,3	160,0	-73,1	160,0	-73,1	160,0	-73,1	160,0	-73,1	160,0
	205	-70,2	160,0	-70,2	160,0	-75,3	160,0	-75,3	160,0	-75,3	160,0	-75,3	160,0
	210	-72,2	160,0	-72,2	160,0	-77,5	160,0	-77,5	160,0	-77,5	160,0	-77,5	160,0
	215	-74,1	160,0	-74,1	160,0	-79,7	160,0	-79,7	160,0	-79,7	160,0	-79,7	160,0
	220	-76,0	160,0	-76,0	160,0	-81,9	160,0	-81,9	160,0	-81,9	160,0	-81,9	160,0
	225	-78,0	160,0	-78,0	160,0	-84,1	160,0	-84,1	160,0	-84,1	160,0	-84,1	160,0
	230	-79,9	160,0	-79,9	160,0	-86,4	160,0	-86,4	160,0	-86,4	160,0	-86,4	160,0
	235	-81,8	160,0	-81,8	160,0	-88,6	160,0	-88,6	160,0	-88,6	160,0	-88,6	160,0
	240	-83,7	160,0	-83,7	160,0	-90,8	160,0	-90,8	160,0	-90,8	160,0	-90,8	160,0
	245	-85,7	160,0	-85,7	160,0	-93,0	160,0	-93,0	160,0	-93,0	160,0	-93,0	160,0
	250	-87,6	160,0	-87,6	160,0	-95,2	160,0	-95,2	160,0	-95,2	160,0	-95,2	160,0
	255	-89,5	160,0	-89,5	160,0	-97,4	160,0	-97,4	160,0	-97,4	160,0	-97,4	160,0
	260	-91,5	160,0	-91,5	160,0	-99,6	160,0	-99,6	160,0	-99,6	160,0	-99,6	160,0
	265	-93,4	160,0	-93,4	160,0	-101,8	160,0	-101,8	160,0	-101,8	160,0	-101,8	160,0
	270	-95,3	160,0	-95,3	160,0	-104,1	160,0	-104,1	160,0	-104,1	160,0	-104,1	160,0
275	-97,3	160,0	-97,3	160,0	-106,3	160,0	-106,3	160,0	-106,3	160,0	-106,3	160,0	
280	-99,2	160,0	-99,2	160,0	-108,5	160,0	-108,5	160,0	-108,5	160,0	-108,5	160,0	
285	-101,1	160,0	-101,1	160,0	-110,7	160,0	-110,7	160,0	-110,7	160,0	-110,7	160,0	
290	-103,0	160,0	-103,0	160,0	-112,9	160,0	-112,9	160,0	-112,9	160,0	-112,9	160,0	
295	-105,0	160,0	-105,0	160,0	-115,1	160,0	-115,1	160,0	-115,1	160,0	-115,1	160,0	
300	-106,9	160,0	-106,9	160,0	-117,3	160,0	-117,3	160,0	-117,3	160,0	-117,3	160,0	
c _{nom} = 30mm	310	-78,9	160,0	-78,9	160,0	-92,5	160,0	-92,5	160,0	-103,1	160,0	-103,1	160,0
	320	-81,7	160,0	-81,7	160,0	-95,8	160,0	-95,8	160,0	-106,8	160,0	-106,8	160,0
c _{nom} = 35mm	305	-77,5	160,0	-77,5	160,0	-90,8	160,0	-90,8	160,0	-101,2	160,0	-101,2	160,0
	315	-80,3	160,0	-80,3	160,0	-94,1	160,0	-94,1	160,0	-105,0	160,0	-105,0	160,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

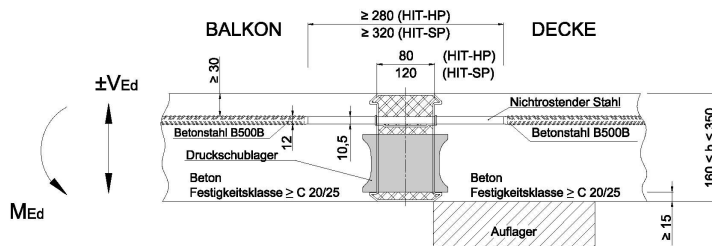


HIT-HP MVX-1010-hh-100-cc														
HIT-HP MVX-0505-hh-050-cc														
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37						
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}				
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt				
		[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]				
		A _{s,req}	0,21	1,28	4,94	0,21	1,39	5,07	0,21	1,39		5,07		
		A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13		1,13		
A _{s,prov}	Ø8	Ø6/22	Ø8/10	Ø8	Ø6/20	Ø8/9,5	Ø8	Ø6/20	Ø8/9,5					
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
		[mm]	[kNm/m]	[kNm]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm		125	-41,2	160,0	-42,3	156,2	-43,6	160,0	-43,6	160,0	-43,6	160,0	-43,6	160,0
		130	-43,6	160,0	-44,7	156,2	-46,0	160,0	-46,0	160,0	-46,0	160,0	-46,0	160,0
		135	-46,0	160,0	-47,2	156,2	-48,5	160,0	-48,5	160,0	-48,5	160,0	-48,5	160,0
		140	-48,4	160,0	-49,4	157,0	-50,9	160,0	-50,9	160,0	-50,9	160,0	-50,9	160,0
		145	-50,7	160,0	-51,5	157,9	-53,4	160,0	-53,4	160,0	-53,4	160,0	-53,4	160,0
		150	-53,1	160,0	-53,6	158,6	-55,8	160,0	-55,8	160,0	-55,8	160,0	-55,8	160,0
		155	-55,5	160,0	-55,8	159,3	-58,3	160,0	-58,3	160,0	-58,3	160,0	-58,3	160,0
		160	-57,9	160,0	-57,9	159,9	-60,8	160,0	-60,8	160,0	-60,8	160,0	-60,8	160,0
		165	-60,1	160,0	-60,1	160,0	-63,2	160,0	-63,2	160,0	-63,2	160,0	-63,2	160,0
		170	-62,2	160,0	-62,2	160,0	-65,7	160,0	-65,7	160,0	-65,7	160,0	-65,7	160,0
		175	-64,4	160,0	-64,4	160,0	-68,1	160,0	-68,1	160,0	-68,1	160,0	-68,1	160,0
		180	-66,5	160,0	-66,5	160,0	-70,6	160,0	-70,6	160,0	-70,6	160,0	-70,6	160,0
		185	-68,7	160,0	-68,7	160,0	-73,1	160,0	-73,1	160,0	-73,1	160,0	-73,1	160,0
		190	-70,8	160,0	-70,8	160,0	-75,5	160,0	-75,5	160,0	-75,5	160,0	-75,5	160,0
		195	-72,9	160,0	-72,9	160,0	-78,0	160,0	-78,0	160,0	-78,0	160,0	-78,0	160,0
		200	-75,1	160,0	-75,1	160,0	-80,4	160,0	-80,4	160,0	-80,4	160,0	-80,4	160,0
		205	-77,2	160,0	-77,2	160,0	-82,9	160,0	-82,9	160,0	-82,9	160,0	-82,9	160,0
		210	-79,4	160,0	-79,4	160,0	-85,4	160,0	-85,4	160,0	-85,4	160,0	-85,4	160,0
		215	-81,5	160,0	-81,5	160,0	-87,8	160,0	-87,8	160,0	-87,8	160,0	-87,8	160,0
		220	-83,7	160,0	-83,7	160,0	-90,3	160,0	-90,3	160,0	-90,3	160,0	-90,3	160,0
		225	-85,8	160,0	-85,8	160,0	-92,7	160,0	-92,7	160,0	-92,7	160,0	-92,7	160,0
		230	-88,0	160,0	-88,0	160,0	-95,2	160,0	-95,2	160,0	-95,2	160,0	-95,2	160,0
		235	-90,1	160,0	-90,1	160,0	-97,6	160,0	-97,6	160,0	-97,6	160,0	-97,6	160,0
		240	-92,2	160,0	-92,2	160,0	-100,1	160,0	-100,1	160,0	-100,1	160,0	-100,1	160,0
		245	-94,4	160,0	-94,4	160,0	-102,6	160,0	-102,6	160,0	-102,6	160,0	-102,6	160,0
		250	-96,5	160,0	-96,5	160,0	-105,0	160,0	-105,0	160,0	-105,0	160,0	-105,0	160,0
		255	-98,7	160,0	-98,7	160,0	-107,5	160,0	-107,5	160,0	-107,5	160,0	-107,5	160,0
		260	-100,8	160,0	-100,8	160,0	-109,9	160,0	-109,9	160,0	-109,9	160,0	-109,9	160,0
		265	-103,0	160,0	-103,0	160,0	-112,4	160,0	-112,4	160,0	-112,4	160,0	-112,4	160,0
		270	-105,1	160,0	-105,1	160,0	-114,9	160,0	-114,9	160,0	-114,9	160,0	-114,9	160,0
	275	-107,2	160,0	-107,2	160,0	-117,3	160,0	-117,3	160,0	-117,3	160,0	-117,3	160,0	
	280	-109,4	160,0	-109,4	160,0	-119,8	160,0	-119,8	160,0	-119,8	160,0	-119,8	160,0	
	285	-111,5	160,0	-111,5	160,0	-122,2	160,0	-122,2	160,0	-122,2	160,0	-122,2	160,0	
	290	-113,7	160,0	-113,7	160,0	-124,7	160,0	-124,7	160,0	-124,7	160,0	-124,7	160,0	
	295	-115,8	160,0	-115,8	160,0	-127,1	160,0	-127,1	160,0	-127,1	160,0	-127,1	160,0	
	300	-118,0	160,0	-118,0	160,0	-129,6	160,0	-129,6	160,0	-129,6	160,0	-129,6	160,0	
c _{nom} = 30mm		310	-87,3	160,0	-87,3	160,0	-102,3	160,0	-102,3	160,0	-114,0	160,0	-114,0	160,0
		320	-90,5	160,0	-90,5	160,0	-106,0	160,0	-106,0	160,0	-118,2	160,0	-118,2	160,0
c _{nom} = 35mm		305	-85,7	160,0	-85,7	160,0	-100,5	160,0	-100,5	160,0	-112,0	160,0	-112,0	160,0
		315	-88,9	160,0	-88,9	160,0	-104,2	160,0	-104,2	160,0	-116,1	160,0	-116,1	160,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

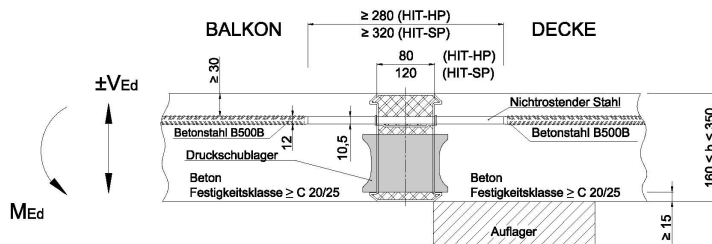


HIT-HP MVX-1110-hh-100-cc											
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37			
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,23	1,34	4,94	0,23	1,46	5,14	0,23	1,46	5,14
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13	
	A _{s,prov}	Ø8	Ø6/21	Ø8/10	Ø8	Ø6/19	Ø8/9,5	Ø8	Ø6/19	Ø8/9,5	
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}
		[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
	[mm]										
125		-41,2	160,0	-45,5	143,9	-47,1	160,0	-47,1	159,9	-47,1	160,0
130		-43,6	160,0	-48,2	143,9	-49,8	160,0	-49,8	159,9	-49,8	160,0
135		-46,0	160,0	-50,9	143,9	-52,5	160,0	-52,5	159,9	-52,5	160,0
140		-48,4	160,0	-53,4	144,6	-55,2	160,0	-55,2	159,9	-55,2	160,0
145		-50,7	160,0	-55,8	145,6	-57,9	160,0	-57,9	159,9	-57,9	160,0
150		-53,1	160,0	-58,1	146,4	-60,6	160,0	-60,6	159,9	-60,6	160,0
155		-55,5	160,0	-60,5	147,2	-63,3	160,0	-63,3	159,9	-63,3	160,0
160		-57,9	160,0	-62,8	147,9	-66,0	160,0	-66,0	159,9	-66,0	160,0
165		-60,3	160,0	-65,2	148,6	-68,7	160,0	-68,7	159,9	-68,7	160,0
170		-62,7	160,0	-67,5	149,1	-71,4	160,0	-71,4	159,9	-71,4	160,0
175		-65,0	160,0	-69,9	149,6	-74,1	160,0	-74,1	159,9	-74,1	160,0
180		-67,4	160,0	-72,3	150,1	-76,8	160,0	-76,8	159,9	-76,8	160,0
185		-69,8	160,0	-74,6	150,6	-79,5	160,0	-79,5	159,9	-79,5	160,0
190		-72,2	160,0	-77,0	151,0	-82,2	160,0	-82,2	159,9	-82,2	160,0
195		-74,6	160,0	-79,3	151,3	-84,9	160,0	-84,9	159,9	-84,9	160,0
200		-77,0	160,0	-81,7	151,7	-87,6	160,0	-87,6	159,9	-87,6	160,0
205		-79,3	160,0	-84,1	152,0	-90,3	160,0	-90,3	159,9	-90,3	160,0
210		-81,7	160,0	-86,4	152,3	-93,0	160,0	-93,1	159,9	-93,1	160,0
215		-84,1	160,0	-88,8	152,6	-95,7	160,0	-95,8	159,9	-95,8	160,0
220		-86,5	160,0	-91,1	152,9	-98,4	160,0	-98,5	159,9	-98,5	160,0
225		-88,9	160,0	-93,5	153,1	-101,1	160,0	-101,2	159,9	-101,2	160,0
230		-91,3	160,0	-95,9	153,4	-103,8	160,0	-103,9	159,9	-103,9	160,0
235		-93,6	160,0	-98,2	153,6	-106,5	160,0	-106,6	159,9	-106,6	160,0
240		-96,0	160,0	-100,6	153,8	-109,2	160,0	-109,3	159,9	-109,3	160,0
245		-98,4	160,0	-102,9	154,0	-111,9	160,0	-112,0	159,9	-112,0	160,0
250		-100,8	160,0	-105,3	154,2	-114,6	160,0	-114,7	159,9	-114,7	160,0
255		-103,2	160,0	-107,6	154,4	-117,3	160,0	-117,4	159,9	-117,4	160,0
260		-105,6	160,0	-110,0	154,5	-120,0	160,0	-120,1	159,9	-120,1	160,0
265		-107,9	160,0	-112,4	154,7	-122,7	160,0	-122,8	159,9	-122,8	160,0
270		-110,3	160,0	-114,7	154,8	-125,5	160,0	-125,5	159,9	-125,5	160,0
275		-112,7	160,0	-117,1	155,0	-128,2	160,0	-128,2	159,9	-128,2	160,0
280		-115,1	160,0	-119,4	155,1	-130,9	160,0	-130,9	159,9	-130,9	160,0
285		-117,5	160,0	-121,8	155,3	-133,6	160,0	-133,6	159,9	-133,6	160,0
290		-119,9	160,0	-124,2	155,4	-136,3	160,0	-136,3	159,9	-136,3	160,0
295		-122,2	160,0	-126,5	155,5	-139,0	160,0	-139,0	159,9	-139,0	160,0
300		-124,6	160,0	-128,9	155,6	-141,7	160,0	-141,7	159,9	-141,7	160,0
C _{nom} = 30mm	310	-95,6	160,0	-95,6	160,0	-112,1	160,0	-112,1	160,0	-124,8	160,0
	320	-99,1	160,0	-99,1	160,0	-116,1	160,0	-116,1	160,0	-129,4	160,0
C _{nom} = 35mm	305	-93,9	160,0	-93,9	160,0	-110,0	160,0	-110,0	160,0	-122,6	160,0
	315	-97,4	160,0	-97,4	160,0	-114,1	160,0	-114,1	160,0	-127,1	160,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

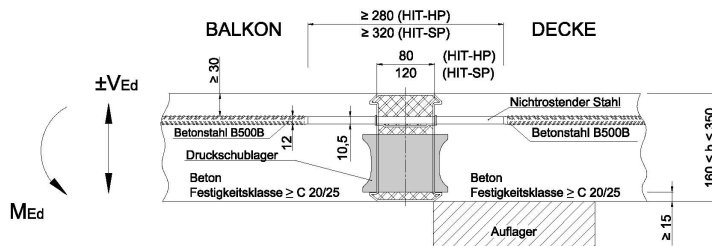


HIT-HP MVX-1210-hh-100-cc													
HIT-HP MVX-0605-hh-050-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,25	1,39	4,94		0,25	1,52	5,14		0,25	1,52	5,20
A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13		
A _{s,prov}	Ø8	Ø6/20	Ø8/10		Ø8	Ø6/18,5	Ø8/9,5		Ø8	Ø6/18,5	Ø8/9,5		
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
		[mm]	[kNm/m]	[kNm/m]	[kNm/m]	[mm]	[kNm/m]	[kNm/m]	[kNm/m]	[mm]	[kNm/m]	[kNm/m]	[kNm/m]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-41,2	160,0	-48,6	131,6	-47,1	160,0	-50,4	147,6	-50,4	160,0	-50,4	160,0
	130	-43,6	160,0	-51,5	131,6	-49,8	160,0	-53,4	147,6	-53,4	160,0	-53,4	160,0
	135	-46,0	160,0	-54,5	131,6	-52,5	160,0	-56,3	147,6	-56,3	160,0	-56,3	160,0
	140	-48,4	160,0	-57,3	132,1	-55,2	160,0	-59,3	147,6	-59,3	160,0	-59,3	160,0
	145	-50,7	160,0	-59,8	133,2	-57,9	160,0	-62,2	147,6	-62,2	160,0	-62,2	160,0
	150	-53,1	160,0	-62,4	134,2	-60,6	160,0	-65,2	147,6	-65,2	160,0	-65,2	160,0
	155	-55,5	160,0	-65,0	135,1	-63,3	160,0	-68,1	147,6	-68,1	160,0	-68,1	160,0
	160	-57,9	160,0	-67,6	135,9	-66,0	160,0	-71,1	147,6	-71,1	160,0	-71,1	160,0
	165	-60,3	160,0	-70,1	136,6	-68,7	160,0	-74,0	147,6	-74,0	160,0	-74,0	160,0
	170	-62,7	160,0	-72,7	137,3	-71,4	160,0	-77,0	147,6	-77,0	160,0	-77,0	160,0
	175	-65,0	160,0	-75,3	137,9	-74,1	160,0	-79,9	147,6	-79,9	160,0	-79,9	160,0
	180	-67,4	160,0	-77,9	138,4	-76,8	160,0	-82,9	147,6	-82,9	160,0	-82,9	160,0
	185	-69,8	160,0	-80,4	138,9	-79,5	160,0	-85,9	147,6	-85,9	160,0	-85,9	160,0
	190	-72,2	160,0	-83,0	139,3	-82,2	160,0	-88,8	147,6	-88,8	160,0	-88,8	160,0
	195	-74,6	160,0	-85,6	139,8	-84,9	160,0	-91,8	147,6	-91,8	160,0	-91,8	160,0
	200	-77,0	160,0	-88,2	140,2	-87,6	160,0	-94,7	147,6	-94,7	160,0	-94,7	160,0
	205	-79,3	160,0	-90,7	140,5	-90,3	160,0	-97,7	147,6	-97,7	160,0	-97,7	160,0
	210	-81,7	160,0	-93,3	140,9	-93,0	160,0	-100,6	147,6	-100,6	160,0	-100,6	160,0
	215	-84,1	160,0	-95,9	141,2	-95,7	160,0	-103,6	147,6	-103,6	160,0	-103,6	160,0
	220	-86,5	160,0	-98,4	141,5	-98,4	160,0	-106,5	147,6	-106,5	160,0	-106,5	160,0
	225	-88,9	160,0	-101,0	141,7	-101,1	160,0	-109,5	147,6	-109,5	160,0	-109,5	160,0
	230	-91,3	160,0	-103,6	142,0	-103,8	160,0	-112,4	147,6	-112,4	160,0	-112,4	160,0
	235	-93,6	160,0	-106,2	142,2	-106,5	160,0	-115,4	147,6	-115,4	160,0	-115,4	160,0
	240	-96,0	160,0	-108,7	142,5	-109,2	160,0	-118,3	147,6	-118,3	160,0	-118,3	160,0
	245	-98,4	160,0	-111,3	142,7	-111,9	160,0	-121,3	147,6	-121,3	160,0	-121,3	160,0
	250	-100,8	160,0	-113,9	142,9	-114,6	160,0	-124,2	147,6	-124,2	160,0	-124,2	160,0
	255	-103,2	160,0	-116,5	143,1	-117,3	160,0	-127,2	147,6	-127,2	160,0	-127,2	160,0
	260	-105,6	160,0	-119,0	143,3	-120,0	160,0	-130,1	147,6	-130,1	160,0	-130,1	160,0
	265	-107,9	160,0	-121,6	143,5	-122,7	160,0	-133,1	147,6	-133,1	160,0	-133,1	160,0
	270	-110,3	160,0	-124,2	143,6	-125,5	160,0	-136,0	147,6	-136,0	160,0	-136,0	160,0
275	-112,7	160,0	-126,8	143,8	-128,2	160,0	-139,0	147,6	-139,0	160,0	-139,0	160,0	
280	-115,1	160,0	-129,3	143,9	-130,9	160,0	-141,9	147,6	-141,9	160,0	-141,9	160,0	
285	-117,5	160,0	-131,9	144,1	-133,6	160,0	-144,9	147,6	-144,9	160,0	-144,9	160,0	
290	-119,9	160,0	-134,5	144,2	-136,3	160,0	-147,8	147,6	-147,8	160,0	-147,8	160,0	
295	-122,2	160,0	-137,0	144,4	-139,0	160,0	-150,8	147,6	-150,8	160,0	-150,8	160,0	
300	-124,6	160,0	-139,6	144,5	-141,7	160,0	-153,7	147,6	-153,7	160,0	-153,7	160,0	
c _{nom} = 30mm	310	-103,9	160,0	-103,9	160,0	-121,8	160,0	-121,8	160,0	-135,5	160,0	-135,5	160,0
	320	-107,7	160,0	-107,7	160,0	-126,2	160,0	-126,2	160,0	-140,5	160,0	-140,5	160,0
c _{nom} = 35mm	305	-102,0	160,0	-102,0	160,0	-119,5	160,0	-119,5	160,0	-133,1	160,0	-133,1	160,0
	315	-105,8	160,0	-105,8	160,0	-124,0	160,0	-124,0	160,0	-138,0	160,0	-138,0	160,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

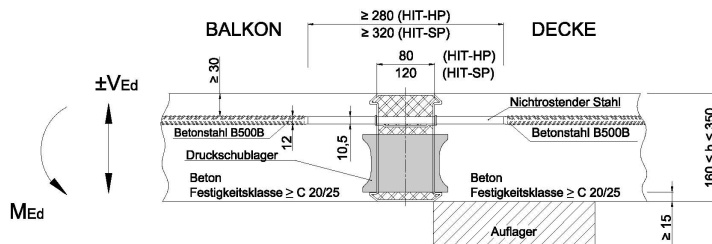


HIT-HP MVX-1310-hh-100-cc											
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37			
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,28	1,43	4,94	0,28	1,57	5,14	0,28	1,57	5,21
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13	
	A _{s,prov}	Ø8	Ø6/19,5	Ø8/10	Ø8	Ø6/17,5	Ø8/9,5	Ø8	Ø6/17,5	Ø8/9,5	
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}
		[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
	[mm]										
125		-41,2	160,0	-51,5	119,3	-47,1	160,0	-53,7	135,3	-50,8	149,1
130		-43,6	160,0	-54,7	119,3	-49,8	160,0	-56,9	135,3	-53,8	149,1
135		-46,0	160,0	-57,9	119,3	-52,5	160,0	-60,1	135,3	-56,8	149,1
140		-48,4	160,0	-61,0	119,5	-55,2	160,0	-63,3	135,3	-59,8	149,1
145		-50,7	160,0	-63,8	120,8	-57,9	160,0	-66,4	135,3	-62,7	149,1
150		-53,1	160,0	-66,6	122,0	-60,6	160,0	-69,6	135,3	-65,7	149,1
155		-55,5	160,0	-69,4	123,0	-63,3	160,0	-72,8	135,3	-68,7	149,1
160		-57,9	160,0	-72,1	123,9	-66,0	160,0	-76,0	135,3	-71,7	149,1
165		-60,3	160,0	-74,9	124,7	-68,7	160,0	-79,2	135,3	-74,7	149,1
170		-62,7	160,0	-77,7	125,4	-71,4	160,0	-82,4	135,3	-77,6	149,1
175		-65,0	160,0	-80,5	126,1	-74,1	160,0	-85,6	135,3	-80,6	149,1
180		-67,4	160,0	-83,3	126,7	-76,8	160,0	-88,8	135,3	-83,6	149,1
185		-69,8	160,0	-86,1	127,2	-79,5	160,0	-92,0	135,3	-86,6	149,1
190		-72,2	160,0	-88,9	127,7	-82,2	160,0	-95,2	135,3	-89,5	149,1
195		-74,6	160,0	-91,7	128,2	-84,9	160,0	-98,4	135,3	-92,5	149,1
200		-77,0	160,0	-94,4	128,6	-87,6	160,0	-101,6	135,3	-95,5	149,1
205		-79,3	160,0	-97,2	129,0	-90,3	160,0	-104,8	135,3	-98,5	149,1
210		-81,7	160,0	-100,0	129,4	-93,0	160,0	-108,0	135,3	-101,5	149,1
215		-84,1	160,0	-102,8	129,7	-95,7	160,0	-111,2	135,3	-104,4	149,1
220		-86,5	160,0	-105,6	130,1	-98,4	160,0	-114,4	135,3	-107,4	149,1
225		-88,9	160,0	-108,4	130,4	-101,1	160,0	-117,6	135,3	-110,4	149,1
230		-91,3	160,0	-111,2	130,7	-103,8	160,0	-120,8	135,3	-113,4	149,1
235		-93,6	160,0	-114,0	130,9	-106,5	160,0	-124,0	135,3	-116,3	149,1
240		-96,0	160,0	-116,7	131,2	-109,2	160,0	-127,2	135,3	-119,3	149,1
245		-98,4	160,0	-119,5	131,4	-111,9	160,0	-130,4	135,3	-122,3	149,1
250		-100,8	160,0	-122,3	131,6	-114,6	160,0	-133,6	135,3	-125,3	149,1
255		-103,2	160,0	-125,1	131,8	-117,3	160,0	-136,8	135,3	-128,3	149,1
260		-105,6	160,0	-127,9	132,0	-120,0	160,0	-140,0	135,3	-131,2	149,1
265		-107,9	160,0	-130,7	132,2	-122,7	160,0	-143,2	135,3	-134,2	149,1
270		-110,3	160,0	-133,5	132,4	-125,5	160,0	-146,4	135,3	-137,2	149,1
275		-112,7	160,0	-136,3	132,6	-128,2	160,0	-149,6	135,3	-140,2	149,1
280		-115,1	160,0	-139,0	132,8	-130,9	160,0	-152,7	135,3	-143,2	149,1
285		-117,5	160,0	-141,8	132,9	-133,6	160,0	-155,9	135,3	-146,1	149,1
290		-119,9	160,0	-144,6	133,1	-136,3	160,0	-159,1	135,3	-149,1	149,1
295		-122,2	160,0	-147,4	133,2	-139,0	160,0	-162,3	135,3	-152,1	149,1
300		-124,6	160,0	-150,2	133,4	-141,7	160,0	-165,5	135,3	-155,1	149,1
c _{nom} = 30mm	310	-112,1	160,0	-112,1	160,0	-131,3	160,0	-131,3	160,0	-146,1	160,0
	320	-116,2	160,0	-116,2	160,0	-136,1	160,0	-136,1	160,0	-151,5	160,0
c _{nom} = 35mm	305	-110,0	160,0	-110,0	160,0	-128,9	160,0	-128,9	160,0	-143,5	160,0
	315	-114,1	160,0	-114,1	160,0	-133,7	160,0	-133,7	160,0	-148,8	160,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

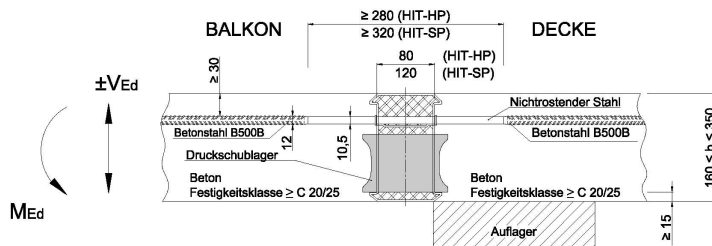


HIT-HP MVX-1410-hh-100-cc													
HIT-HP MVX-0705-hh-050-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig		direkt	indirekt	beidseitig		direkt	indirekt	beidseitig		direkt	indirekt
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,30	1,47	4,94	0,30	1,62	5,14	0,30	1,62	5,21		
A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13				
A _{s,prov}	Ø8	Ø6/19	Ø8/10	Ø8	Ø6/17	Ø8/9,5	Ø8	Ø6/17	Ø8/9,5				
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
		[mm]	[kNm/m]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-41,2	160,0	-54,2	107,0	-47,1	160,0	-56,7	123,1	-50,8	160,0	-56,7	136,8
	130	-43,6	160,0	-57,6	107,0	-49,8	160,0	-60,2	123,1	-53,8	160,0	-60,2	136,8
	135	-46,0	160,0	-61,1	107,0	-52,5	160,0	-63,6	123,1	-56,8	160,0	-63,6	136,8
	140	-48,4	160,0	-64,5	107,0	-55,2	160,0	-67,1	123,1	-59,8	160,0	-67,1	136,8
	145	-50,7	160,0	-67,6	108,4	-57,9	160,0	-70,5	123,1	-62,7	160,0	-70,5	136,8
	150	-53,1	160,0	-70,6	109,7	-60,6	160,0	-73,9	123,1	-65,7	160,0	-73,9	136,8
	155	-55,5	160,0	-73,6	110,8	-63,3	160,0	-77,4	123,1	-68,7	160,0	-77,4	136,8
	160	-57,9	160,0	-76,6	111,8	-66,0	160,0	-80,8	123,1	-71,7	160,0	-80,8	136,8
	165	-60,3	160,0	-79,6	112,7	-68,7	160,0	-84,3	123,1	-74,7	160,0	-84,3	136,8
	170	-62,7	160,0	-82,6	113,6	-71,4	160,0	-87,7	123,1	-77,6	160,0	-87,7	136,8
	175	-65,0	160,0	-85,6	114,3	-74,1	160,0	-91,2	123,1	-80,6	160,0	-91,2	136,8
	180	-67,4	160,0	-88,6	115,0	-76,8	160,0	-94,6	123,1	-83,6	160,0	-94,6	136,8
	185	-69,8	160,0	-91,6	115,6	-79,5	160,0	-98,0	123,1	-86,6	160,0	-98,0	136,8
	190	-72,2	160,0	-94,6	116,1	-82,2	160,0	-101,5	123,1	-89,5	160,0	-101,5	136,8
	195	-74,6	160,0	-97,6	116,6	-84,9	160,0	-104,9	123,1	-92,5	160,0	-104,9	136,8
	200	-77,0	160,0	-100,6	117,1	-87,6	160,0	-108,4	123,1	-95,5	160,0	-108,4	136,8
	205	-79,3	160,0	-103,6	117,5	-90,3	160,0	-111,8	123,1	-98,5	160,0	-111,8	136,8
	210	-81,7	160,0	-106,6	118,0	-93,0	160,0	-115,2	123,1	-101,5	160,0	-115,2	136,8
	215	-84,1	160,0	-109,6	118,3	-95,7	160,0	-118,7	123,1	-104,4	160,0	-118,7	136,8
	220	-86,5	160,0	-112,6	118,7	-98,4	160,0	-122,1	123,1	-107,4	160,0	-122,1	136,8
	225	-88,9	160,0	-115,6	119,0	-101,1	160,0	-125,6	123,1	-110,4	160,0	-125,6	136,8
	230	-91,3	160,0	-118,6	119,3	-103,8	160,0	-129,0	123,1	-113,4	160,0	-129,0	136,8
	235	-93,6	160,0	-121,6	119,6	-106,5	160,0	-132,5	123,1	-116,3	160,0	-132,5	136,8
	240	-96,0	160,0	-124,6	119,9	-109,2	160,0	-135,9	123,1	-119,3	160,0	-135,9	136,8
	245	-98,4	160,0	-127,6	120,1	-111,9	160,0	-139,3	123,1	-122,3	160,0	-139,3	136,8
	250	-100,8	160,0	-130,6	120,4	-114,6	160,0	-142,8	123,1	-125,3	160,0	-142,8	136,8
	255	-103,2	160,0	-133,6	120,6	-117,3	160,0	-146,2	123,1	-128,3	160,0	-146,2	136,8
	260	-105,6	160,0	-136,6	120,8	-120,0	160,0	-149,7	123,1	-131,2	160,0	-149,7	136,8
	265	-107,9	160,0	-139,6	121,0	-122,7	160,0	-153,1	123,1	-134,2	160,0	-153,1	136,8
	270	-110,3	160,0	-142,6	121,2	-125,5	160,0	-156,6	123,1	-137,2	160,0	-156,6	136,8
275	-112,7	160,0	-145,6	121,4	-128,2	160,0	-160,0	123,1	-140,2	160,0	-160,0	136,8	
280	-115,1	160,0	-148,6	121,6	-130,9	160,0	-163,4	123,1	-143,2	160,0	-163,4	136,8	
285	-117,5	160,0	-151,6	121,8	-133,6	160,0	-166,9	123,1	-146,1	160,0	-166,9	136,8	
290	-119,9	160,0	-154,6	121,9	-136,3	160,0	-170,3	123,1	-149,1	160,0	-170,3	136,8	
295	-122,2	160,0	-157,6	122,1	-139,0	160,0	-173,8	123,1	-152,1	160,0	-173,8	136,8	
300	-124,6	160,0	-160,6	122,3	-141,7	160,0	-177,2	123,1	-155,1	160,0	-177,2	136,8	
c _{nom} = 30mm	310	-120,2	160,0	-120,2	160,0	-139,1	160,0	-139,1	160,0	-156,6	160,0	-156,6	160,0
	320	-124,6	160,0	-124,6	160,0	-144,2	160,0	-144,2	160,0	-162,4	160,0	-162,4	160,0
c _{nom} = 35mm	305	-118,0	160,0	-118,0	160,0	-136,5	160,0	-136,5	160,0	-153,7	160,0	-153,7	160,0
	315	-122,4	160,0	-122,4	160,0	-141,6	160,0	-141,6	160,0	-159,5	160,0	-159,5	160,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

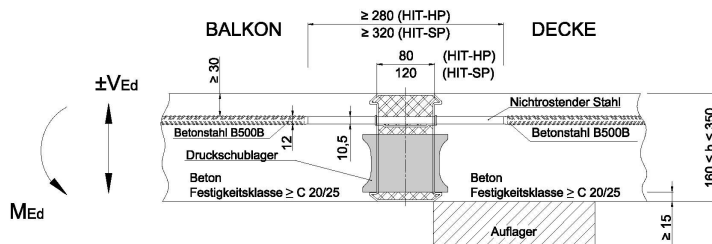


HIT-HP MVX-1610-hh-100-cc														
HIT-HP MVX-0805-hh-050-cc														
Spaltzug- und Aufhängewehrung		C20/25			C25/30			C30/37						
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}				
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt				
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]				
		A _{s,req}	0,34	1,54	4,94	0,34	1,71	5,14	0,34	1,71		5,21		
		A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13		1,13		
A _{s,prov}	Ø8	Ø6/18	Ø8/10	Ø8	Ø6/16,5	Ø8/9,5	Ø8	Ø6/16,5	Ø8/9,5					
Tragfähigkeit im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	h-c _{nom}	Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
	[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]		
	125	-41,2	160,0	-59,1	82,5	-47,1	160,0	-62,4	98,5	-50,8	160,0	-62,4	112,2	
	130	-43,6	160,0	-63,0	82,5	-49,8	160,0	-66,3	98,5	-53,8	160,0	-66,3	112,2	
	135	-46,0	160,0	-66,9	82,5	-52,5	160,0	-70,3	98,5	-56,8	160,0	-70,3	112,2	
	140	-48,4	160,0	-70,9	82,5	-55,2	160,0	-74,2	98,5	-59,8	160,0	-74,2	112,2	
	145	-50,7	160,0	-74,6	83,2	-57,9	160,0	-78,1	98,5	-62,7	160,0	-78,1	112,2	
	150	-53,1	160,0	-78,0	84,9	-60,6	160,0	-82,1	98,5	-65,7	160,0	-82,1	112,2	
	155	-55,5	160,0	-81,5	86,4	-63,3	160,0	-86,0	98,5	-68,7	160,0	-86,0	112,2	
	160	-57,9	160,0	-84,9	87,7	-66,0	160,0	-89,9	98,5	-71,7	160,0	-89,9	112,2	
	165	-60,3	160,0	-88,3	88,8	-68,7	160,0	-93,9	98,5	-74,7	160,0	-93,9	112,2	
	170	-62,7	160,0	-91,8	89,8	-71,4	160,0	-97,8	98,5	-77,6	160,0	-97,8	112,2	
	175	-65,0	160,0	-95,2	90,7	-74,1	160,0	-101,7	98,5	-80,6	160,0	-101,7	112,2	
	180	-67,4	160,0	-98,6	91,5	-76,8	160,0	-105,7	98,5	-83,6	160,0	-105,7	112,2	
	185	-69,8	160,0	-102,1	92,3	-79,5	160,0	-109,6	98,5	-86,6	160,0	-109,6	112,2	
	190	-72,2	160,0	-105,5	92,9	-82,2	160,0	-113,5	98,5	-89,5	160,0	-113,5	112,2	
	195	-74,6	160,0	-108,9	93,5	-84,9	160,0	-117,5	98,5	-92,5	160,0	-117,5	112,2	
	200	-77,0	160,0	-112,3	94,1	-87,6	160,0	-121,4	98,5	-95,5	160,0	-121,4	112,2	
	205	-79,3	160,0	-115,8	94,6	-90,3	160,0	-125,3	98,5	-98,5	160,0	-125,3	112,2	
	210	-81,7	160,0	-119,2	95,1	-93,0	160,0	-129,3	98,5	-101,5	160,0	-129,3	112,2	
	215	-84,1	160,0	-122,6	95,6	-95,7	160,0	-133,2	98,5	-104,4	160,0	-133,2	112,2	
	220	-86,5	160,0	-126,1	96,0	-98,4	160,0	-137,1	98,5	-107,4	160,0	-137,1	112,2	
	225	-88,9	160,0	-129,5	96,4	-101,1	160,0	-141,1	98,5	-110,4	160,0	-141,1	112,2	
	230	-91,3	160,0	-132,9	96,7	-103,8	160,0	-145,0	98,5	-113,4	160,0	-145,0	112,2	
	235	-93,6	160,0	-136,4	97,1	-106,5	160,0	-149,0	98,5	-116,3	160,0	-149,0	112,2	
	240	-96,0	160,0	-139,8	97,4	-109,2	160,0	-152,9	98,5	-119,3	160,0	-152,9	112,2	
	245	-98,4	160,0	-143,2	97,7	-111,9	160,0	-156,8	98,5	-122,3	160,0	-156,8	112,2	
	250	-100,8	160,0	-146,7	98,0	-114,6	160,0	-160,8	98,5	-125,3	160,0	-160,8	112,2	
	255	-103,2	160,0	-150,1	98,2	-117,3	160,0	-164,7	98,5	-128,3	160,0	-164,7	112,2	
	260	-105,6	160,0	-153,5	98,5	-120,0	160,0	-168,6	98,5	-131,2	160,0	-168,6	112,2	
	265	-107,9	160,0	-156,9	98,7	-122,7	160,0	-172,6	98,5	-134,2	160,0	-172,6	112,2	
	270	-110,3	160,0	-160,4	98,9	-125,5	160,0	-176,5	98,5	-137,2	160,0	-176,5	112,2	
	275	-112,7	160,0	-163,8	99,2	-128,2	160,0	-180,4	98,5	-140,2	160,0	-180,4	112,2	
	280	-115,1	160,0	-167,2	99,4	-130,9	160,0	-184,4	98,5	-143,2	160,0	-184,4	112,2	
	285	-117,5	160,0	-170,7	99,6	-133,6	160,0	-188,3	98,5	-146,1	160,0	-188,3	112,2	
	290	-119,9	160,0	-174,1	99,7	-136,3	160,0	-192,2	98,5	-149,1	160,0	-192,2	112,2	
	295	-122,2	160,0	-177,5	99,9	-139,0	160,0	-196,2	98,5	-152,1	160,0	-196,2	112,2	
	300	-124,6	160,0	-181,0	100,1	-141,7	160,0	-200,1	98,5	-155,1	160,0	-200,1	112,2	
	c _{nom} = 30mm	310	-129,4	160,0	-136,2	153,3	-147,1	160,0	-157,6	149,6	-161,0	160,0	-177,3	143,7
	320	-134,1	160,0	-141,2	153,3	-152,5	160,0	-163,4	149,6	-167,0	160,0	-183,9	143,7	
	c _{nom} = 35mm	305	-127,0	160,0	-133,7	153,3	-144,4	160,0	-154,7	149,6	-158,0	160,0	-174,0	143,7
	315	-131,8	160,0	-138,7	153,3	-149,8	160,0	-160,5	149,6	-164,0	160,0	-180,6	143,7	

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

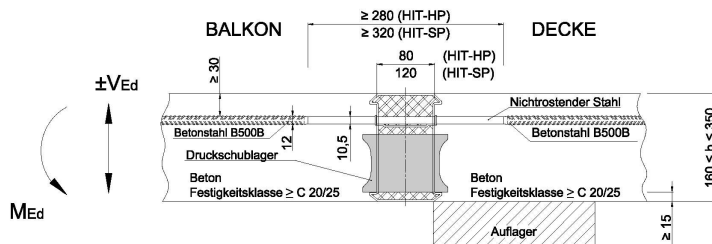


HIT-HP MVX-1810-hh-100-cc													
HIT-HP MVX-0905-hh-050-cc													
Spaltzug- und Aufhängewehrung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]			
		A _{s,req}	0,38	1,61	4,94	0,38	1,79	5,14	0,38	1,79	5,21		
A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13				
A _{s,prov}	Ø8	Ø6/17,5	Ø8/10	Ø8	Ø6/15,5	Ø8/9,5	Ø8	Ø6/15,5	Ø8/9,5				
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)					
	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
125	-41,2	160,0	-63,2	57,9	-47,1	160,0	-67,5	73,9	-50,8	160,0	-67,5	87,6	
130	-43,6	160,0	-67,7	57,9	-49,8	160,0	-71,9	73,9	-53,8	160,0	-71,9	87,6	
135	-46,0	160,0	-72,1	57,9	-52,5	160,0	-76,3	73,9	-56,8	160,0	-76,3	87,6	
140	-48,4	160,0	-76,5	57,9	-55,2	160,0	-80,8	73,9	-59,8	160,0	-80,8	87,6	
145	-50,7	160,0	-81,0	57,9	-57,9	160,0	-85,2	73,9	-62,7	160,0	-85,2	87,6	
150	-53,1	160,0	-84,9	59,8	-60,6	160,0	-89,6	73,9	-65,7	160,0	-89,6	87,6	
155	-55,5	160,0	-88,7	61,7	-63,3	160,0	-94,0	73,9	-68,7	160,0	-94,0	87,6	
160	-57,9	160,0	-92,6	63,3	-66,0	160,0	-98,5	73,9	-71,7	160,0	-98,5	87,6	
165	-60,3	160,0	-96,5	64,8	-68,7	160,0	-102,9	73,9	-74,6	160,0	-102,9	87,6	
170	-62,7	160,0	-100,3	66,0	-71,4	160,0	-107,3	73,9	-77,6	160,0	-107,3	87,6	
175	-65,0	160,0	-104,2	67,1	-74,1	160,0	-111,7	73,9	-80,6	160,0	-111,7	87,6	
180	-67,4	160,0	-108,0	68,1	-76,8	160,0	-116,2	73,9	-83,6	160,0	-116,2	87,6	
185	-69,8	160,0	-111,9	69,0	-79,5	160,0	-120,6	73,9	-86,6	160,0	-120,6	87,6	
190	-72,2	160,0	-115,7	69,8	-82,2	160,0	-125,0	73,9	-89,5	160,0	-125,0	87,6	
195	-74,6	160,0	-119,6	70,5	-84,9	160,0	-129,4	73,9	-92,5	160,0	-129,4	87,6	
200	-77,0	160,0	-123,5	71,2	-87,6	160,0	-133,9	73,9	-95,5	160,0	-133,9	87,6	
205	-79,3	160,0	-127,3	71,8	-90,3	160,0	-138,3	73,9	-98,5	160,0	-138,3	87,6	
210	-81,7	160,0	-131,2	72,3	-93,0	160,0	-142,7	73,9	-101,5	160,0	-142,7	87,6	
215	-84,1	160,0	-135,0	72,9	-95,7	160,0	-147,1	73,9	-104,4	160,0	-147,1	87,6	
220	-86,5	160,0	-138,9	73,3	-98,4	160,0	-151,6	73,9	-107,4	160,0	-151,6	87,6	
225	-88,9	160,0	-142,8	73,8	-101,1	160,0	-156,0	73,9	-110,4	160,0	-156,0	87,6	
230	-91,3	160,0	-146,6	74,2	-103,8	160,0	-160,4	73,9	-113,4	160,0	-160,4	87,6	
235	-93,6	160,0	-150,5	74,6	-106,5	160,0	-164,8	73,9	-116,3	160,0	-164,8	87,6	
240	-96,0	160,0	-154,3	75,0	-109,2	160,0	-169,3	73,9	-119,3	160,0	-169,3	87,6	
245	-98,4	160,0	-158,2	75,3	-111,9	160,0	-173,7	73,9	-122,3	160,0	-173,7	87,6	
250	-100,8	160,0	-162,1	75,6	-114,6	160,0	-178,1	73,9	-125,3	160,0	-178,1	87,6	
255	-103,2	160,0	-165,9	75,9	-117,3	160,0	-182,5	73,9	-128,3	160,0	-182,5	87,6	
260	-105,6	160,0	-169,8	76,2	-120,0	160,0	-187,0	73,9	-131,2	160,0	-187,0	87,6	
265	-107,9	160,0	-173,6	76,5	-122,7	160,0	-191,4	73,9	-134,2	160,0	-191,4	87,6	
270	-110,3	160,0	-177,5	76,7	-125,5	160,0	-195,8	73,9	-137,2	160,0	-195,8	87,6	
275	-112,7	160,0	-181,4	77,0	-128,2	160,0	-200,2	73,9	-140,2	160,0	-200,2	87,6	
280	-115,1	160,0	-185,2	77,2	-130,9	160,0	-204,7	73,9	-143,2	160,0	-204,7	87,6	
285	-117,5	160,0	-189,1	77,4	-133,6	160,0	-209,1	73,9	-146,1	160,0	-209,1	87,6	
290	-119,9	160,0	-192,9	77,6	-136,3	160,0	-213,5	73,9	-149,1	160,0	-213,5	87,6	
295	-122,2	160,0	-196,8	77,8	-139,0	160,0	-217,9	73,9	-152,1	160,0	-217,9	87,6	
300	-124,6	160,0	-200,7	78,0	-141,7	160,0	-222,4	73,9	-155,1	160,0	-222,4	87,6	
c _{nom} = 30mm	310	-129,4	160,0	-151,9	137,5	-147,1	160,0	-175,8	131,4	-161,0	160,0	-197,5	123,1
	320	-134,1	160,0	-157,6	137,5	-152,5	160,0	-182,4	131,4	-167,0	160,0	-205,0	123,1
c _{nom} = 35mm	305	-127,0	160,0	-149,1	137,5	-144,4	160,0	-172,6	131,4	-158,0	160,0	-193,8	123,1
	315	-131,8	160,0	-154,7	137,5	-149,8	160,0	-179,1	131,4	-164,0	160,0	-201,2	123,1

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

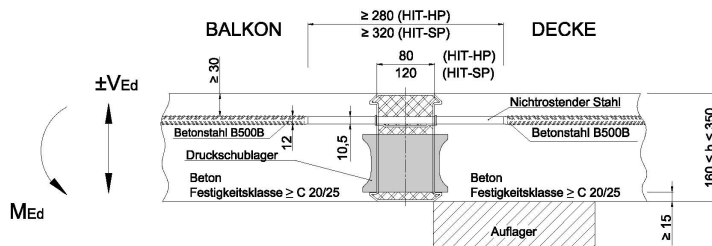


HIT-HP MVX-0811-hh-100-cc											
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37			
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,15	1,21	5,25	0,15	1,29	5,34	0,15	1,29	5,34
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13	
	A _{s,prov}	Ø8	Ø6/23	Ø8/9,5	Ø8	Ø6/21,5	Ø8/9	Ø8	Ø6/21,5	Ø8/9	
h-c _{nom}	h-c _{nom}	Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}
		[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Werte paare für c _{nom} =30 - 50mm	125	-35,7	176,0	-35,7	176,0	-36,5	176,0	-36,5	176,0	-36,5	176,0
	130	-37,7	176,0	-37,7	176,0	-38,5	176,0	-38,5	176,0	-38,5	176,0
	135	-39,7	176,0	-39,7	176,0	-40,4	176,0	-40,4	176,0	-40,4	176,0
	140	-41,6	176,0	-41,6	176,0	-42,4	176,0	-42,4	176,0	-42,4	176,0
	145	-43,6	176,0	-43,6	176,0	-44,4	176,0	-44,4	176,0	-44,4	176,0
	150	-45,6	176,0	-45,6	176,0	-46,3	176,0	-46,3	176,0	-46,3	176,0
	155	-47,5	176,0	-47,5	176,0	-48,3	176,0	-48,3	176,0	-48,3	176,0
	160	-49,5	176,0	-49,5	176,0	-50,3	176,0	-50,3	176,0	-50,3	176,0
	165	-51,5	176,0	-51,5	176,0	-52,2	176,0	-52,2	176,0	-52,2	176,0
	170	-53,4	176,0	-53,4	176,0	-54,2	176,0	-54,2	176,0	-54,2	176,0
	175	-55,4	176,0	-55,4	176,0	-56,2	176,0	-56,2	176,0	-56,2	176,0
	180	-57,4	176,0	-57,4	176,0	-58,1	176,0	-58,1	176,0	-58,1	176,0
	185	-59,3	176,0	-59,3	176,0	-60,1	176,0	-60,1	176,0	-60,1	176,0
	190	-61,3	176,0	-61,3	176,0	-62,1	176,0	-62,1	176,0	-62,1	176,0
	195	-63,3	176,0	-63,3	176,0	-64,0	176,0	-64,0	176,0	-64,0	176,0
	200	-65,2	176,0	-65,2	176,0	-66,0	176,0	-66,0	176,0	-66,0	176,0
	205	-67,2	176,0	-67,2	176,0	-68,0	176,0	-68,0	176,0	-68,0	176,0
	210	-69,2	176,0	-69,2	176,0	-69,9	176,0	-69,9	176,0	-69,9	176,0
	215	-71,1	176,0	-71,1	176,0	-71,9	176,0	-71,9	176,0	-71,9	176,0
	220	-73,1	176,0	-73,1	176,0	-73,9	176,0	-73,9	176,0	-73,9	176,0
	225	-75,1	176,0	-75,1	176,0	-75,8	176,0	-75,8	176,0	-75,8	176,0
	230	-77,0	176,0	-77,0	176,0	-77,8	176,0	-77,8	176,0	-77,8	176,0
	235	-79,0	176,0	-79,0	176,0	-79,8	176,0	-79,8	176,0	-79,8	176,0
	240	-81,0	176,0	-81,0	176,0	-81,7	176,0	-81,7	176,0	-81,7	176,0
	245	-82,9	176,0	-82,9	176,0	-83,7	176,0	-83,7	176,0	-83,7	176,0
	250	-84,9	176,0	-84,9	176,0	-85,7	176,0	-85,7	176,0	-85,7	176,0
	255	-86,9	176,0	-86,9	176,0	-87,6	176,0	-87,6	176,0	-87,6	176,0
	260	-88,8	176,0	-88,8	176,0	-89,6	176,0	-89,6	176,0	-89,6	176,0
	265	-90,8	176,0	-90,8	176,0	-91,6	176,0	-91,6	176,0	-91,6	176,0
	270	-92,8	176,0	-92,8	176,0	-93,5	176,0	-93,5	176,0	-93,5	176,0
	275	-94,7	176,0	-94,7	176,0	-95,5	176,0	-95,5	176,0	-95,5	176,0
	280	-96,7	176,0	-96,7	176,0	-97,5	176,0	-97,5	176,0	-97,5	176,0
	285	-98,7	176,0	-98,7	176,0	-99,4	176,0	-99,4	176,0	-99,4	176,0
	290	-100,6	176,0	-100,6	176,0	-101,4	176,0	-101,4	176,0	-101,4	176,0
	295	-102,6	176,0	-102,6	176,0	-103,4	176,0	-103,4	176,0	-103,4	176,0
	300	-104,6	176,0	-104,6	176,0	-105,3	176,0	-105,3	176,0	-105,3	176,0
c _{nom} = 30mm	310	-97,1	176,0	-97,1	176,0	-109,3	176,0	-109,3	176,0	-109,3	176,0
	320	-100,6	176,0	-100,6	176,0	-113,2	176,0	-113,2	176,0	-113,2	176,0
c _{nom} = 35mm	305	-95,3	176,0	-95,3	176,0	-107,3	176,0	-107,3	176,0	-107,3	176,0
	315	-98,8	176,0	-98,8	176,0	-111,2	176,0	-111,2	176,0	-111,2	176,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

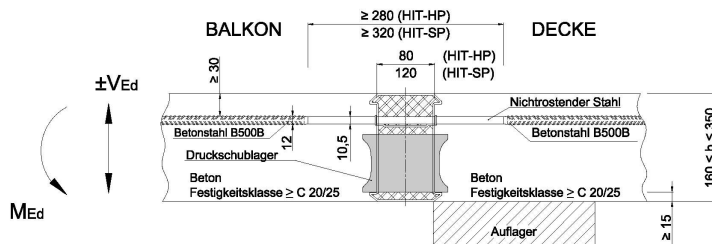


HIT-HP MVX-0911-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]			
		A _{s,req}	0,17	1,28	5,28	0,17	1,38	5,43	0,17	1,38		5,43	
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13			
A _{s,prov}	Ø8	Ø6/22	Ø8/9,5	Ø8	Ø6/20	Ø8/9	Ø8	Ø6/20	Ø8/9				
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)					
	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-37,2	176,0	-39,4	168,9	-40,4	176,0	-40,4	176,0	-40,4	176,0	-40,4	176,0
	130	-39,3	176,0	-41,3	169,8	-42,7	176,0	-42,7	176,0	-42,7	176,0	-42,7	176,0
	135	-41,3	176,0	-43,2	170,5	-44,9	176,0	-44,9	176,0	-44,9	176,0	-44,9	176,0
	140	-43,4	176,0	-45,1	171,2	-47,1	176,0	-47,1	176,0	-47,1	176,0	-47,1	176,0
	145	-45,5	176,0	-47,1	171,8	-49,3	176,0	-49,3	176,0	-49,3	176,0	-49,3	176,0
	150	-47,5	176,0	-49,0	172,3	-51,5	176,0	-51,5	176,0	-51,5	176,0	-51,5	176,0
	155	-49,6	176,0	-50,9	172,8	-53,7	176,0	-53,7	176,0	-53,7	176,0	-53,7	176,0
	160	-51,7	176,0	-52,9	173,3	-55,9	176,0	-55,9	176,0	-55,9	176,0	-55,9	176,0
	165	-53,7	176,0	-54,8	173,7	-58,1	176,0	-58,1	176,0	-58,1	176,0	-58,1	176,0
	170	-55,8	176,0	-56,7	174,1	-60,4	176,0	-60,4	176,0	-60,4	176,0	-60,4	176,0
	175	-57,8	176,0	-58,7	174,4	-62,6	176,0	-62,6	176,0	-62,6	176,0	-62,6	176,0
	180	-59,9	176,0	-60,6	174,7	-64,8	176,0	-64,8	176,0	-64,8	176,0	-64,8	176,0
	185	-62,0	176,0	-62,5	175,0	-67,0	176,0	-67,0	176,0	-67,0	176,0	-67,0	176,0
	190	-64,0	176,0	-64,4	175,3	-69,2	176,0	-69,2	176,0	-69,2	176,0	-69,2	176,0
	195	-66,1	176,0	-66,4	175,5	-71,4	176,0	-71,4	176,0	-71,4	176,0	-71,4	176,0
	200	-68,2	176,0	-68,3	175,8	-73,6	176,0	-73,6	176,0	-73,6	176,0	-73,6	176,0
	205	-70,2	176,0	-70,2	176,0	-75,8	176,0	-75,8	176,0	-75,8	176,0	-75,8	176,0
	210	-72,2	176,0	-72,2	176,0	-78,1	176,0	-78,1	176,0	-78,1	176,0	-78,1	176,0
	215	-74,1	176,0	-74,1	176,0	-80,3	176,0	-80,3	176,0	-80,3	176,0	-80,3	176,0
	220	-76,0	176,0	-76,0	176,0	-82,5	176,0	-82,5	176,0	-82,5	176,0	-82,5	176,0
	225	-78,0	176,0	-78,0	176,0	-84,7	176,0	-84,7	176,0	-84,7	176,0	-84,7	176,0
	230	-79,9	176,0	-79,9	176,0	-86,9	176,0	-86,9	176,0	-86,9	176,0	-86,9	176,0
	235	-81,8	176,0	-81,8	176,0	-89,1	176,0	-89,1	176,0	-89,1	176,0	-89,1	176,0
	240	-83,7	176,0	-83,7	176,0	-91,3	176,0	-91,3	176,0	-91,3	176,0	-91,3	176,0
	245	-85,7	176,0	-85,7	176,0	-93,5	176,0	-93,5	176,0	-93,5	176,0	-93,5	176,0
	250	-87,6	176,0	-87,6	176,0	-95,8	176,0	-95,8	176,0	-95,8	176,0	-95,8	176,0
	255	-89,5	176,0	-89,5	176,0	-98,0	176,0	-98,0	176,0	-98,0	176,0	-98,0	176,0
	260	-91,5	176,0	-91,5	176,0	-100,2	176,0	-100,2	176,0	-100,2	176,0	-100,2	176,0
	265	-93,4	176,0	-93,4	176,0	-102,4	176,0	-102,4	176,0	-102,4	176,0	-102,4	176,0
	270	-95,3	176,0	-95,3	176,0	-104,6	176,0	-104,6	176,0	-104,6	176,0	-104,6	176,0
275	-97,3	176,0	-97,3	176,0	-106,8	176,0	-106,8	176,0	-106,8	176,0	-106,8	176,0	
280	-99,2	176,0	-99,2	176,0	-109,0	176,0	-109,0	176,0	-109,0	176,0	-109,0	176,0	
285	-101,1	176,0	-101,1	176,0	-111,2	176,0	-111,2	176,0	-111,2	176,0	-111,2	176,0	
290	-103,0	176,0	-103,0	176,0	-113,5	176,0	-113,5	176,0	-113,5	176,0	-113,5	176,0	
295	-105,0	176,0	-105,0	176,0	-115,7	176,0	-115,7	176,0	-115,7	176,0	-115,7	176,0	
300	-106,9	176,0	-106,9	176,0	-117,9	176,0	-117,9	176,0	-117,9	176,0	-117,9	176,0	
c _{nom} = 30mm	310	-79,2	165,0	-79,2	165,0	-91,6	176,0	-91,6	176,0	-102,3	176,0	-102,3	176,0
	320	-82,0	165,0	-82,0	165,0	-94,9	176,0	-94,9	176,0	-106,0	176,0	-106,0	176,0
c _{nom} = 35mm	305	-77,8	165,0	-77,8	165,0	-89,9	176,0	-89,9	176,0	-100,5	176,0	-100,5	176,0
	315	-80,6	165,0	-80,6	165,0	-93,2	176,0	-93,2	176,0	-104,1	176,0	-104,1	176,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

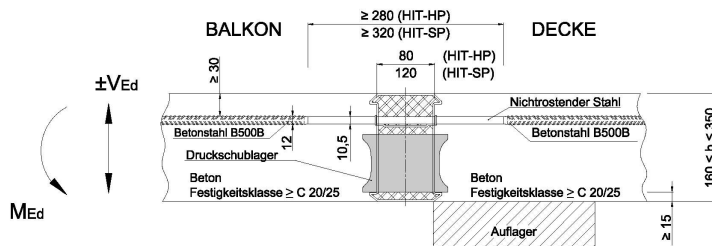


HIT-HP MVX-1011-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]			
		A _{s,req}	0,19	1,35	5,28	0,19	1,46	5,49	0,19	1,46	5,51		
		A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13		
A _{s,prov}	Ø8	Ø6/20,5	Ø8/9,5	Ø8	Ø6/19	Ø8/9	Ø8	Ø6/19	Ø8/9				
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)					
	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
125	-37,2	176,0	-42,9	156,7	-43,1	176,0	-44,2	172,2	-44,2	176,0	-44,2	176,0	
130	-39,3	176,0	-45,1	157,7	-45,5	176,0	-46,7	172,2	-46,7	176,0	-46,7	176,0	
135	-41,3	176,0	-47,2	158,6	-47,9	176,0	-49,2	172,2	-49,2	176,0	-49,2	176,0	
140	-43,4	176,0	-49,4	159,3	-50,2	176,0	-51,6	172,2	-51,6	176,0	-51,6	176,0	
145	-45,5	176,0	-51,5	160,0	-52,6	176,0	-54,1	172,2	-54,1	176,0	-54,1	176,0	
150	-47,5	176,0	-53,6	160,6	-55,0	176,0	-56,5	172,2	-56,5	176,0	-56,5	176,0	
155	-49,6	176,0	-55,8	161,2	-57,4	176,0	-59,0	172,2	-59,0	176,0	-59,0	176,0	
160	-51,7	176,0	-57,9	161,7	-59,8	176,0	-61,5	172,2	-61,5	176,0	-61,5	176,0	
165	-53,7	176,0	-60,1	162,1	-62,2	176,0	-63,9	172,2	-63,9	176,0	-63,9	176,0	
170	-55,8	176,0	-62,2	162,6	-64,5	176,0	-66,4	172,2	-66,4	176,0	-66,4	176,0	
175	-57,8	176,0	-64,4	162,9	-66,9	176,0	-68,8	172,2	-68,8	176,0	-68,8	176,0	
180	-59,9	176,0	-66,5	163,3	-69,3	176,0	-71,3	172,2	-71,3	176,0	-71,3	176,0	
185	-62,0	176,0	-68,7	163,6	-71,7	176,0	-73,7	172,2	-73,7	176,0	-73,7	176,0	
190	-64,0	176,0	-70,8	163,9	-74,1	176,0	-76,2	172,2	-76,2	176,0	-76,2	176,0	
195	-66,1	176,0	-72,9	164,2	-76,5	176,0	-78,7	172,2	-78,7	176,0	-78,7	176,0	
200	-68,2	176,0	-75,1	164,5	-78,8	176,0	-81,1	172,2	-81,1	176,0	-81,1	176,0	
205	-70,2	176,0	-77,2	164,7	-81,2	176,0	-83,6	172,2	-83,6	176,0	-83,6	176,0	
210	-72,3	176,0	-79,4	164,9	-83,6	176,0	-86,0	172,2	-86,0	176,0	-86,0	176,0	
215	-74,4	176,0	-81,5	165,1	-86,0	176,0	-88,5	172,2	-88,5	176,0	-88,5	176,0	
220	-76,4	176,0	-83,7	165,3	-88,4	176,0	-91,0	172,2	-91,0	176,0	-91,0	176,0	
225	-78,5	176,0	-85,8	165,5	-90,8	176,0	-93,4	172,2	-93,4	176,0	-93,4	176,0	
230	-80,5	176,0	-88,0	165,7	-93,1	176,0	-95,9	172,2	-95,9	176,0	-95,9	176,0	
235	-82,6	176,0	-90,1	165,9	-95,5	176,0	-98,3	172,2	-98,3	176,0	-98,3	176,0	
240	-84,7	176,0	-92,2	166,0	-97,9	176,0	-100,8	172,2	-100,8	176,0	-100,8	176,0	
245	-86,7	176,0	-94,4	166,2	-100,3	176,0	-103,3	172,2	-103,3	176,0	-103,3	176,0	
250	-88,8	176,0	-96,5	166,3	-102,7	176,0	-105,7	172,2	-105,7	176,0	-105,7	176,0	
255	-90,9	176,0	-98,7	166,5	-105,1	176,0	-108,2	172,2	-108,2	176,0	-108,2	176,0	
260	-92,9	176,0	-100,8	166,6	-107,4	176,0	-110,6	172,2	-110,6	176,0	-110,6	176,0	
265	-95,0	176,0	-103,0	166,7	-109,8	176,0	-113,1	172,2	-113,1	176,0	-113,1	176,0	
270	-97,0	176,0	-105,1	166,8	-112,2	176,0	-115,5	172,2	-115,5	176,0	-115,5	176,0	
275	-99,1	176,0	-107,2	167,0	-114,6	176,0	-118,0	172,2	-118,0	176,0	-118,0	176,0	
280	-101,2	176,0	-109,4	167,1	-117,0	176,0	-120,5	172,2	-120,5	176,0	-120,5	176,0	
285	-103,2	176,0	-111,5	167,2	-119,4	176,0	-122,9	172,2	-122,9	176,0	-122,9	176,0	
290	-105,3	176,0	-113,7	167,3	-121,7	176,0	-125,4	172,2	-125,4	176,0	-125,4	176,0	
295	-107,4	176,0	-115,8	167,4	-124,1	176,0	-127,8	172,2	-127,8	176,0	-127,8	176,0	
300	-109,4	176,0	-118,0	167,5	-126,5	176,0	-130,3	172,2	-130,3	176,0	-130,3	176,0	
c _{nom} = 30mm	310	-87,6	176,0	-87,6	176,0	-101,4	176,0	-101,4	176,0	-113,2	176,0	-113,2	176,0
	320	-90,8	176,0	-90,8	176,0	-105,0	176,0	-105,0	176,0	-117,3	176,0	-117,3	176,0
c _{nom} = 35mm	305	-86,1	176,0	-86,1	176,0	-99,6	176,0	-99,6	176,0	-111,2	176,0	-111,2	176,0
	315	-89,2	176,0	-89,2	176,0	-103,2	176,0	-103,2	176,0	-115,2	176,0	-115,2	176,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

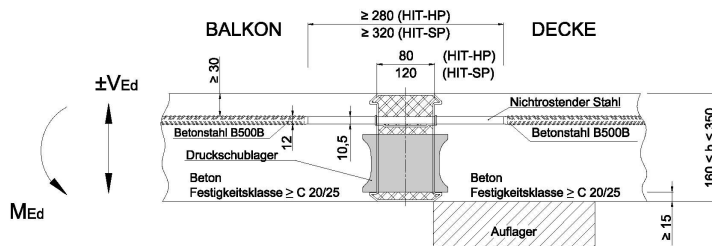


HIT-HP MVX-1111-hh-100-cc											
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37			
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,21	1,41	5,28	0,21	1,53	5,49	0,21	1,53	5,57
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13	
	A _{s,prov}	Ø8	Ø6/20	Ø8/9,5	Ø8	Ø6/18	Ø8/9	Ø8	Ø6/18	Ø8/9	
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}
		[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
	[mm]										
125		-37,2	176,0	-46,3	144,5	-43,1	176,0	-47,9	159,9	-47,2	176,0
130		-39,3	176,0	-48,7	145,6	-45,5	176,0	-50,6	159,9	-49,9	176,0
135		-41,3	176,0	-51,0	146,6	-47,9	176,0	-53,3	159,9	-52,6	176,0
140		-43,4	176,0	-53,4	147,5	-50,2	176,0	-56,0	159,9	-55,2	176,0
145		-45,5	176,0	-55,8	148,3	-52,6	176,0	-58,7	159,9	-57,9	176,0
150		-47,5	176,0	-58,1	149,0	-55,0	176,0	-61,4	159,9	-60,5	176,0
155		-49,6	176,0	-60,5	149,6	-57,4	176,0	-64,1	159,9	-63,2	176,0
160		-51,7	176,0	-62,8	150,1	-59,8	176,0	-66,8	159,9	-65,8	176,0
165		-53,7	176,0	-65,2	150,6	-62,2	176,0	-69,5	159,9	-68,5	176,0
170		-55,8	176,0	-67,5	151,1	-64,5	176,0	-72,3	159,9	-71,2	176,0
175		-57,8	176,0	-69,9	151,5	-66,9	176,0	-75,0	159,9	-73,8	176,0
180		-59,9	176,0	-72,3	151,9	-69,3	176,0	-77,7	159,9	-76,5	176,0
185		-62,0	176,0	-74,6	152,3	-71,7	176,0	-80,4	159,9	-79,1	176,0
190		-64,0	176,0	-77,0	152,6	-74,1	176,0	-83,1	159,9	-81,8	176,0
195		-66,1	176,0	-79,3	152,9	-76,5	176,0	-85,8	159,9	-84,5	176,0
200		-68,2	176,0	-81,7	153,2	-78,8	176,0	-88,5	159,9	-87,1	176,0
205		-70,2	176,0	-84,1	153,5	-81,2	176,0	-91,2	159,9	-89,8	176,0
210		-72,3	176,0	-86,4	153,7	-83,6	176,0	-93,9	159,9	-92,4	176,0
215		-74,4	176,0	-88,8	153,9	-86,0	176,0	-96,6	159,9	-95,1	176,0
220		-76,4	176,0	-91,1	154,2	-88,4	176,0	-99,3	159,9	-97,7	176,0
225		-78,5	176,0	-93,5	154,4	-90,8	176,0	-102,0	159,9	-100,4	176,0
230		-80,5	176,0	-95,9	154,6	-93,1	176,0	-104,7	159,9	-103,1	176,0
235		-82,6	176,0	-98,2	154,7	-95,5	176,0	-107,4	159,9	-105,7	176,0
240		-84,7	176,0	-100,6	154,9	-97,9	176,0	-110,1	159,9	-108,4	176,0
245		-86,7	176,0	-102,9	155,1	-100,3	176,0	-112,8	159,9	-111,0	176,0
250		-88,8	176,0	-105,3	155,2	-102,7	176,0	-115,5	159,9	-113,7	176,0
255		-90,9	176,0	-107,6	155,4	-105,1	176,0	-118,2	159,9	-116,4	176,0
260		-92,9	176,0	-110,0	155,5	-107,4	176,0	-120,9	159,9	-119,0	176,0
265		-95,0	176,0	-112,4	155,7	-109,8	176,0	-123,6	159,9	-121,7	176,0
270		-97,0	176,0	-114,7	155,8	-112,2	176,0	-126,3	159,9	-124,3	176,0
275		-99,1	176,0	-117,1	155,9	-114,6	176,0	-129,0	159,9	-127,0	176,0
280		-101,2	176,0	-119,4	156,0	-117,0	176,0	-131,8	159,9	-129,6	176,0
285		-103,2	176,0	-121,8	156,1	-119,4	176,0	-134,5	159,9	-132,3	176,0
290		-105,3	176,0	-124,2	156,3	-121,7	176,0	-137,2	159,9	-135,0	176,0
295		-107,4	176,0	-126,5	156,4	-124,1	176,0	-139,9	159,9	-137,6	176,0
300		-109,4	176,0	-128,9	156,5	-126,5	176,0	-142,6	159,9	-140,3	176,0
C _{nom} = 30mm	310	-96,0	176,0	-96,0	176,0	-111,1	176,0	-111,1	176,0	-124,0	176,0
	320	-99,5	176,0	-99,5	176,0	-115,1	176,0	-115,1	176,0	-128,5	176,0
C _{nom} = 35mm	305	-94,3	176,0	-94,3	176,0	-109,1	176,0	-109,1	176,0	-121,8	176,0
	315	-97,8	176,0	-97,8	176,0	-113,1	176,0	-113,1	176,0	-126,2	176,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

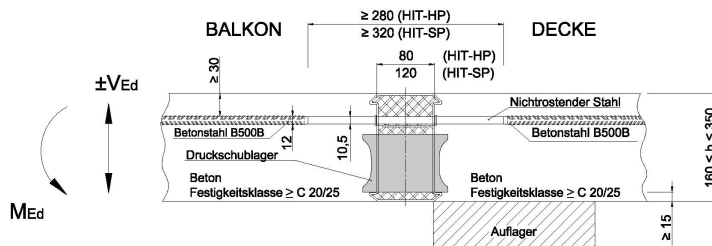


HIT-HP MVX-1211-hh-100-cc											
Spaltzug- und Aufhängewehrung		C20/25			C25/30			C30/37			
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,23	1,46	5,28	0,23	1,60	5,49	0,23	1,60	5,57
h-c _{nom}	h-c _{nom}	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13
		A _{s,prov}	Ø8	Ø6/19	Ø8/9,5	Ø8	Ø6/17,5	Ø8/9	Ø8	Ø6/17,5	Ø8/9
		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}
		[mm]	[kNm/m]	[kNm]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Werte für c _{nom} =30 - 50mm	125	-37,2	176,0	-49,6	132,3	-43,1	176,0	-51,4	147,6	-47,2	176,0
	130	-39,3	176,0	-52,1	133,6	-45,5	176,0	-54,4	147,6	-49,9	176,0
	135	-41,3	176,0	-54,7	134,7	-47,9	176,0	-57,3	147,6	-52,6	176,0
	140	-43,4	176,0	-57,3	135,7	-50,2	176,0	-60,3	147,6	-55,2	176,0
	145	-45,5	176,0	-59,8	136,6	-52,6	176,0	-63,2	147,6	-57,9	176,0
	150	-47,5	176,0	-62,4	137,3	-55,0	176,0	-66,2	147,6	-60,5	176,0
	155	-49,6	176,0	-65,0	138,0	-57,4	176,0	-69,1	147,6	-63,2	176,0
	160	-51,7	176,0	-67,6	138,6	-59,8	176,0	-72,1	147,6	-65,8	176,0
	165	-53,7	176,0	-70,1	139,2	-62,2	176,0	-75,0	147,6	-68,5	176,0
	170	-55,8	176,0	-72,7	139,7	-64,5	176,0	-78,0	147,6	-71,2	176,0
	175	-57,8	176,0	-75,3	140,2	-66,9	176,0	-80,9	147,6	-73,8	176,0
	180	-59,9	176,0	-77,9	140,6	-69,3	176,0	-83,9	147,6	-76,5	176,0
	185	-62,0	176,0	-80,4	141,0	-71,7	176,0	-86,8	147,6	-79,1	176,0
	190	-64,0	176,0	-83,0	141,3	-74,1	176,0	-89,8	147,6	-81,8	176,0
	195	-66,1	176,0	-85,6	141,7	-76,5	176,0	-92,7	147,6	-84,5	176,0
	200	-68,2	176,0	-88,2	142,0	-78,8	176,0	-95,7	147,6	-87,1	176,0
	205	-70,2	176,0	-90,7	142,3	-81,2	176,0	-98,6	147,6	-89,8	176,0
	210	-72,3	176,0	-93,3	142,5	-83,6	176,0	-101,6	147,6	-92,4	176,0
	215	-74,4	176,0	-95,9	142,8	-86,0	176,0	-104,5	147,6	-95,1	176,0
	220	-76,4	176,0	-98,4	143,0	-88,4	176,0	-107,5	147,6	-97,7	176,0
	225	-78,5	176,0	-101,0	143,2	-90,8	176,0	-110,4	147,6	-100,4	176,0
	230	-80,5	176,0	-103,6	143,5	-93,1	176,0	-113,4	147,6	-103,1	176,0
	235	-82,6	176,0	-106,2	143,7	-95,5	176,0	-116,3	147,6	-105,7	176,0
	240	-84,7	176,0	-108,7	143,8	-97,9	176,0	-119,3	147,6	-108,4	176,0
	245	-86,7	176,0	-111,3	144,0	-100,3	176,0	-122,2	147,6	-111,0	176,0
	250	-88,8	176,0	-113,9	144,2	-102,7	176,0	-125,2	147,6	-113,7	176,0
	255	-90,9	176,0	-116,5	144,3	-105,1	176,0	-128,1	147,6	-116,4	176,0
	260	-92,9	176,0	-119,0	144,5	-107,4	176,0	-131,1	147,6	-119,0	176,0
	265	-95,0	176,0	-121,6	144,6	-109,8	176,0	-134,0	147,6	-121,7	176,0
	270	-97,0	176,0	-124,2	144,8	-112,2	176,0	-137,0	147,6	-124,3	176,0
	275	-99,1	176,0	-126,8	144,9	-114,6	176,0	-139,9	147,6	-127,0	176,0
	280	-101,2	176,0	-129,3	145,0	-117,0	176,0	-142,9	147,6	-129,6	176,0
	285	-103,2	176,0	-131,9	145,2	-119,4	176,0	-145,9	147,6	-132,3	176,0
	290	-105,3	176,0	-134,5	145,3	-121,7	176,0	-148,8	147,6	-135,0	176,0
	295	-107,4	176,0	-137,0	145,4	-124,1	176,0	-151,8	147,6	-137,6	176,0
	300	-109,4	176,0	-139,6	145,5	-126,5	176,0	-154,7	147,6	-140,3	176,0
c _{nom} =30mm	310	-102,8	176,0	-102,8	176,0	-120,8	176,0	-120,8	176,0	-134,7	176,0
	320	-106,5	176,0	-106,5	176,0	-125,1	176,0	-125,1	176,0	-139,6	176,0
c _{nom} =35mm	305	-101,0	176,0	-101,0	176,0	-118,6	176,0	-118,6	176,0	-132,3	176,0
	315	-104,7	176,0	-104,7	176,0	-122,9	176,0	-122,9	176,0	-137,1	176,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

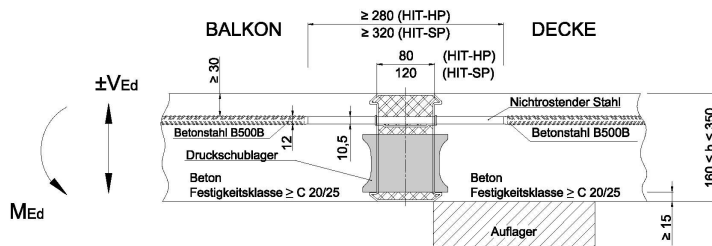


HIT-HP MVX-1311-hh-100-cc											
Spaltzug- und Aufhängewehrung		C20/25			C25/30			C30/37			
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,25	1,51	5,28	0,25	1,66	5,49	0,25	1,66	5,57
h-c _{nom}	h-c _{nom}	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13
		A _{s,prov}	Ø8	Ø6/18,5	Ø8/9,5	Ø8	Ø6/17	Ø8/9	Ø8	Ø6/17	Ø8/9
		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}
		[mm]	[kNm/m]	[kNm]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-37,2	176,0	-52,6	120,1	-43,1	176,0	-54,8	135,3	-47,2	176,0
	130	-39,3	176,0	-55,4	121,6	-45,5	176,0	-58,0	135,3	-49,9	176,0
	135	-41,3	176,0	-58,2	122,9	-47,9	176,0	-61,2	135,3	-52,6	176,0
	140	-43,4	176,0	-61,0	123,9	-50,2	176,0	-64,4	135,3	-55,2	176,0
	145	-45,5	176,0	-63,8	124,9	-52,6	176,0	-67,6	135,3	-57,9	176,0
	150	-47,5	176,0	-66,6	125,7	-55,0	176,0	-70,8	135,3	-60,5	176,0
	155	-49,6	176,0	-69,4	126,5	-57,4	176,0	-74,0	135,3	-63,2	176,0
	160	-51,7	176,0	-72,1	127,2	-59,8	176,0	-77,2	135,3	-65,8	176,0
	165	-53,7	176,0	-74,9	127,8	-62,2	176,0	-80,4	135,3	-68,5	176,0
	170	-55,8	176,0	-77,7	128,3	-64,5	176,0	-83,6	135,3	-71,2	176,0
	175	-57,8	176,0	-80,5	128,8	-66,9	176,0	-86,8	135,3	-73,8	176,0
	180	-59,9	176,0	-83,3	129,3	-69,3	176,0	-90,0	135,3	-76,5	176,0
	185	-62,0	176,0	-86,1	129,7	-71,7	176,0	-93,2	135,3	-79,1	176,0
	190	-64,0	176,0	-88,9	130,1	-74,1	176,0	-96,4	135,3	-81,8	176,0
	195	-66,1	176,0	-91,7	130,5	-76,5	176,0	-99,6	135,3	-84,5	176,0
	200	-68,2	176,0	-94,4	130,8	-78,8	176,0	-102,8	135,3	-87,1	176,0
	205	-70,2	176,0	-97,2	131,1	-81,2	176,0	-106,0	135,3	-89,8	176,0
	210	-72,3	176,0	-100,0	131,4	-83,6	176,0	-109,2	135,3	-92,4	176,0
	215	-74,4	176,0	-102,8	131,7	-86,0	176,0	-112,4	135,3	-95,1	176,0
	220	-76,4	176,0	-105,6	131,9	-88,4	176,0	-115,6	135,3	-97,7	176,0
	225	-78,5	176,0	-108,4	132,2	-90,8	176,0	-118,8	135,3	-100,4	176,0
	230	-80,5	176,0	-111,2	132,4	-93,1	176,0	-121,9	135,3	-103,1	176,0
	235	-82,6	176,0	-114,0	132,6	-95,5	176,0	-125,1	135,3	-105,7	176,0
	240	-84,7	176,0	-116,7	132,8	-97,9	176,0	-128,3	135,3	-108,4	176,0
	245	-86,7	176,0	-119,5	133,0	-100,3	176,0	-131,5	135,3	-111,0	176,0
	250	-88,8	176,0	-122,3	133,2	-102,7	176,0	-134,7	135,3	-113,7	176,0
	255	-90,9	176,0	-125,1	133,3	-105,1	176,0	-137,9	135,3	-116,4	176,0
	260	-92,9	176,0	-127,9	133,5	-107,4	176,0	-141,1	135,3	-119,0	176,0
	265	-95,0	176,0	-130,7	133,6	-109,8	176,0	-144,3	135,3	-121,7	176,0
	270	-97,0	176,0	-133,5	133,8	-112,2	176,0	-147,5	135,3	-124,3	176,0
	275	-99,1	176,0	-136,3	133,9	-114,6	176,0	-150,7	135,3	-127,0	176,0
	280	-101,2	176,0	-139,0	134,1	-117,0	176,0	-153,9	135,3	-129,6	176,0
	285	-103,2	176,0	-141,8	134,2	-119,4	176,0	-157,1	135,3	-132,3	176,0
	290	-105,3	176,0	-144,6	134,3	-121,7	176,0	-160,3	135,3	-135,0	176,0
	295	-107,4	176,0	-147,4	134,4	-124,1	176,0	-163,5	135,3	-137,6	176,0
	300	-109,4	176,0	-150,2	134,5	-126,5	176,0	-166,7	135,3	-140,3	176,0
	c _{nom} =30mm	310	-111,0	176,0	-111,0	176,0	-130,3	176,0	-130,3	176,0	-145,3
		320	-115,0	176,0	-115,0	176,0	-135,1	176,0	-135,1	176,0	-150,6
	c _{nom} =35mm	305	-109,0	176,0	-109,0	176,0	-128,0	176,0	-128,0	176,0	-142,7
		315	-113,0	176,0	-113,0	176,0	-132,7	176,0	-132,7	176,0	-148,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

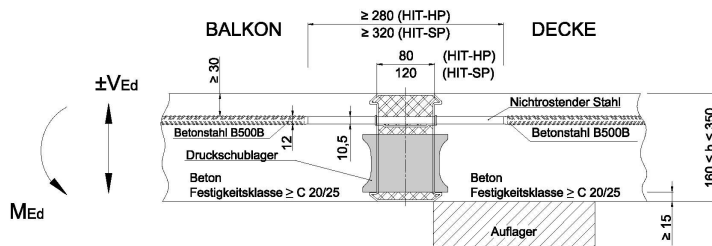


HIT-HP MVX-1411-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]		[cm²]	[cm²/m]	[cm²/m]	
		A _{s,req}	0,27	1,56	5,28		0,27	1,71	5,49		0,27	1,71	5,57
		A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13
A _{s,prov}	Ø8	Ø6/18	Ø8/9,5		Ø8	Ø6/16	Ø8/9		Ø8	Ø6/16	Ø8/9		
h-c _{nom}		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}
		[mm]	[kNm/m]	[kNm]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-37,2	176,0	-55,5	108,0	-43,1	176,0	-58,1	123,1	-47,2	176,0	-58,1	136,8
	130	-39,3	176,0	-58,5	109,6	-45,5	176,0	-61,5	123,1	-49,9	176,0	-61,5	136,8
	135	-41,3	176,0	-61,5	111,0	-47,9	176,0	-65,0	123,1	-52,6	176,0	-65,0	136,8
	140	-43,4	176,0	-64,6	112,2	-50,2	176,0	-68,4	123,1	-55,2	176,0	-68,4	136,8
	145	-45,5	176,0	-67,6	113,3	-52,6	176,0	-71,8	123,1	-57,9	176,0	-71,8	136,8
	150	-47,5	176,0	-70,6	114,2	-55,0	176,0	-75,3	123,1	-60,5	176,0	-75,3	136,8
	155	-49,6	176,0	-73,6	115,0	-57,4	176,0	-78,7	123,1	-63,2	176,0	-78,7	136,8
	160	-51,7	176,0	-76,6	115,8	-59,8	176,0	-82,2	123,1	-65,8	176,0	-82,2	136,8
	165	-53,7	176,0	-79,6	116,4	-62,2	176,0	-85,6	123,1	-68,5	176,0	-85,6	136,8
	170	-55,8	176,0	-82,6	117,0	-64,5	176,0	-89,1	123,1	-71,2	176,0	-89,1	136,8
	175	-57,8	176,0	-85,6	117,6	-66,9	176,0	-92,5	123,1	-73,8	176,0	-92,5	136,8
	180	-59,9	176,0	-88,6	118,1	-69,3	176,0	-95,9	123,1	-76,5	176,0	-95,9	136,8
	185	-62,0	176,0	-91,6	118,5	-71,7	176,0	-99,4	123,1	-79,1	176,0	-99,4	136,8
	190	-64,0	176,0	-94,6	118,9	-74,1	176,0	-102,8	123,1	-81,8	176,0	-102,8	136,8
	195	-66,1	176,0	-97,6	119,3	-76,5	176,0	-106,3	123,1	-84,5	176,0	-106,3	136,8
	200	-68,2	176,0	-100,6	119,7	-78,8	176,0	-109,7	123,1	-87,1	176,0	-109,7	136,8
	205	-70,2	176,0	-103,6	120,0	-81,2	176,0	-113,2	123,1	-89,8	176,0	-113,2	136,8
	210	-72,3	176,0	-106,6	120,3	-83,6	176,0	-116,6	123,1	-92,4	176,0	-116,6	136,8
	215	-74,4	176,0	-109,6	120,6	-86,0	176,0	-120,0	123,1	-95,1	176,0	-120,0	136,8
	220	-76,4	176,0	-112,6	120,9	-88,4	176,0	-123,5	123,1	-97,7	176,0	-123,5	136,8
	225	-78,5	176,0	-115,6	121,1	-90,8	176,0	-126,9	123,1	-100,4	176,0	-126,9	136,8
	230	-80,5	176,0	-118,6	121,4	-93,1	176,0	-130,4	123,1	-103,1	176,0	-130,4	136,8
	235	-82,6	176,0	-121,6	121,6	-95,5	176,0	-133,8	123,1	-105,7	176,0	-133,8	136,8
	240	-84,7	176,0	-124,6	121,8	-97,9	176,0	-137,2	123,1	-108,4	176,0	-137,2	136,8
	245	-86,7	176,0	-127,6	122,0	-100,3	176,0	-140,7	123,1	-111,0	176,0	-140,7	136,8
	250	-88,8	176,0	-130,6	122,2	-102,7	176,0	-144,1	123,1	-113,7	176,0	-144,1	136,8
	255	-90,9	176,0	-133,6	122,4	-105,1	176,0	-147,6	123,1	-116,4	176,0	-147,6	136,8
	260	-92,9	176,0	-136,6	122,5	-107,4	176,0	-151,0	123,1	-119,0	176,0	-151,0	136,8
	265	-95,0	176,0	-139,6	122,7	-109,8	176,0	-154,5	123,1	-121,7	176,0	-154,5	136,8
	270	-97,0	176,0	-142,6	122,9	-112,2	176,0	-157,9	123,1	-124,3	176,0	-157,9	136,8
275	-99,1	176,0	-145,6	123,0	-114,6	176,0	-161,3	123,1	-127,0	176,0	-161,3	136,8	
280	-101,2	176,0	-148,6	123,1	-117,0	176,0	-164,8	123,1	-129,6	176,0	-164,8	136,8	
285	-103,2	176,0	-151,6	123,3	-119,4	176,0	-168,2	123,1	-132,3	176,0	-168,2	136,8	
290	-105,3	176,0	-154,6	123,4	-121,7	176,0	-171,7	123,1	-135,0	176,0	-171,7	136,8	
295	-107,4	176,0	-157,6	123,5	-124,1	176,0	-175,1	123,1	-137,6	176,0	-175,1	136,8	
300	-109,4	176,0	-160,6	123,6	-126,5	176,0	-178,6	123,1	-140,3	176,0	-178,6	136,8	
c _{nom} = 30mm	310	-113,5	176,0	-119,1	170,7	-131,3	176,0	-139,8	167,8	-145,6	176,0	-155,8	166,1
	320	-117,7	176,0	-123,4	170,7	-136,0	176,0	-144,9	167,8	-150,9	176,0	-161,5	166,1
c _{nom} = 35mm	305	-111,5	176,0	-116,9	170,7	-128,9	176,0	-137,3	167,8	-142,9	176,0	-153,0	166,1
	315	-115,6	176,0	-121,2	170,7	-133,7	176,0	-142,4	167,8	-148,3	176,0	-158,7	166,1

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

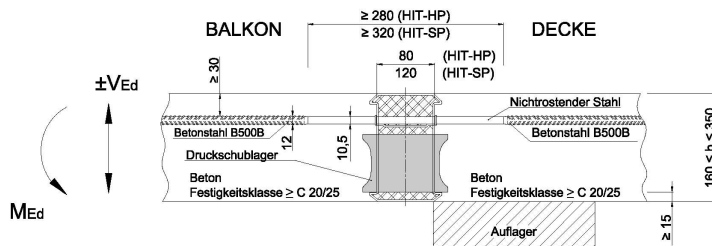


HIT-HP MVX-1611-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]			
		A _{s,req}	0,31	1,64	5,28	0,31	1,81	5,49	0,31	1,81		5,57	
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13			
A _{s,prov}	Ø8	Ø6/17	Ø8/9,5	Ø8	Ø6/15,5	Ø8/9	Ø8	Ø6/15,5	Ø8/9				
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)					
	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-37,2	176,0	-60,9	83,7	-43,1	176,0	-64,2	98,5	-47,2	176,0	-64,2	112,2
	130	-39,3	176,0	-64,3	85,8	-45,5	176,0	-68,1	98,5	-49,9	176,0	-68,1	112,2
	135	-41,3	176,0	-67,7	87,5	-47,9	176,0	-72,0	98,5	-52,6	176,0	-72,0	112,2
	140	-43,4	176,0	-71,2	89,0	-50,2	176,0	-76,0	98,5	-55,2	176,0	-76,0	112,2
	145	-45,5	176,0	-74,6	90,3	-52,6	176,0	-79,9	98,5	-57,9	176,0	-79,9	112,2
	150	-47,5	176,0	-78,0	91,4	-55,0	176,0	-83,8	98,5	-60,5	176,0	-83,8	112,2
	155	-49,6	176,0	-81,5	92,3	-57,4	176,0	-87,8	98,5	-63,2	176,0	-87,8	112,2
	160	-51,7	176,0	-84,9	93,2	-59,8	176,0	-91,7	98,5	-65,8	176,0	-91,7	112,2
	165	-53,7	176,0	-88,3	94,0	-62,2	176,0	-95,6	98,5	-68,5	176,0	-95,6	112,2
	170	-55,8	176,0	-91,8	94,6	-64,5	176,0	-99,6	98,5	-71,2	176,0	-99,6	112,2
	175	-57,8	176,0	-95,2	95,3	-66,9	176,0	-103,5	98,5	-73,8	176,0	-103,5	112,2
	180	-59,9	176,0	-98,6	95,8	-69,3	176,0	-107,4	98,5	-76,5	176,0	-107,4	112,2
	185	-62,0	176,0	-102,1	96,3	-71,7	176,0	-111,4	98,5	-79,1	176,0	-111,4	112,2
	190	-64,0	176,0	-105,5	96,8	-74,1	176,0	-115,3	98,5	-81,8	176,0	-115,3	112,2
	195	-66,1	176,0	-108,9	97,2	-76,5	176,0	-119,2	98,5	-84,5	176,0	-119,2	112,2
	200	-68,2	176,0	-112,3	97,6	-78,8	176,0	-123,2	98,5	-87,1	176,0	-123,2	112,2
	205	-70,2	176,0	-115,8	98,0	-81,2	176,0	-127,1	98,5	-89,8	176,0	-127,1	112,2
	210	-72,3	176,0	-119,2	98,3	-83,6	176,0	-131,0	98,5	-92,4	176,0	-131,0	112,2
	215	-74,4	176,0	-122,6	98,7	-86,0	176,0	-135,0	98,5	-95,1	176,0	-135,0	112,2
	220	-76,4	176,0	-126,1	99,0	-88,4	176,0	-138,9	98,5	-97,7	176,0	-138,9	112,2
	225	-78,5	176,0	-129,5	99,2	-90,8	176,0	-142,8	98,5	-100,4	176,0	-142,8	112,2
	230	-80,5	176,0	-132,9	99,5	-93,1	176,0	-146,8	98,5	-103,1	176,0	-146,8	112,2
	235	-82,6	176,0	-136,4	99,7	-95,5	176,0	-150,7	98,5	-105,7	176,0	-150,7	112,2
	240	-84,7	176,0	-139,8	100,0	-97,9	176,0	-154,6	98,5	-108,4	176,0	-154,6	112,2
	245	-86,7	176,0	-143,2	100,2	-100,3	176,0	-158,6	98,5	-111,0	176,0	-158,6	112,2
	250	-88,8	176,0	-146,7	100,4	-102,7	176,0	-162,5	98,5	-113,7	176,0	-162,5	112,2
	255	-90,9	176,0	-150,1	100,6	-105,1	176,0	-166,5	98,5	-116,4	176,0	-166,5	112,2
	260	-92,9	176,0	-153,5	100,8	-107,4	176,0	-170,4	98,5	-119,0	176,0	-170,4	112,2
	265	-95,0	176,0	-156,9	100,9	-109,8	176,0	-174,3	98,5	-121,7	176,0	-174,3	112,2
	270	-97,0	176,0	-160,4	101,1	-112,2	176,0	-178,3	98,5	-124,3	176,0	-178,3	112,2
	275	-99,1	176,0	-163,8	101,3	-114,6	176,0	-182,2	98,5	-127,0	176,0	-182,2	112,2
	280	-101,2	176,0	-167,2	101,4	-117,0	176,0	-186,1	98,5	-129,6	176,0	-186,1	112,2
	285	-103,2	176,0	-170,7	101,6	-119,4	176,0	-190,1	98,5	-132,3	176,0	-190,1	112,2
	290	-105,3	176,0	-174,1	101,7	-121,7	176,0	-194,0	98,5	-135,0	176,0	-194,0	112,2
	295	-107,4	176,0	-177,5	101,8	-124,1	176,0	-197,9	98,5	-137,6	176,0	-197,9	112,2
	300	-109,4	176,0	-181,0	101,9	-126,5	176,0	-201,9	98,5	-140,3	176,0	-201,9	112,2
c _{nom} = 30mm	310	-113,5	176,0	-135,0	155,2	-131,3	176,0	-158,6	149,6	-145,6	176,0	-176,6	145,7
	320	-117,7	176,0	-140,0	155,2	-136,0	176,0	-164,4	149,6	-150,9	176,0	-183,1	145,7
c _{nom} = 35mm	305	-111,5	176,0	-132,6	155,2	-128,9	176,0	-155,7	149,6	-142,9	176,0	-173,3	145,7
	315	-115,6	176,0	-137,5	155,2	-133,7	176,0	-161,5	149,6	-148,3	176,0	-179,8	145,7

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

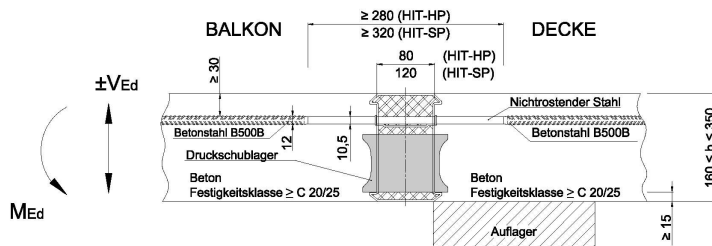


HIT-HP MVX-1811-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]			
		A _{s,req}	0,34	1,71	5,28	0,35	1,90	5,49	0,35	1,90		5,57	
A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13				
A _{s,prov}	Ø8	Ø6/16,5	Ø8/9,5	Ø8	Ø6/14,5	Ø8/9	Ø8	Ø6/14,5	Ø8/9				
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)			
	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
Tragfähigkeit im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-37,2	176,0	-65,6	59,5	-43,1	176,0	-69,7	73,9	-47,2	176,0	-69,7	87,6
	130	-39,3	176,0	-69,4	62,1	-45,5	176,0	-74,1	73,9	-49,9	176,0	-74,1	87,6
	135	-41,3	176,0	-73,3	64,3	-47,9	176,0	-78,6	73,9	-52,6	176,0	-78,6	87,6
	140	-43,4	176,0	-77,2	66,0	-50,2	176,0	-83,0	73,9	-55,2	176,0	-83,0	87,6
	145	-45,5	176,0	-81,0	67,5	-52,6	176,0	-87,4	73,9	-57,9	176,0	-87,4	87,6
	150	-47,5	176,0	-84,9	68,8	-55,0	176,0	-91,8	73,9	-60,5	176,0	-91,8	87,6
	155	-49,6	176,0	-88,7	69,9	-57,4	176,0	-96,3	73,9	-63,2	176,0	-96,3	87,6
	160	-51,7	176,0	-92,6	70,9	-59,8	176,0	-100,7	73,9	-65,8	176,0	-100,7	87,6
	165	-53,7	176,0	-96,5	71,8	-62,2	176,0	-105,1	73,9	-68,5	176,0	-105,1	87,6
	170	-55,8	176,0	-100,3	72,5	-64,5	176,0	-109,5	73,9	-71,2	176,0	-109,5	87,6
	175	-57,8	176,0	-104,2	73,2	-66,9	176,0	-114,0	73,9	-73,8	176,0	-114,0	87,6
	180	-59,9	176,0	-108,0	73,9	-69,3	176,0	-118,4	73,9	-76,5	176,0	-118,4	87,6
	185	-62,0	176,0	-111,9	74,4	-71,7	176,0	-122,8	73,9	-79,1	176,0	-122,8	87,6
	190	-64,0	176,0	-115,7	74,9	-74,1	176,0	-127,2	73,9	-81,8	176,0	-127,2	87,6
	195	-66,1	176,0	-119,6	75,4	-76,5	176,0	-131,7	73,9	-84,5	176,0	-131,7	87,6
	200	-68,2	176,0	-123,5	75,8	-78,8	176,0	-136,1	73,9	-87,1	176,0	-136,1	87,6
	205	-70,2	176,0	-127,3	76,2	-81,2	176,0	-140,5	73,9	-89,8	176,0	-140,5	87,6
	210	-72,3	176,0	-131,2	76,6	-83,6	176,0	-144,9	73,9	-92,4	176,0	-144,9	87,6
	215	-74,4	176,0	-135,0	76,9	-86,0	176,0	-149,4	73,9	-95,1	176,0	-149,4	87,6
	220	-76,4	176,0	-138,9	77,3	-88,4	176,0	-153,8	73,9	-97,7	176,0	-153,8	87,6
	225	-78,5	176,0	-142,8	77,6	-90,8	176,0	-158,2	73,9	-100,4	176,0	-158,2	87,6
	230	-80,5	176,0	-146,6	77,8	-93,1	176,0	-162,6	73,9	-103,1	176,0	-162,6	87,6
	235	-82,6	176,0	-150,5	78,1	-95,5	176,0	-167,1	73,9	-105,7	176,0	-167,1	87,6
	240	-84,7	176,0	-154,3	78,3	-97,9	176,0	-171,5	73,9	-108,4	176,0	-171,5	87,6
	245	-86,7	176,0	-158,2	78,6	-100,3	176,0	-175,9	73,9	-111,0	176,0	-175,9	87,6
	250	-88,8	176,0	-162,1	78,8	-102,7	176,0	-180,4	73,9	-113,7	176,0	-180,4	87,6
	255	-90,9	176,0	-165,9	79,0	-105,1	176,0	-184,8	73,9	-116,4	176,0	-184,8	87,6
	260	-92,9	176,0	-169,8	79,2	-107,4	176,0	-189,2	73,9	-119,0	176,0	-189,2	87,6
	265	-95,0	176,0	-173,6	79,4	-109,8	176,0	-193,6	73,9	-121,7	176,0	-193,6	87,6
	270	-97,0	176,0	-177,5	79,5	-112,2	176,0	-198,1	73,9	-124,3	176,0	-198,1	87,6
275	-99,1	176,0	-181,4	79,7	-114,6	176,0	-202,5	73,9	-127,0	176,0	-202,5	87,6	
280	-101,2	176,0	-185,2	79,9	-117,0	176,0	-206,9	73,9	-129,6	176,0	-206,9	87,6	
285	-103,2	176,0	-189,1	80,0	-119,4	176,0	-211,3	73,9	-132,3	176,0	-211,3	87,6	
290	-105,3	176,0	-192,9	80,1	-121,7	176,0	-215,8	73,9	-135,0	176,0	-215,8	87,6	
295	-107,4	176,0	-196,8	80,3	-124,1	176,0	-220,2	73,9	-137,6	176,0	-220,2	87,6	
300	-109,4	176,0	-200,7	80,4	-126,5	176,0	-224,6	73,9	-140,3	176,0	-224,6	87,6	
c _{nom} = 30mm	310	-113,5	176,0	-150,8	139,7	-131,3	176,0	-177,1	131,4	-145,6	176,0	-196,9	125,3
	320	-117,7	176,0	-156,3	139,7	-136,0	176,0	-183,6	131,4	-150,9	176,0	-204,3	125,3
c _{nom} = 35mm	305	-111,5	176,0	-148,0	139,7	-128,9	176,0	-173,8	131,4	-142,9	176,0	-193,2	125,3
	315	-115,6	176,0	-153,5	139,7	-133,7	176,0	-180,3	131,4	-148,3	176,0	-200,6	125,3

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

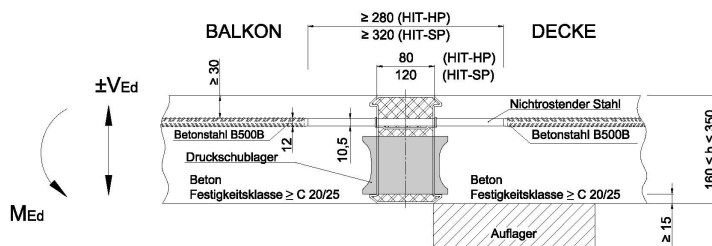


HIT-HP MVX-1012-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]	[cm²]	[cm²/m]	[cm²/m]			
		A _{s,req}	0,17	1,39	5,59	0,18	1,52	5,80	0,18	1,52	5,90		
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13			
A _{s,prov}	Ø8	Ø6/20	Ø8/8,5	Ø8	Ø6/18,5	Ø8/8,5	Ø8	Ø6/18,5	Ø8/8,5				
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)					
	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
	[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm]	
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-32,5	192,0	-42,9	158,9	-38,5	192,0	-44,8	172,2	-42,9	192,0	-44,8	186,0
	130	-34,3	192,0	-45,1	159,8	-40,5	192,0	-47,3	172,2	-45,3	192,0	-47,3	186,0
	135	-36,0	192,0	-47,2	160,5	-42,6	192,0	-49,7	172,2	-47,6	192,0	-49,7	186,0
	140	-37,8	192,0	-49,4	161,1	-44,7	192,0	-52,2	172,2	-49,9	192,0	-52,2	186,0
	145	-39,5	192,0	-51,5	161,7	-46,7	192,0	-54,7	172,2	-52,3	192,0	-54,7	186,0
	150	-41,2	192,0	-53,6	162,2	-48,8	192,0	-57,1	172,2	-54,6	192,0	-57,1	186,0
	155	-43,0	192,0	-55,8	162,7	-50,8	192,0	-59,6	172,2	-57,0	192,0	-59,6	186,0
	160	-44,7	192,0	-57,9	163,1	-52,9	192,0	-62,0	172,2	-59,3	192,0	-62,0	186,0
	165	-46,5	192,0	-60,1	163,5	-55,0	192,0	-64,5	172,2	-61,6	192,0	-64,5	186,0
	170	-48,2	192,0	-62,2	163,8	-57,0	192,0	-66,9	172,2	-64,0	192,0	-66,9	186,0
	175	-50,0	192,0	-64,4	164,1	-59,1	192,0	-69,4	172,2	-66,3	192,0	-69,4	186,0
	180	-51,7	192,0	-66,5	164,4	-61,2	192,0	-71,9	172,2	-68,6	192,0	-71,9	186,0
	185	-53,4	192,0	-68,7	164,7	-63,2	192,0	-74,3	172,2	-71,0	192,0	-74,3	186,0
	190	-55,2	192,0	-70,8	165,0	-65,3	192,0	-76,8	172,2	-73,3	192,0	-76,8	186,0
	195	-56,9	192,0	-72,9	165,2	-67,3	192,0	-79,2	172,2	-75,7	192,0	-79,2	186,0
	200	-58,7	192,0	-75,1	165,4	-69,4	192,0	-81,7	172,2	-78,0	192,0	-81,7	186,0
	205	-60,4	192,0	-77,2	165,6	-71,5	192,0	-84,2	172,2	-80,3	192,0	-84,2	186,0
	210	-62,2	192,0	-79,4	165,8	-73,5	192,0	-86,6	172,2	-82,7	192,0	-86,6	186,0
	215	-63,9	192,0	-81,5	166,0	-75,6	192,0	-89,1	172,2	-85,0	192,0	-89,1	186,0
	220	-65,6	192,0	-83,7	166,2	-77,7	192,0	-91,5	172,2	-87,4	192,0	-91,5	186,0
	225	-67,4	192,0	-85,8	166,3	-79,7	192,0	-94,0	172,2	-89,7	192,0	-94,0	186,0
	230	-69,1	192,0	-88,0	166,5	-81,8	192,0	-96,5	172,2	-92,0	192,0	-96,5	186,0
	235	-70,9	192,0	-90,1	166,6	-83,9	192,0	-98,9	172,2	-94,4	192,0	-98,9	186,0
	240	-72,6	192,0	-92,2	166,8	-85,9	192,0	-101,4	172,2	-96,7	192,0	-101,4	186,0
	245	-74,4	192,0	-94,4	166,9	-88,0	192,0	-103,8	172,2	-99,0	192,0	-103,8	186,0
	250	-76,1	192,0	-96,5	167,0	-90,0	192,0	-106,3	172,2	-101,4	192,0	-106,3	186,0
	255	-77,8	192,0	-98,7	167,2	-92,1	192,0	-108,7	172,2	-103,7	192,0	-108,7	186,0
	260	-79,6	192,0	-100,8	167,3	-94,2	192,0	-111,2	172,2	-106,1	192,0	-111,2	186,0
	265	-81,3	192,0	-103,0	167,4	-96,2	192,0	-113,7	172,2	-108,4	192,0	-113,7	186,0
	270	-83,1	192,0	-105,1	167,5	-98,3	192,0	-116,1	172,2	-110,7	192,0	-116,1	186,0
275	-84,8	192,0	-107,2	167,6	-100,4	192,0	-118,6	172,2	-113,1	192,0	-118,6	186,0	
280	-86,6	192,0	-109,4	167,7	-102,4	192,0	-121,0	172,2	-115,4	192,0	-121,0	186,0	
285	-88,3	192,0	-111,5	167,8	-104,5	192,0	-123,5	172,2	-117,8	192,0	-123,5	186,0	
290	-90,0	192,0	-113,7	167,9	-106,6	192,0	-126,0	172,2	-120,1	192,0	-126,0	186,0	
295	-91,8	192,0	-115,8	167,9	-108,6	192,0	-128,4	172,2	-122,4	192,0	-128,4	186,0	
300	-93,5	192,0	-118,0	168,0	-110,7	192,0	-130,9	172,2	-124,8	192,0	-130,9	186,0	
c _{nom} = 30mm	310	-86,6	180,3	-86,6	180,3	-101,7	192,0	-101,7	192,0	-113,6	192,0	-113,6	192,0
	320	-89,7	180,3	-89,7	180,3	-105,3	192,0	-105,3	192,0	-117,7	192,0	-117,7	192,0
c _{nom} = 35mm	305	-85,0	180,3	-85,0	180,3	-99,9	192,0	-99,9	192,0	-111,6	192,0	-111,6	192,0
	315	-88,1	180,3	-88,1	180,3	-103,5	192,0	-103,5	192,0	-115,6	192,0	-115,6	192,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

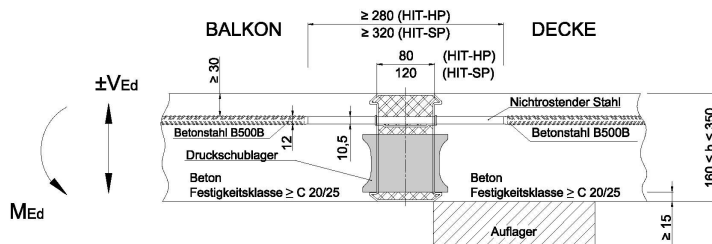


HIT-HP MVX-1112-hh-100-cc											
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37			
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,19	1,46	5,59	0,19	1,60	5,80	0,19	1,60	5,90
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13	
	A _{s,prov}	Ø8	Ø6/19	Ø8/8,5	Ø8	Ø6/17,5	Ø8/8,5	Ø8	Ø6/17,5	Ø8/8,5	
h-c _{nom}	h-c _{nom}	Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}
		[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
	[mm]										
125		-32,5	192,0	-46,3	147,3	-38,5	192,0	-48,6	159,9	-42,9	192,0
130		-34,3	192,0	-48,7	148,2	-40,5	192,0	-51,3	159,9	-45,3	192,0
135		-36,0	192,0	-51,0	149,0	-42,6	192,0	-54,0	159,9	-47,6	192,0
140		-37,8	192,0	-53,4	149,7	-44,7	192,0	-56,7	159,9	-49,9	192,0
145		-39,5	192,0	-55,8	150,3	-46,7	192,0	-59,4	159,9	-52,3	192,0
150		-41,2	192,0	-58,1	150,9	-48,8	192,0	-62,1	159,9	-54,6	192,0
155		-43,0	192,0	-60,5	151,4	-50,8	192,0	-64,8	159,9	-57,0	192,0
160		-44,7	192,0	-62,8	151,9	-52,9	192,0	-67,5	159,9	-59,3	192,0
165		-46,5	192,0	-65,2	152,3	-55,0	192,0	-70,2	159,9	-61,6	192,0
170		-48,2	192,0	-67,5	152,6	-57,0	192,0	-72,9	159,9	-64,0	192,0
175		-50,0	192,0	-69,9	153,0	-59,1	192,0	-75,7	159,9	-66,3	192,0
180		-51,7	192,0	-72,3	153,3	-61,2	192,0	-78,4	159,9	-68,6	192,0
185		-53,4	192,0	-74,6	153,6	-63,2	192,0	-81,1	159,9	-71,0	192,0
190		-55,2	192,0	-77,0	153,9	-65,3	192,0	-83,8	159,9	-73,3	192,0
195		-56,9	192,0	-79,3	154,1	-67,3	192,0	-86,5	159,9	-75,7	192,0
200		-58,7	192,0	-81,7	154,4	-69,4	192,0	-89,2	159,9	-78,0	192,0
205		-60,4	192,0	-84,1	154,6	-71,5	192,0	-91,9	159,9	-80,3	192,0
210		-62,2	192,0	-86,4	154,8	-73,5	192,0	-94,6	159,9	-82,7	192,0
215		-63,9	192,0	-88,8	155,0	-75,6	192,0	-97,3	159,9	-85,0	192,0
220		-65,6	192,0	-91,1	155,2	-77,7	192,0	-100,0	159,9	-87,4	192,0
225		-67,4	192,0	-93,5	155,4	-79,7	192,0	-102,7	159,9	-89,7	192,0
230		-69,1	192,0	-95,9	155,5	-81,8	192,0	-105,4	159,9	-92,0	192,0
235		-70,9	192,0	-98,2	155,7	-83,9	192,0	-108,1	159,9	-94,4	192,0
240		-72,6	192,0	-100,6	155,8	-85,9	192,0	-110,8	159,9	-96,7	192,0
245		-74,4	192,0	-102,9	156,0	-88,0	192,0	-113,5	159,9	-99,0	192,0
250		-76,1	192,0	-105,3	156,1	-90,0	192,0	-116,2	159,9	-101,4	192,0
255		-77,8	192,0	-107,6	156,2	-92,1	192,0	-118,9	159,9	-103,7	192,0
260		-79,6	192,0	-110,0	156,3	-94,2	192,0	-121,6	159,9	-106,1	192,0
265		-81,3	192,0	-112,4	156,5	-96,2	192,0	-124,3	159,9	-108,4	192,0
270		-83,1	192,0	-114,7	156,6	-98,3	192,0	-127,0	159,9	-110,7	192,0
275		-84,8	192,0	-117,1	156,7	-100,4	192,0	-129,7	159,9	-113,1	192,0
280		-86,6	192,0	-119,4	156,8	-102,4	192,0	-132,4	159,9	-115,4	192,0
285		-88,3	192,0	-121,8	156,9	-104,5	192,0	-135,1	159,9	-117,8	192,0
290		-90,0	192,0	-124,2	157,0	-106,6	192,0	-137,9	159,9	-120,1	192,0
295		-91,8	192,0	-126,5	157,0	-108,6	192,0	-140,6	159,9	-122,4	192,0
300		-93,5	192,0	-128,9	157,1	-110,7	192,0	-143,3	159,9	-124,8	192,0
C _{nom} = 30mm	310	-94,9	192,0	-94,9	192,0	-111,5	192,0	-111,5	192,0	-124,5	192,0
	320	-98,3	192,0	-98,3	192,0	-115,5	192,0	-115,5	192,0	-129,0	192,0
C _{nom} = 35mm	305	-93,2	192,0	-93,2	192,0	-109,5	192,0	-109,5	192,0	-122,2	192,0
	315	-96,6	192,0	-96,6	192,0	-113,5	192,0	-113,5	192,0	-126,7	192,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

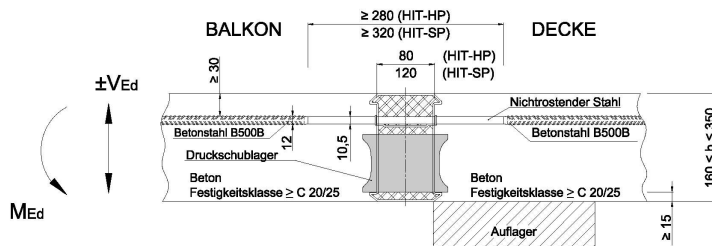


HIT-HP MVX-1212-hh-100-cc											
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37			
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,21	1,52	5,59	0,21	1,67	5,80	0,21	1,67	5,90
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13	
	A _{s,prov}	Ø8	Ø6/18,5	Ø8/8,5	Ø8	Ø6/16,5	Ø8/8,5	Ø8	Ø6/16,5	Ø8/8,5	
h-c _{nom}	h-c _{nom}	Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}
		[mm]	[kNm/m]	[kNm/m]	[kNm/m]	[mm]	[kNm/m]	[kNm/m]	[kNm/m]	[mm]	[kNm/m]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-32,5	192,0	-49,6	135,8	-38,5	192,0	-52,3	147,6	-42,9	192,0
	130	-34,3	192,0	-52,1	136,8	-40,5	192,0	-55,2	147,6	-45,3	192,0
	135	-36,0	192,0	-54,7	137,7	-42,6	192,0	-58,2	147,6	-47,6	192,0
	140	-37,8	192,0	-57,3	138,4	-44,7	192,0	-61,1	147,6	-49,9	192,0
	145	-39,5	192,0	-59,8	139,1	-46,7	192,0	-64,1	147,6	-52,3	192,0
	150	-41,2	192,0	-62,4	139,7	-48,8	192,0	-67,0	147,6	-54,6	192,0
	155	-43,0	192,0	-65,0	140,2	-50,8	192,0	-70,0	147,6	-57,0	192,0
	160	-44,7	192,0	-67,6	140,7	-52,9	192,0	-72,9	147,6	-59,3	192,0
	165	-46,5	192,0	-70,1	141,2	-55,0	192,0	-75,9	147,6	-61,6	192,0
	170	-48,2	192,0	-72,7	141,6	-57,0	192,0	-78,8	147,6	-64,0	192,0
	175	-50,0	192,0	-75,3	141,9	-59,1	192,0	-81,8	147,6	-66,3	192,0
	180	-51,7	192,0	-77,9	142,3	-61,2	192,0	-84,7	147,6	-68,6	192,0
	185	-53,4	192,0	-80,4	142,6	-63,2	192,0	-87,7	147,6	-71,0	192,0
	190	-55,2	192,0	-83,0	142,9	-65,3	192,0	-90,6	147,6	-73,3	192,0
	195	-56,9	192,0	-85,6	143,2	-67,3	192,0	-93,6	147,6	-75,7	192,0
	200	-58,7	192,0	-88,2	143,4	-69,4	192,0	-96,5	147,6	-78,0	192,0
	205	-60,4	192,0	-90,7	143,6	-71,5	192,0	-99,5	147,6	-80,3	192,0
	210	-62,2	192,0	-93,3	143,9	-73,5	192,0	-102,4	147,6	-82,7	192,0
	215	-63,9	192,0	-95,9	144,1	-75,6	192,0	-105,4	147,6	-85,0	192,0
	220	-65,6	192,0	-98,4	144,3	-77,7	192,0	-108,3	147,6	-87,4	192,0
	225	-67,4	192,0	-101,0	144,4	-79,7	192,0	-111,3	147,6	-89,7	192,0
	230	-69,1	192,0	-103,6	144,6	-81,8	192,0	-114,2	147,6	-92,0	192,0
	235	-70,9	192,0	-106,2	144,8	-83,9	192,0	-117,2	147,6	-94,4	192,0
	240	-72,6	192,0	-108,7	144,9	-85,9	192,0	-120,1	147,6	-96,7	192,0
	245	-74,4	192,0	-111,3	145,1	-88,0	192,0	-123,1	147,6	-99,0	192,0
	250	-76,1	192,0	-113,9	145,2	-90,0	192,0	-126,0	147,6	-101,4	192,0
	255	-77,8	192,0	-116,5	145,3	-92,1	192,0	-129,0	147,6	-103,7	192,0
	260	-79,6	192,0	-119,0	145,5	-94,2	192,0	-131,9	147,6	-106,1	192,0
	265	-81,3	192,0	-121,6	145,6	-96,2	192,0	-134,9	147,6	-108,4	192,0
	270	-83,1	192,0	-124,2	145,7	-98,3	192,0	-137,8	147,6	-110,7	192,0
	275	-84,8	192,0	-126,8	145,8	-100,4	192,0	-140,8	147,6	-113,1	192,0
	280	-86,6	192,0	-129,3	145,9	-102,4	192,0	-143,7	147,6	-115,4	192,0
	285	-88,3	192,0	-131,9	146,0	-104,5	192,0	-146,7	147,6	-117,8	192,0
	290	-90,0	192,0	-134,5	146,1	-106,6	192,0	-149,6	147,6	-120,1	192,0
	295	-91,8	192,0	-137,0	146,2	-108,6	192,0	-152,6	147,6	-122,4	192,0
	300	-93,5	192,0	-139,6	146,3	-110,7	192,0	-155,5	147,6	-124,8	192,0
c _{nom} = 30mm	310	-97,0	192,0	-103,2	186,2	-114,8	192,0	-121,2	186,0	-129,4	192,0
	320	-100,5	192,0	-106,9	186,2	-118,9	192,0	-125,6	186,0	-134,1	192,0
c _{nom} = 35mm	305	-95,3	192,0	-101,3	186,2	-112,7	192,0	-119,0	186,0	-127,1	192,0
	315	-98,8	192,0	-105,1	186,2	-116,9	192,0	-123,4	186,0	-131,8	192,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

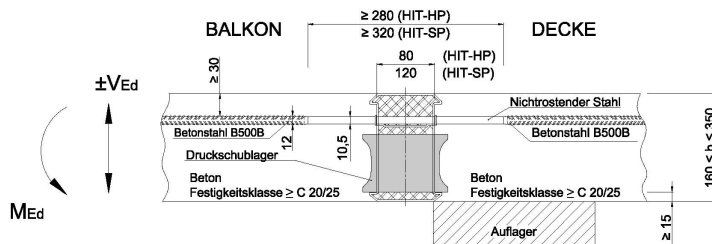


HIT-HP MVX-1312-hh-100-cc											
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37			
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,22	1,57	5,59	0,23	1,74	5,80	0,23	1,74	5,90
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13	
	A _{s,prov}	Ø8	Ø6/17,5	Ø8/8,5	Ø8	Ø6/16	Ø8/8,5	Ø8	Ø6/16	Ø8/8,5	
h-c _{nom}	h-c _{nom}	Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)		Punkt 2 (max M)		Punkt 1 (max V)	
		M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}
		[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Werte paare für c _{nom} =30 - 50mm	125	-32,5	192,0	-52,6	124,4	-38,5	192,0	-55,8	135,3	-42,9	192,0
	130	-34,3	192,0	-55,4	125,5	-40,5	192,0	-59,0	135,3	-45,3	192,0
	135	-36,0	192,0	-58,2	126,4	-42,6	192,0	-62,2	135,3	-47,6	192,0
	140	-37,8	192,0	-61,0	127,2	-44,7	192,0	-65,4	135,3	-49,9	192,0
	145	-39,5	192,0	-63,8	128,0	-46,7	192,0	-68,6	135,3	-52,3	192,0
	150	-41,2	192,0	-66,6	128,6	-48,8	192,0	-71,8	135,3	-54,6	192,0
	155	-43,0	192,0	-69,4	129,2	-50,8	192,0	-75,0	135,3	-57,0	192,0
	160	-44,7	192,0	-72,1	129,7	-52,9	192,0	-78,2	135,3	-59,3	192,0
	165	-46,5	192,0	-74,9	130,2	-55,0	192,0	-81,4	135,3	-61,6	192,0
	170	-48,2	192,0	-77,7	130,6	-57,0	192,0	-84,6	135,3	-64,0	192,0
	175	-50,0	192,0	-80,5	131,0	-59,1	192,0	-87,8	135,3	-66,3	192,0
	180	-51,7	192,0	-83,3	131,3	-61,2	192,0	-91,0	135,3	-68,6	192,0
	185	-53,4	192,0	-86,1	131,7	-63,2	192,0	-94,2	135,3	-71,0	192,0
	190	-55,2	192,0	-88,9	132,0	-65,3	192,0	-97,4	135,3	-73,3	192,0
	195	-56,9	192,0	-91,7	132,3	-67,3	192,0	-100,5	135,3	-75,7	192,0
	200	-58,7	192,0	-94,4	132,5	-69,4	192,0	-103,7	135,3	-78,0	192,0
	205	-60,4	192,0	-97,2	132,8	-71,5	192,0	-106,9	135,3	-80,3	192,0
	210	-62,2	192,0	-100,0	133,0	-73,5	192,0	-110,1	135,3	-82,7	192,0
	215	-63,9	192,0	-102,8	133,2	-75,6	192,0	-113,3	135,3	-85,0	192,0
	220	-65,6	192,0	-105,6	133,4	-77,7	192,0	-116,5	135,3	-87,4	192,0
	225	-67,4	192,0	-108,4	133,6	-79,7	192,0	-119,7	135,3	-89,7	192,0
	230	-69,1	192,0	-111,2	133,8	-81,8	192,0	-122,9	135,3	-92,0	192,0
	235	-70,9	192,0	-114,0	133,9	-83,9	192,0	-126,1	135,3	-94,4	192,0
	240	-72,6	192,0	-116,7	134,1	-85,9	192,0	-129,3	135,3	-96,7	192,0
	245	-74,4	192,0	-119,5	134,3	-88,0	192,0	-132,5	135,3	-99,0	192,0
	250	-76,1	192,0	-122,3	134,4	-90,0	192,0	-135,7	135,3	-101,4	192,0
	255	-77,8	192,0	-125,1	134,5	-92,1	192,0	-138,9	135,3	-103,7	192,0
	260	-79,6	192,0	-127,9	134,7	-94,2	192,0	-142,1	135,3	-106,1	192,0
	265	-81,3	192,0	-130,7	134,8	-96,2	192,0	-145,3	135,3	-108,4	192,0
	270	-83,1	192,0	-133,5	134,9	-98,3	192,0	-148,5	135,3	-110,7	192,0
	275	-84,8	192,0	-136,3	135,0	-100,4	192,0	-151,7	135,3	-113,1	192,0
	280	-86,6	192,0	-139,0	135,1	-102,4	192,0	-154,9	135,3	-115,4	192,0
	285	-88,3	192,0	-141,8	135,2	-104,5	192,0	-158,1	135,3	-117,8	192,0
	290	-90,0	192,0	-144,6	135,3	-106,6	192,0	-161,3	135,3	-120,1	192,0
	295	-91,8	192,0	-147,4	135,4	-108,6	192,0	-164,5	135,3	-122,4	192,0
	300	-93,5	192,0	-150,2	135,5	-110,7	192,0	-167,7	135,3	-124,8	192,0
c _{nom} = 30mm	310	-97,0	192,0	-111,4	178,5	-114,8	192,0	-130,9	176,9	-129,4	192,0
	320	-100,5	192,0	-115,4	178,5	-118,9	192,0	-135,6	176,9	-134,1	192,0
c _{nom} = 35mm	305	-95,3	192,0	-109,4	178,5	-112,7	192,0	-128,5	176,9	-127,1	192,0
	315	-98,8	192,0	-113,4	178,5	-116,9	192,0	-133,2	176,9	-131,8	192,0

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

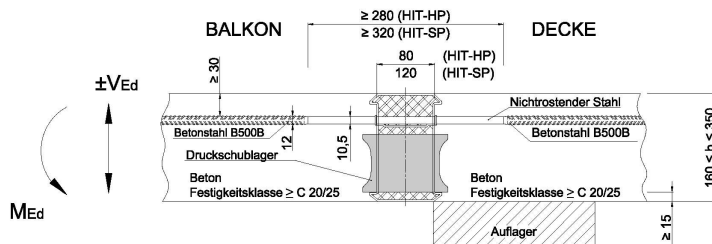


HIT-HP MVX-1412-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25			C25/30			C30/37					
		A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}	A _{s,Sp,h}		A _{s,v}			
		beidseitig	direkt	indirekt	beidseitig	direkt	indirekt	beidseitig	direkt	indirekt			
		[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]	[cm ²]	[cm ² /m]	[cm ² /m]			
		A _{s,req}	0,24	1,62	5,59	0,25	1,80	5,80	0,25	1,80	5,90		
	A _{s,min}	0,50	1,13	1,13	0,50	1,13	1,13	0,50	1,13	1,13			
A _{s,prov}	Ø8	Ø6/17	Ø8/8,5	Ø8	Ø6/15,5	Ø8/8,5	Ø8	Ø6/15,5	Ø8/8,5				
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)		Punkt 1 (max V)	Punkt 2 (max M)		
	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
	[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm]	
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-32,5	192,0	-55,5	113,2	-38,5	192,0	-59,2	123,1	-42,9	192,0	-59,2	136,8
	130	-34,3	192,0	-58,5	114,3	-40,5	192,0	-62,6	123,1	-45,3	192,0	-62,6	136,8
	135	-36,0	192,0	-61,5	115,3	-42,6	192,0	-66,1	123,1	-47,6	192,0	-66,1	136,8
	140	-37,8	192,0	-64,6	116,2	-44,7	192,0	-69,5	123,1	-49,9	192,0	-69,5	136,8
	145	-39,5	192,0	-67,6	117,0	-46,7	192,0	-73,0	123,1	-52,3	192,0	-73,0	136,8
	150	-41,2	192,0	-70,6	117,6	-48,8	192,0	-76,4	123,1	-54,6	192,0	-76,4	136,8
	155	-43,0	192,0	-73,6	118,2	-50,8	192,0	-79,9	123,1	-57,0	192,0	-79,9	136,8
	160	-44,7	192,0	-76,6	118,8	-52,9	192,0	-83,3	123,1	-59,3	192,0	-83,3	136,8
	165	-46,5	192,0	-79,6	119,3	-55,0	192,0	-86,7	123,1	-61,6	192,0	-86,7	136,8
	170	-48,2	192,0	-82,6	119,7	-57,0	192,0	-90,2	123,1	-64,0	192,0	-90,2	136,8
	175	-50,0	192,0	-85,6	120,1	-59,1	192,0	-93,6	123,1	-66,3	192,0	-93,6	136,8
	180	-51,7	192,0	-88,6	120,5	-61,2	192,0	-97,1	123,1	-68,6	192,0	-97,1	136,8
	185	-53,4	192,0	-91,6	120,8	-63,2	192,0	-100,5	123,1	-71,0	192,0	-100,5	136,8
	190	-55,2	192,0	-94,6	121,1	-65,3	192,0	-104,0	123,1	-73,3	192,0	-104,0	136,8
	195	-56,9	192,0	-97,6	121,4	-67,3	192,0	-107,4	123,1	-75,7	192,0	-107,4	136,8
	200	-58,7	192,0	-100,6	121,7	-69,4	192,0	-110,8	123,1	-78,0	192,0	-110,8	136,8
	205	-60,4	192,0	-103,6	122,0	-71,5	192,0	-114,3	123,1	-80,3	192,0	-114,3	136,8
	210	-62,2	192,0	-106,6	122,2	-73,5	192,0	-117,7	123,1	-82,7	192,0	-117,7	136,8
	215	-63,9	192,0	-109,6	122,4	-75,6	192,0	-121,2	123,1	-85,0	192,0	-121,2	136,8
	220	-65,6	192,0	-112,6	122,6	-77,7	192,0	-124,6	123,1	-87,4	192,0	-124,6	136,8
	225	-67,4	192,0	-115,6	122,8	-79,7	192,0	-128,0	123,1	-89,7	192,0	-128,0	136,8
	230	-69,1	192,0	-118,6	123,0	-81,8	192,0	-131,5	123,1	-92,0	192,0	-131,5	136,8
	235	-70,9	192,0	-121,6	123,2	-83,9	192,0	-134,9	123,1	-94,4	192,0	-134,9	136,8
	240	-72,6	192,0	-124,6	123,3	-85,9	192,0	-138,4	123,1	-96,7	192,0	-138,4	136,8
	245	-74,4	192,0	-127,6	123,5	-88,0	192,0	-141,8	123,1	-99,0	192,0	-141,8	136,8
	250	-76,1	192,0	-130,6	123,6	-90,0	192,0	-145,3	123,1	-101,4	192,0	-145,3	136,8
	255	-77,8	192,0	-133,6	123,8	-92,1	192,0	-148,7	123,1	-103,7	192,0	-148,7	136,8
	260	-79,6	192,0	-136,6	123,9	-94,2	192,0	-152,1	123,1	-106,1	192,0	-152,1	136,8
	265	-81,3	192,0	-139,6	124,0	-96,2	192,0	-155,6	123,1	-108,4	192,0	-155,6	136,8
	270	-83,1	192,0	-142,6	124,1	-98,3	192,0	-159,0	123,1	-110,7	192,0	-159,0	136,8
275	-84,8	192,0	-145,6	124,3	-100,4	192,0	-162,5	123,1	-113,1	192,0	-162,5	136,8	
280	-86,6	192,0	-148,6	124,4	-102,4	192,0	-165,9	123,1	-115,4	192,0	-165,9	136,8	
285	-88,3	192,0	-151,6	124,5	-104,5	192,0	-169,4	123,1	-117,8	192,0	-169,4	136,8	
290	-90,0	192,0	-154,6	124,6	-106,6	192,0	-172,8	123,1	-120,1	192,0	-172,8	136,8	
295	-91,8	192,0	-157,6	124,7	-108,6	192,0	-176,2	123,1	-122,4	192,0	-176,2	136,8	
300	-93,5	192,0	-160,6	124,8	-110,7	192,0	-179,7	123,1	-124,8	192,0	-179,7	136,8	
c _{nom} = 30mm	310	-97,0	192,0	-119,6	170,7	-114,8	192,0	-140,4	167,8	-129,4	192,0	-156,6	166,1
	320	-100,5	192,0	-123,9	170,7	-118,9	192,0	-145,5	167,8	-134,1	192,0	-162,3	166,1
c _{nom} = 35mm	305	-95,3	192,0	-117,4	170,7	-112,7	192,0	-137,9	167,8	-127,1	192,0	-153,7	166,1
	315	-98,8	192,0	-121,7	170,7	-116,9	192,0	-143,0	167,8	-131,8	192,0	-159,5	166,1

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

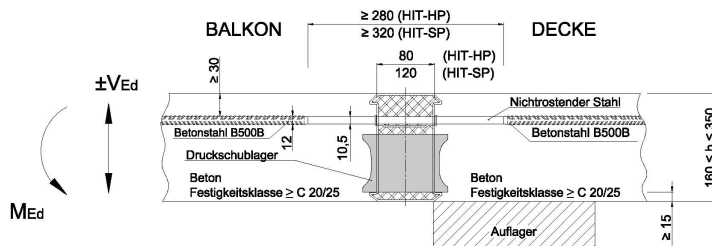

HIT-HP MVX-1612-hh-100-cc													
Spaltzug- und Aufhängebewehrung		C20/25				C25/30				C30/37			
		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}		A _{s,Sp,h}		A _{s,v}	
		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt		beidseitig	direkt	indirekt	
		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]		[cm ²]	[cm ² /m]	[cm ² /m]	
		A _{s,req}	0,27	1,71	5,59		0,28	1,91	5,80		0,28	1,91	5,90
A _{s,min}	0,50	1,13	1,13		0,50	1,13	1,13		0,50	1,13	1,13		
A _{s,prov}	Ø8	Ø6/16,5	Ø8/8,5		Ø8	Ø6/14,5	Ø8/8,5		Ø8	Ø6/14,5	Ø8/8,5		
h-c _{nom}	Punkt 1 (max V)	Punkt 2 (max M)			Punkt 1 (max V)	Punkt 2 (max M)			Punkt 1 (max V)	Punkt 2 (max M)			
	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	M _{Rd,1}	±V _{Rd,1}	M _{Rd,2}	±V _{Rd,2}	
[mm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	[kNm/m]	[kNm]	
Tragfähigkeiten im Grenzzustand der Tragfähigkeit, Momenten-Querkraft-Wertepaare für c _{nom} =30 - 50mm	125	-32,5	192,0	-60,9	91,1	-38,5	192,0	-65,6	98,5	-42,9	192,0	-65,6	112,2
	130	-34,3	192,0	-64,3	92,4	-40,5	192,0	-69,6	98,5	-45,3	192,0	-69,6	112,2
	135	-36,0	192,0	-67,7	93,6	-42,6	192,0	-73,5	98,5	-47,6	192,0	-73,5	112,2
	140	-37,8	192,0	-71,2	94,5	-44,7	192,0	-77,4	98,5	-49,9	192,0	-77,4	112,2
	145	-39,5	192,0	-74,6	95,3	-46,7	192,0	-81,4	98,5	-52,3	192,0	-81,4	112,2
	150	-41,2	192,0	-78,0	96,1	-48,8	192,0	-85,3	98,5	-54,6	192,0	-85,3	112,2
	155	-43,0	192,0	-81,5	96,7	-50,8	192,0	-89,2	98,5	-57,0	192,0	-89,2	112,2
	160	-44,7	192,0	-84,9	97,3	-52,9	192,0	-93,2	98,5	-59,3	192,0	-93,2	112,2
	165	-46,5	192,0	-88,3	97,8	-55,0	192,0	-97,1	98,5	-61,6	192,0	-97,1	112,2
	170	-48,2	192,0	-91,8	98,3	-57,0	192,0	-101,0	98,5	-64,0	192,0	-101,0	112,2
	175	-50,0	192,0	-95,2	98,7	-59,1	192,0	-105,0	98,5	-66,3	192,0	-105,0	112,2
	180	-51,7	192,0	-98,6	99,1	-61,2	192,0	-108,9	98,5	-68,6	192,0	-108,9	112,2
	185	-53,4	192,0	-102,1	99,4	-63,2	192,0	-112,8	98,5	-71,0	192,0	-112,8	112,2
	190	-55,2	192,0	-105,5	99,8	-65,3	192,0	-116,8	98,5	-73,3	192,0	-116,8	112,2
	195	-56,9	192,0	-108,9	100,1	-67,3	192,0	-120,7	98,5	-75,7	192,0	-120,7	112,2
	200	-58,7	192,0	-112,3	100,4	-69,4	192,0	-124,7	98,5	-78,0	192,0	-124,7	112,2
	205	-60,4	192,0	-115,8	100,6	-71,5	192,0	-128,6	98,5	-80,3	192,0	-128,6	112,2
	210	-62,2	192,0	-119,2	100,9	-73,5	192,0	-132,5	98,5	-82,7	192,0	-132,5	112,2
	215	-63,9	192,0	-122,6	101,1	-75,6	192,0	-136,5	98,5	-85,0	192,0	-136,5	112,2
	220	-65,6	192,0	-126,1	101,3	-77,7	192,0	-140,4	98,5	-87,4	192,0	-140,4	112,2
	225	-67,4	192,0	-129,5	101,5	-79,7	192,0	-144,3	98,5	-89,7	192,0	-144,3	112,2
	230	-69,1	192,0	-132,9	101,7	-81,8	192,0	-148,3	98,5	-92,0	192,0	-148,3	112,2
	235	-70,9	192,0	-136,4	101,8	-83,9	192,0	-152,2	98,5	-94,4	192,0	-152,2	112,2
	240	-72,6	192,0	-139,8	102,0	-85,9	192,0	-156,1	98,5	-96,7	192,0	-156,1	112,2
	245	-74,4	192,0	-143,2	102,2	-88,0	192,0	-160,1	98,5	-99,0	192,0	-160,1	112,2
	250	-76,1	192,0	-146,7	102,3	-90,0	192,0	-164,0	98,5	-101,4	192,0	-164,0	112,2
	255	-77,8	192,0	-150,1	102,4	-92,1	192,0	-167,9	98,5	-103,7	192,0	-167,9	112,2
	260	-79,6	192,0	-153,5	102,6	-94,2	192,0	-171,9	98,5	-106,1	192,0	-171,9	112,2
	265	-81,3	192,0	-156,9	102,7	-96,2	192,0	-175,8	98,5	-108,4	192,0	-175,8	112,2
	270	-83,1	192,0	-160,4	102,8	-98,3	192,0	-179,7	98,5	-110,7	192,0	-179,7	112,2
275	-84,8	192,0	-163,8	102,9	-100,4	192,0	-183,7	98,5	-113,1	192,0	-183,7	112,2	
280	-86,6	192,0	-167,2	103,0	-102,4	192,0	-187,6	98,5	-115,4	192,0	-187,6	112,2	
285	-88,3	192,0	-170,7	103,1	-104,5	192,0	-191,5	98,5	-117,8	192,0	-191,5	112,2	
290	-90,0	192,0	-174,1	103,2	-106,6	192,0	-195,5	98,5	-120,1	192,0	-195,5	112,2	
295	-91,8	192,0	-177,5	103,3	-108,6	192,0	-199,4	98,5	-122,4	192,0	-199,4	112,2	
300	-93,5	192,0	-181,0	103,4	-110,7	192,0	-203,3	98,5	-124,8	192,0	-203,3	112,2	
c _{nom} = 30mm	310	-97,0	192,0	-135,7	155,2	-114,8	192,0	-159,4	149,6	-129,4	192,0	-177,6	145,7
	320	-100,5	192,0	-140,7	155,2	-118,9	192,0	-165,2	149,6	-134,1	192,0	-184,1	145,7
c _{nom} = 35mm	305	-95,3	192,0	-133,2	155,2	-112,7	192,0	-156,5	149,6	-127,1	192,0	-174,3	145,7
	315	-98,8	192,0	-138,2	155,2	-116,9	192,0	-162,3	149,6	-131,8	192,0	-180,8	145,7

1) "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

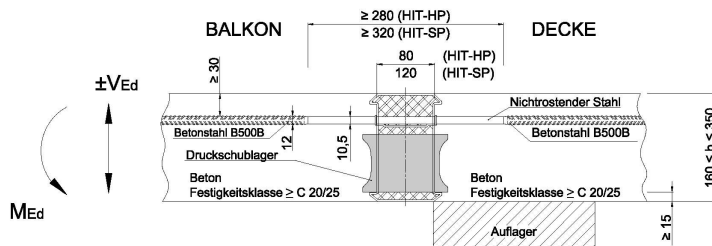

¹⁾ "hh" – Elementhöhe h in [cm] ; "cc" – Betondeckung [mm]

