

Instituto Federal de Educação, Ciência e Tecnologia do Ceará


Curso:Informática Disciplina: SOR 2

Aluno: Gabriel Rodrigues Moreira

Atividade-Presença-03

Parte 1

1 etapa:

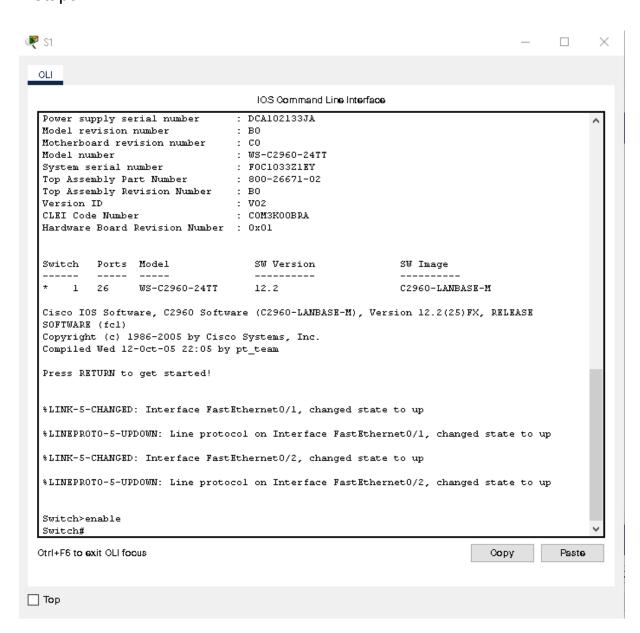

2 etapa:


- a) 0/24
- b) 0/2
- c) 04e515
- d) show startup-config
- e) as configurações de startup ainda não foram definidas

Parte 2

etapa 1:


```
P S1
                                                                                    _ 🗆
                                                                                                 \times
 CLI
                                       IOS Command Line Interface
  interface GigabitEthernet0/2
  interface Vlanl
   no ip address
   shutdown
  line con 0
  line vty 0 4
   login
  line vty 5 15
   login
  Switch#
  Switch#show startup-config
  startup-config is not present
  Switch#
  Switch#configure terminal
  Enter configuration commands, one per line. End with {\tt CNTL/Z}.
  Switch(config)#hostname Sl
  Sl(config)#exit
  S1#
  %SYS-5-CONFIG_I: Configured from console by console
  Ctrl+F6 to exit CLI focus
                                                                               Сору
                                                                                           Paste.
□ Тор
```

etapa 2:

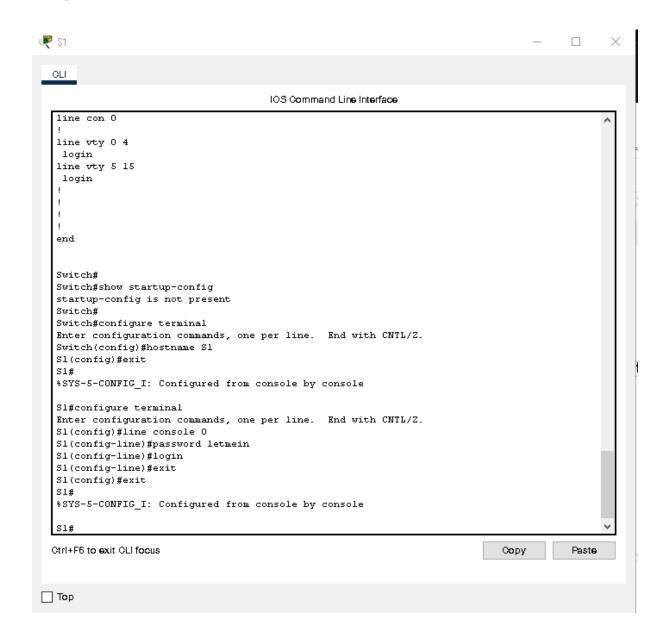


a) sem o login o usuário não pode acessar o router

etapa 3:

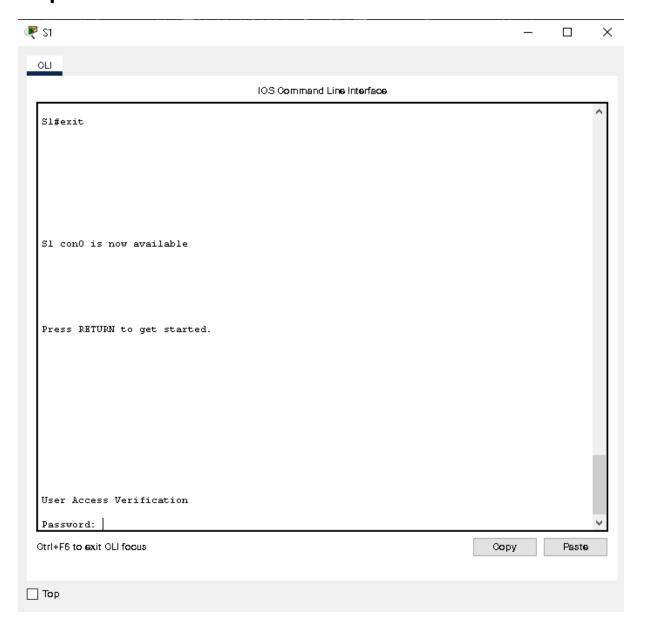

etapa 4:

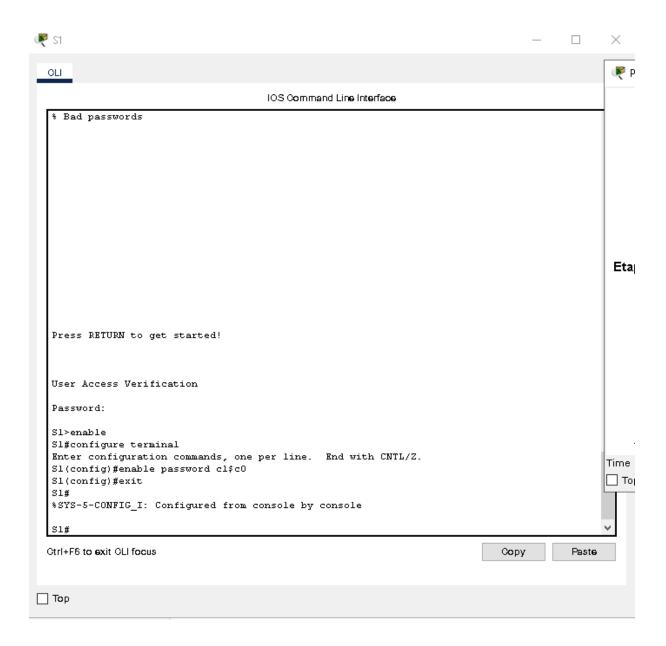

etapa 5:



etapa 6:

```
P S1
                                                                                   - 🗆 X
  OLI
                                       IOS Command Line Interface
  line con 0
   password letmein
   login
   line vty 0 4
   login
   line vty 5 15
   login
   end
  S1#
  Sl#config t
  Enter configuration commands, one per line. End with {\tt CNTL/Z}.
  Sl(config)#enable secret itsasecret
  Sl(config)#sair
   % Invalid input detected at '^' marker.
  Sl(config)#sair
   % Invalid input detected at '^' marker.
  Sl(config)#exit
   %SYS-5-CONFIG_I: Configured from console by console
  Otrl+F6 to exit OLI focus
                                                                              Сору
                                                                                          Paste.
□ Тор
```

etapa 7:

- a) 082D495A041C0C19
- b) para que a senha não fique exposta.

etapa 8:



Parte 3

etapa 1:

- a) quando alguém logar no switch.
- b) porque as configurações são separadas.


Parte 4

etapa 1:

- a) copy run start
- b) show start
- c) sim

Parte 5

etapa 1:

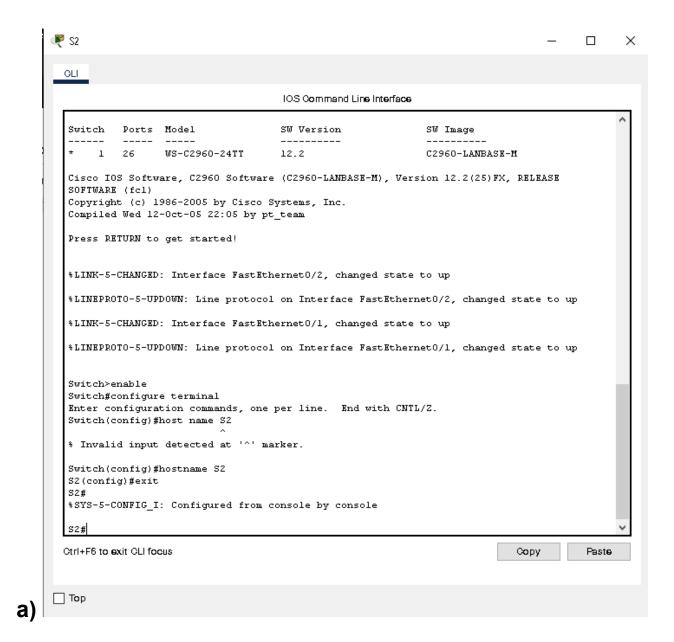

```
₽ S2
                                                                                              ×
       OLL
                                            IOS Command Line Interface
        %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
        %LINK-5-CHANGED: Interface FastEthernetO/1, changed state to up
        %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
        Switch>enable
        Switch#configure terminal
        Enter configuration commands, one per line. End with CNTL/Z.
        Switch(config)#host name S2
        % Invalid input detected at '^' marker.
        Switch(config)#hostname S2
        S2(config)#exit
        S2#
        %SYS-5-CONFIG_I: Configured from console by console
        S2#line console 0
        % Invalid input detected at '^' marker.
        S2#configure terminal
        Enter configuration commands, one per line. End with CNTL/Z.
        S2(config)#line console 0
        S2(config-line)#password letmain
        S2(config-line)#login
        S2(config-line)#exit
        S2(config)#exit
        S2#
        *SYS-5-CONFIG_I: Configured from console by console
        S2#
       Ctrl+F6 to exit CLI focus
                                                                                   Сору
                                                                                              Paste.
     □ Тор
b)
        S2#configure terminal
        Enter configuration commands, one per line. End with CNTL/Z.
        S2(config)#enable password c1$c0
        S2(config)#exit
        S2#
        *SYS-5-CONFIG I: Configured from console by console
c)
       S2#
     S2#config t
     Enter configuration commands, one per line. End with {\tt CNTL/Z}.
     S2(config)#banner motd "Sistema Seguro somente, pessoal autorizado!"
     S2(config)#exit
     S2#
     *SYS-5-CONFIG I: Configured from console by console
d)
```

```
S2#configure t
Enter configuration commands, one per line. End with CNTL/Z.
S2(config)#enable secret itsasecret
S2(config)#exit
S2#
$SYS-5-CONFIG_I: Configured from console by console

S2#

S2#copy run start
Destination filename [startup-config]?
Building configuration...
[OK]
```

f)

S2# S2#