MALLEABLE IRON WIDE-MOUTH TOP BEAM CLAMP

Type: 3034 **Doc No: DS-1A7-3034-01-E**

1.0 PRODUCT OVERVIEW

The clamp is a kind of clamping connector connected with the steel structure. The clamping system can ensure the safe load after the connection is completed, and can be flexibly used in the installation process to reduce the overall installation cost.

The use of wire clamp can avoid drilling or welding on the surface of steel structure or angle iron. When making connection adjustment, just loosen the screws, rearrange and tighten the screws to complete the connection. The existing steel structure connection will not be weakened and the protective coating on the steel structure surface will not be damaged.



Dimensions:

3/8” (DN10)-1/2” (DN15)

Design Standard:

Design by Meide Group

Connection Standard:

ANSI/ASME B 1.1

Working Pressure:

The load of 10 specifications does not exceed 2500N, the torque does not exceed 6.78 N • m, the load of 15 specifications does not exceed 3500N, and the torque does not exceed 6.78 N • m.

Application:

This product is mainly used for steel structures or angle iron surfaces that cannot

be drilled or welded. The load of 10 specifications does not exceed 2500N, the torque does not exceed 6.78 N • m, the load of 15 specifications does not exceed 3500N, and the torque does not exceed 6.78 N • m.

Pipe Material:

Q235 Carbon steel alloy steel bolt and Q235B Carbon steel alloy steel nut：
GB/T 708、GB/T 700

Surface Treatment：


- Black
- Hot-dip galvanizing
- Electric zinc plating
- Electric zinc plating base on hot dipped galvanizing
- Others would be available upon clients' detailed request

2.0 APPROVALS


c UL us LISTED FM APPROVED

3.0 DIMENSIONS AND PERFORMANCE

DIMENSIONS：

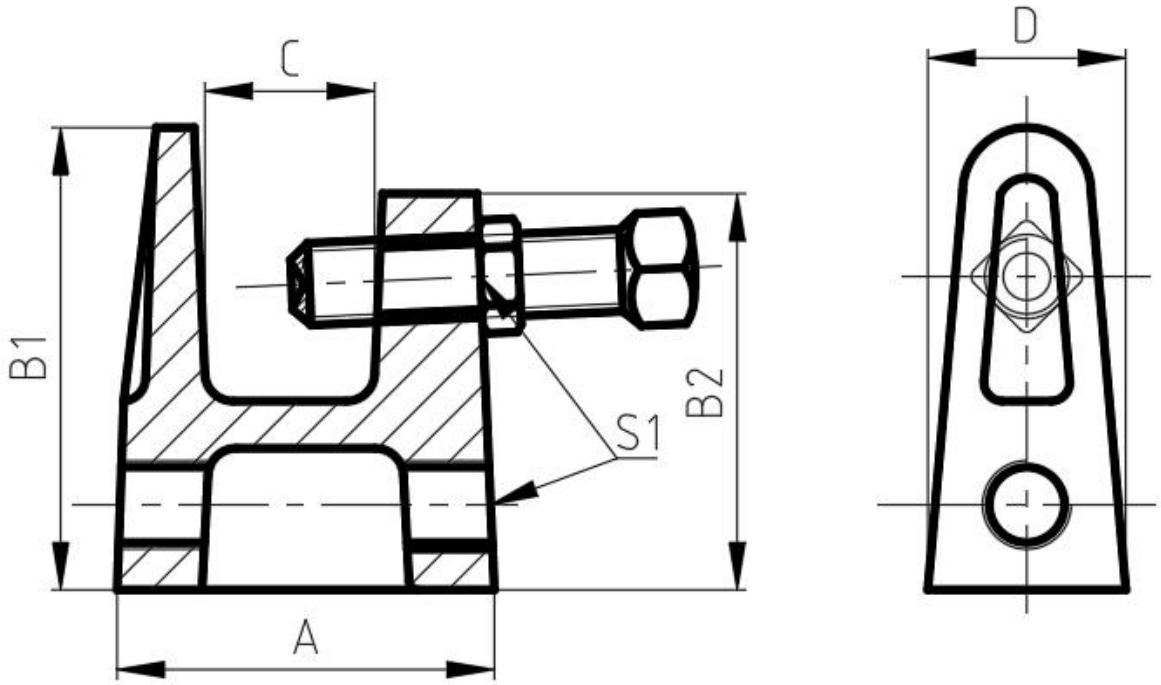


3034 10

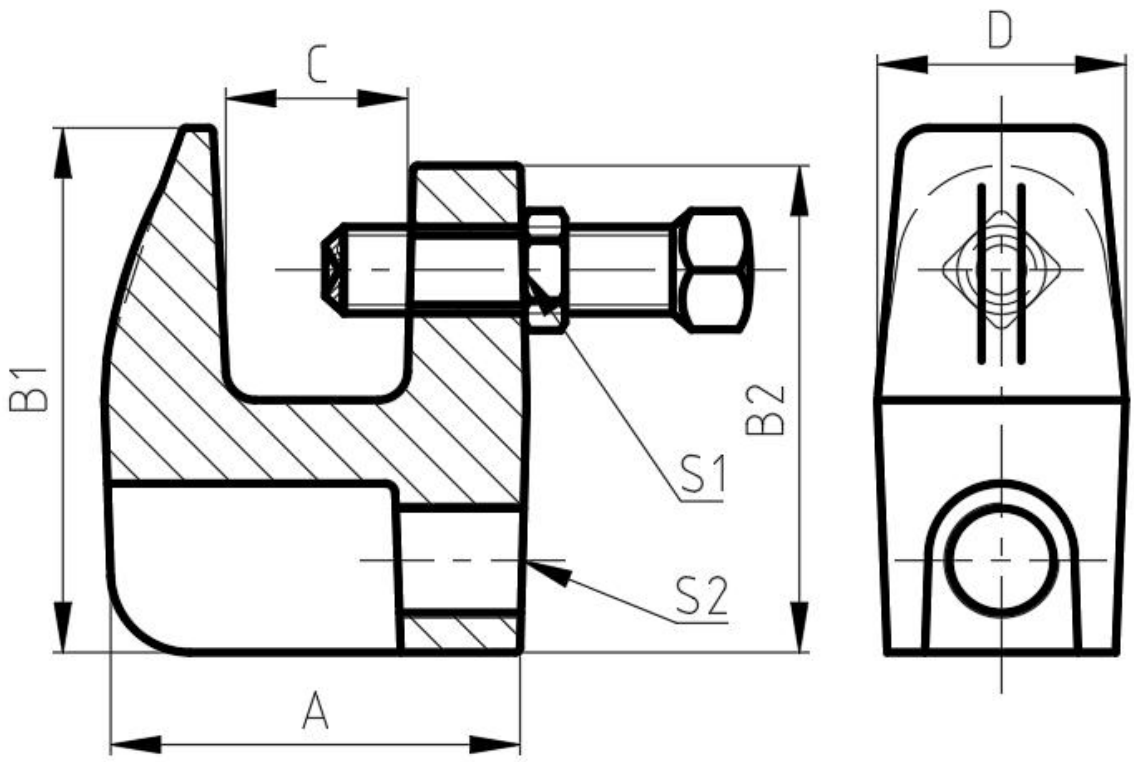

3034 15

Size	A	B1	B2	C	D
10	40±1.0	49±1.0	42±1.0	18±0.85	21±0.85
15	41.2±1.0	52.8±1.0	49±1.0	18.3±0.85	25±0.9
S1	**S2**	**FM**	**CUL/UL**		
3/8-16UNC-2B	/	Yes	Yes		
3/8-16UNC-2B	1/2-13UNC-2B	Yes	Yes		

PERFORMANCE：

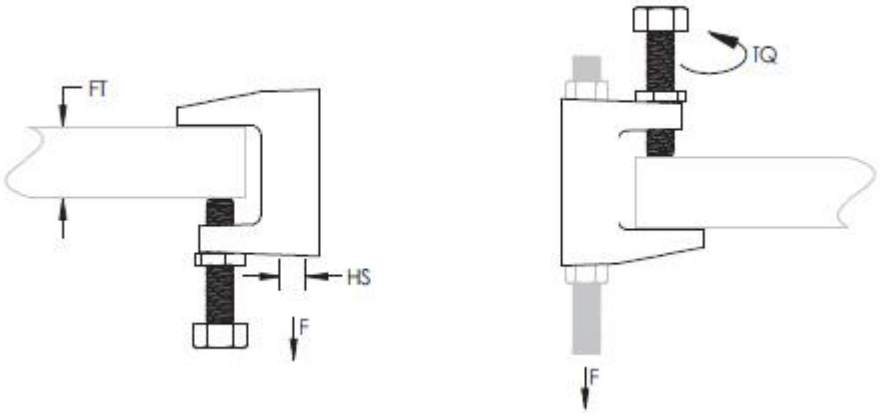

Size		load F		torque QT	
inch	(mm)	lb-f	(Newtons)	Lb • in	(N • m)
3/8	(9.5)	561	(2500)	60	(6.78)
1/2	(12.7)	786	(3500)	60	(6.78)

4.0 REFERENCE MATERIALS

UL 203 Certification standards、FM Certification standards