

# Linux Networking

Markus Gachnang und Martin Sprecher

25. September 2020

# Inhaltsverzeichnis

<b>1</b>	<b>Ausgangslage</b>	<b>2</b>
<b>2</b>	<b>Kochbuch</b>	<b>2</b>
2.1	General . . . . .	2
2.2	IP Address Assignment . . . . .	2
2.3	BIRD . . . . .	3
2.4	IP Forwarding . . . . .	5
2.5	Script . . . . .	5
<b>3</b>	<b>Verifizierung</b>	<b>9</b>
3.1	Route Failover . . . . .	9
3.2	Passive Interfaces . . . . .	9
3.3	Access Website . . . . .	9
<b>4</b>	<b>Performanz</b>	<b>9</b>
<b>5</b>	<b>Referenzblatt</b>	<b>10</b>
<b>6</b>	<b>Anhänge</b>	<b>10</b>
6.1	Routing . . . . .	10
6.2	Firewall . . . . .	10
6.3	Quellennachweis . . . . .	11
<b>7</b>	<b>Nachwort</b>	<b>11</b>

# 1 Ausgangslage

## 2 Kochbuch

It is expected of you to hand in a step-by-step cookbook for the whole final setup. Explain important commands and reason your decisions. We should be able to fully retrace what you did to be able to assess your work. One cookbook is expected per group.

### 2.1 General

Change the password ... Also, change the hostname to the name given in LTB.

Wir verbinden uns auf jeden Container und ändern den Inhalt der Datei `/etc/hostname` auf den Namen des Containers. Dafür benützen wir `sudo nano /etc/hostname`, ändern den Namen und speichern mit Ctrl-O und beenden nano mit Ctrl-X. Zusätzlich rufen wir `sudo hostname <newHostName>` auf.

Wir setzen das Passwort des jeweiligen Containers auf seinen Namen mit `sudo passwd ins`.

### 2.2 IP Address Assignment

Use Netplan to assign the ip addresses to the interfaces. ...

Name	IP
Client	ENS2: 172.16.0.2
R1	ENS2: 172.16.0.1 ENS3: 10.0.1.1
R2	ENS2: 10.0.1.2 ENS3: 10.0.4.1 ENS4: 10.0.2.1
R3	ENS2: 10.0.2.2 ENS3: 10.0.5.1 ENS4: 10.0.3.1
R4	ENS2: 10.0.4.2 ENS3: 10.0.5.2 ENS4: 10.0.100.1
R5	ENS2: 10.0.3.2 ENS3: 192.168.1.1
Server	?: 192.168.1.100
MITM	ENS2: 10.0.100.2

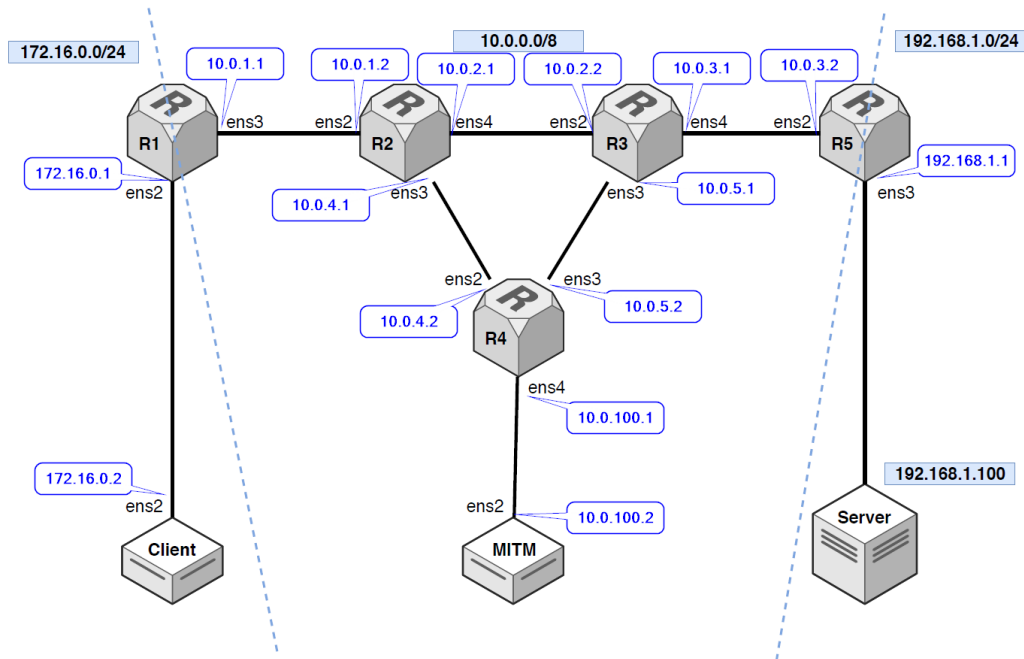


Abbildung 1: Netplan

Die Adressen sind so definiert, dass jede Verbindung ein eigenes Subnet hat. Bird sucht seine Nachbarn anhand des Broadcasts.

Wir ändern den netplan mit `sudo nano /etc/netplan/50-cloud-init.yaml`.

```

1 # This file is generated from information provided by
2 # the datasource. Changes to it will not persist across an instance.
3 # To disable cloud-init's network configuration capabilities, write a file
4 # /etc/cloud/cloud.cfg.d/99-disable-network-config.cfg with the following:
5 # network: {config: disabled}
6 network:
7   version: 2
8   ethernets:
9     ens2:
10       dhcp4: false
11       addresses: [172.16.0.1/24]
12     ens3:
13       dhcp4: false
14       addresses: [10.0.1.1/24]

```

Listing 1: /etc/netplan/50-cloud-init.yaml on R1

Mit `netplan apply` übernehmen wir die neu definierten IP-Adressen.

## 2.3 BIRD

Now, your routers must run OSPF. ...

- OSPFv2 must run on the routers.
- Find a way to protect the CPU from too much OSPF processing.
- A restart of BIRD should not result in lost routes.

Wir definieren die Configuration von Bird indem wir `"/etc/bird/bird.conf"` anpassen.

```

1 # This file is generated from information provided by $0
2 # Please refer to the documentation in the bird-doc package or BIRD User's
3 # Guide on http://bird.network.cz/ for more information on configuring BIRD
  and

```

```

4 # adding routing protocols.
5
6 # log "/var/log/bird.log" all;
7 log syslog { info, remote, warning, error, auth, fatal, bug };
8
9 # Change this into your BIRD router ID.
10 router id 1.1.1.1;
11
12 # The Device protocol is not a real routing protocol. It doesn't generate
13 # any
14 # routes and it only serves as a module for getting information about
15 # network
16 # interfaces from the kernel.
17 protocol device {
18     scan time 10; # Scan interfaces every 10 seconds
19 }
20
21 # The Kernel protocol is not a real routing protocol. Instead of
22 # communicating
23 # with other routers in the network, it performs synchronization of BIRD's
24 # routing tables with the OS kernel.
25 protocol kernel {
26     metric 64;          # Use explicit kernel route metric to avoid collisions
27                        # with non-BIRD routes in the kernel routing table
28     persist;           # Don't remove routes on BIRD shutdown
29     scan time 20;      # Scan kernel routing table every 20 seconds
30     import none;
31     export all;        # Actually insert routes into the kernel routing table
32 }
33
34 protocol rip {
35     export all;
36     import all;
37     interface "*";
38 }
39
40 protocol static {
41     import all;
42
43     172.16.0.0/24 via "ens2"
44 }
45
46 protocol ospf {
47     tick 10;           # The routing table calculation and clean-up of areas'
48                        # databases is not performed when a single link
49                        # state change arrives. To lower the CPU utilization,
50                        # it's processed later at periodical intervals of num
51                        # seconds. The default value is 1.
52
53     import all;
54     #export filter {
55     #     ospf_metric1 = 1000;
56     #     if source = RTS_STATIC then accept; else reject;
57     #};
58
59     area 0 {
60         networks {
61             10.0.0.0/8;
62             172.16.0.0/24;
63             192.168.1.0/24;
64         };
65
66         interface "ens*" {
67             cost 5;
68             type broadcast;
69             hello 5;
70             retransmit 2;

```

```

65         wait 10;
66         dead 20;
67     };
68
69     interface "*" {
70         cost 1000;
71         stub;
72     };
73 };
74 }

```

Listing 2: /etc/bird/bird.conf on R1

Zuerst definierten wir die "router id" nach Vorgabe. Unter "protocol kernen" definierten wird dass alle routes in die kernel routing table exportiert werden und dort persistent sind, dadurch funktioniert das Routing weiterhin wenn Bird beendet wird.

Unter "protocol static" werden statische routes eingetragen. Nur R1 und R5 haben dort Einträge um ein routing nach Aussen / Innen des Routing-Netzwerkes zu ermöglichen.

Unter "protocol ospf" definieren wird das Verhalten des OSPF. Wir setzten "tick" auf 10, dadurch werden Änderungen innerhalb von 10 Sekunden gesammelt, bevor diese ausgeführt werden. Dadurch wird das Netzwerk weniger geflutet und die CPU ausgelastet.

Wir definieren dass die "area 0" aus den Netzwerken "10.0.0.0/8", "172.16.0/24" und "192.168.1.0/24" besteht. Dadurch weiss OSPF, welche Adressen geroutet werden sollen.

Zusätzlich definieren wir, welche Interface von OSPF verwendet werden sollen. Dort definieren wir auch, in welchem Intervall zum Beispiel ein "hello" geschickt wird. Um ebenfalls das fluten des Netzwerks zu minimieren, werden gewisse Werte höher gesetzt als der Standardwert.

Zum Schluss definieren wir, das alle restlichen Interfaces "stub" sind und daher zu ignorieren sind.

Wir haben eine Vorlage aus dem Internet übernommen [1] und die einzelnen Einstellungen anhand von [2] überprüft und angepasst.

## 2.4 IP Forwarding

"IP-Forwarding" ist standartgemäs ausgeschaltet. Mit `sysctl net.ipv4.ip_forward=1` aktivieren wird das weiterleiten der Packete erlaubt.

## 2.5 Script

Da wir keine Ahnung von "Bird" hatten, wurde das Anpassen und Testen der Configuration aufwendig, weshalb wir kurzer Hand ein Script erzeugten, welche die zuvor definierten Einstellungen anwendet:

```

1  #!/bin/bash
2
3  setup_hostname()
4  {
5      echo "Set hostname to $1"
6      echo "$1" > '/etc/hostname'
7      hostname $1
8  }
9
10 setup_ip()
11 {
12     echo "Setup netplan"
13     cat <<EOF > '/etc/netplan/50-cloud-init.yaml'
14 # This file is generated from information provided by $0
15 # Changes to it will not persist across an instance.
16 # To disable cloud-init's network configuration capabilities, write a file
17 # /etc/cloud/cloud.cfg.d/99-disable-network-config.cfg with the following:

```

```

18 # network: {config: disabled}
19 network:
20     version: 2
21     ethernets:
22 EOF
23     if [ $# -ge "1" ]; then
24         echo " ens2 = $1"
25         cat <<EOF >> '/etc/netplan/50-cloud-init.yaml'
26         ens2:
27             dhcp4: false
28             addresses: [$1]
29 EOF
30     fi
31     if [ $# -ge "2" ]; then
32         echo " ens3 = $2"
33         cat <<EOF >> '/etc/netplan/50-cloud-init.yaml'
34         ens3:
35             dhcp4: false
36             addresses: [$2]
37 EOF
38     fi
39     if [ $# -ge "3" ]; then
40         echo " ens4 = $3"
41         cat <<EOF >> '/etc/netplan/50-cloud-init.yaml'
42         ens4:
43             dhcp4: false
44             addresses: [$3]
45 EOF
46     fi
47 }
48
49 setup_bird()
50 {
51     echo "Setup bird"
52     cat <<EOF > '/etc/bird/bird.conf'
53 # This file is generated from information provided by $0
54 # Please refer to the documentation in the bird-doc package or BIRD User's
55 # Guide on http://bird.network.cz/ for more information on configuring BIRD
56 # and
57 # adding routing protocols.
58 # log "/var/log/bird.log" all;
59 log syslog { info, remote, warning, error, auth, fatal, bug };
60
61 # Change this into your BIRD router ID.
62 router id $1;
63
64 # The Device protocol is not a real routing protocol. It doesn't generate
65 # any
66 # routes and it only serves as a module for getting information about
67 # network
68 # interfaces from the kernel.
69 protocol device {
70     scan time 10; # Scan interfaces every 10 seconds
71 }
72
73 # The Kernel protocol is not a real routing protocol. Instead of
74 # communicating
75 # with other routers in the network, it performs synchronization of BIRD's
76 # routing tables with the OS kernel.
77 protocol kernel {
78     metric 64; # Use explicit kernel route metric to avoid collisions
79     # with non-BIRD routes in the kernel routing table
80     persist; # Don't remove routes on BIRD shutdown
81     scan time 20; # Scan kernel routing table every 20 seconds
82     import none;

```

```

80     export all;          # Actually insert routes into the kernel routing table
81 }
82
83
84 protocol rip {
85     export all;
86     import all;
87     interface "*";
88 }
89
90 protocol static {
91     import all;
92
93 EOF
94
95     for var in "$@"
96     do
97         echo " $var"
98         if [ "$var" != "$1" ]; then
99             echo "         route $var;" >> '/etc/bird/bird.conf'
100         fi
101     done
102
103     cat <<EOF >> '/etc/bird/bird.conf'
104 }
105
106 protocol ospf {
107     tick 10;              # The routing table calculation and clean-up of areas'
                           # databases is not performed when a single link
108                           # state change arrives. To lower the CPU utilization,
                           # it's processed later at periodical intervals of num
109                           # seconds. The default value is 1.
110
111     import all;
112     #export filter {
113     #    ospf_metric1 = 1000;
114     #    if source = RTS_STATIC then accept; else reject;
115     #};
116
117     area 0 {
118         networks {
119             10.0.0.0/8;
120             172.16.0.0/24;
121             192.168.1.0/24;
122         };
123
124         interface "ens*" {
125             cost 5;
126             type broadcast;
127             hello 5;
128             retransmit 2;
129             wait 10;
130             dead 20;
131         };
132
133         interface "*" {
134             cost 1000;
135             stub;
136         };
137     }
138
139 EOF
140     sysctl net.ipv4.ip_forward=1
141     ip route flush table main
142     bird -p
143     birdc down

```



```

144     # bird -R
145     systemctl start bird
146     birdc show status
147     systemctl status bird
148 }
149
150 setup()
151 {
152     echo "Start setup for '$1'"
153     case $1 in
154         Client)
155             setup_hostname "Client"
156             setup_ip "172.16.0.2/24"
157             echo "                gateway4: 172.16.0.1" >> '/etc/netplan/50-
                cloud-init.yaml'
158             ;;
159         MITM)
160             setup_hostname "MITM"
161             setup_ip "10.0.100.2"
162             echo "                gateway4: 10.0.100.1" >> '/etc/netplan/50-
                cloud-init.yaml'
163             ;;
164         R1)
165             setup_hostname "R1"
166             setup_ip "172.16.0.1/24" "10.0.1.1/24"
167             setup_bird "1.1.1.1" "172.16.0.0/24 via \"ens2\""
168             # "10.0.0.0/8 via \"ens3\""
169             ;;
170         R2)
171             setup_hostname "R2"
172             setup_ip "10.0.1.2/24" "10.0.4.1/24" "10.0.2.1/24"
173             setup_bird "2.2.2.2"
174             # "10.0.1.0/24 via \"ens2\"" "10.0.4.0/24 via \"ens3\""
175             "10.0.3.0/24 via \"ens4\""
176             ;;
177         R3)
178             setup_hostname "R3"
179             setup_ip "10.0.2.2/24" "10.0.5.1/24" "10.0.3.1/24"
180             setup_bird "3.3.3.3"
181             # "10.0.2.0/24 via \"ens2\"" "10.0.4.0/24 via \"ens3\""
182             "10.0.5.0/24 via \"ens4\""
183             ;;
184         R4)
185             setup_hostname "R4"
186             setup_ip "10.0.4.2/24" "10.0.5.2/24" "10.0.100.1/24"
187             setup_bird "4.4.4.4"
188             ;;
189         R5)
190             setup_hostname "R5"
191             setup_ip "10.0.3.2/24" "192.168.1.1/24"
192             setup_bird "5.5.5.5" "192.168.1.0/24 via \"ens3\""
193             # "10.0.0.0/8 via \"ens2\""
194             ;;
195         *)
196             echo "name is unknown..."
197             exit 1
198             ;;
199     esac
200     netplan apply
201 }
202
203 echo "CldInf Networker"
204 if [ "$EUID" -ne 0 ]; then
205     echo "Please run as root"
206     exit 1
207 elif [ $# -lt "1" ]; then

```

```

206     hostname=$(hostname)
207     case $hostname in
208         Client|MITM|R1|R2|R3|R4|R5)
209             setup $hostname
210             ;;
211         *)
212             echo "Usage: $0 <name>"
213             echo " name = Client, MITM, [R1 .. R5]"
214             exit 1
215             ;;
216     esac
217 else
218     setup $1
219 fi

```

Listing 3: /doConfig.sh

## 3 Verifizierung

Verify your routing implementation. Explain which exact commands you used for each verification step and show how they provide prove that your setup works.

### 3.1 Route Failover

Verify that your setup works. Prove that a route failover takes place in case of a route outage. To do that, a well known tool can be used.

### 3.2 Passive Interfaces

Show that no OSPF packets are sent into the client and server networks, too. `tcpdump` and `tshark` are good tools for that, sniff on the suspicious interfaces and filter for OSPFv2 packets. To be sure that your filter works, sniff on an interface where you expect OSPF-messages, too.

Wir haben versucht, anhand von Wireshark mit "Sshdump" und "Ciscodump" auf den Interfaces zu lauschen, erhielten aber keine Pakete. Wir versuchten ebenfalls mit `tcpdump` die Pakete aufzufangen. Dies klappte zwar, aber das pcap-File wollte sich einfach nicht übertragen lassen. Wir sind anhand von [3] vorgegangen.

### 3.3 Access Website

Finally, you must be able to access the webpage from the webserver. You can use `curl` or `wget` for that. The webserver listens on port 8080.

## 4 Performanz

Provide the measurement before and after the appliance of the `tc` commands. Provide the exact used `tc` commands.

## 5 Referenzblatt

We also expect you to hand in a reference sheet for all the net-work commands used in this lab. Just list every command and its function. This reference must not be longer than one page.

Befehl	Funktion
<code>sudo nano &lt;Pfad&gt;</code>	Öffnen eines Files im Texteditor
<code>sudo hostname &lt;newHostName&gt;</code>	Zum ändern des Hostnames
<code>sudo passwd &lt;user&gt;</code>	Ändert das Passwort des momentanen Benutzers.
<code>sudo birdc</code>	Zum kommunizieren mit einem laufenden BIRD. Einzelne Befehle, die hier nicht aufgeführt sind, sind auf [4] zu finden.
<code>sudo birdc show status</code>	Anzeigen vom router status, BIRD version, Laufzeit und Zeitpunkt von der letzten Rekonfiguration.
<code>sudo birdc show interfaces</code>	Anzeigen der Liste von allen Interfaces. Zeigt für jedes Interface, Typ, Status, MTU und die zugewiesene Adresse an.
<code>sudo birdc show ospf interface</code>	Anzeigen von detaillierten Informationen über die OSPF Interfaces.
<code>birdc show ospf neighbors</code>	Anzeigen der Liste mit allen OSPF Nachbarn deren Zustand.
<code>birdc show ospf state</code>	Anzeigen von detaillierten Informationen über OSPF Bereiche basierend auf der link-state database. Es zeigt die Netzwerk Topologie, stub Netzwerke, zusammengeführte Netzwerke und Router von anderen Areas und externen Routen. Ausserdem zeigt es erreichbare Netzwerk Knoten an.
<code>ping -c &lt;num&gt; &lt;ip&gt;</code>	sendet num mal einen Ping an die ip
<code>blub</code>	blob
<code>blub</code>	blob
<code>blub</code>	blob
<code>blub</code>	blob

## 6 Anhänge

### 6.1 Routing

- Your delivered report must include the new usernames and pass-words of the hosts.
- Your delivery must contain the created netplan files and an ad-dress plan.
- Attach the BIRD config files to your cookbook and explain how you achieve the minimal requirements.
- Verify your routing implementation. Explain which exact commands you used for each verification step and show how they provide prove that your setup works.

Erarbeitung der BIRD-config ist im 2.3 erläutert. Verifikation der Routing unter 3.

### 6.2 Firewall

We're interested in the used `nmap` command, where the firewall runs and why you've chosen that location. Print the ruleset of the firewall and attach it to your report.

### 6.3 Quellennachweis

- [1] Ondrej Sury, "Ospf\_example · wiki · labs / bird internet routing daemon · gitlab," 25.09.2020. [Online]. Available: [https://gitlab.nic.cz/labs/bird/-/wikis/OSPF\\_example#:~:text=OSPF%20example,ptp%20links%20to%20other%20routers](https://gitlab.nic.cz/labs/bird/-/wikis/OSPF_example#:~:text=OSPF%20example,ptp%20links%20to%20other%20routers).
- [2] Tomas Filip - HIPPO © 2004 and C. F. ALL: WEBarium, "The bird internet routing daemon project," 25.09.2020. [Online]. Available: [https://bird.network.cz/?get\\_doc&v=20&f=bird-6.html](https://bird.network.cz/?get_doc&v=20&f=bird-6.html)
- [3] A. Phillips, "How to run a remote packet capture with wireshark and tcpdump," *Comparitech*, 27.12.2018. [Online]. Available: <https://www.comparitech.com/net-admin/tcpdump-capture-wireshark/>
- [4] Tomas Filip - HIPPO © 2004 and C. F. ALL: WEBarium, "The bird internet routing daemon project," 25.09.2020. [Online]. Available: [https://bird.network.cz/?get\\_doc&v=20&f=bird-4.html](https://bird.network.cz/?get_doc&v=20&f=bird-4.html)

## 7 Nachwort

Kein Mitglied unserer Gruppe hat CN2 besucht. Alleine bis wir 2.3 zum laufen kriegten haben wir gemeinsam mehr als 30 Stunden aufwenden müssen.