



Marlin 2.0.x Firmware Changes

In Platformio.ini file
change: `default_envs = BIGTREE_GTR_V1_0`



In Configuration.h file change:
`#define SERIAL_PORT -1`
`#define SERIAL_PORT_2 3`
`#define MOTHERBOARD BOARD_BTT_GTR_V1_0`

Note: Serial Port definitions in Marlin 2.0.x for GTR Board:
-1: USB Port; 3: TFT Port; 6: WIFI Port;
1: TX1/RX1 on Raspberry Pi Connector

0 - M1; MS1 0 - M0; MS0
1 - M2; MS2 OR 1 - M1; MS1
2 - M3; MS3 2 - M2; MS2

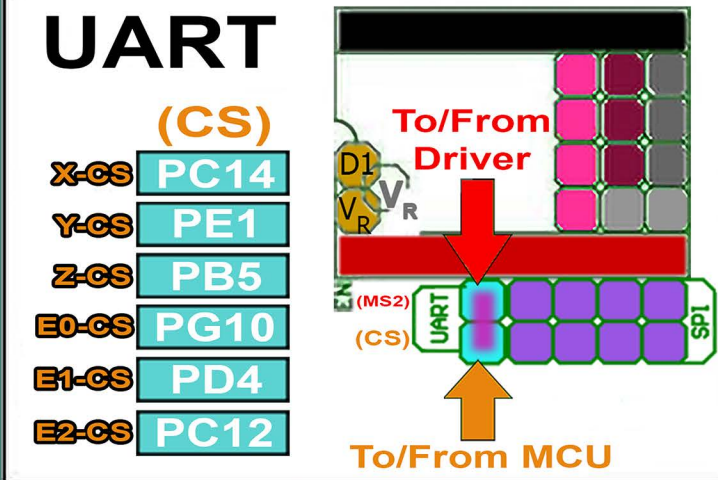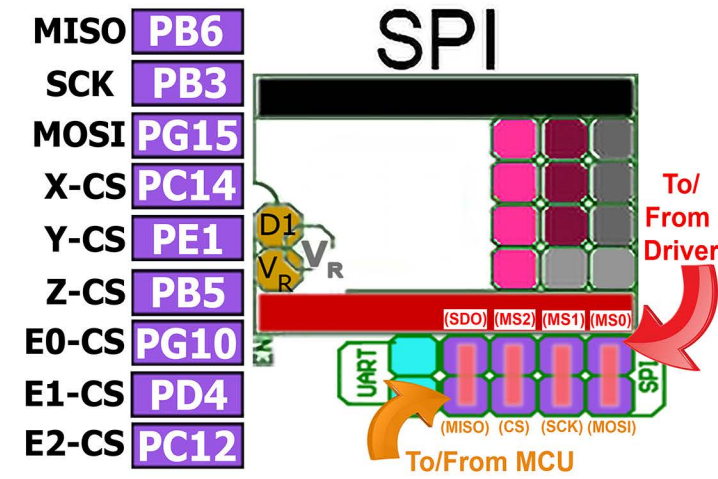

*1 THE CORRECTED PIN VALUE. THE CORRECT PIN VALUE CAME FROM BTT's GTR V1.0 SCHEMATIC DIAGRAM!

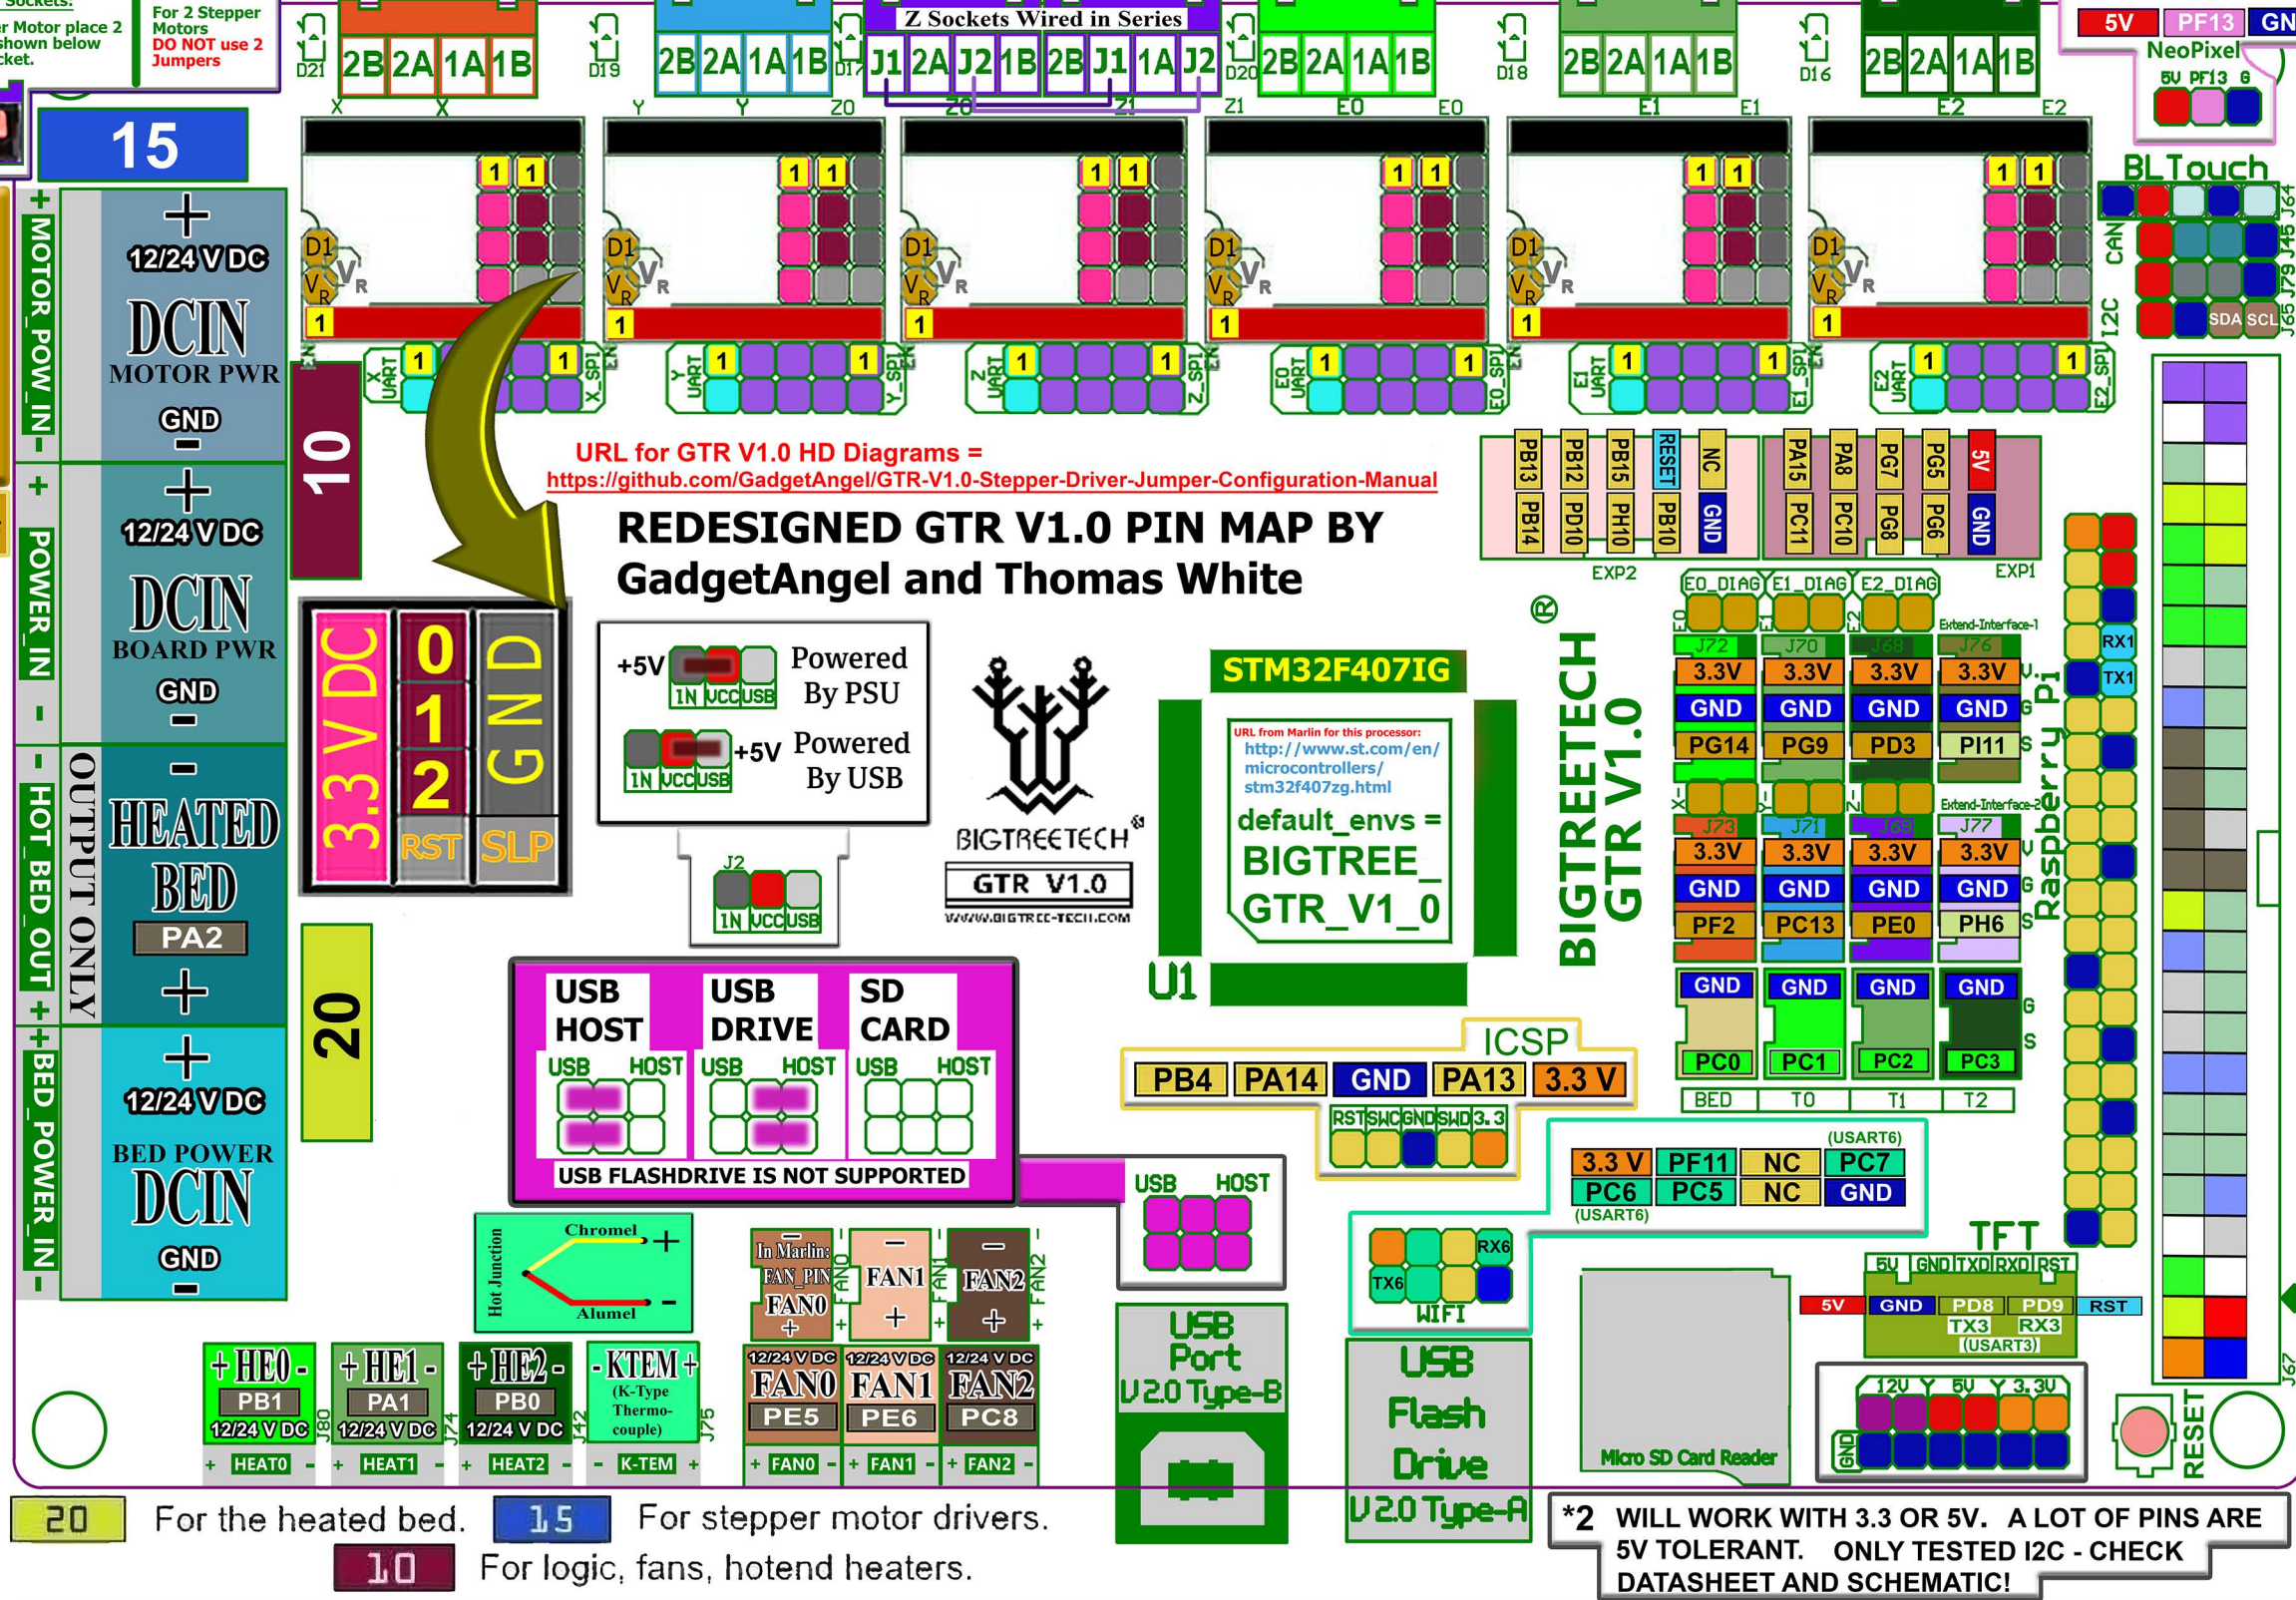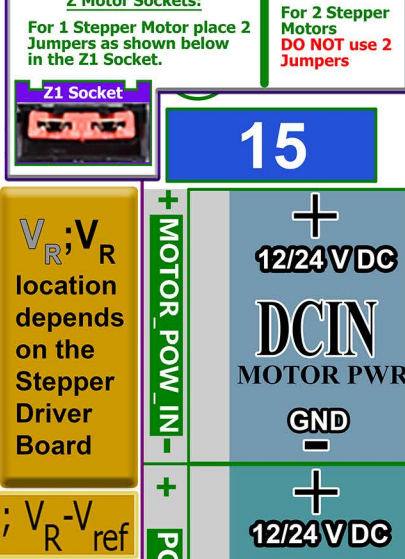

EN			STEP			DIR			EN			STEP			DIR			EN			STEP			DIR			EN			STEP			DIR		
X	PF1	PC15	PF0	Y	PE4	PE3	PE2	Z	PB9	PB8	PB7	*1	E0	PG13	PG12	PG11	E1	PD7	PD6	PD5	E2	PD2	PD1	PD0											

