

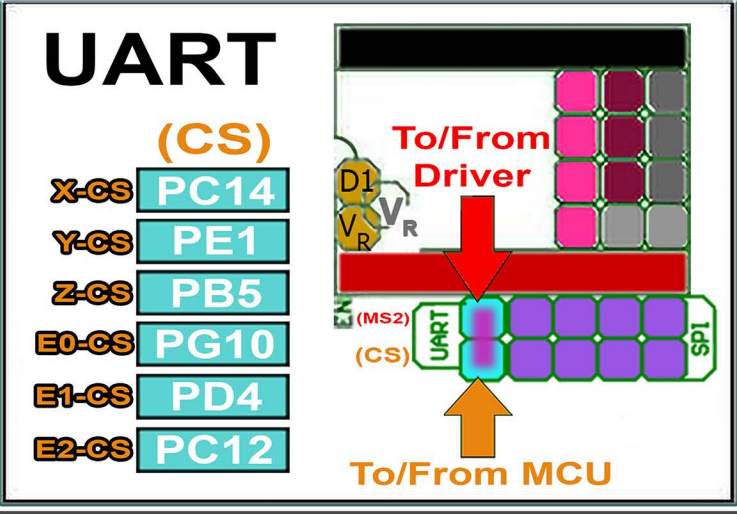
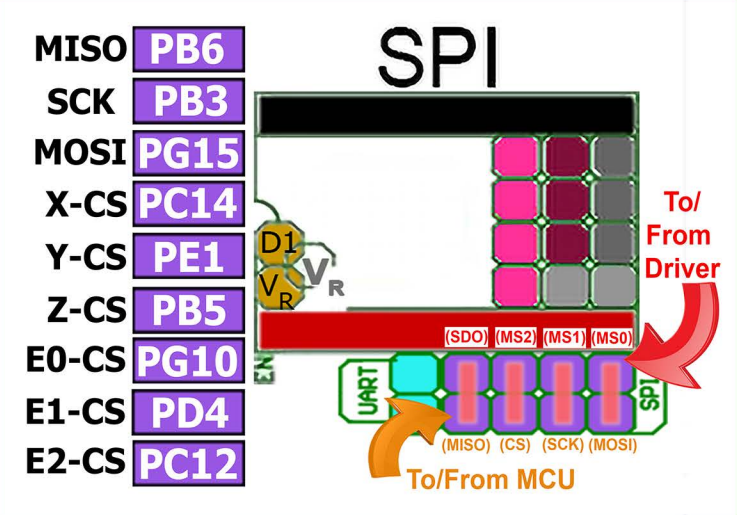


**Marlin 2.0.x Firmware Changes**  
In Platformio.ini file  
change: `default_envs =`  
`BIGTREE_GTR_V1_0`  
In Configuration.h file change:  
`#define SERIAL_PORT -1`  
`#define SERIAL_PORT_2 3`  
`#define MOTHERBOARD`  
`MOTHERBOARD BOARD_BTT_GTR_V1_0`  
**Note:** Serial Port definitions in Marlin 2.0.x for GTR Board:  
-1: USB Port; 3: TFT Port; 6: WIFI Port;  
1: TX1/RX1 on Raspberry Pi Connector

0 - M1; MS1      0 - M0; MS0  
1 - M2; MS2 OR 1 - M1; MS1  
2 - M3; MS3      2 - M2; MS2

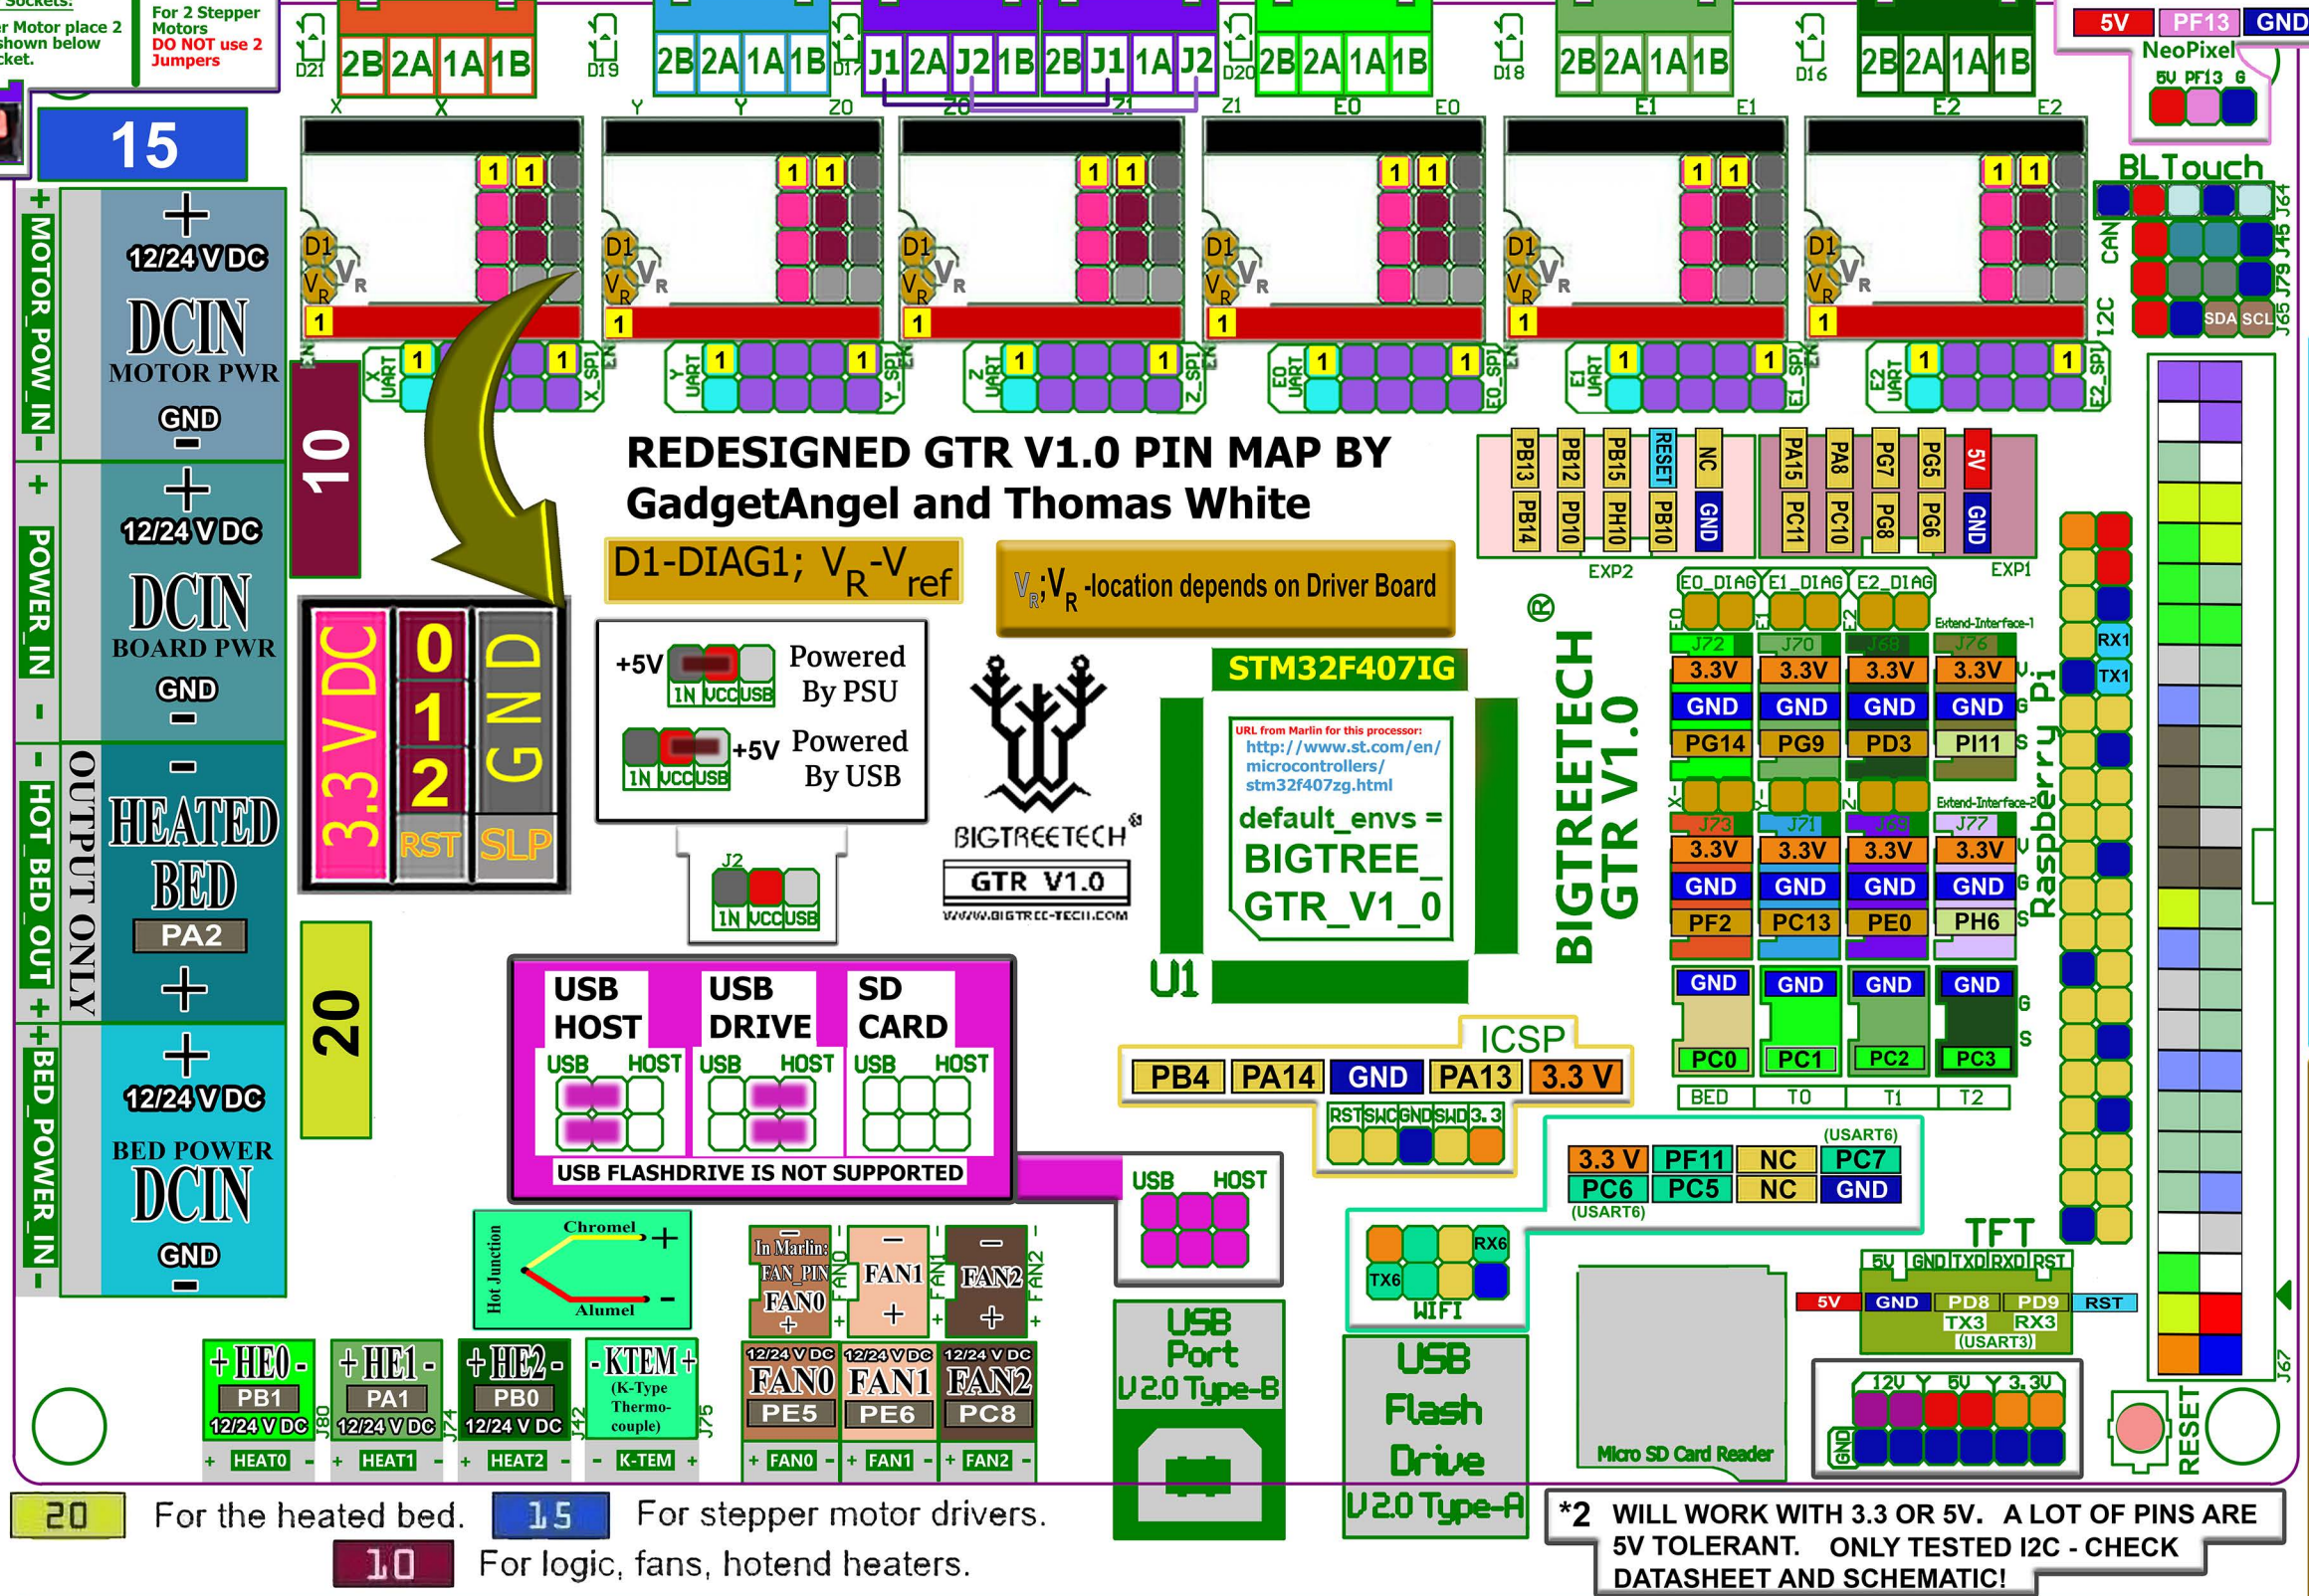

\*1 THE CORRECTED PIN VALUE. THE CORRECT PIN VALUE CAME FROM BTT's GTR V1.0 SCHEMATIC DIAGRAM!

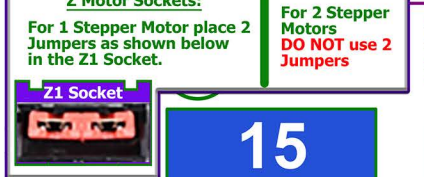

\*2 WILL WORK WITH 3.3 OR 5V. A LOT OF PINS ARE 5V TOLERANT. ONLY TESTED I2C - CHECK DATASHEET AND SCHEMATIC!

