
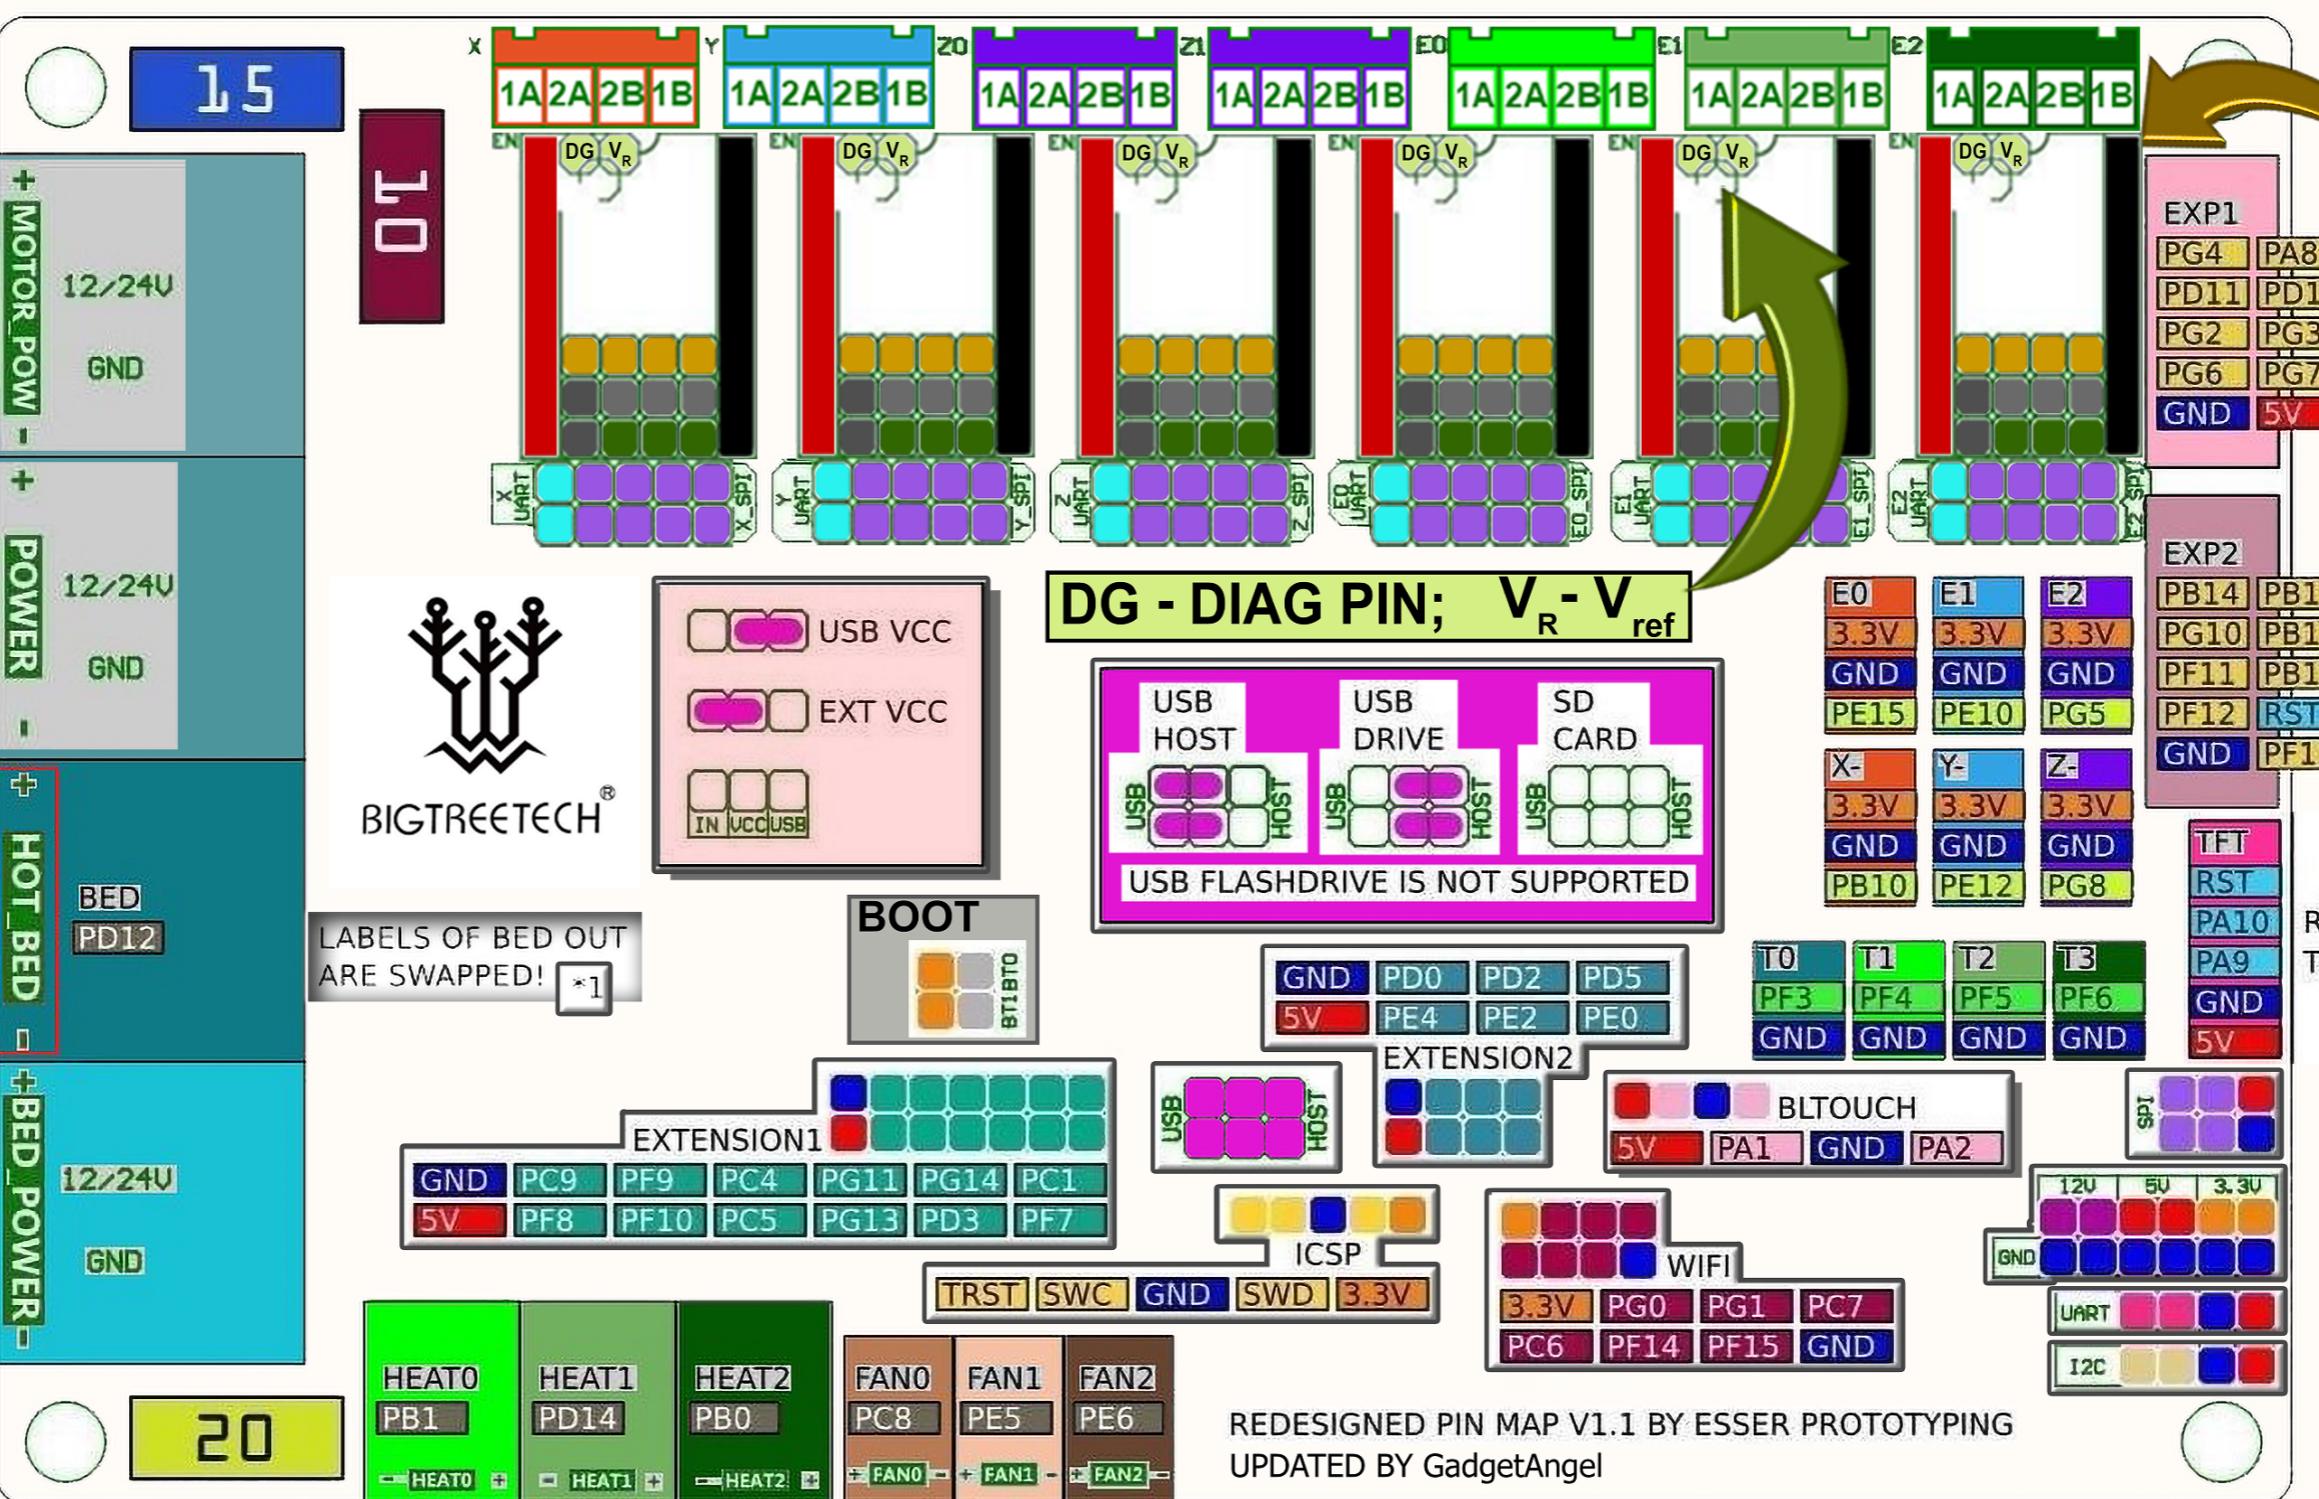
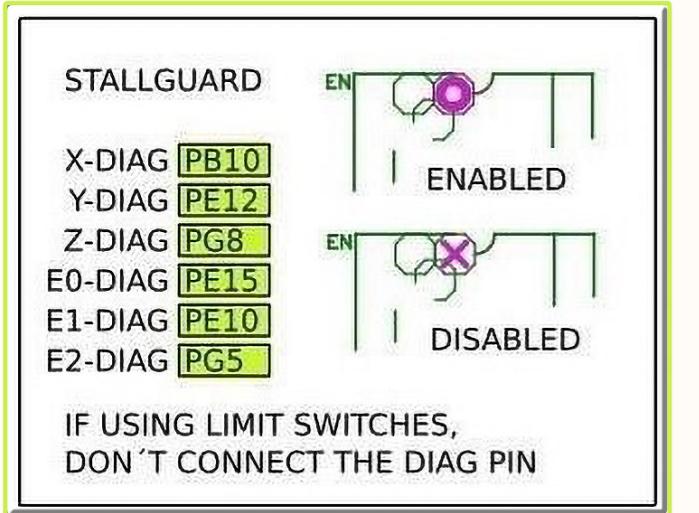
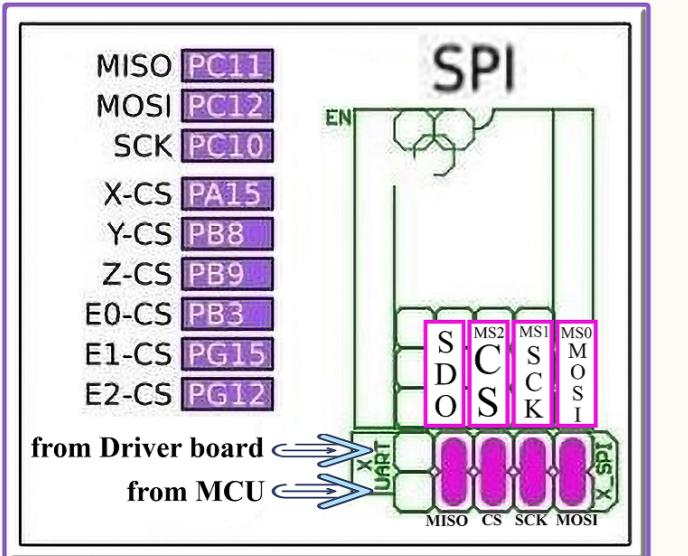




BIGTREETECH SKR-PRO-V1.1

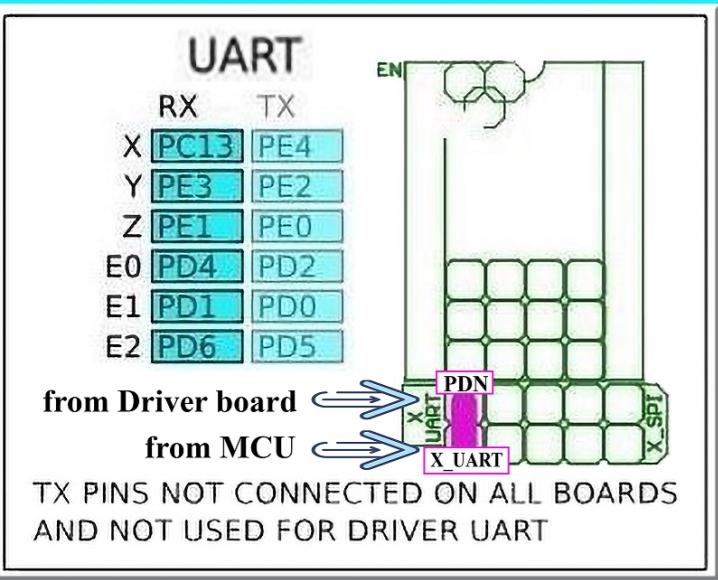

*1 IMPORTANT IF USING EXTERNAL MOSFET OR SSR.
IF HEAT BED IS CONNECTED IN REVERSE,
IT WILL HEAT, BUT STATUS LED OF BED MAY NOT WORK.

- 20 For the heated bed.
- 15 For stepper motor drivers.
- 10 For logic, fans, hotend heaters.

*2 WILL WORK WITH 3.3 OR 5V.
A LOT OF PINS ARE 5V TOLERANT.
ONLY TESTED I2C - CHECK DATASHEET AND SCHEMATIC!

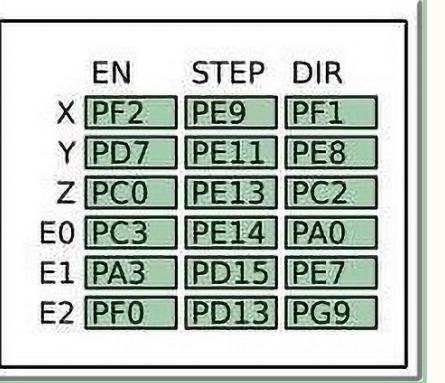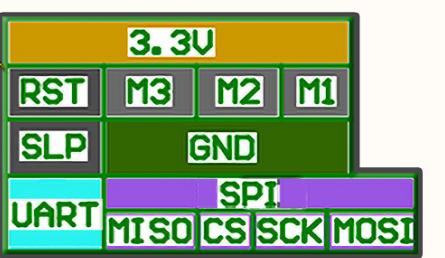

Marlin Firmware:

Platformio.ini:
(default_envs)=
BIGTREE_SKR_PRO

Configuration.h:
#define
MOTHERBOARD
BOARD_BIGTREE_SKR_PRO_V1_1

SCK MISO
PC10 PC11 5V SPI - SHARED
PA15 PC12 GND W. DRIVERS!
X-CS MOSI
RX3 TX3
PD9 PD8 GND 5V UART
PB7 PB6 GND 5V I2C
SDA SCL
*2 (OLD) MANUAL 3.3V
*2 REALLY 5V!