


CFO validation — emulator injects, RX recovers via differential-phase estimator
 $f_c = 2.4$ GHz, $f_s = 50$ kHz, pilot = 2000 samples, LOS-only channel, NF = 10 dB

(a) Estimated vs actual CFO



(b) Per-point estimation error

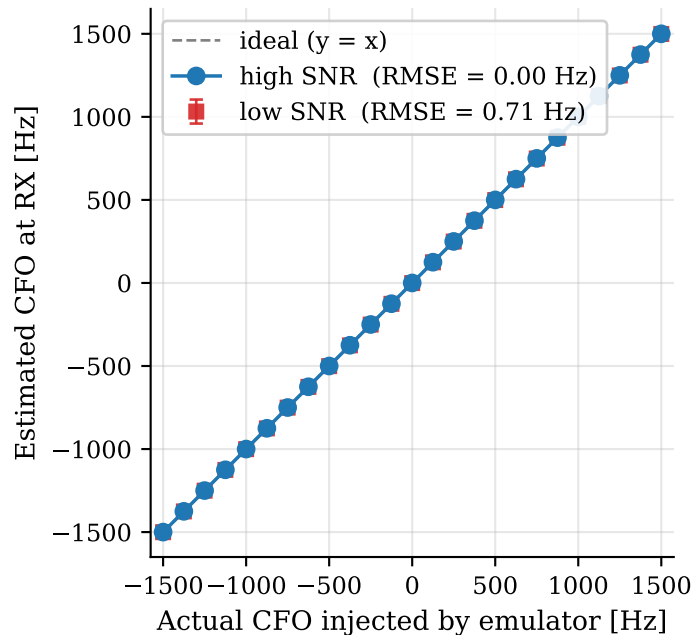