


Emulator runtime profile — wall-clock time per simulated tick (measured on this machine, fs = 10 kHz, RIS = 16×16)

(a) Per-tick wall time vs node count



(b) Cost of the full RF + fading pipeline

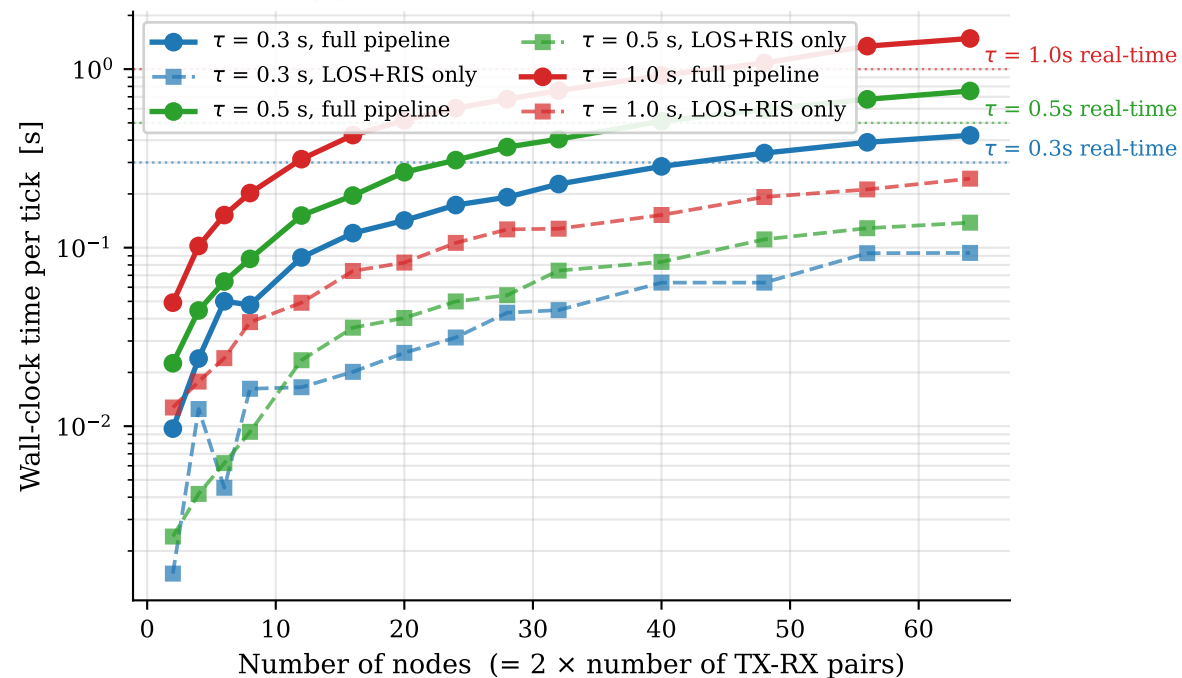