


Polar-grid RIS validation — paper §III-C scenario
 $f_c = 3.5$ GHz, three 5×8 panels in $\{\sigma_1^2 \sigma_2^2 \sigma_1^2\}$ with $\sigma_1 = +49.64^\circ$, $\sigma_2 = -153.77^\circ$

(a) Gain vs LOS [dB] across the polar grid



(b) Directional cut at each radius

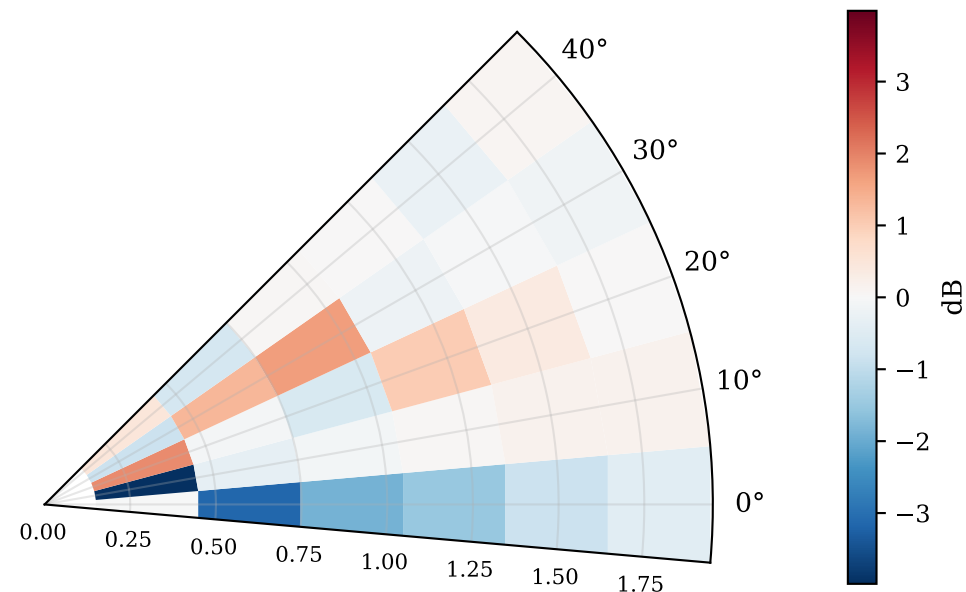