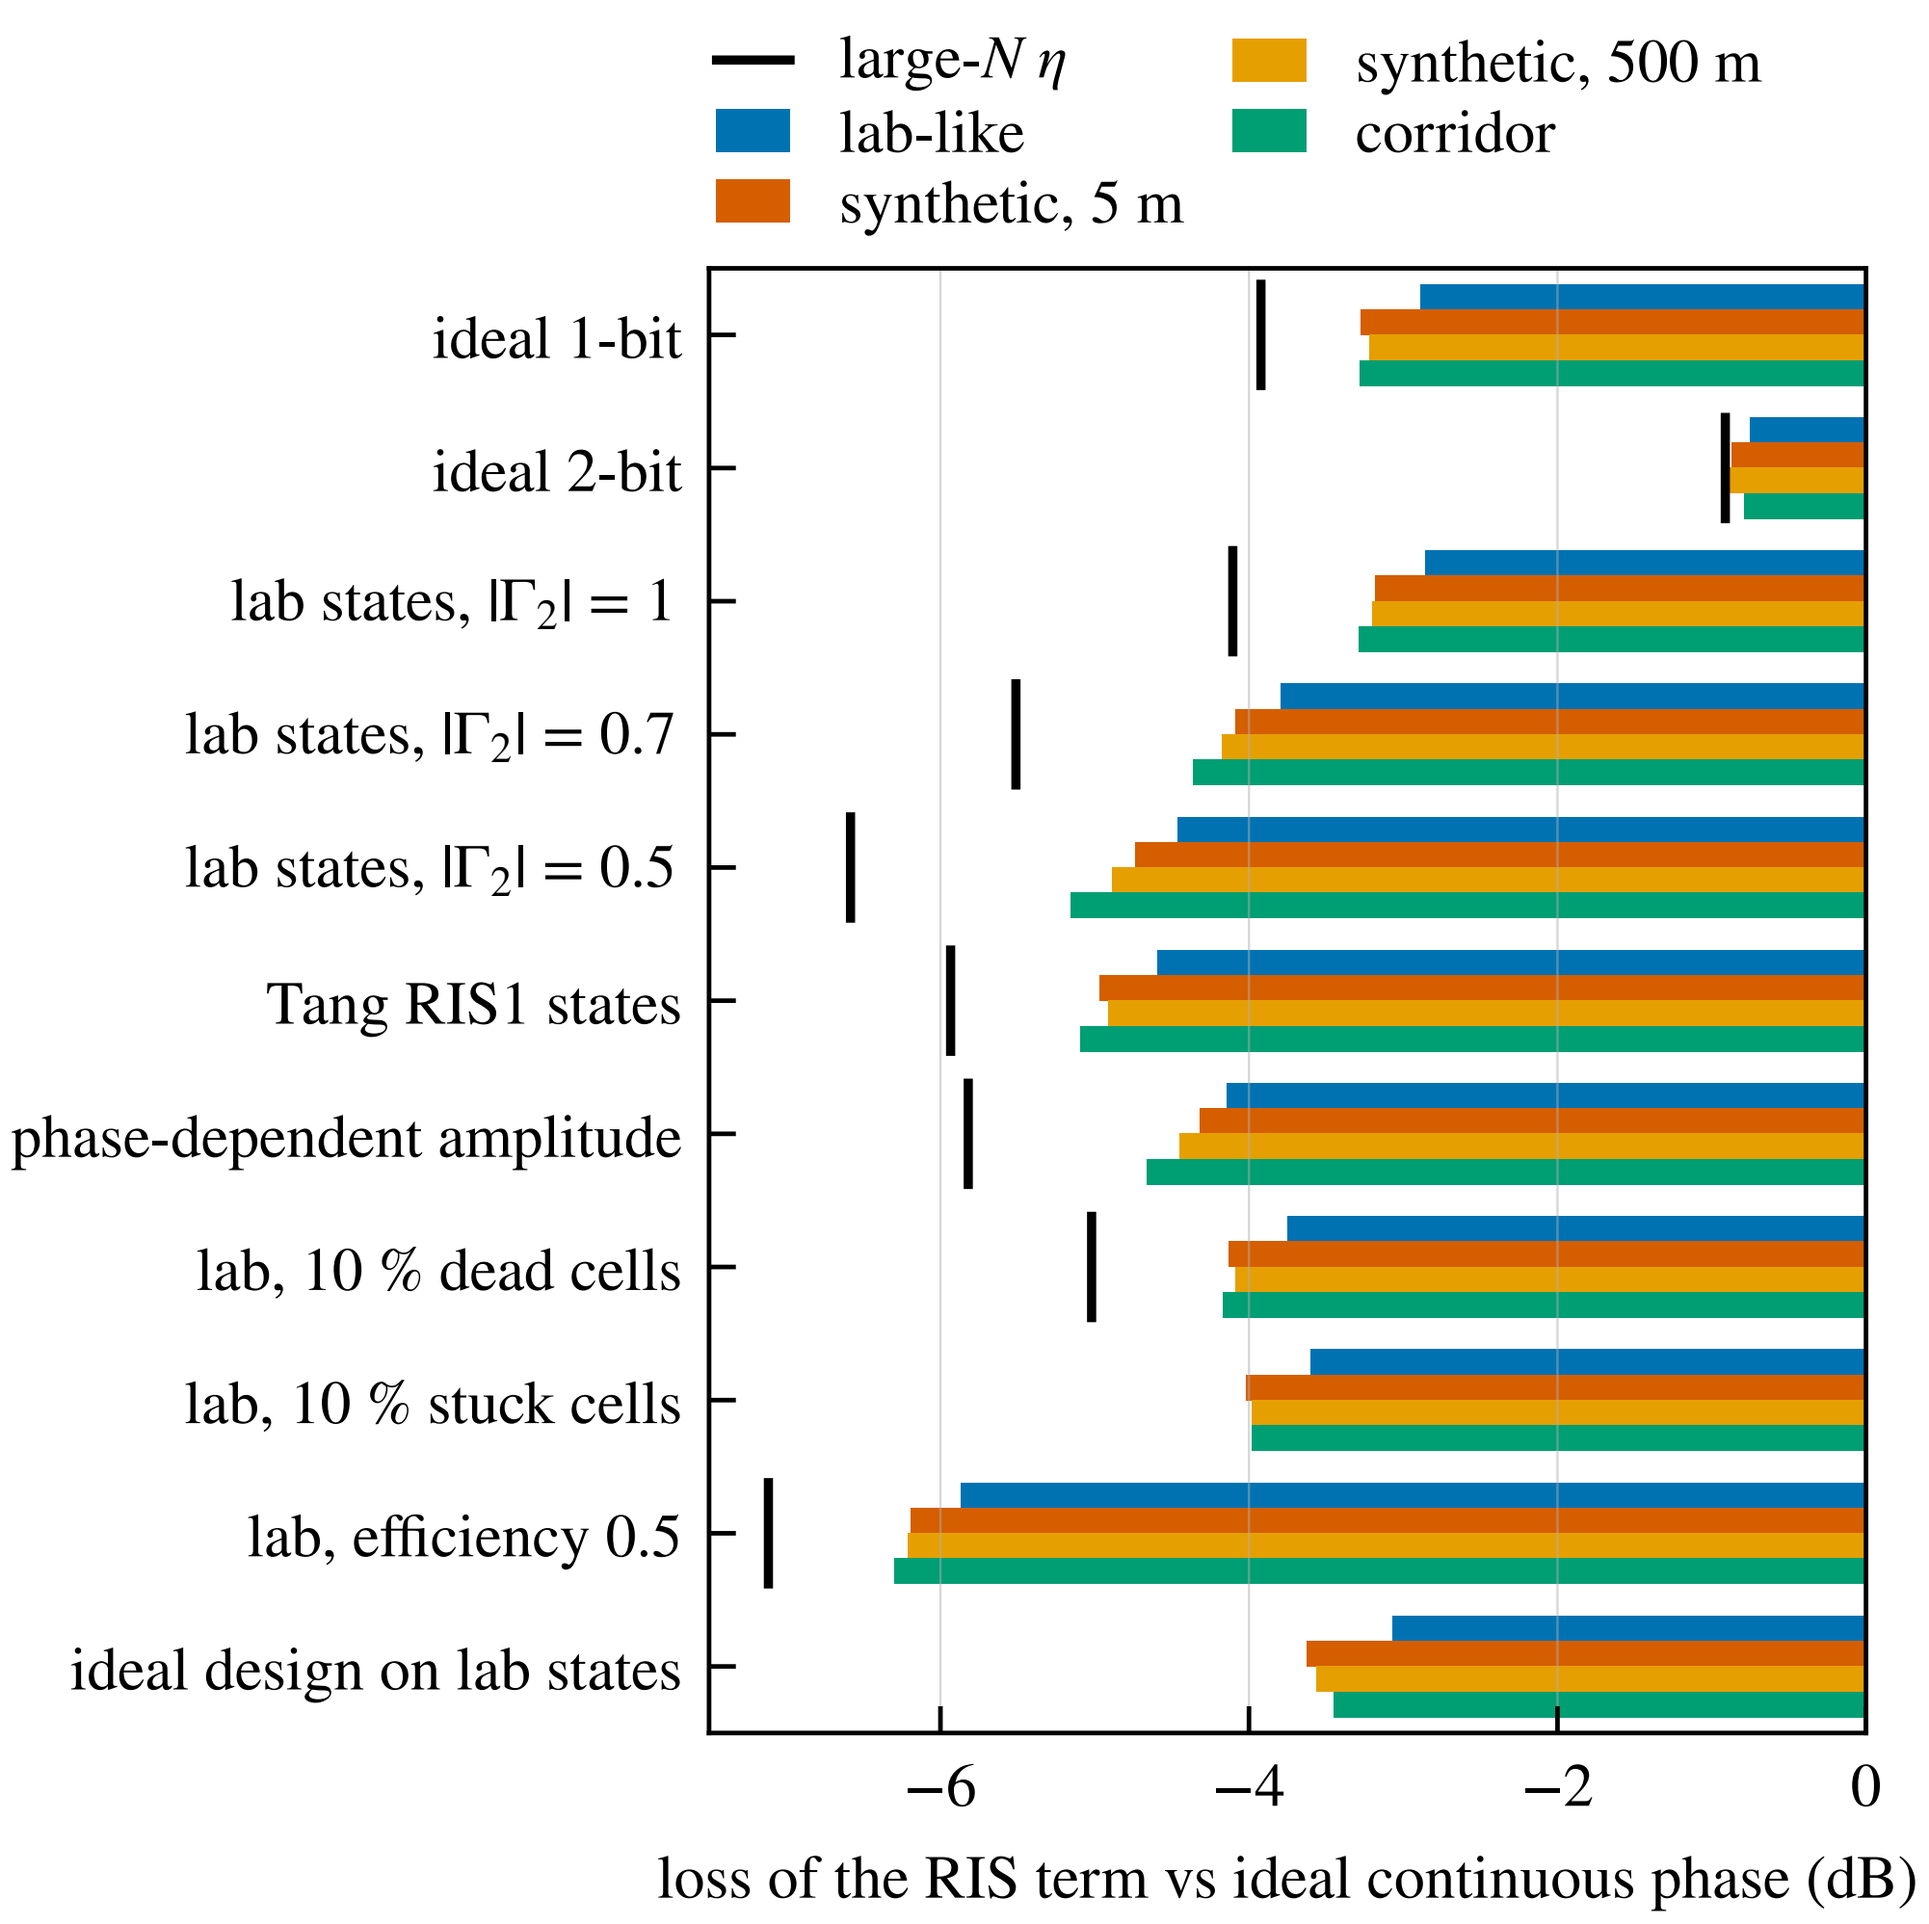
large-N η
lab-like
synthetic, 5 m
synthetic, 500 m
corridor
ideal 1-bit
ideal 2-bit
lab states, $|\Gamma_2| = 1$
lab states, $|\Gamma_2| = 0.7$
lab states, $|\Gamma_2| = 0.5$
Tang RIS1 states
phase-dependent amplitude
lab, 10 % dead cells
lab, 10 % stuck cells
lab, efficiency 0.5
ideal design on lab states
−6
−4
−2
0
loss of the RIS term vs ideal continuous phase (dB)