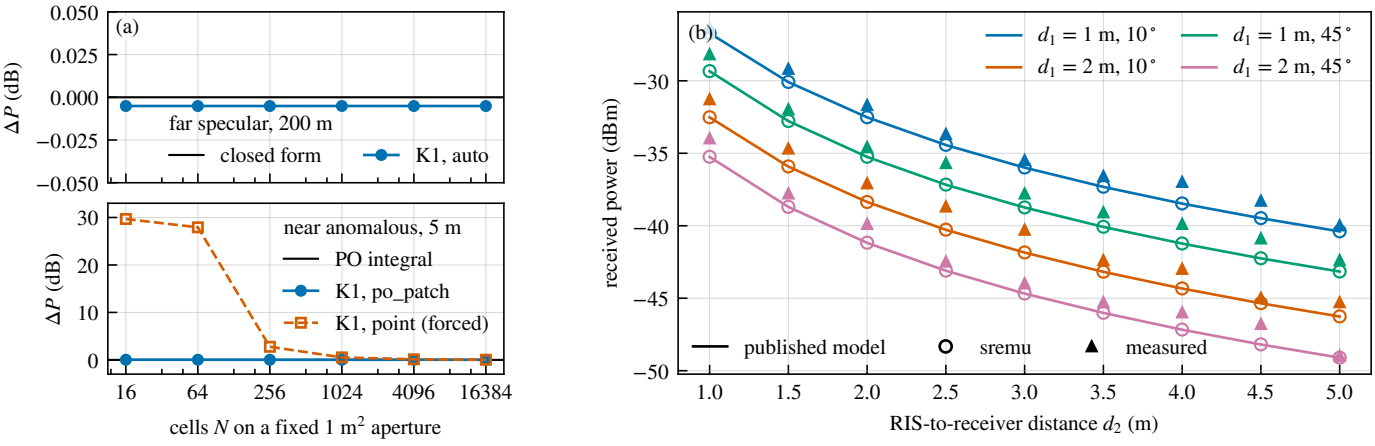
(a)
far specular, 200 m
closed form
K1, auto
near anomalous, 5 m
PO integral
K1, po_patch
K1, point (forced)
ΔP (dB)
cells N on a fixed 1 m² aperture
(b)
d1 = 1 m, 10°
d1 = 2 m, 10°
d1 = 1 m, 45°
d1 = 2 m, 45°
published model
sremu
measured
received power (dBm)
RIS-to-receiver distance d2 (m)