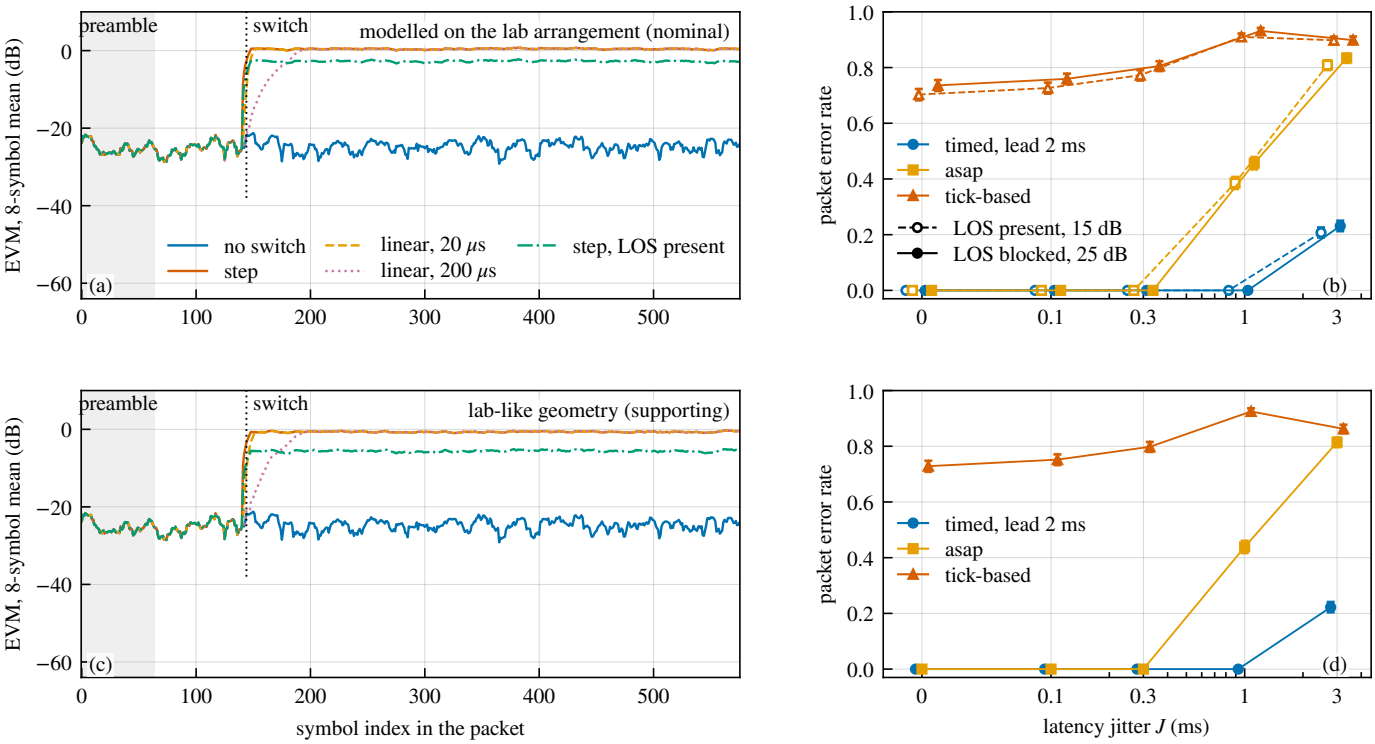
preamble
switch
modelled on the lab arrangement (nominal)
EVM, 8-symbol mean (dB)
0
−20
−40
−60
(a)
no switch
step
linear, 20 μs
linear, 200 μs
step, LOS present
0
100
200
300
400
500
packet error rate
1.0
0.8
0.6
0.4
0.2
0.0
timed, lead 2 ms
asap
tick-based
LOS present, 15 dB
LOS blocked, 25 dB
(b)
0
0.1
0.3
1
3
preamble
switch
lab-like geometry (supporting)
EVM, 8-symbol mean (dB)
(c)
symbol index in the packet
packet error rate
timed, lead 2 ms
asap
tick-based
(d)
latency jitter J (ms)