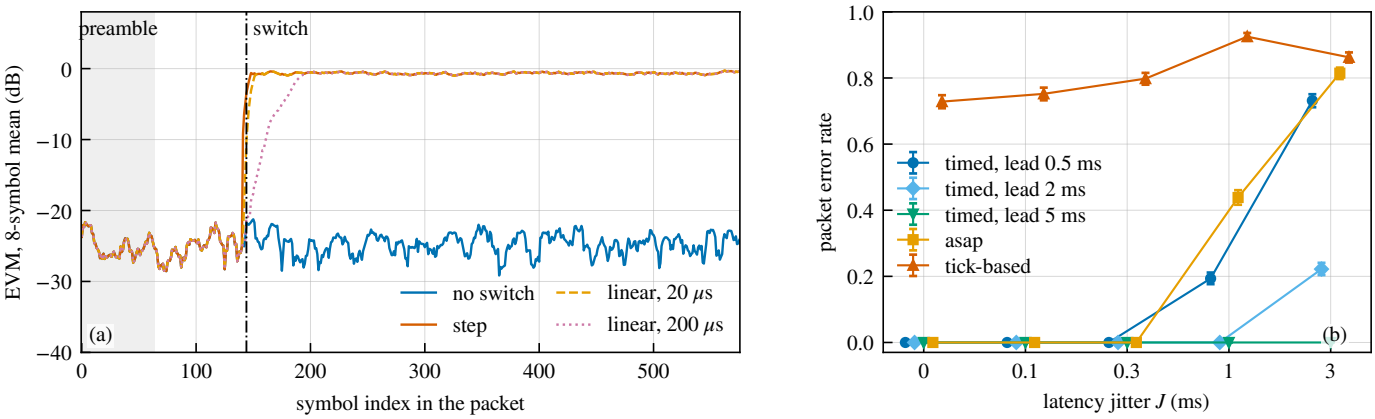
preamble
switch
EVM, 8-symbol mean (dB)
0
−10
−20
−30
−40
0
100
200
300
400
500
symbol index in the packet
(a)
no switch
step
linear, 20 μs
linear, 200 μs
packet error rate
1.0
0.8
0.6
0.4
0.2
0.0
0
0.1
0.3
1
3
latency jitter J (ms)
(b)
timed, lead 0.5 ms
timed, lead 2 ms
timed, lead 5 ms
asap
tick-based