

# Lid-Driven Cavity Flow

Ruipengyu (Brandon) Li

August 11, 2017

# 1 Introduction

Lid-driven cavity flow is calculated using various methods.

## 2 Governing Equations

The non-dimensional Navier-Stokes equations for incompressible flow assuming constant fluid properties reads:

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0 \quad (1)$$

$$\frac{\partial u}{\partial t} + \frac{\partial uu}{\partial x} + \frac{\partial uv}{\partial y} = -\frac{\partial p}{\partial x} + \frac{1}{Re} \left( \frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial y^2} \right) \quad (2)$$

$$\frac{\partial v}{\partial t} + \frac{\partial vu}{\partial x} + \frac{\partial vv}{\partial y} = -\frac{\partial p}{\partial y} + \frac{1}{Re} \left( \frac{\partial^2 v}{\partial x^2} + \frac{\partial^2 v}{\partial y^2} \right) \quad (3)$$

## 3 Finite Difference Method

### 3.1 Description

Cell-centred staggered grid is used for this method as shown in Fig.1. Alternatively, cell-vertex grid layout (Fig.2) can be used and the difference is mainly the at the boundary. Depending on the numerical schemes, a few layers of ghost cells are needed outside the physical boundary. Indices start from 1 for all the variables. Central differencing requires one extra point beyond the boundary. This means that if the number of grid lines is  $(ni, nj)$ , there will be  $(ni, nj + 1)$  u-nodes,  $(ni + 1, nj)$  v-nodes and  $(ni + 1, nj + 1)$  p-nodes.

### 3.2 Momentum equation

Consider u-momentum equation. The unsteady term is discretized using explicit or implicit Euler scheme:

$$\frac{\partial u}{\partial t} = \frac{u_{i,j} - u_{i,j}^0}{\Delta t}$$

The first advection term is discretized using the 2nd-order central difference scheme. For implicit Euler, it is

$$\frac{\partial uu}{\partial x} = \frac{u_{i+1,j}^0 u_{i+1,j} - u_{i-1,j}^0 u_{i-1,j}}{2\Delta x}$$

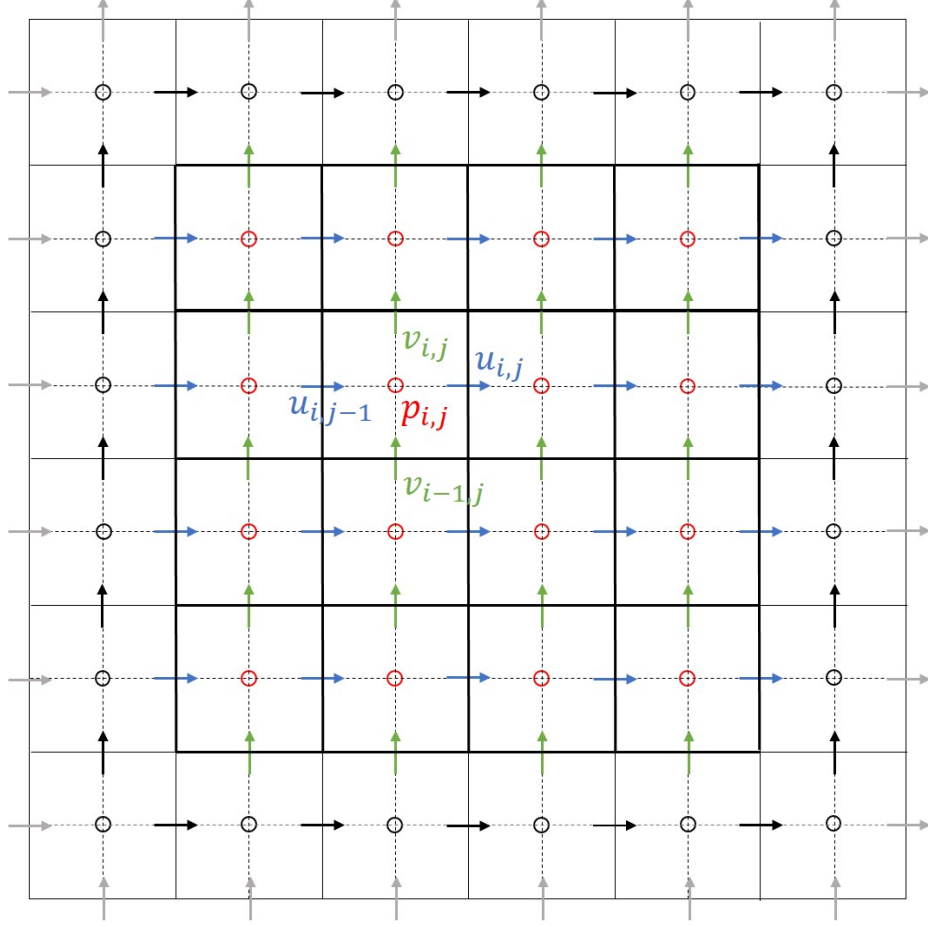


Figure 1: Cell-centred staggered grid layout

Similarly for the second advection term, gradient is evaluated using the values at north and south faces of a u-cell:

$$\begin{aligned} \frac{\partial uv}{\partial y} &= \left( \frac{v_{i,j}^0 + v_{i+1,j}^0}{2} \frac{u_{i,j} + u_{i,j+1}}{2} - \frac{v_{i,j-1}^0 + v_{i+1,j-1}^0}{2} \frac{u_{i,j} + u_{i,j-1}}{2} \right) \frac{1}{\Delta y} \\ &= \frac{1}{4\Delta y} [(v_{i,j}^0 + v_{i+1,j}^0)(u_{i,j} + u_{i,j+1}) - (v_{i,j-1}^0 + v_{i+1,j-1}^0)(u_{i,j} + u_{i,j-1})] \end{aligned}$$

However, this inevitably includes interpolation using  $u_{i,j}$  itself, which increases the complexity of the resulting algebraic equation. Here, a simple alternative is to evaluate the derivative using the adjacent available  $u$  points, i.e.  $u_{i,j+1}$  and  $u_{i,j-1}$ , but keep the  $v$  value interpolated at the  $u_{i,j}$  faces as it

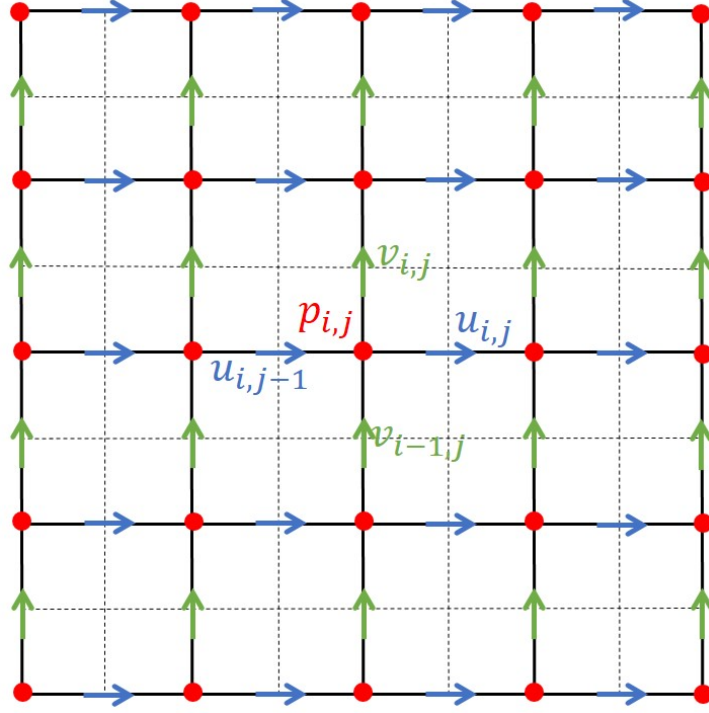


Figure 2: Cell-vertex staggered grid layout

is a known from the last iteration. Thus, the advection term reads:

$$\frac{\partial uv}{\partial y} = \frac{u_{i,j+1}v_{i+1/2,j}^0 - u_{i,j-1}v_{i+1/2,j-1}^0}{2\Delta y}$$

where

$$v_{i+1/2,j}^0 = \frac{v_{i,j}^0 + v_{i+1,j}^0}{2}$$

$$v_{i+1/2,j-1}^0 = \frac{v_{i,j-1}^0 + v_{i+1,j-1}^0}{2}$$

and  $u_{i,j}$  term is not present. The advantage is that the formula for pressure correction will be simplified. Pressure term is discretized as

$$-\frac{\partial p}{\partial x} = -\frac{p_{i+1,j}^0 - p_{i,j}^0}{\Delta x}$$

Diffusion (viscous) term:

$$\frac{1}{Re} \left( \frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial y^2} \right) = \frac{1}{Re} \left( \frac{u_{i-1,j} - 2u_{i,j} + u_{i+1,j}}{\Delta x^2} + \frac{u_{i,j-1} - 2u_{i,j} + u_{i,j+1}}{\Delta y^2} \right)$$

Put all the terms together:

$$\begin{aligned} & \frac{u_{i,j} - u_{i,j}^0}{\Delta t} + \frac{u_{i+1,j}^0 u_{i+1,j} - u_{i-1,j}^0 u_{i-1,j}}{2\Delta x} + \frac{v_{i+1/2,j}^0 u_{i,j+1} - v_{i+1/2,j-1}^0 u_{i,j-1}}{2\Delta y} \\ &= -\frac{p_{i+1,j}^0 - p_{i,j}^0}{\Delta x} + \frac{1}{Re} \left( \frac{u_{i-1,j} - 2u_{i,j} + u_{i+1,j}}{\Delta x^2} + \frac{u_{i,j-1} - 2u_{i,j} + u_{i,j+1}}{\Delta y^2} \right) \end{aligned}$$

It may also be rearranged to the form following the compass notation

$$a_P^u u_{i,j} = a_E^u u_{i+1,j} + a_W^u u_{i-1,j} + a_N^u u_{i,j+1} + a_S^u u_{i,j-1} + \frac{p_{i,j}^0 - p_{i+1,j}^0}{\Delta x} + b^u \quad (4)$$

where

$$a_E^u = -\frac{u_{i+1,j}^0}{2\Delta x} + \frac{1}{Re\Delta x^2} \quad (5a)$$

$$a_W^u = \frac{u_{i-1,j}^0}{2\Delta x} + \frac{1}{Re\Delta x^2} \quad (5b)$$

$$a_N^u = -\frac{v_{i+1/2,j}^0}{2\Delta y} + \frac{1}{Re\Delta y^2} \quad (5c)$$

$$a_S^u = \frac{v_{i+1/2,j-1}^0}{2\Delta y} + \frac{1}{Re\Delta y^2} \quad (5d)$$

$$a_P^u = \frac{1}{\Delta t} + \frac{2}{Re\Delta x^2} + \frac{2}{Re\Delta y^2} \quad (5e)$$

$$b^u = \frac{u_{i,j}^0}{\Delta t} \quad (5f)$$

with

$$\begin{aligned} v_{i+1/2,j}^0 &= \frac{v_{i,j}^0 + v_{i+1,j}^0}{2} \\ v_{i+1/2,j-1}^0 &= \frac{v_{i,j-1}^0 + v_{i+1,j-1}^0}{2} \end{aligned}$$

The v-momentum equation can be obtained in a similar manner:

$$\begin{aligned} & \frac{v_{i,j} - v_{i,j}^0}{\Delta t} + \frac{v_{i,j+1}^0 v_{i,j+1} - v_{i,j-1}^0 v_{i,j-1}}{2\Delta y} + \frac{u_{i,j+1/2}^0 v_{i+1,j} - u_{i-1,j+1/2}^0 v_{i-1,j}}{2\Delta x} \\ &= -\frac{p_{i,j+1}^0 - p_{i,j}^0}{\Delta y} + \frac{1}{Re} \left( \frac{v_{i-1,j} - 2v_{i,j} + v_{i+1,j}}{\Delta x^2} + \frac{v_{i,j-1} - 2v_{i,j} + v_{i,j+1}}{\Delta y^2} \right) \end{aligned}$$

After assembly of coefficients:

$$a_P^v v_{i,j} = a_E^v v_{i+1,j} + a_W^v v_{i-1,j} + a_N^v v_{i,j+1} + a_S^v v_{i,j-1} + \frac{p_{i,j}^0 - p_{i,j+1}^0}{\Delta y} + b^v \quad (6)$$

where

$$a_E^v = -\frac{u_{i,j+1/2}^0}{2\Delta x} + \frac{1}{Re\Delta x^2} \quad (7a)$$

$$a_W^v = \frac{u_{i-1,j+1/2}^0}{2\Delta x} + \frac{1}{Re\Delta x^2} \quad (7b)$$

$$a_N^v = -\frac{v_{i,j+1}^0}{2\Delta y} + \frac{1}{Re\Delta y^2} \quad (7c)$$

$$a_S^v = \frac{v_{i,j-1}^0}{2\Delta y} + \frac{1}{Re\Delta y^2} \quad (7d)$$

$$a_P^v = \frac{1}{\Delta t} + \frac{2}{Re\Delta x^2} + \frac{2}{Re\Delta y^2} \quad (7e)$$

$$b^v = \frac{v_{i,j}^0}{\Delta t} \quad (7f)$$

with

$$u_{i,j+1/2}^0 = \frac{u_{i,j}^0 + u_{i,j+1}^0}{2}$$

$$u_{i-1,j+1/2}^0 = \frac{u_{i-1,j}^0 + u_{i-1,j+1}^0}{2}$$

The momentum equations are discretized as above.

### 3.3 Pressure Correction

The SIMPLE algorithm states that the uncorrected and corrected velocities both satisfy the momentum equations. From this, we can get the expression for correction velocity by writing momentum equations in terms of  $u'$  and  $v'$  neglecting the contribution from neighbouring points:

$$u'_{i,j} = \frac{p'_{i,j} - p'_{i+1,j}}{a\Delta x} \quad (8a)$$

$$u'_{i-1,j} = \frac{p'_{i-1,j} - p'_{i,j}}{a\Delta x} \quad (8b)$$

$$v'_{i,j} = \frac{p'_{i,j} - p'_{i,j+1}}{a\Delta y} \quad (8c)$$

$$v'_{i,j-1} = \frac{p'_{i,j-1} - p'_{i,j}}{a\Delta y} \quad (8d)$$

where

$$a = a_P^u = a_P^v = \frac{1}{\Delta t} + \frac{2}{Re\Delta x^2} + \frac{2}{Re\Delta y^2}$$

Now, the continuity equation,  $\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0$ , is discretized to derive the expression for pressure correction around the scalar cell  $p(i, j)$ :

$$\frac{u_{i,j} - u_{i-1,j}}{\Delta x} + \frac{v_{i,j} - v_{i,j-1}}{\Delta y} = 0$$

$$\frac{u_{i,j}^* + (p'_{i,j} - p'_{i+1,j})/(a\Delta x) - u_{i-1,j}^* - (p'_{i-1,j} - p'_{i,j})/(a\Delta x)}{\Delta x} + \frac{v_{i,j}^* + (p'_{i,j} - p'_{i,j+1})/(a\Delta y) - v_{i,j-1}^* - (p'_{i,j-1} - p'_{i,j})/(a\Delta y)}{\Delta y} = 0 \quad (9)$$

It can be rearranged to

$$a_P^p p_{i,j} = a_E^p p_{i+1,j} + a_W^p p_{i-1,j} + a_N^p p_{i,j+1} + a_S^p p_{i,j-1} + b^p \quad (10)$$

where

$$a_E^p = \frac{1}{a\Delta x^2} \quad (11a)$$

$$a_W^p = \frac{1}{a\Delta x^2} \quad (11b)$$

$$a_N^p = \frac{1}{a\Delta y^2} \quad (11c)$$

$$a_S^p = \frac{1}{a\Delta y^2} \quad (11d)$$

$$a_P^p = a_E^p + a_W^p + a_N^p + a_S^p \quad (11e)$$

$$b^p = \frac{u_{i-1,j}^* - u_{i,j}^*}{\Delta x} + \frac{v_{i,j-1}^* - v_{i,j}^*}{\Delta y} \quad (11f)$$

with

$$a = \frac{1}{\Delta t} + \frac{2}{Re\Delta x^2} + \frac{2}{Re\Delta y^2}$$

Note that  $b^p$  can be seen as the mass source and  $b^p \rightarrow 0$  indicates the convergence of velocity fields. The above is the *pressure correction formula*. And it is essentially a central difference formulation of the *Poisson equation* in terms of  $p'$ :

$$\frac{\partial^2 p'}{\partial x^2} + \frac{\partial^2 p'}{\partial y^2} = Q$$

when  $Q = -ab$ .

### 3.4 Boundary Condition

For cell-centred scheme with staggered grid,  $u$ -velocity needs to be interpolated on top and bottom of the domain since  $u$ -nodes are not on the physical boundary.

$$\begin{aligned}\frac{u_{i,1} + u_{i,2}}{2} &= 0 \\ \frac{u_{i,nj+1} + u_{i,nj}}{2} &= U_{top} \\ u_{1,j} &= 0 \\ u_{ni,j} &= 0\end{aligned}$$

Similar treatment is done for  $v$ -velocity on the left and right boundaries.

$$\begin{aligned}\frac{v_{1,j} + v_{2,j}}{2} &= 0 \\ \frac{v_{ni,j} + v_{ni+1,j}}{2} &= 0 \\ v_{i,1} &= 0 \\ v_{i,nj} &= 0\end{aligned}$$

Boundary conditions for  $p'$  must also be given. At all the walls, we can assume zero gradient, e.g.

$$\left(\frac{\partial p}{\partial x}\right)_w = 0$$

Note that boundary conditions for the cell-vertex layout are straightforward as velocity nodes coincide with the physical boundaries.

## 4 Finite Volume Method