


② MIRRORED

COMPONENT
LAYER

+10V -10V GND

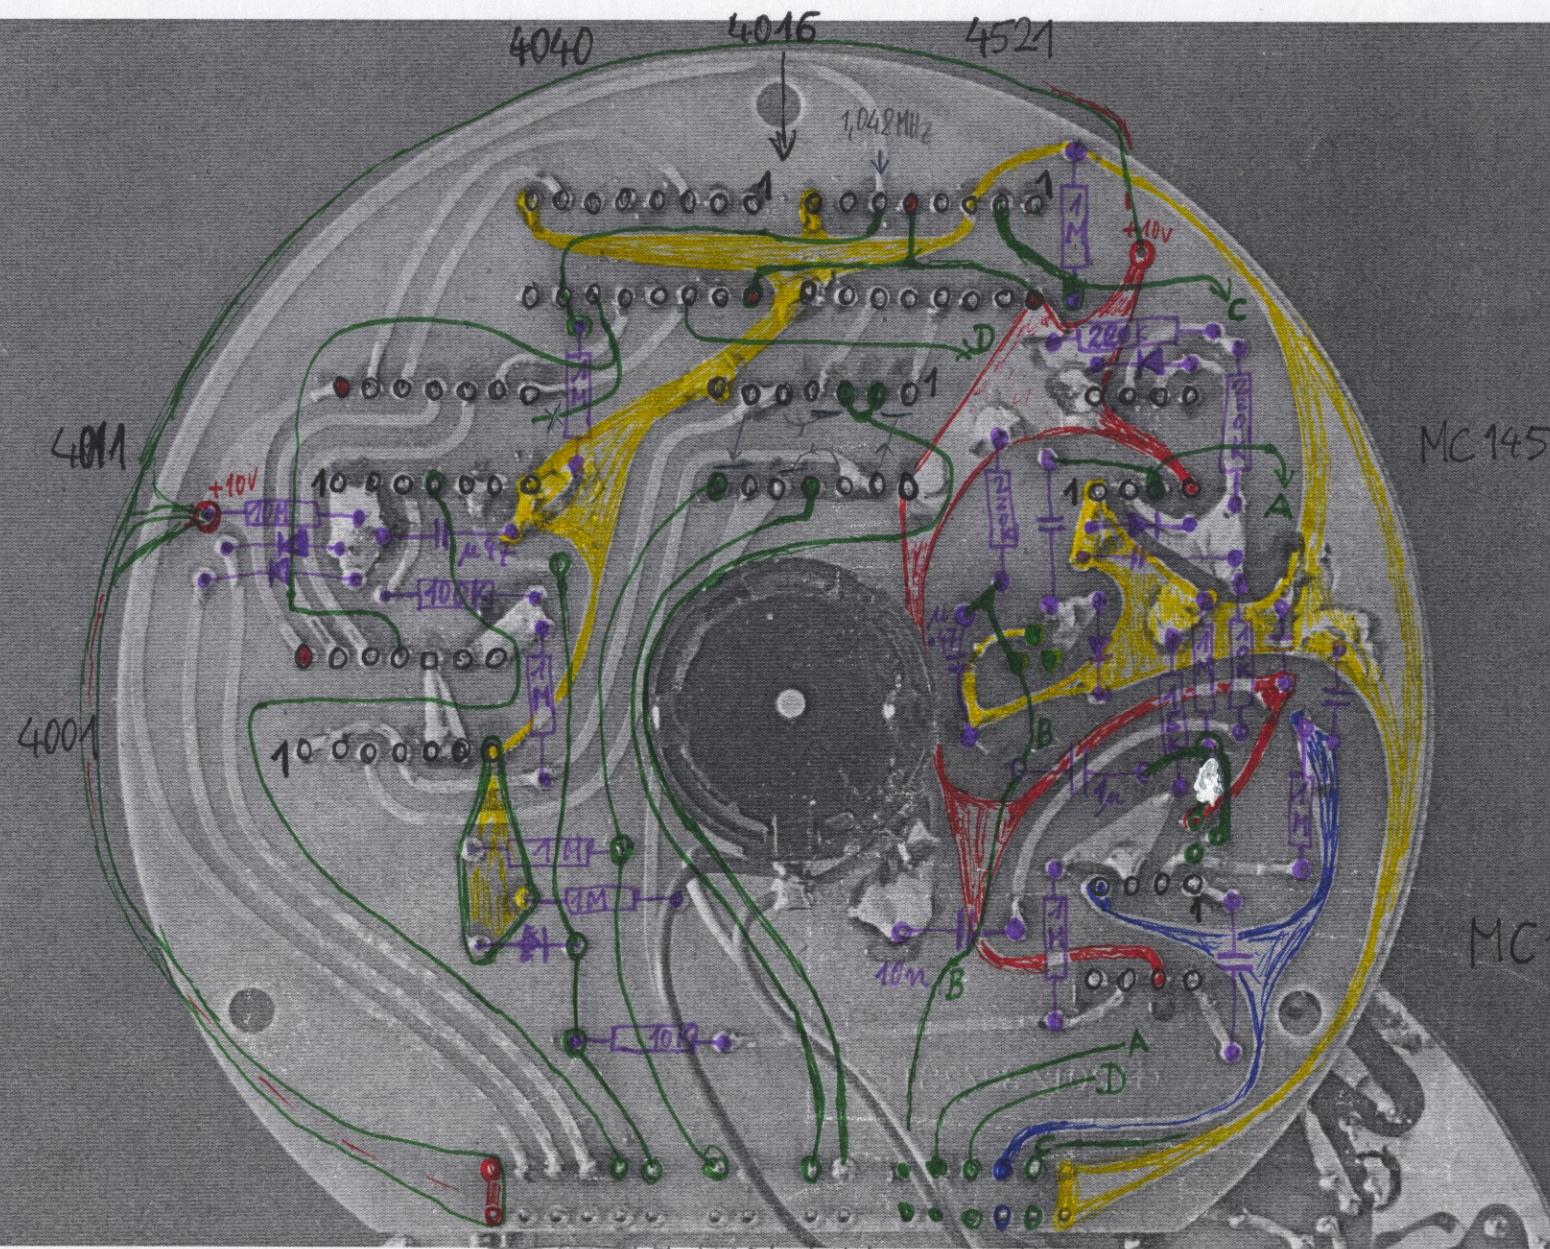

1 2 3 4 5 6 7 8 9 10 BA 11 12 13 14
+10V (3) (3) (1) FREF (1) INV (1) 110V (1)
tal 1098 ↑ (HI LO) ×40 F TACH ↓
1.048 Hz ↑ START STOP (4) DISPLAY (4)
1.048 Hz FIX = 333x40

C O OA
D