

NORMAL COPPER SIDE (MOUNTED UPSIDE DOWN)


FANATSON 5102/60

TRACES ON
COMPONENT
SIDE

1027 10V
(COMPONENT SIDE)

GNB

III - 10V

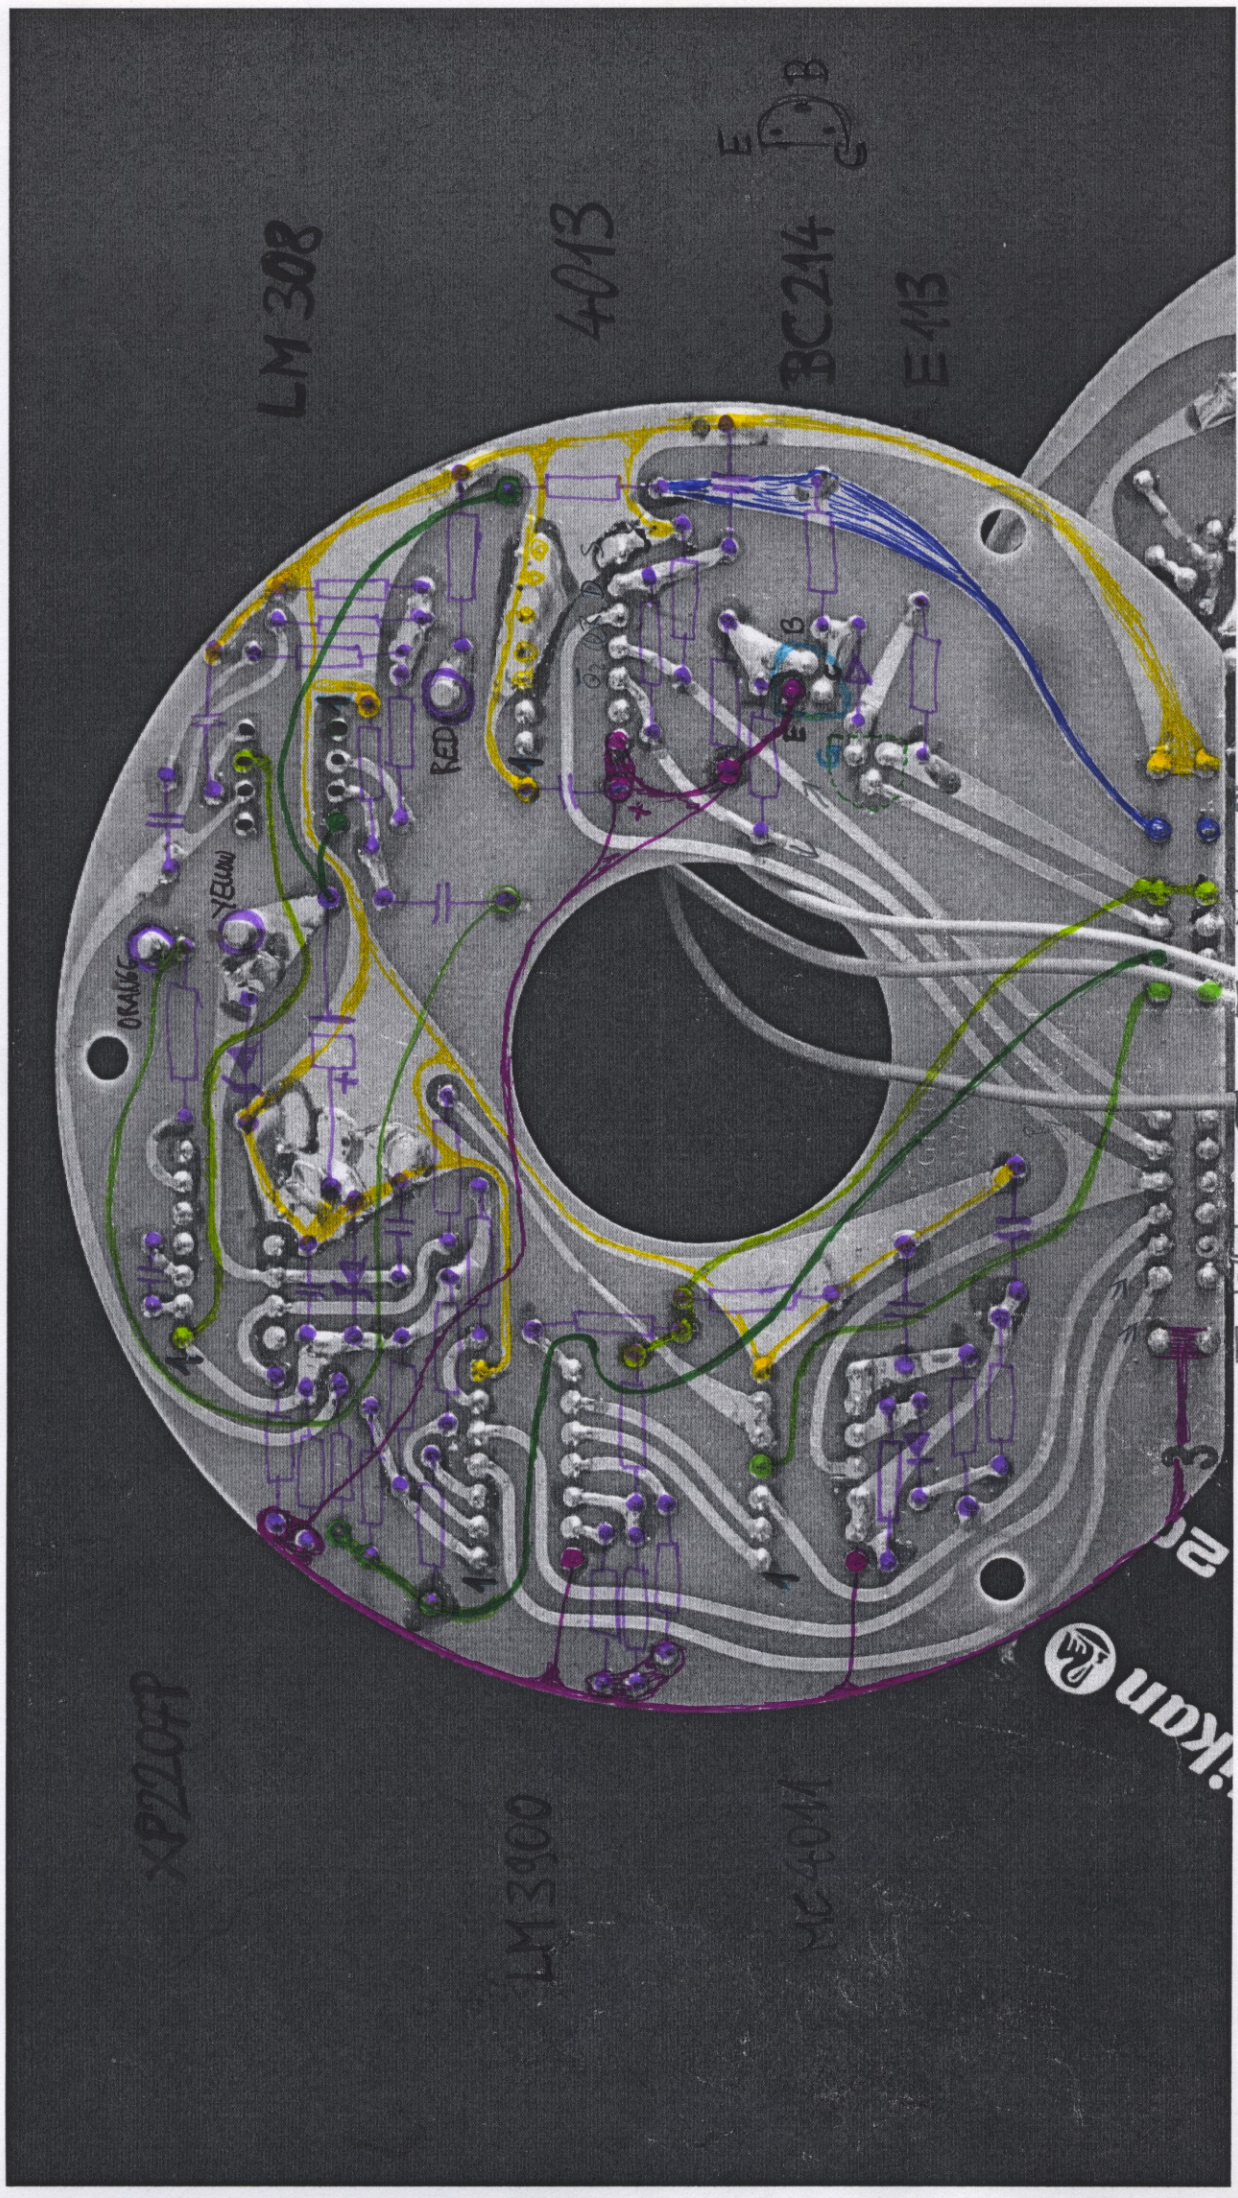

1 2 3 4 5
 +10V
 ② ②
 ↓
 ② ②
 ↓
 ④ ②
 ↑
 FVAR
 ②
 5
 10V 0V
 12V 12V
 16V 16V
 24V 24V
 45 45
 78 78
 STILL
 33.3 KPH
 10V
 GND