When las piece moved out, please do following in CONTROL PANEL:

1. Unselect the auto cycle

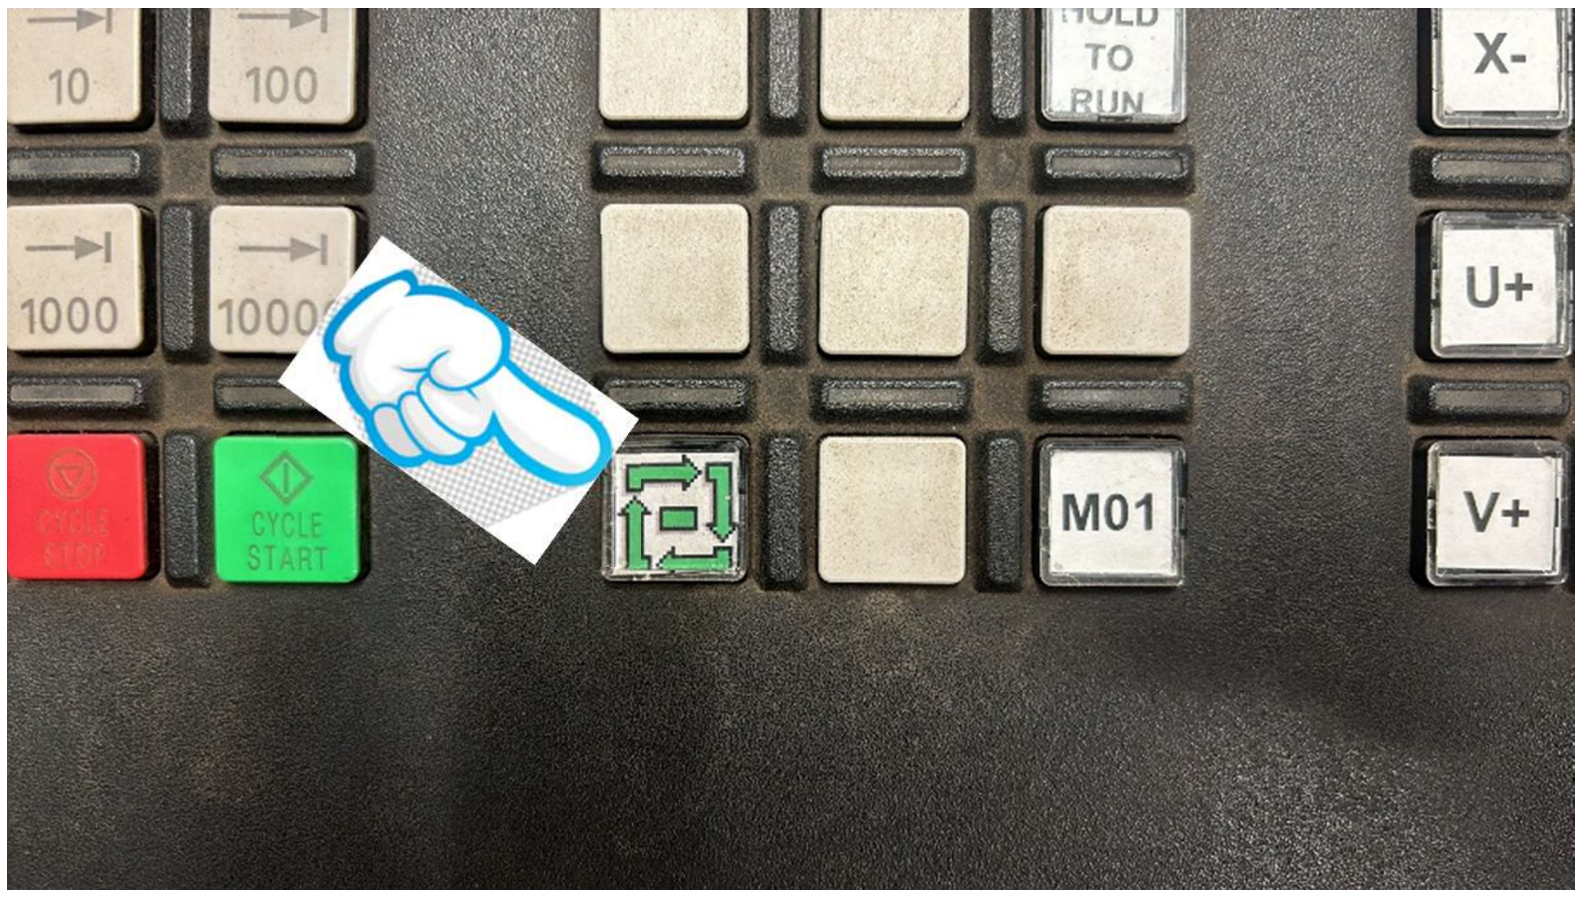

2. Select Jog mode

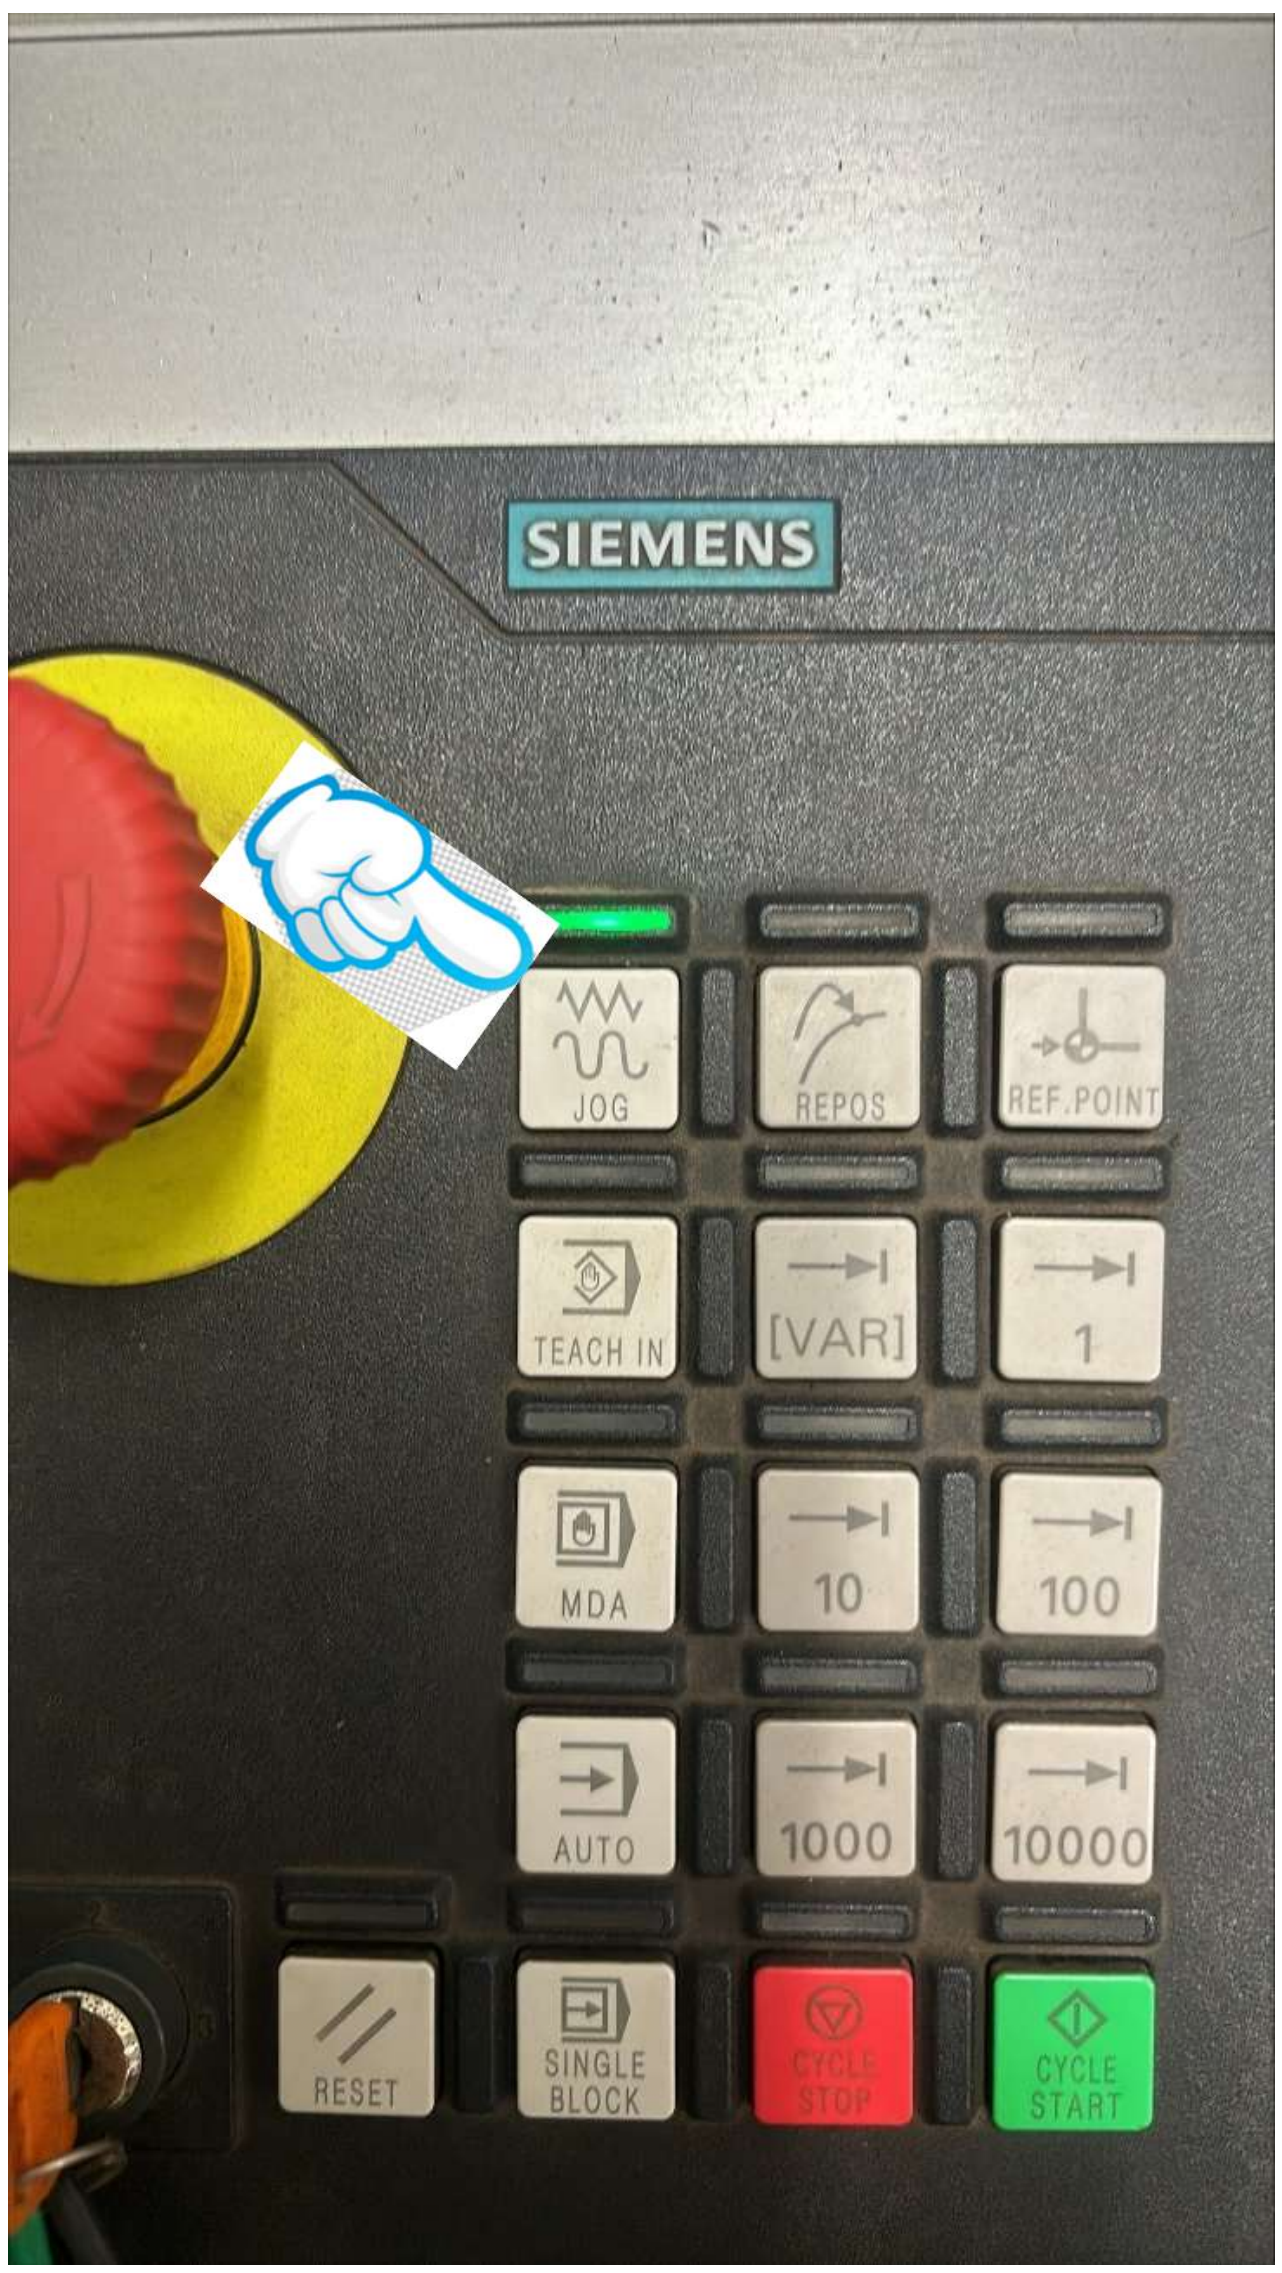

3. Select Channel 1 or 2

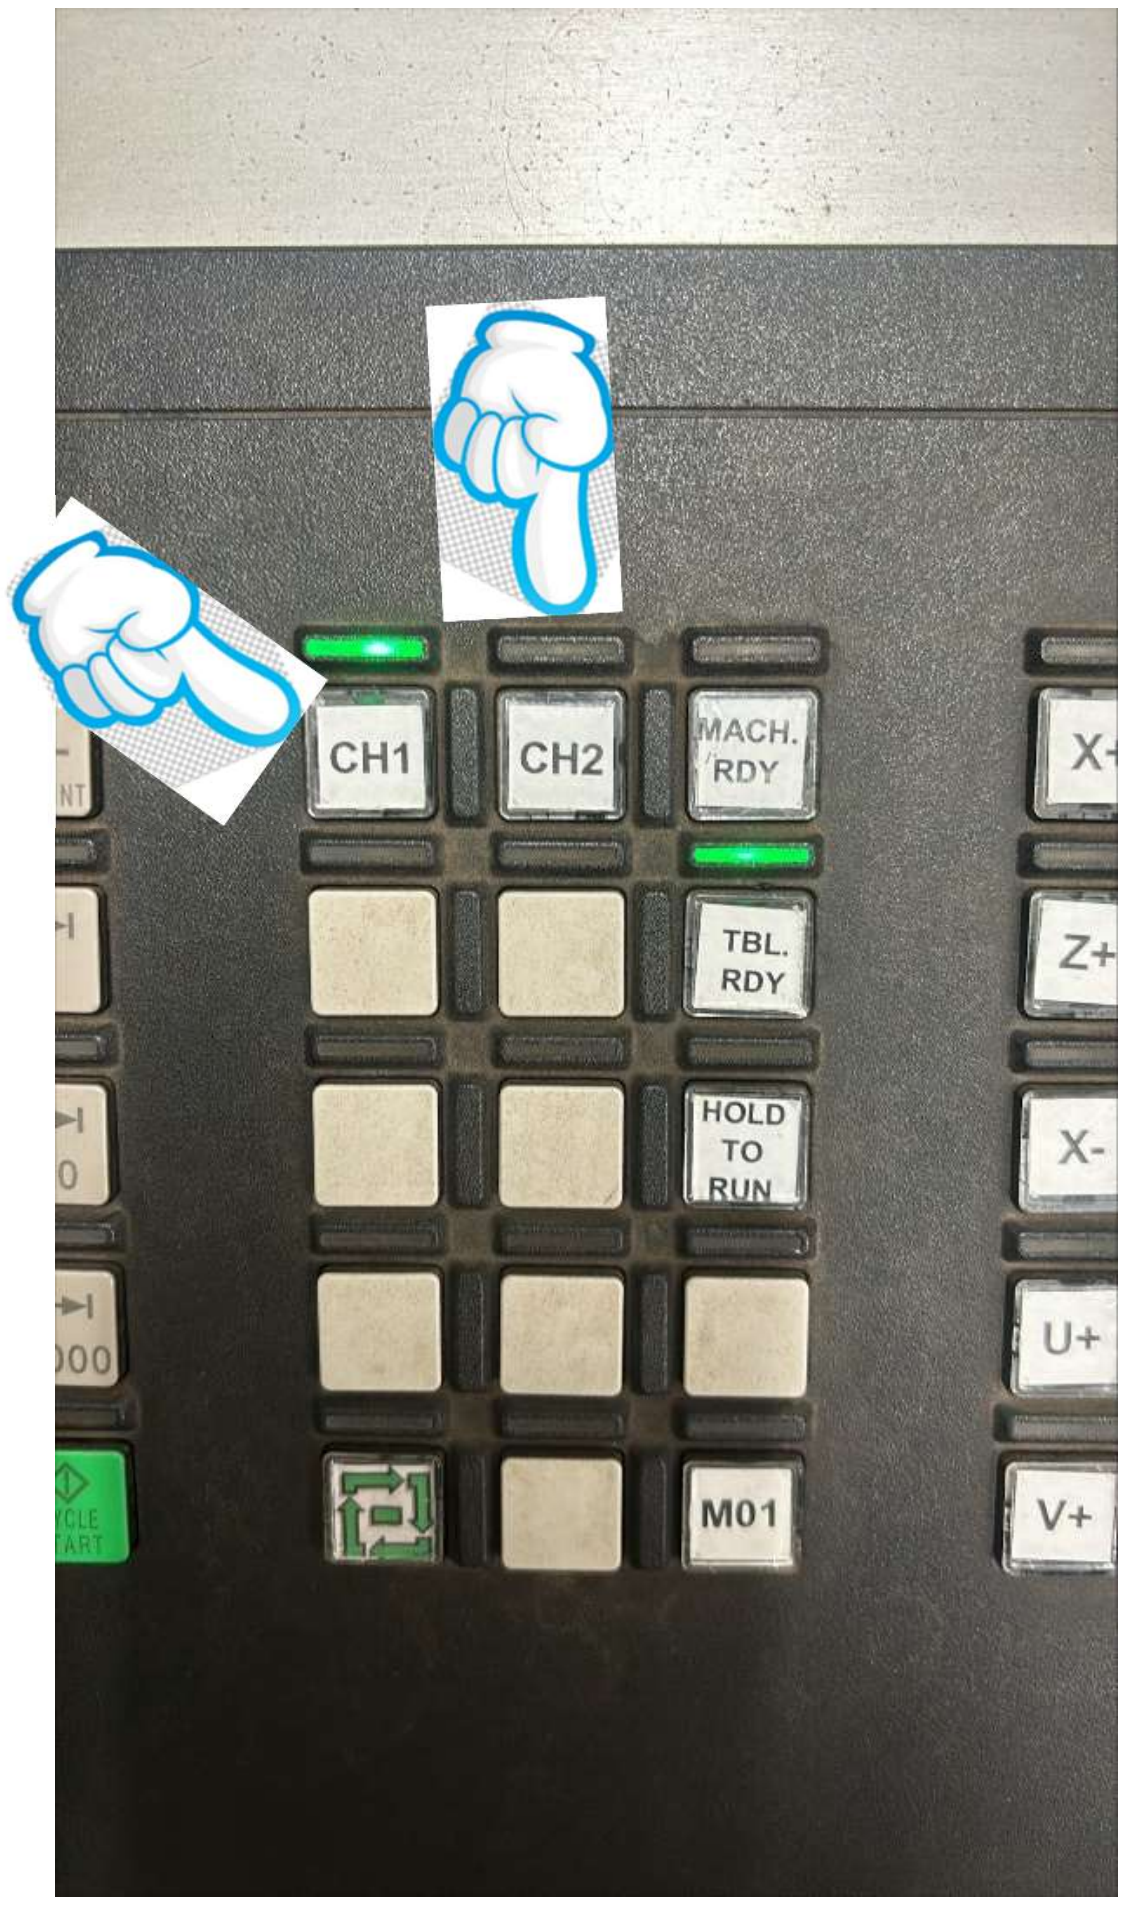

4. Select “Open Request” on Touch Panel

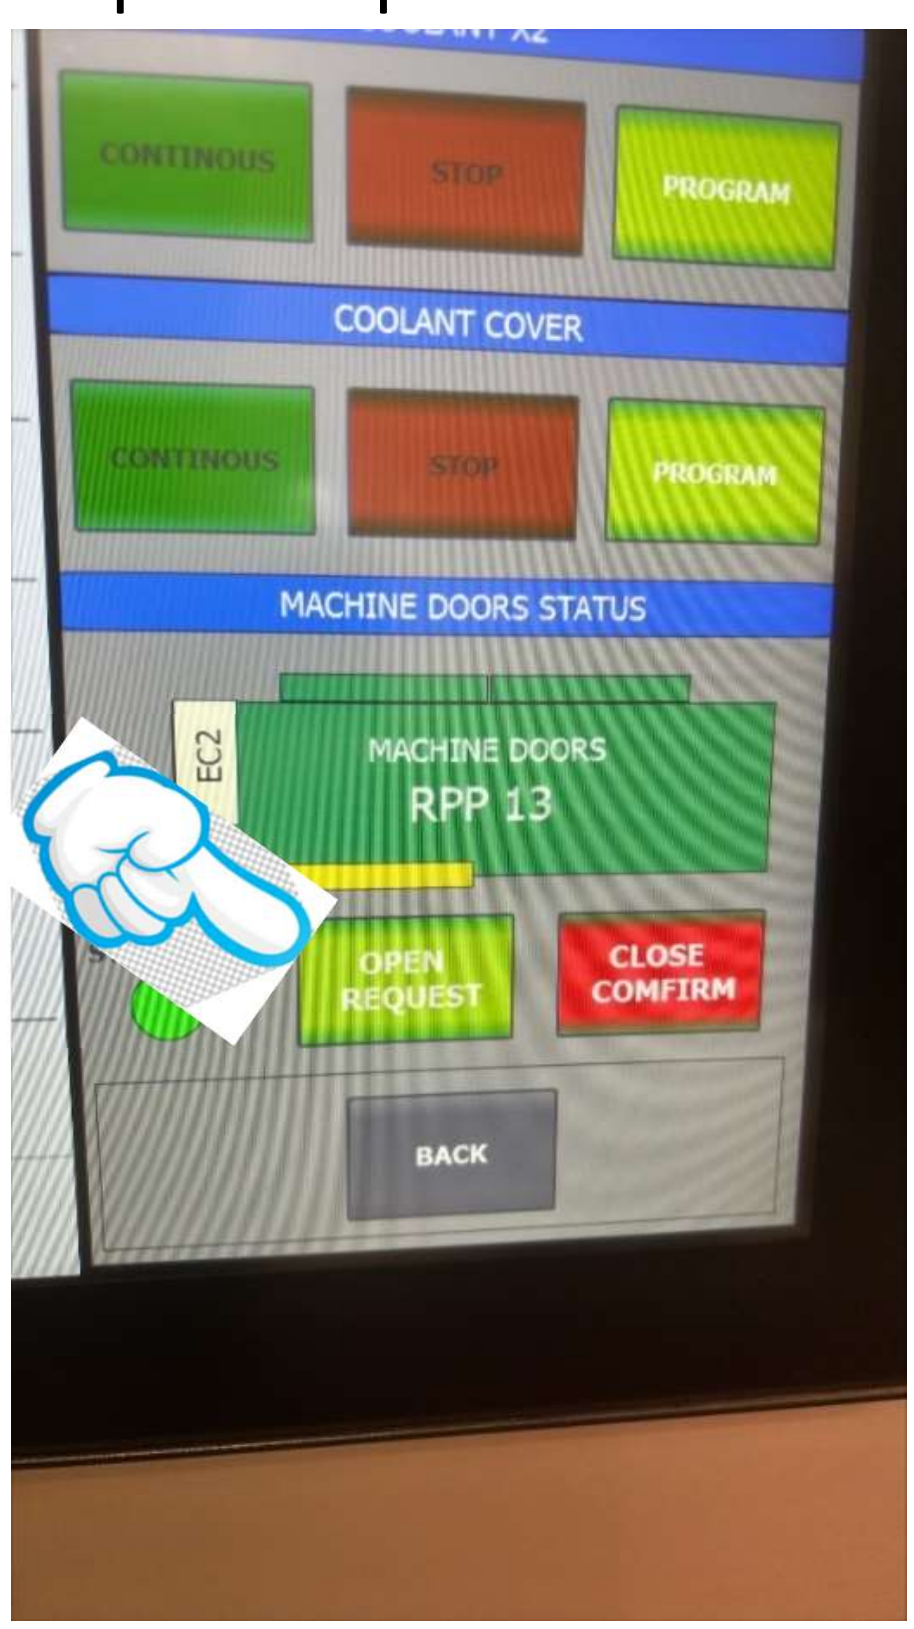

5. Rotate spindle to needed position. C+ or C-

Machines Rotating Hands pinching by machine and pipe in movement.

Keep hands away from pinching zones as well as make sure there are not people interfering with the machine and pipe while moving it.

Risk of damages in the machine

Do the operation carefully to avoid hitting any machine part.

6. Unmount centering jaws. Used torque wrench. Size 14mm

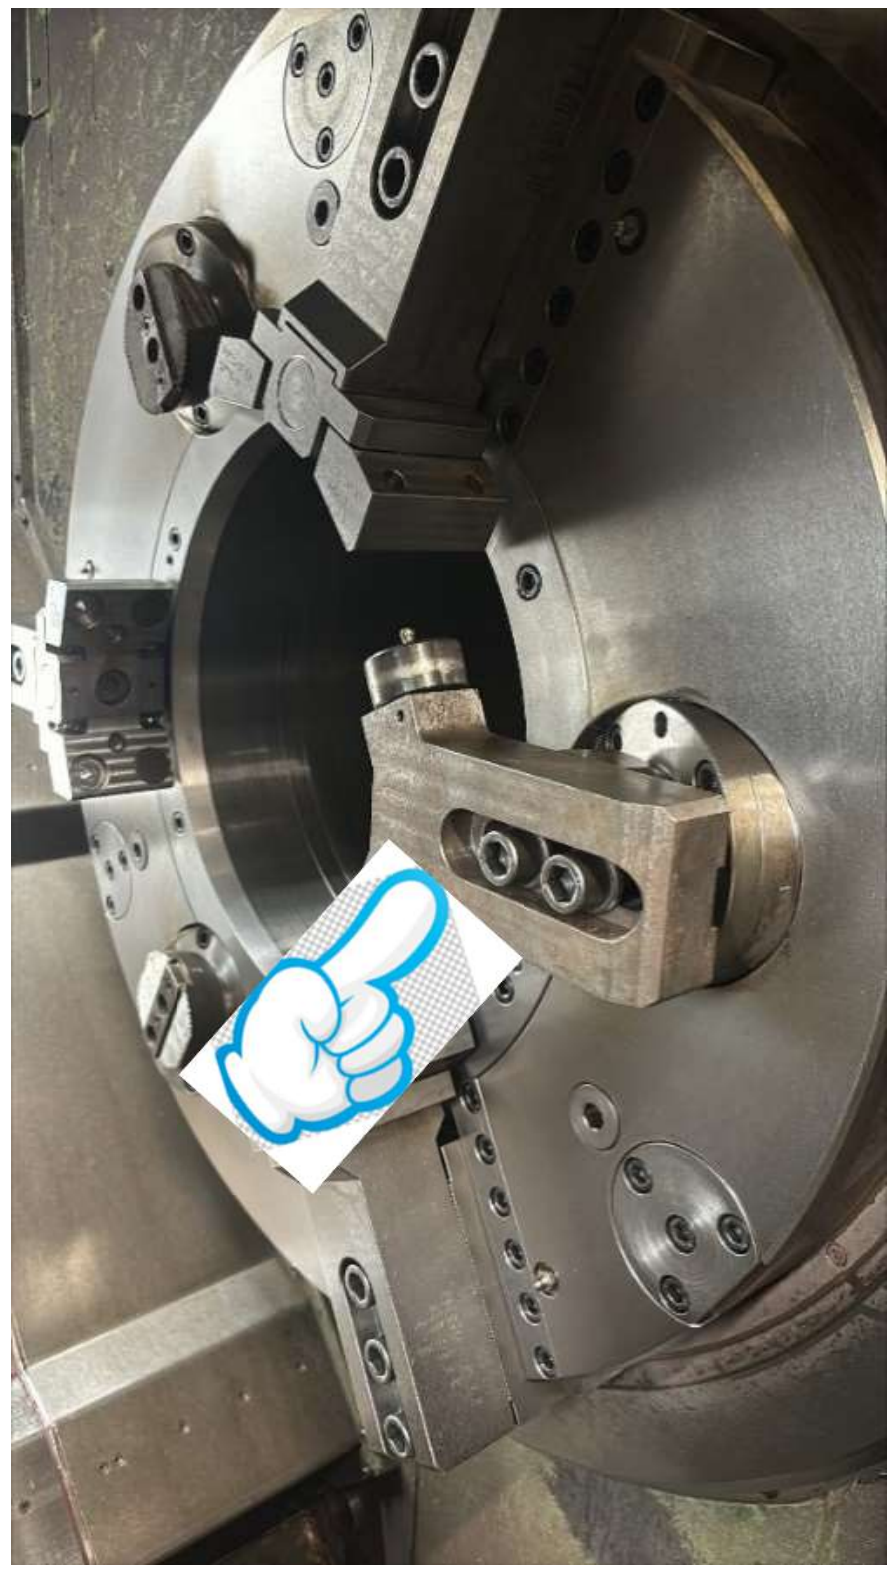

Make sure pathways are free and clean. Use the correct

Risk of falls due to the lack of housekeeping.

Falling Material hand tools.

7. Repeat to the rest centering jaws

8. Put new centering jaws and adjust the position according to the diameter of the pipe to be machined




9. Tight with 155 torque Nm

Risk of being cut by sharp edges.

Hands pinching by machine in movement.

Keep hands away from pinching areas.

10. Remove clamping jaws head


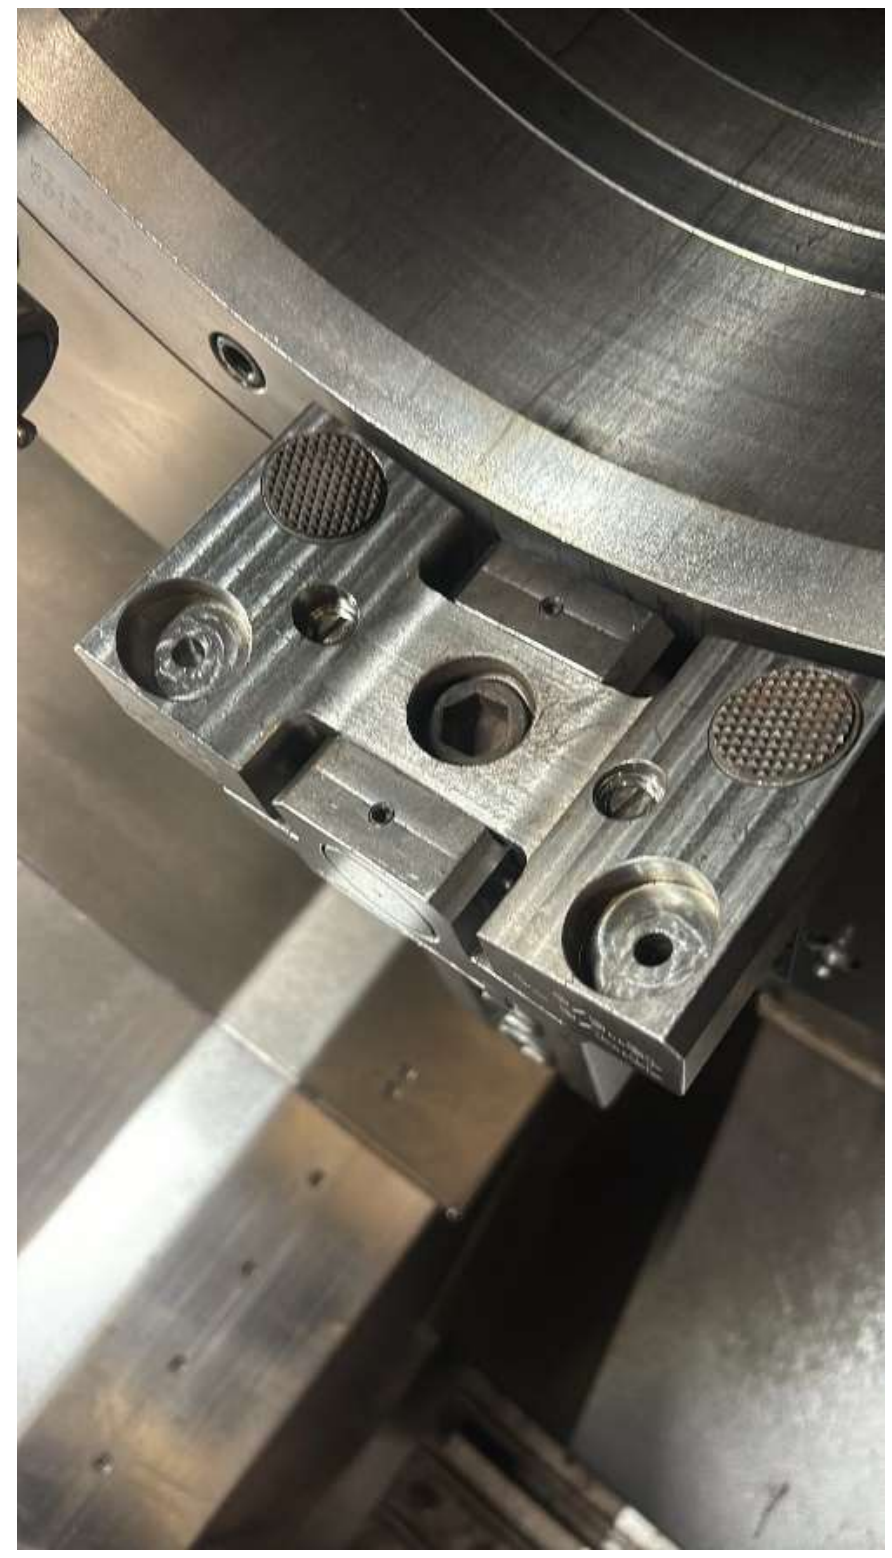

Use 14mm wrench

Clean the jaw seats. Use wd-40 lubricant.

11. Rotate spindle in manual mode by C+ to next clamping jaws

12. Repeat same process to remained clamping jaws

13. Spray wd-40 to old jaws and spray also for new jaws

14. Put need jaws

15. Use long key 12mm to fix it

16. Check the movement of swivel jaws.
If needed use rubber hummer.

17. Rotate spindle to next position

18. Repeat same process to other jaws

19. Loose the bolts and adjust the jaws position based on the marks engraved on the jaws and jaw holders

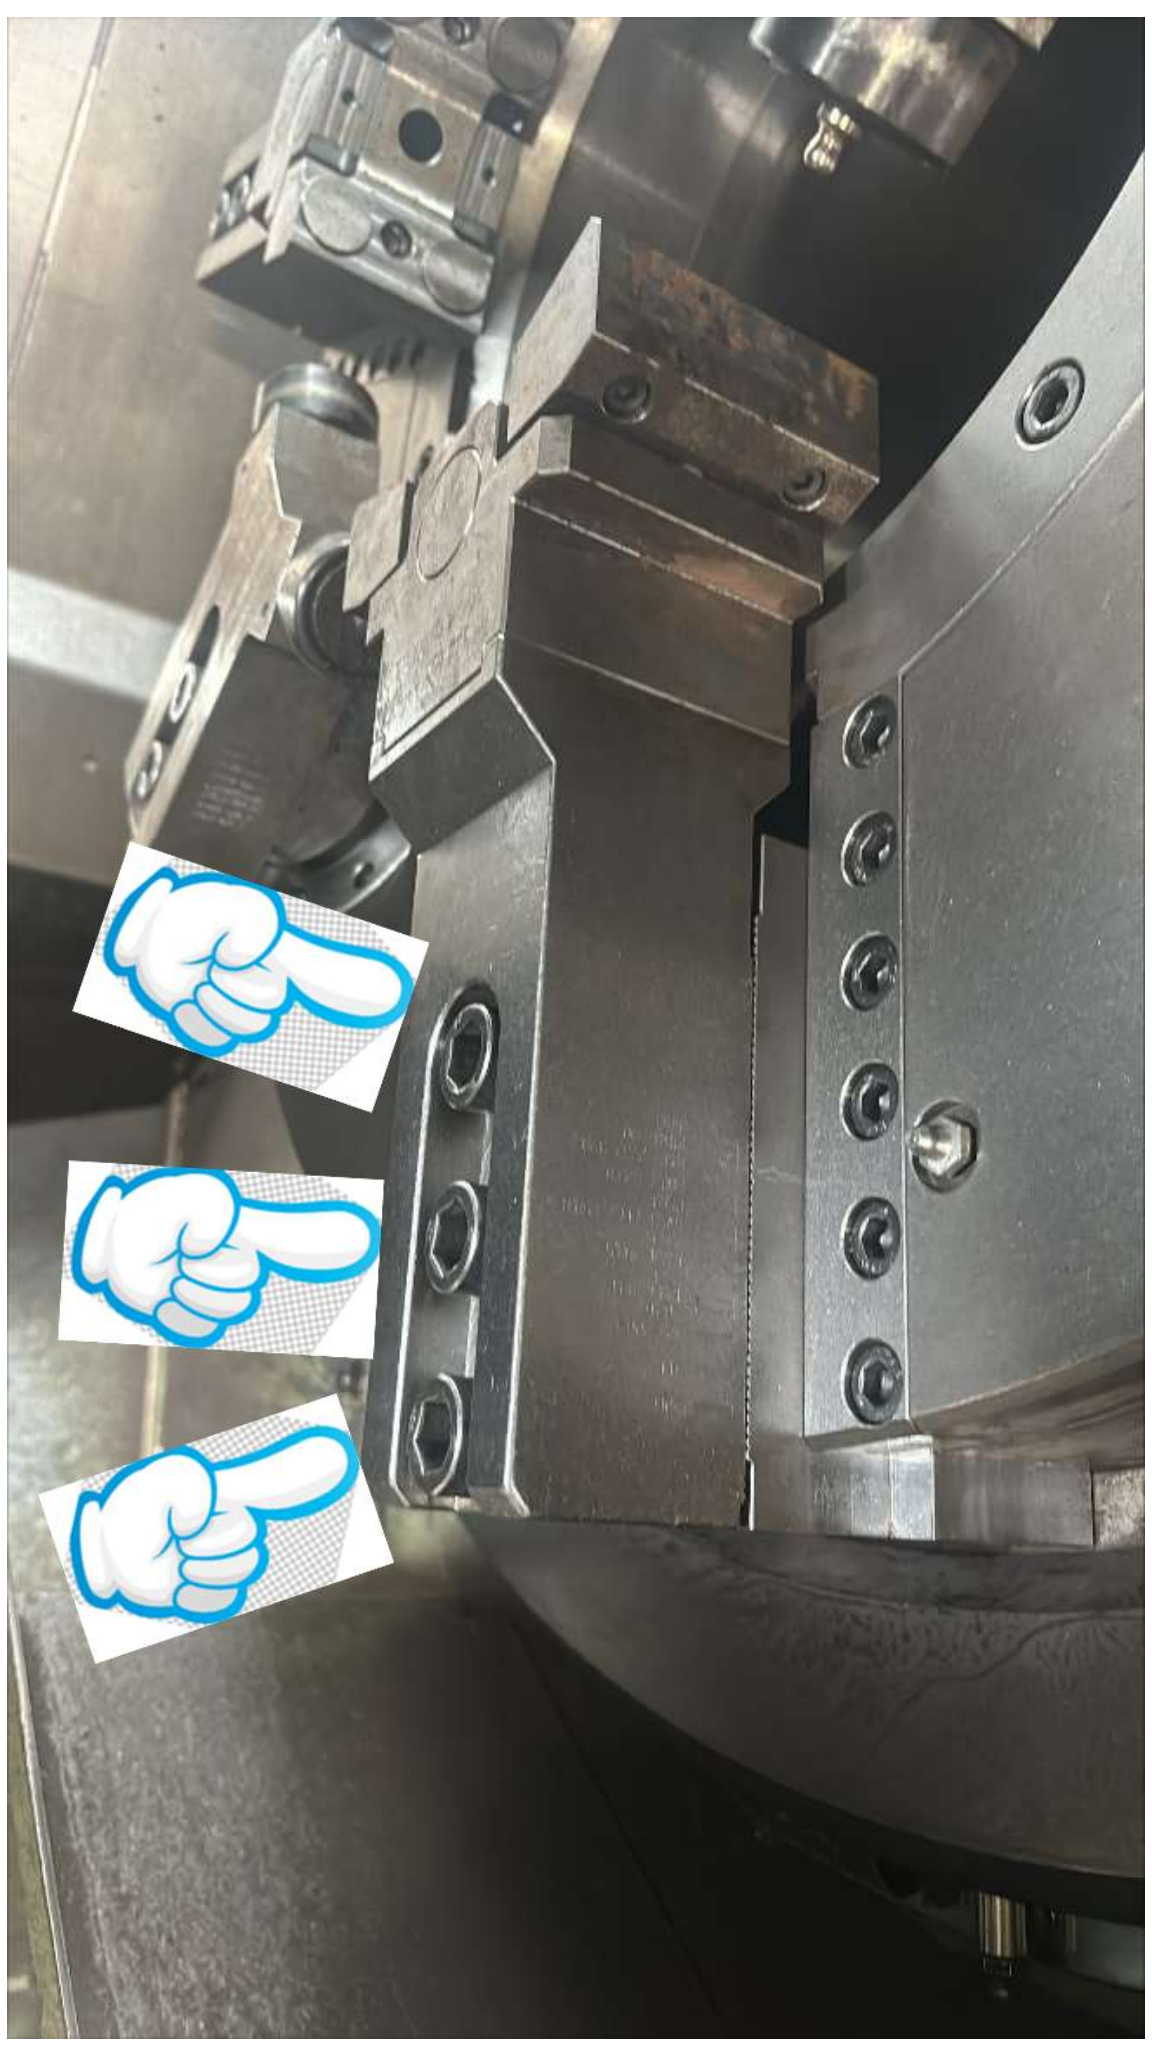


101.6
114.3
127 - 206.4
152.4 - 298.5
244.5
177.8
260.4 - 323.9
346.1


282.6 - 346.1

20. Move jaws to needed position by using hammer and screwdriver.

If needed remove the holder and clean it

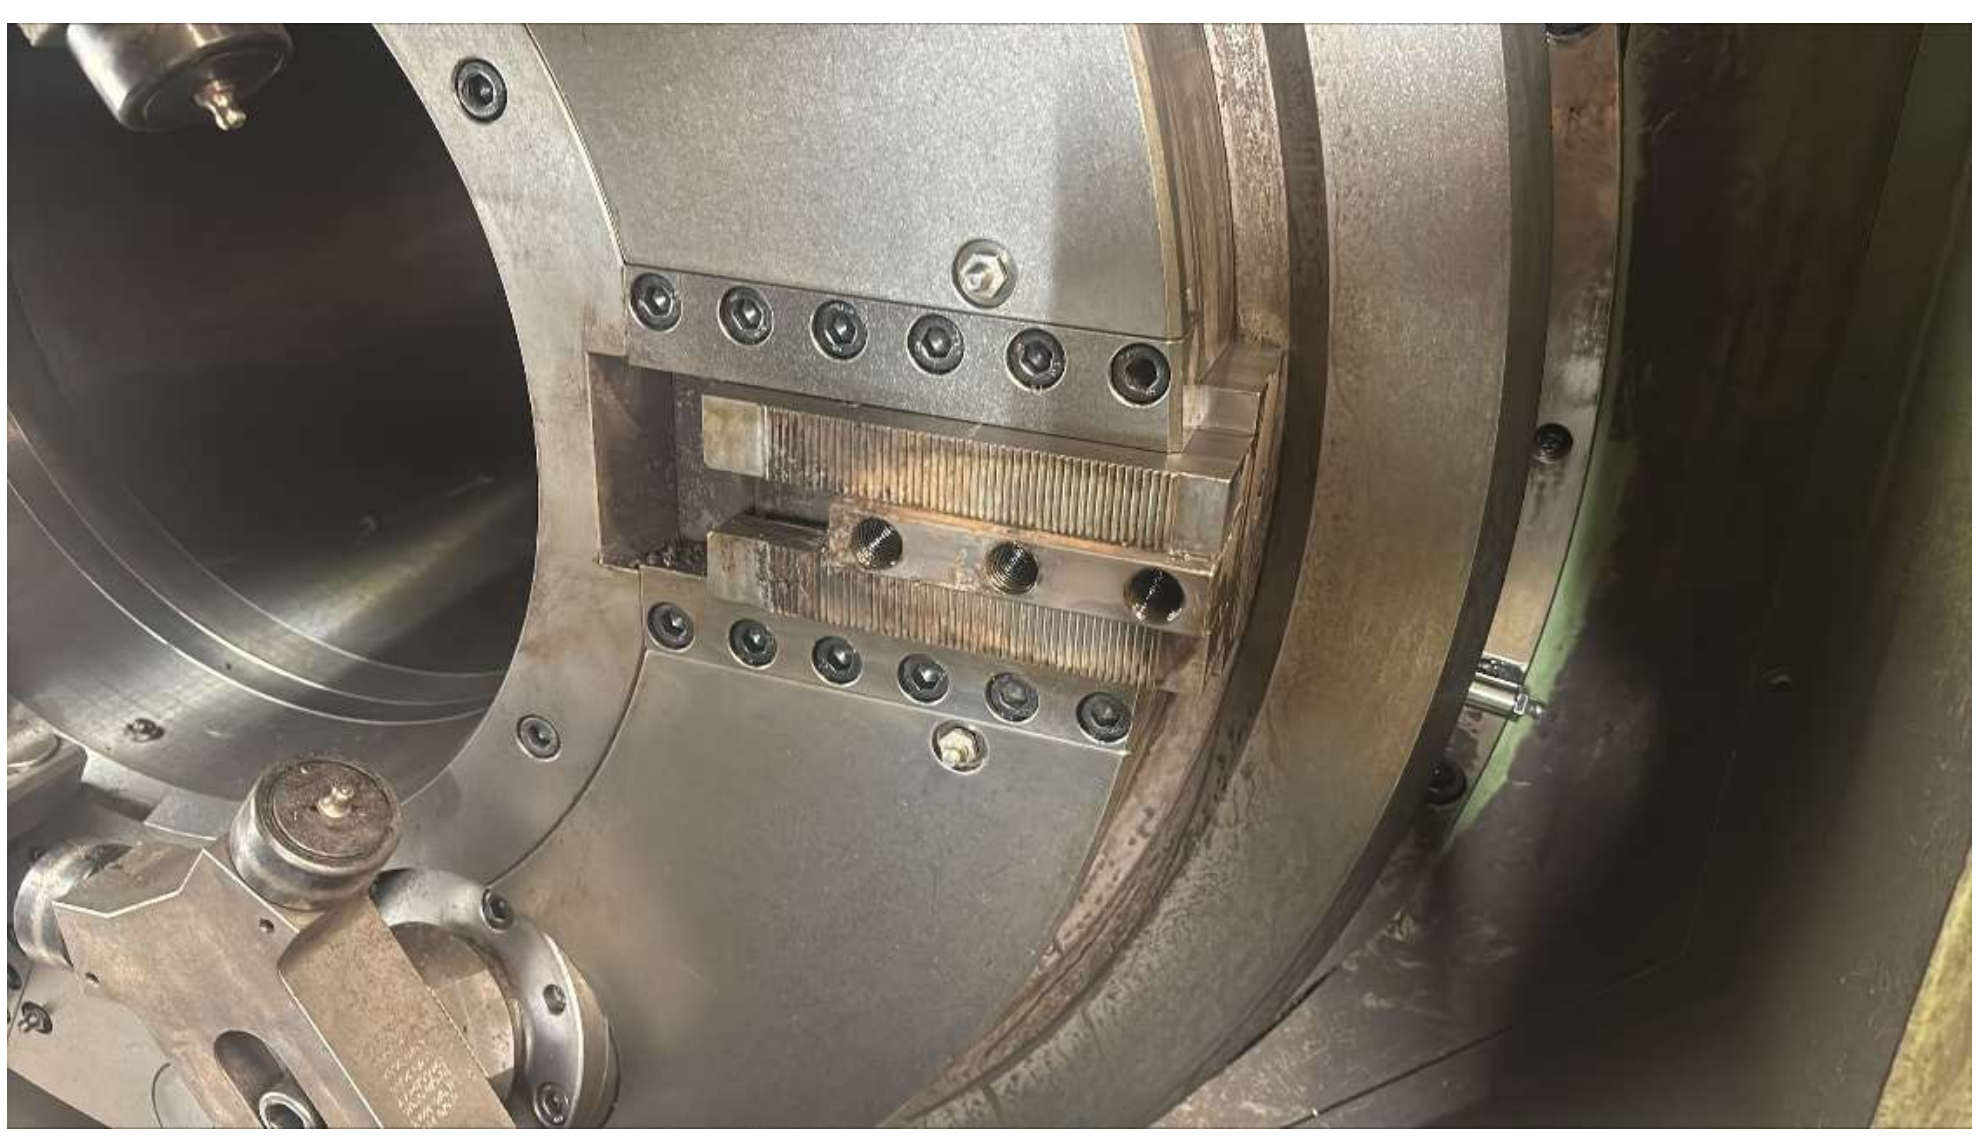

Use wd-40 for cleaning. Put back to needed position and tight the bolt with key 14mm
If needed remove all holders, clean the seat positions with brush below and then put back

Risk of being pinched or hit because tool comes off.

Be sure the tools are clean and fix them properly before tightening the screws.

Risk of foreign particles getting into your eyes during cleaning.

Use your safety glasses always as well as be sure the people around the area are using them.

21. Cross check the position of jaws

22. Removing process of old plug

23. Remove support rubber using 5mm key

24. Put bolts back

25. Use locking ring

26. Ungrip plug

Use support of helper

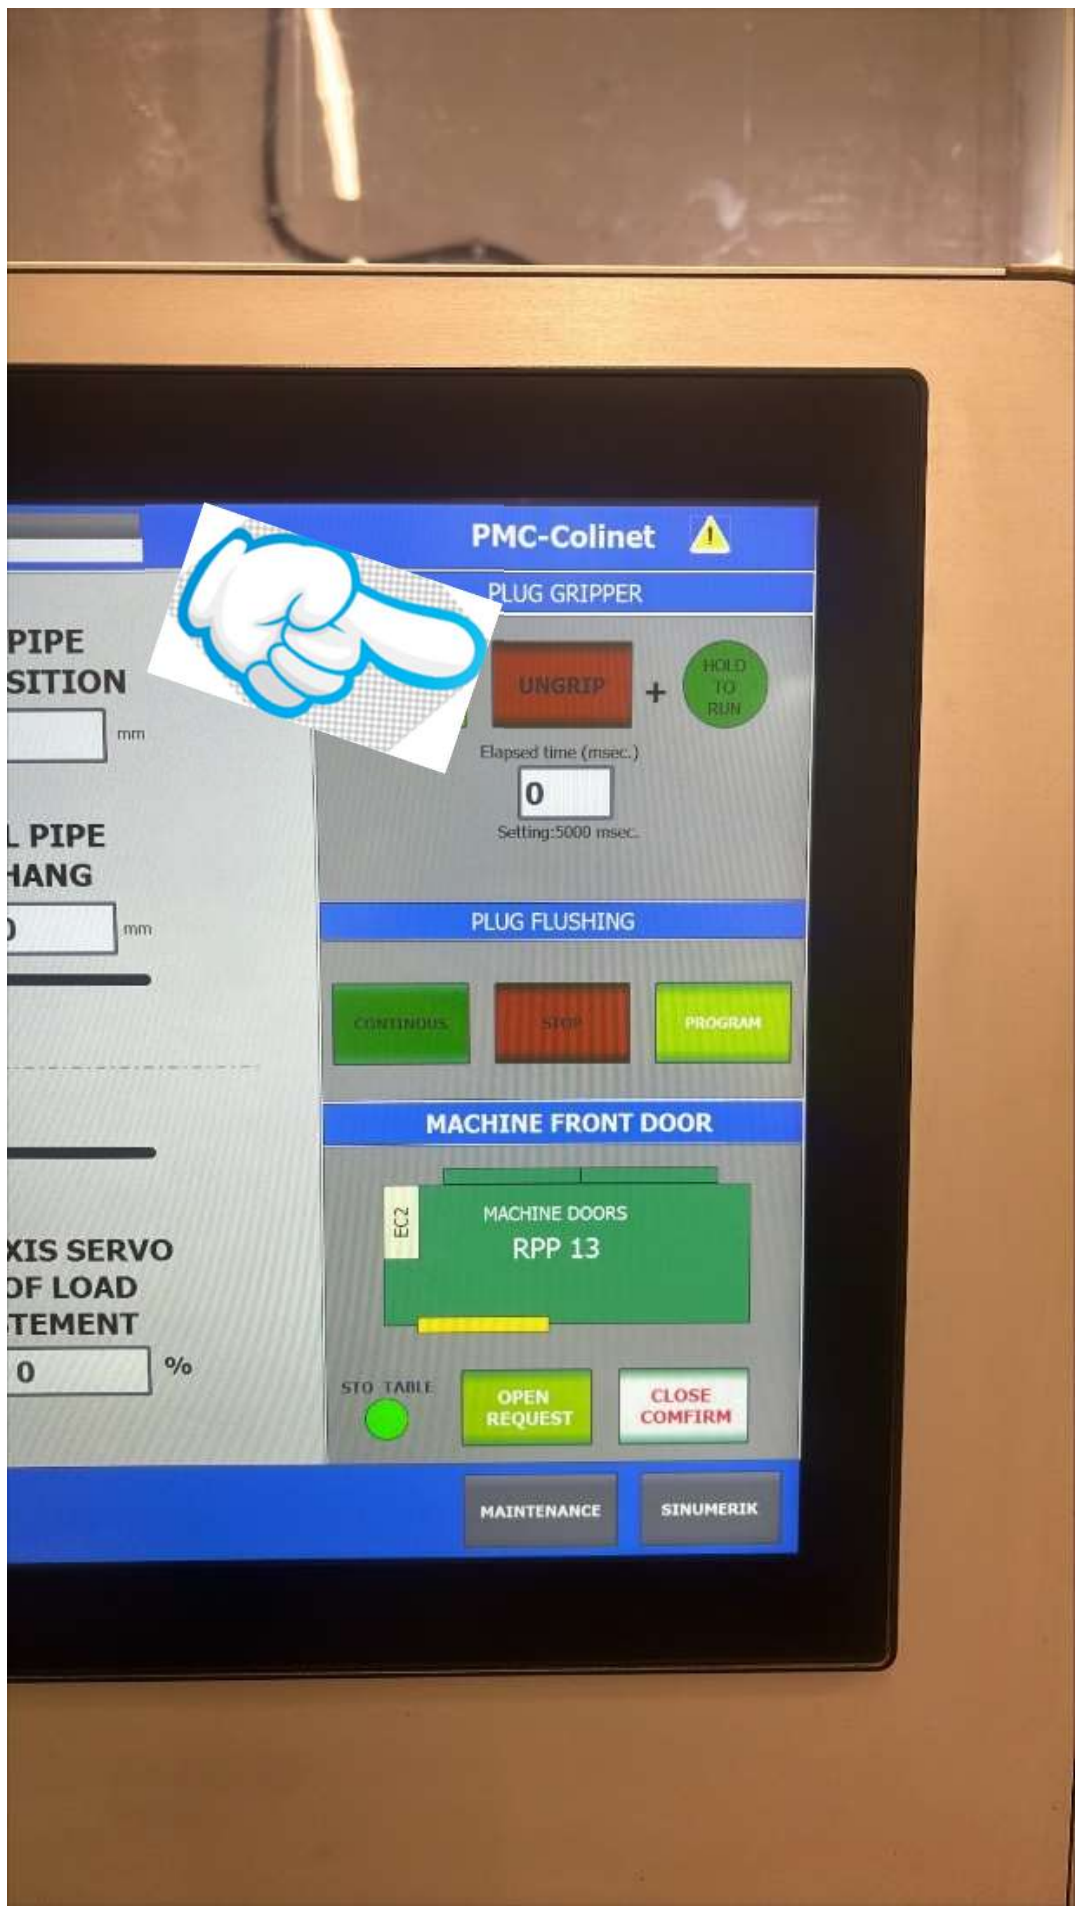

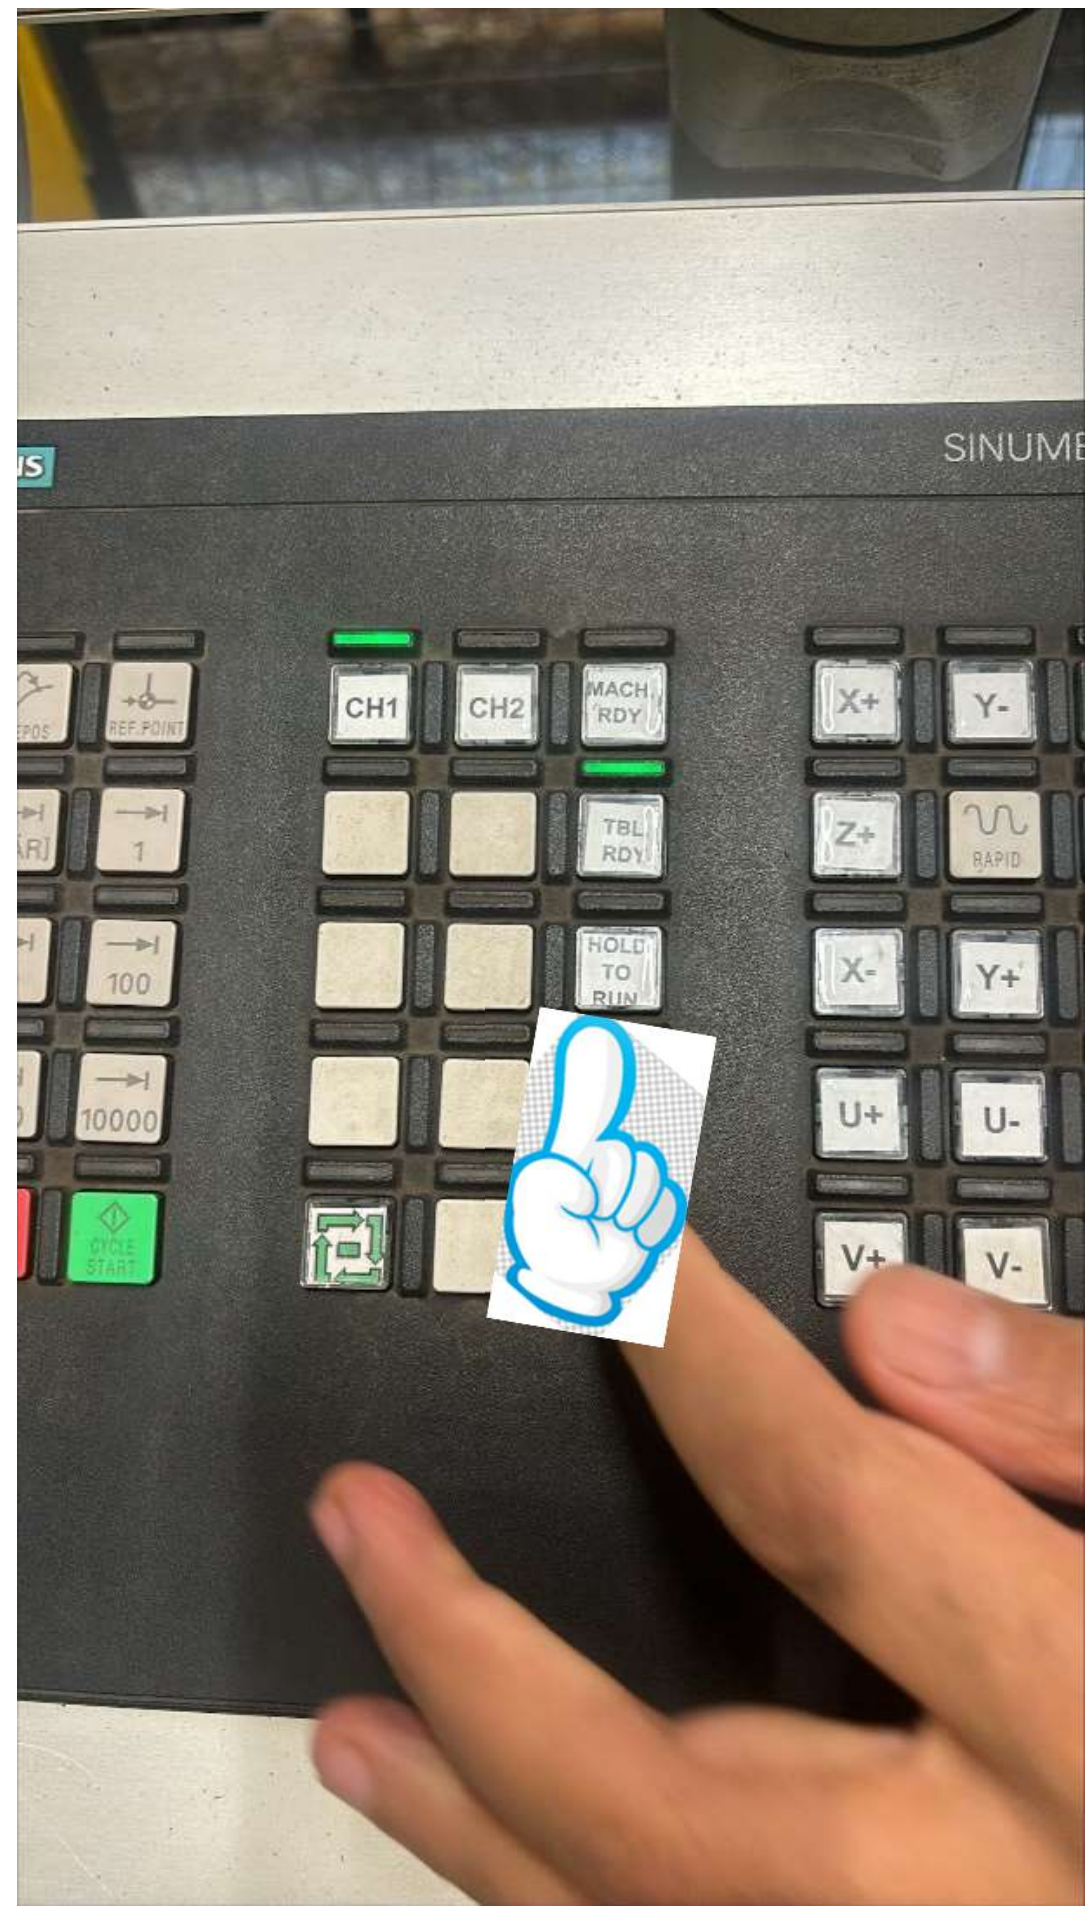

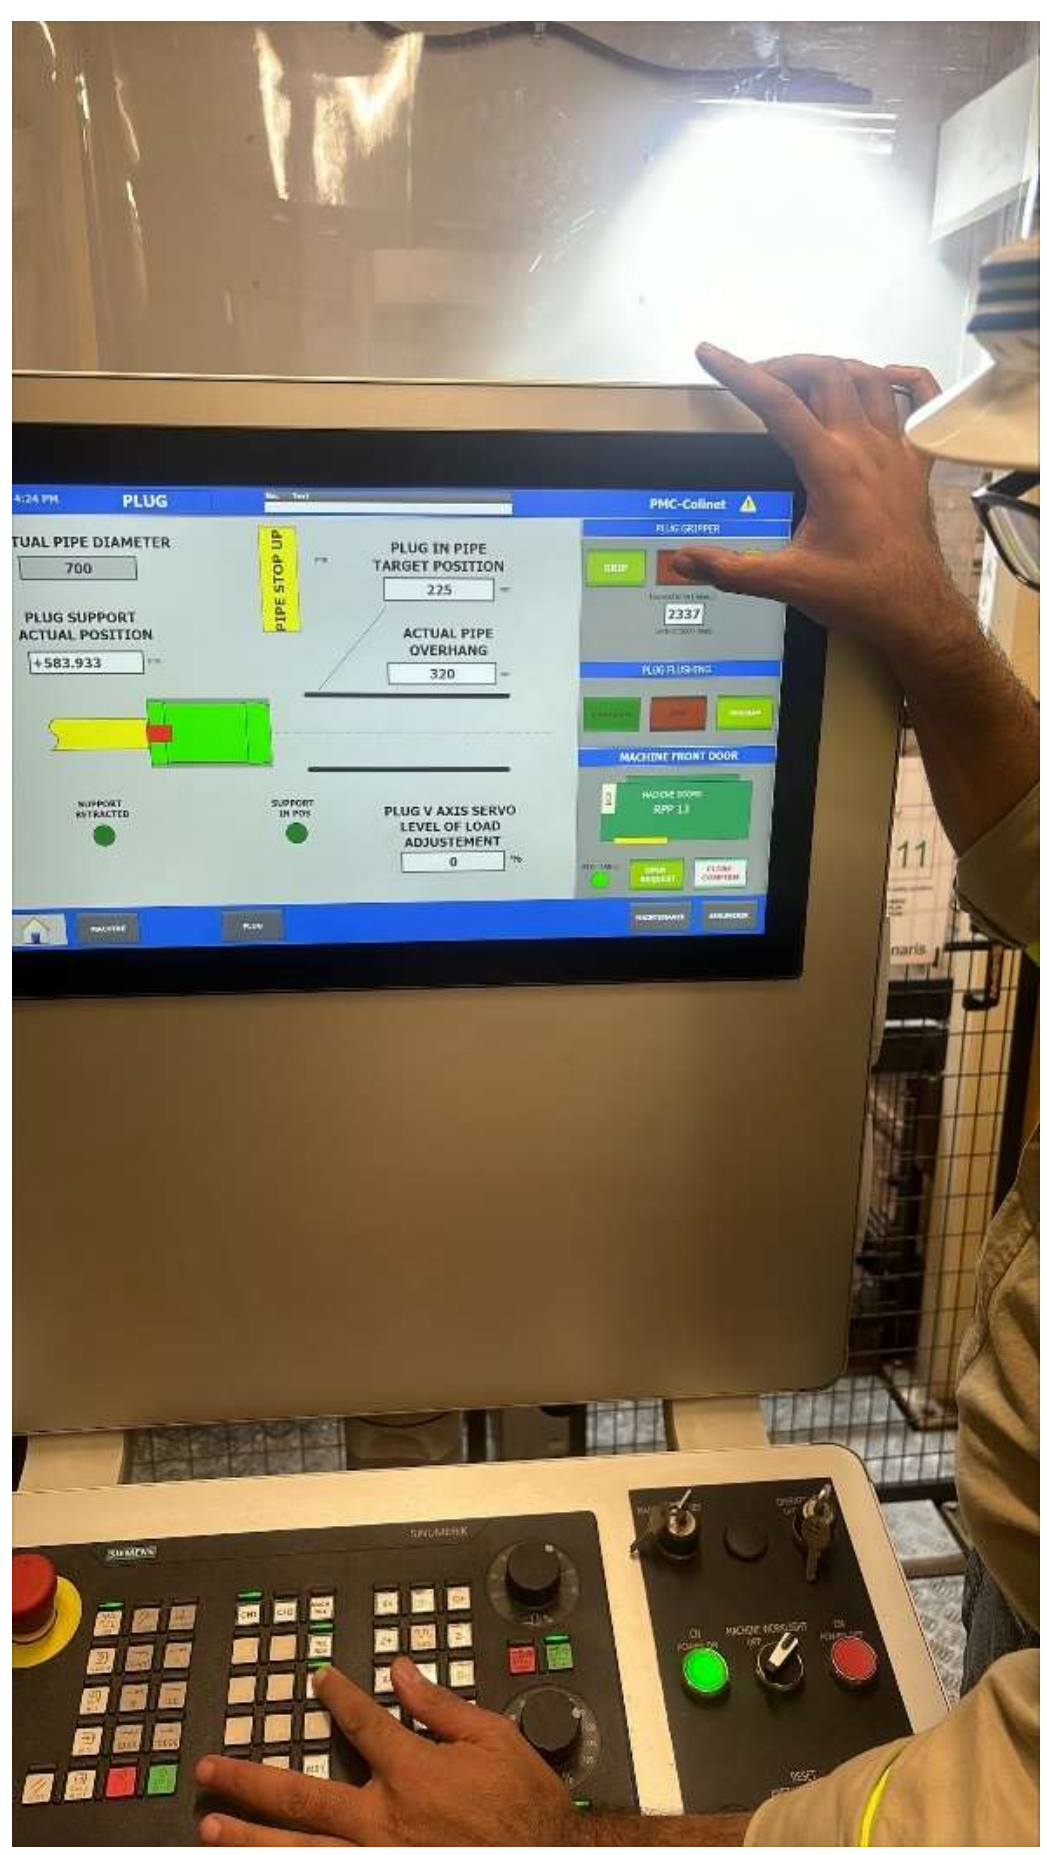

Risk of being pinched or hit because tool comes off.

Keep your workplace clean, and before this operation be sure the ground is free of foreign particles, oil, coolant

One operator should hold plug and 2nd operator push at same time the button “**HOLD TO RUN**” on panel and the “**UNGRIP**” in touch screen

27. Put new plug

One operator set the plug and second one selects the “**GRIP**” in touch panel

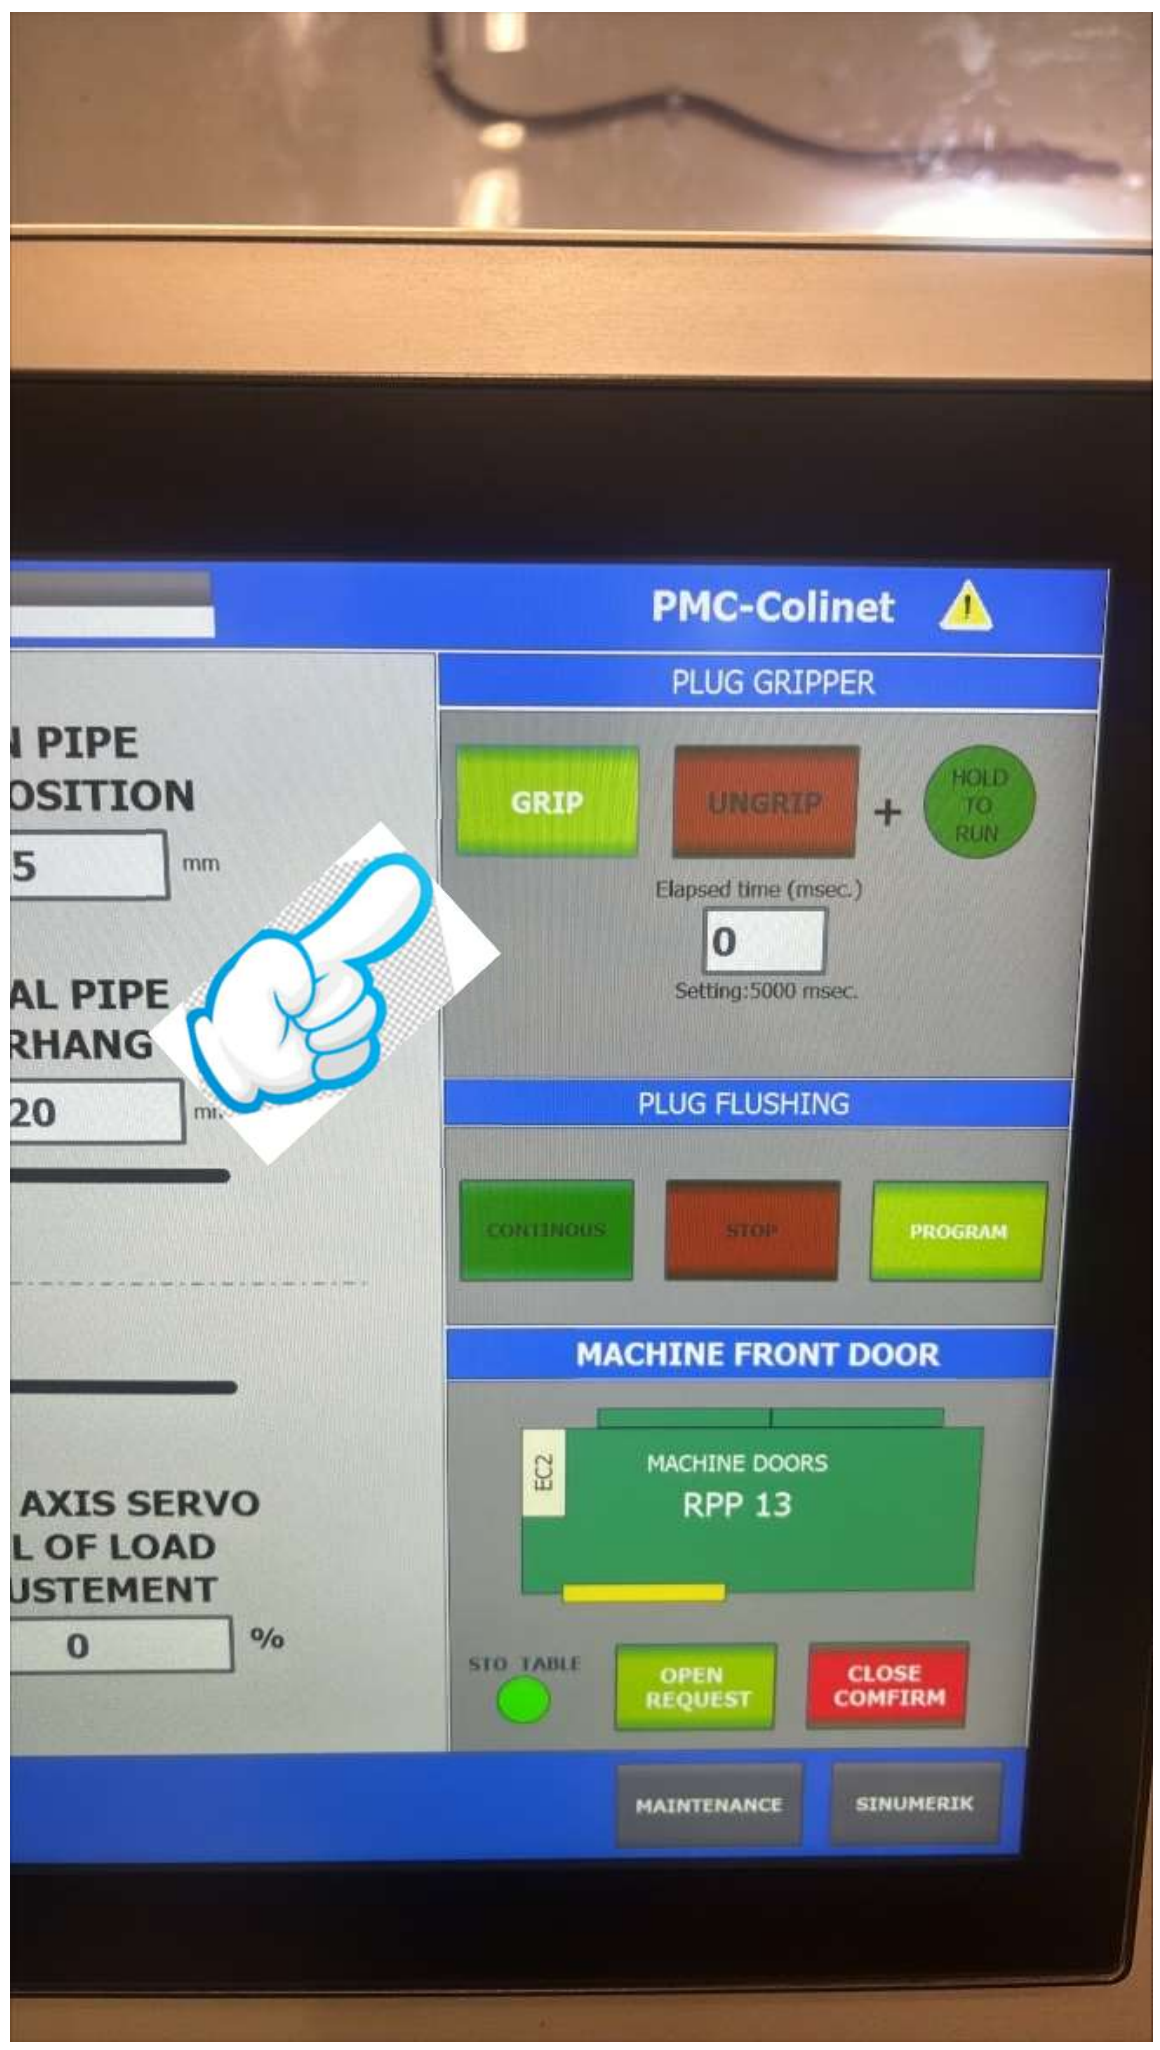

28. Remove locking ring

29. Put support rubber

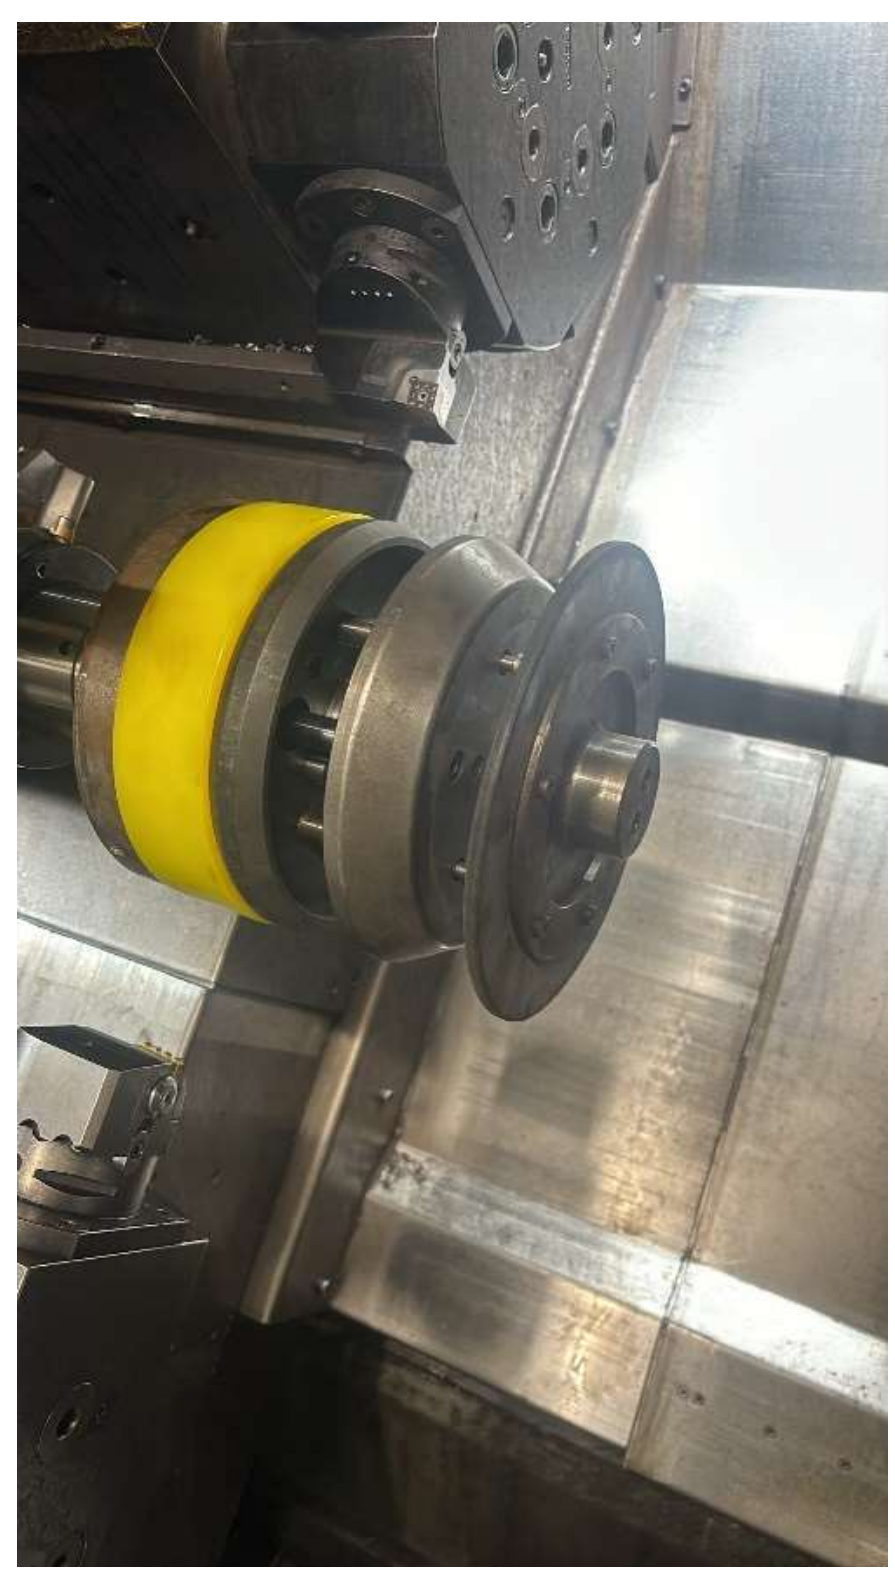

*Check dimensions of rubber

30. Rear chuck change over

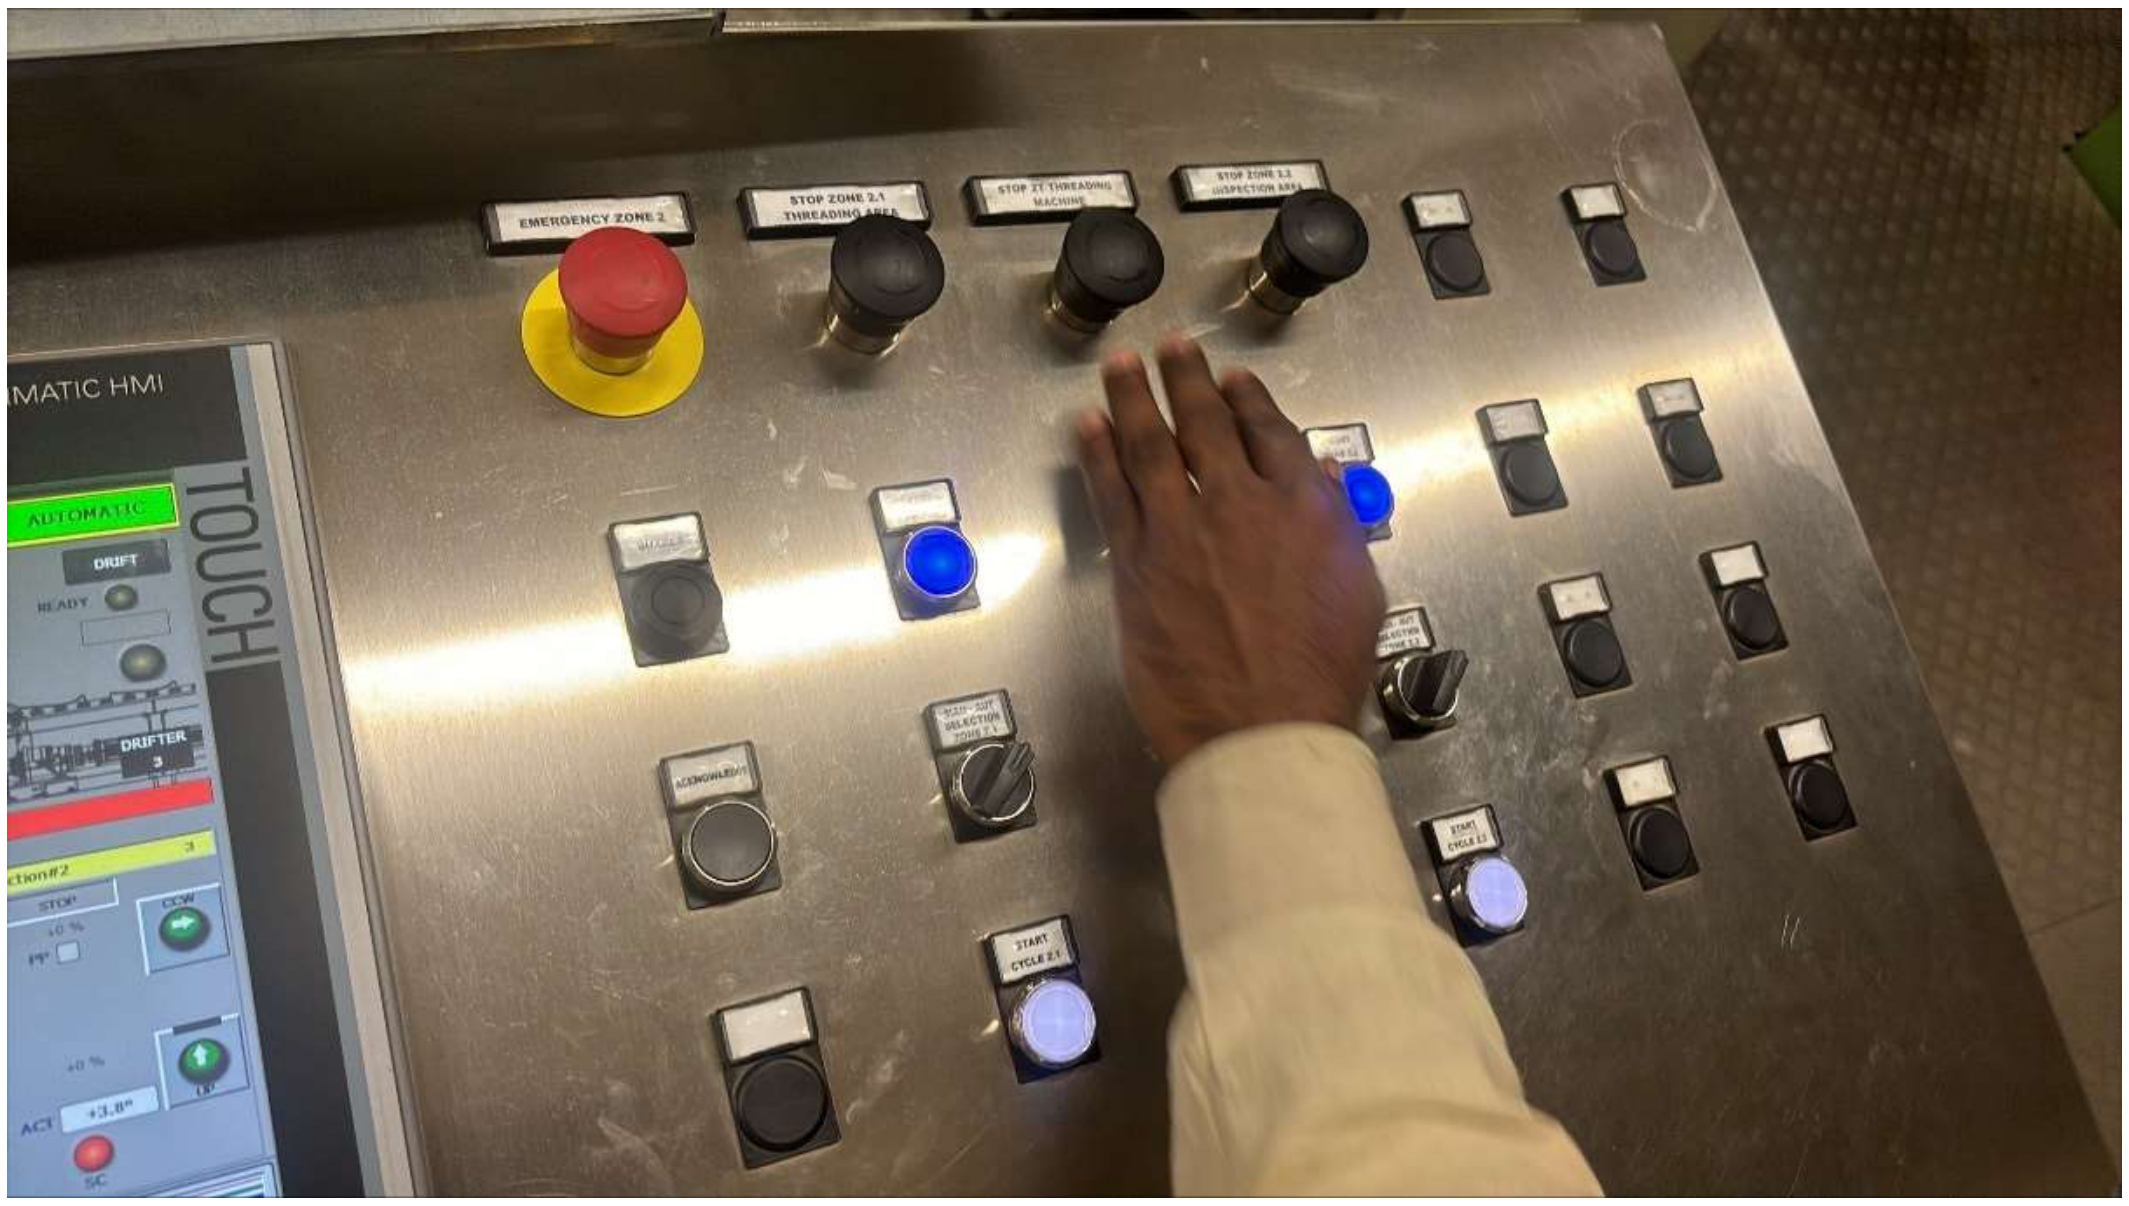

Off the line, put tag and Open gate

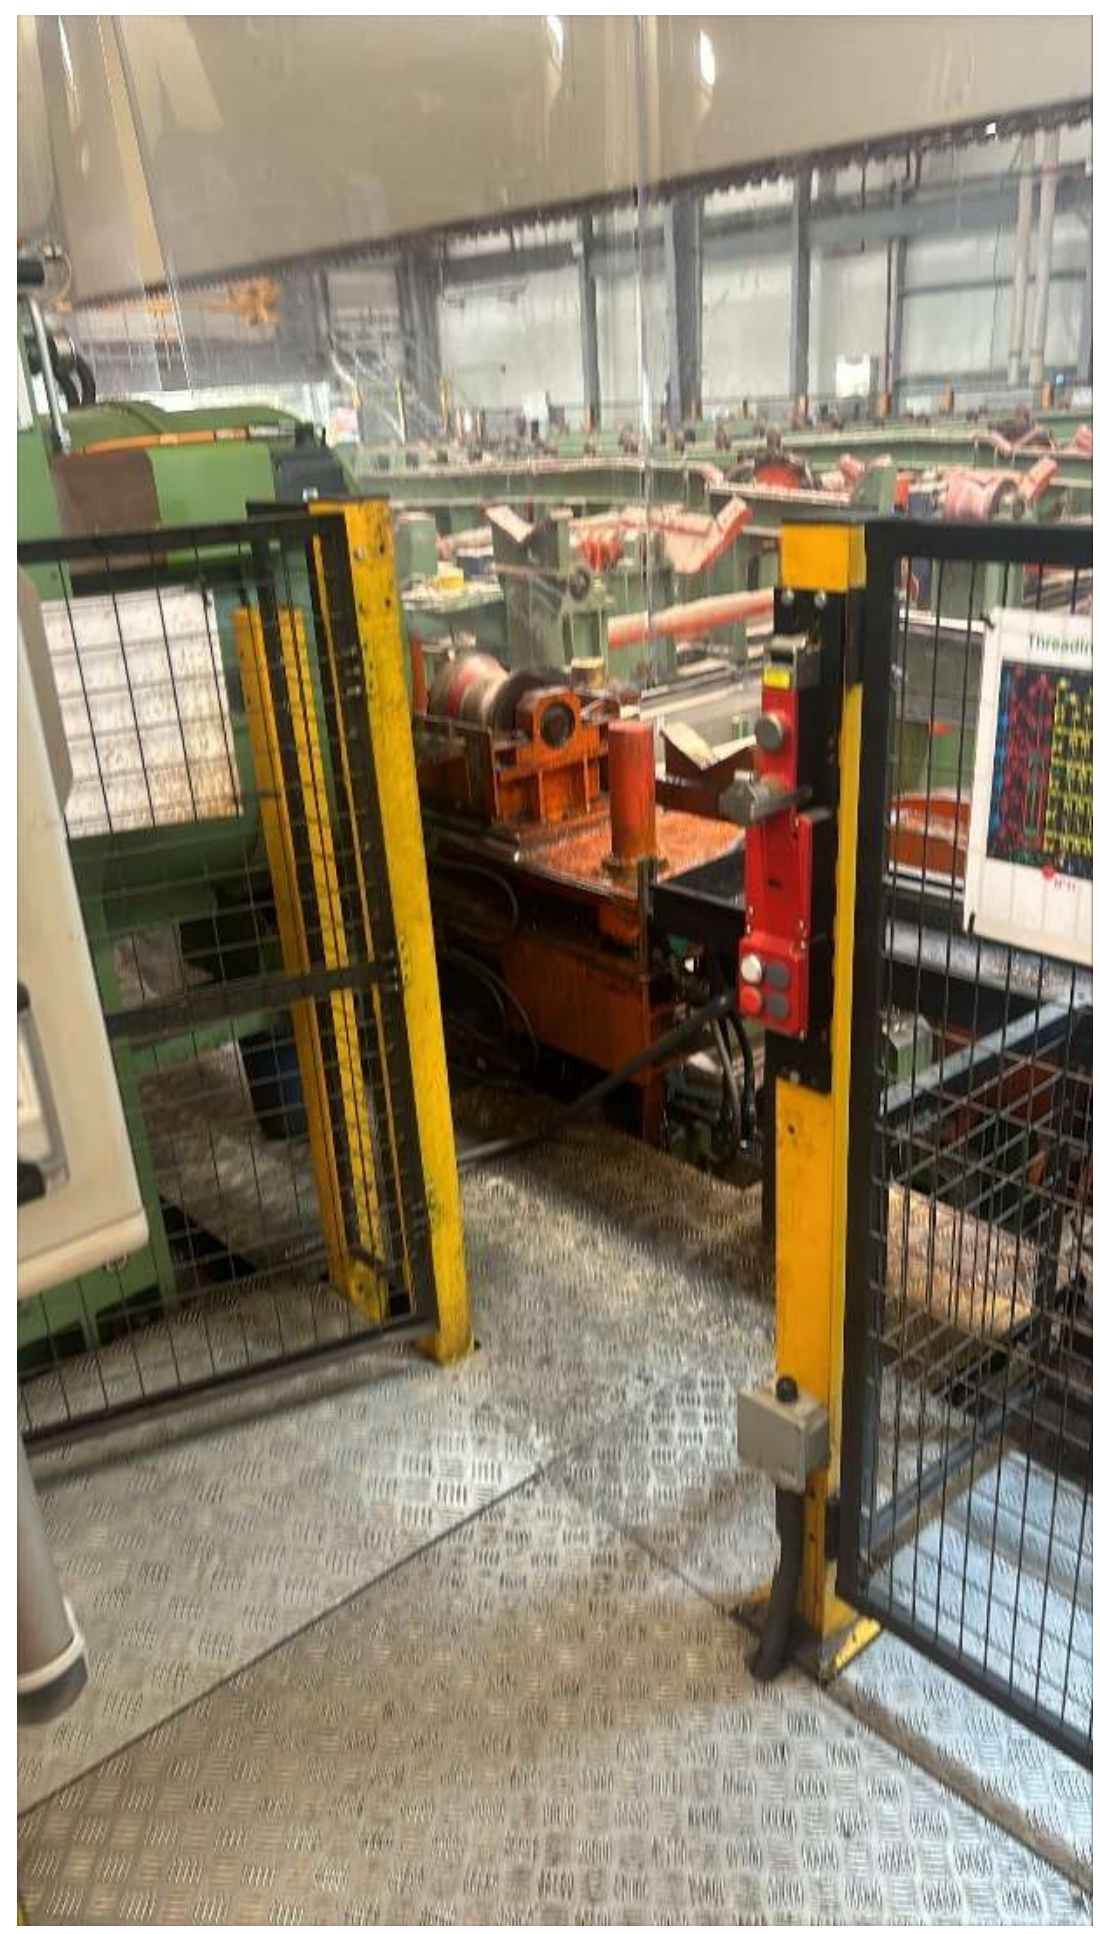

31. Remove old jaws

Use 14mm wrench key

If needed clean the bolts of jaws

32. Put new jaws and tight it

Make sure pathways are free and clean. Use the correct

Risk of falls due to the lack of housekeeping.

Falling Material hand tools.

33. Close the gate, on the line, rotate spindle to need position.
Repeat to other jaws by rotating spindle

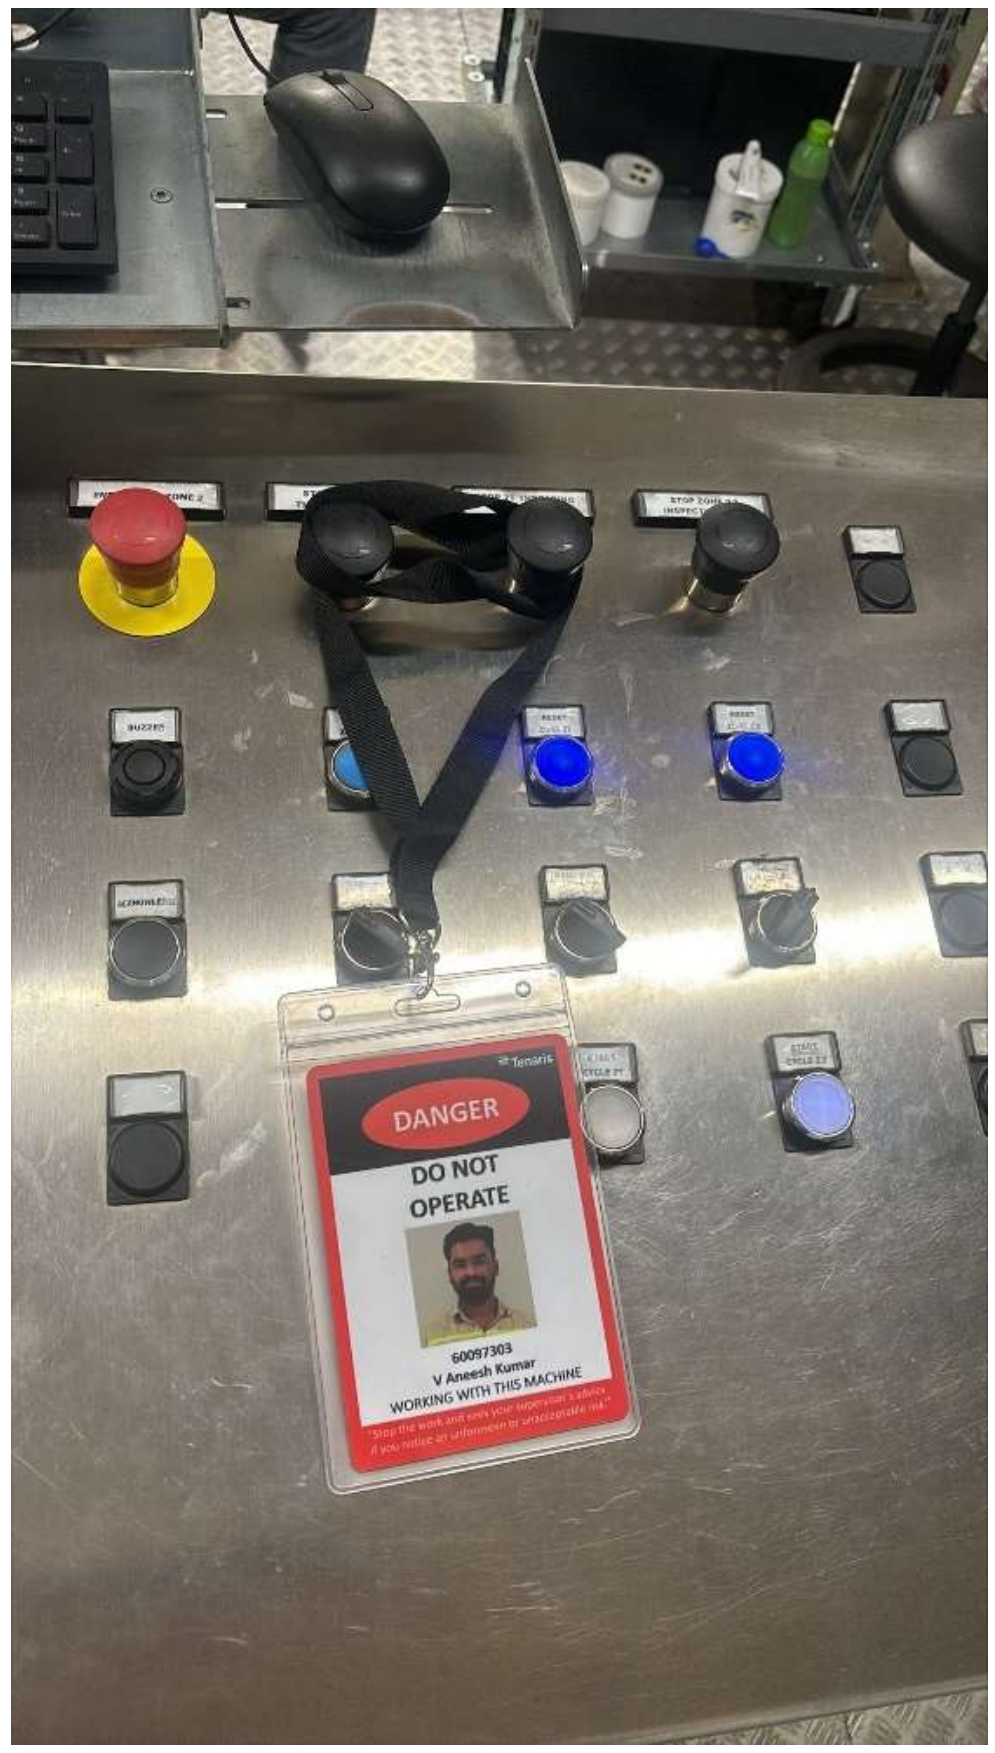

Rotate spindle and off the line

Repeat process to rest jaws

34. Close gate and online

35. Change the program

Turn On the machine on Touch Screen

Follow following steps to change the program

Select machine in touch screen

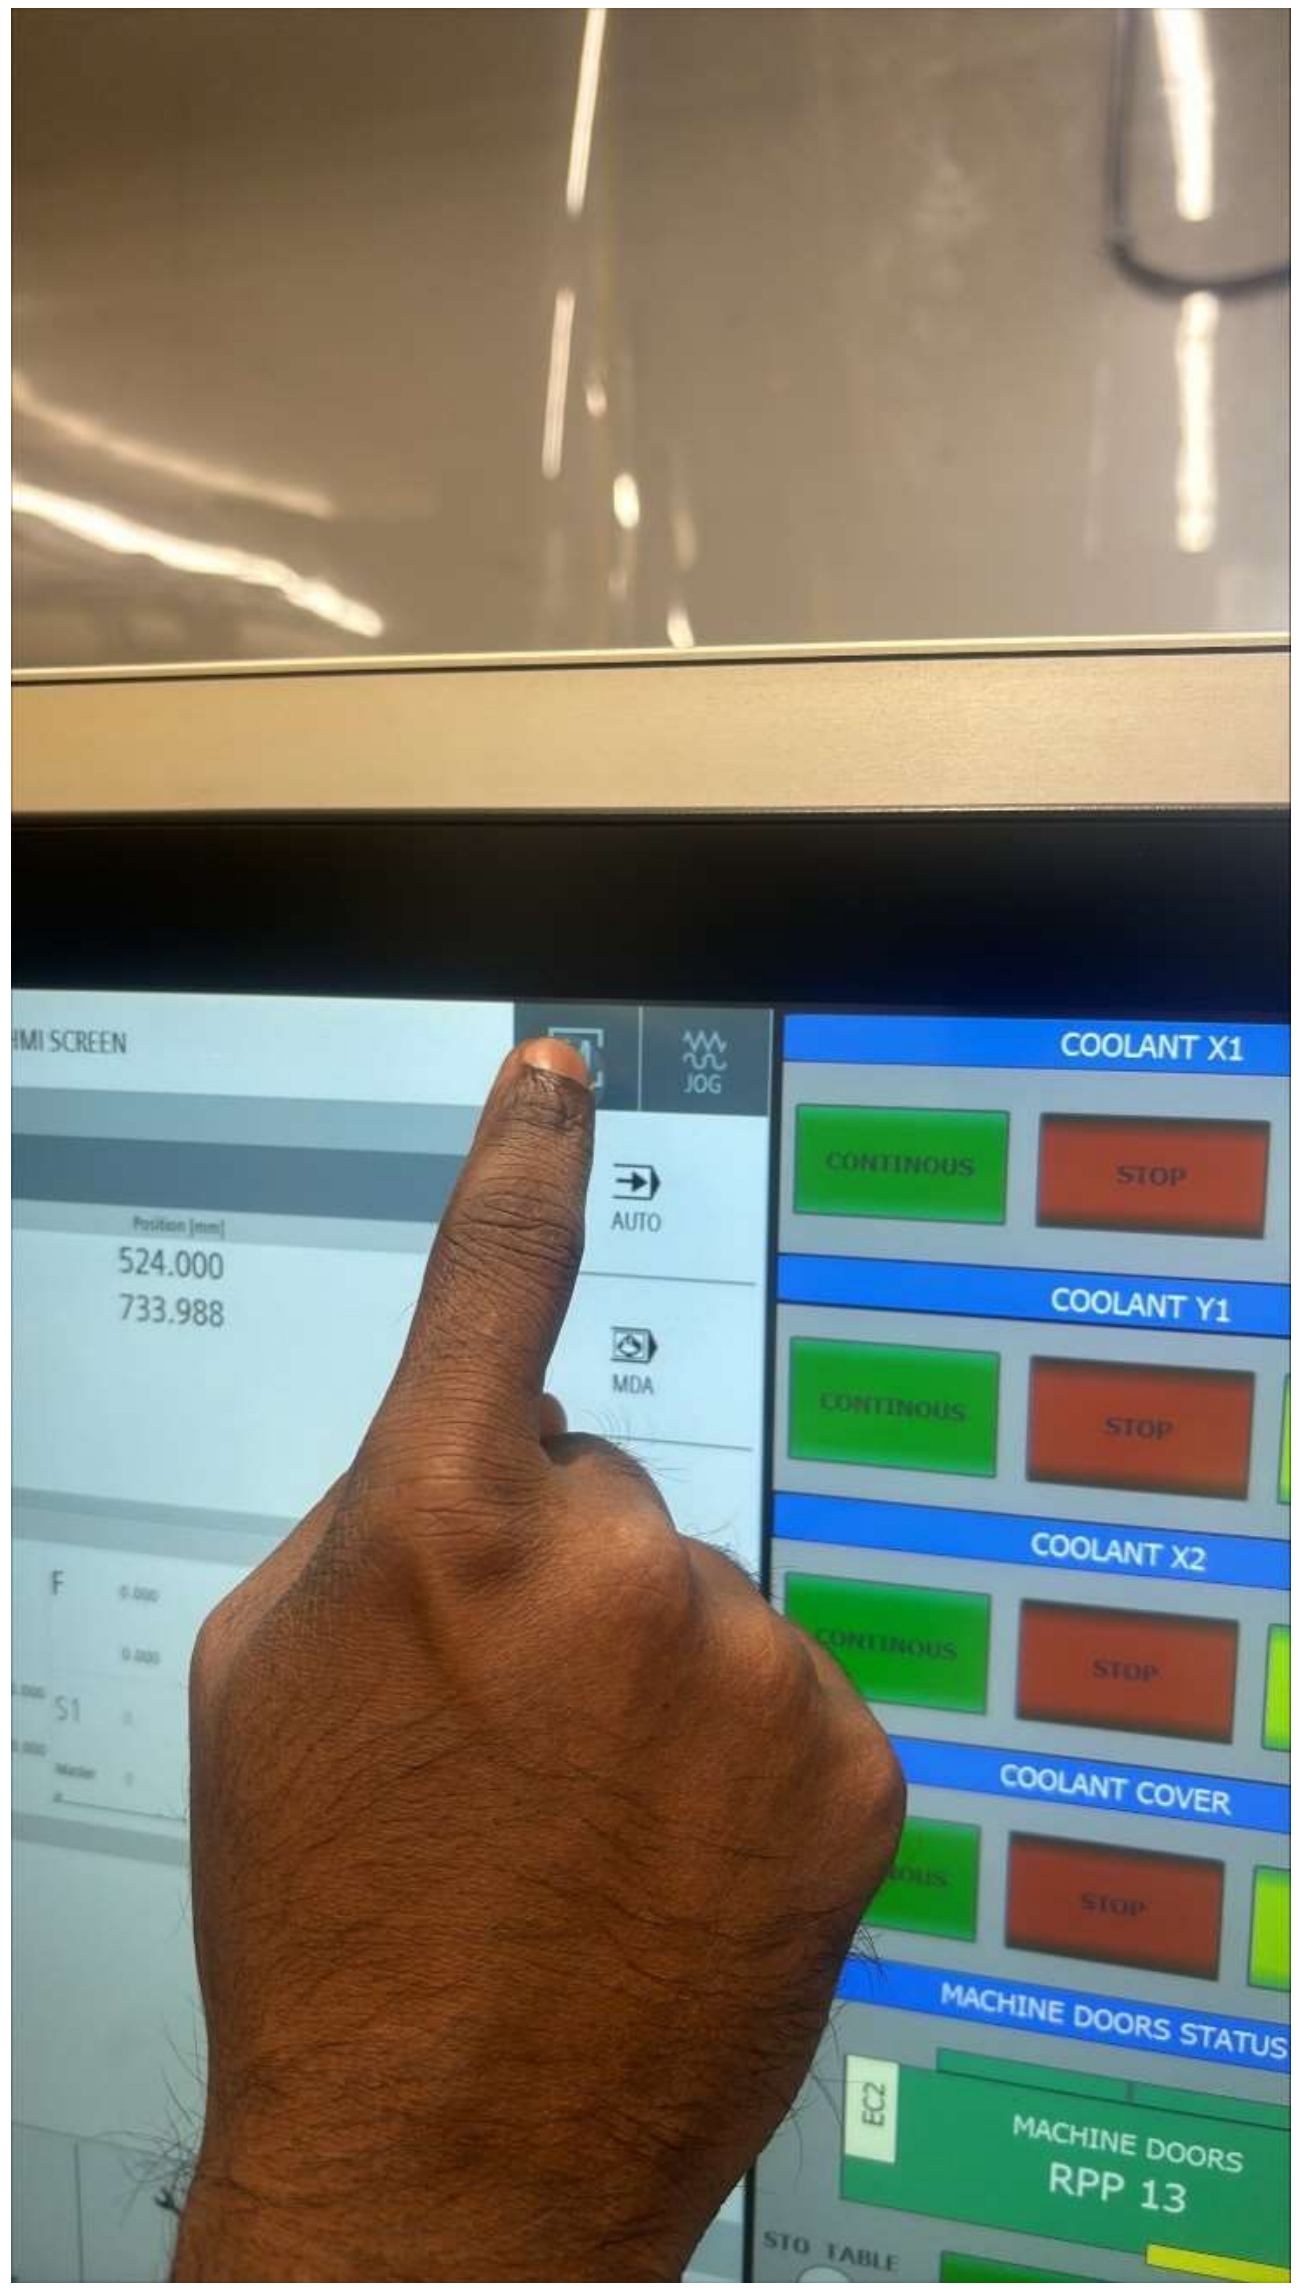

Select the program as shown below

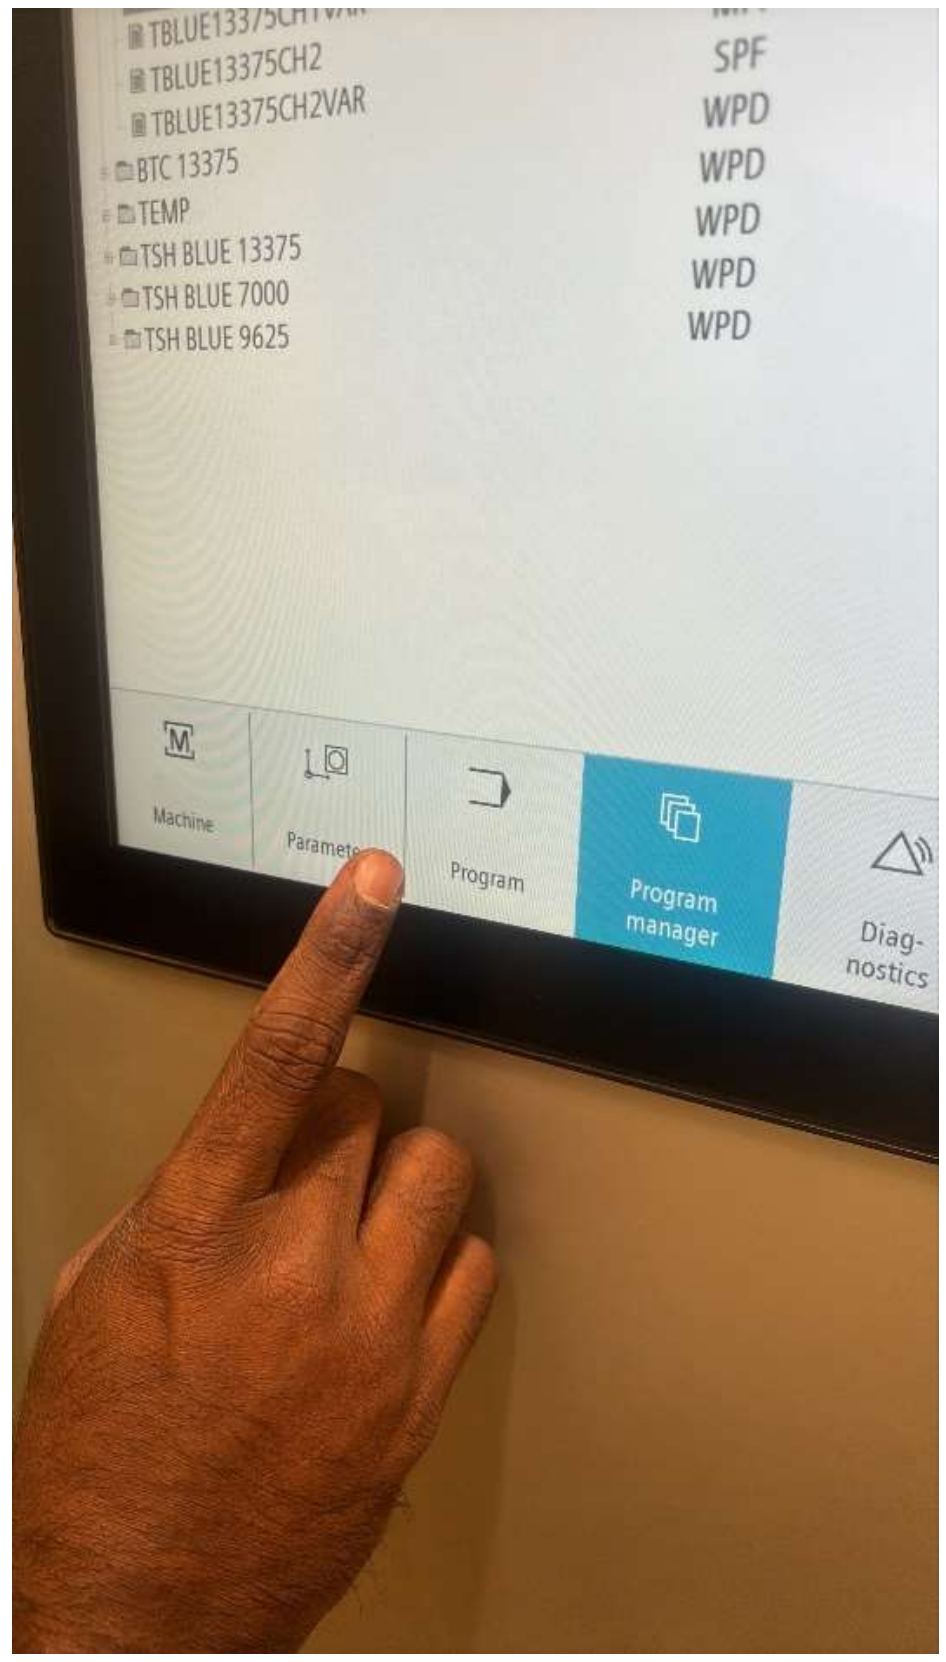

Go to need program

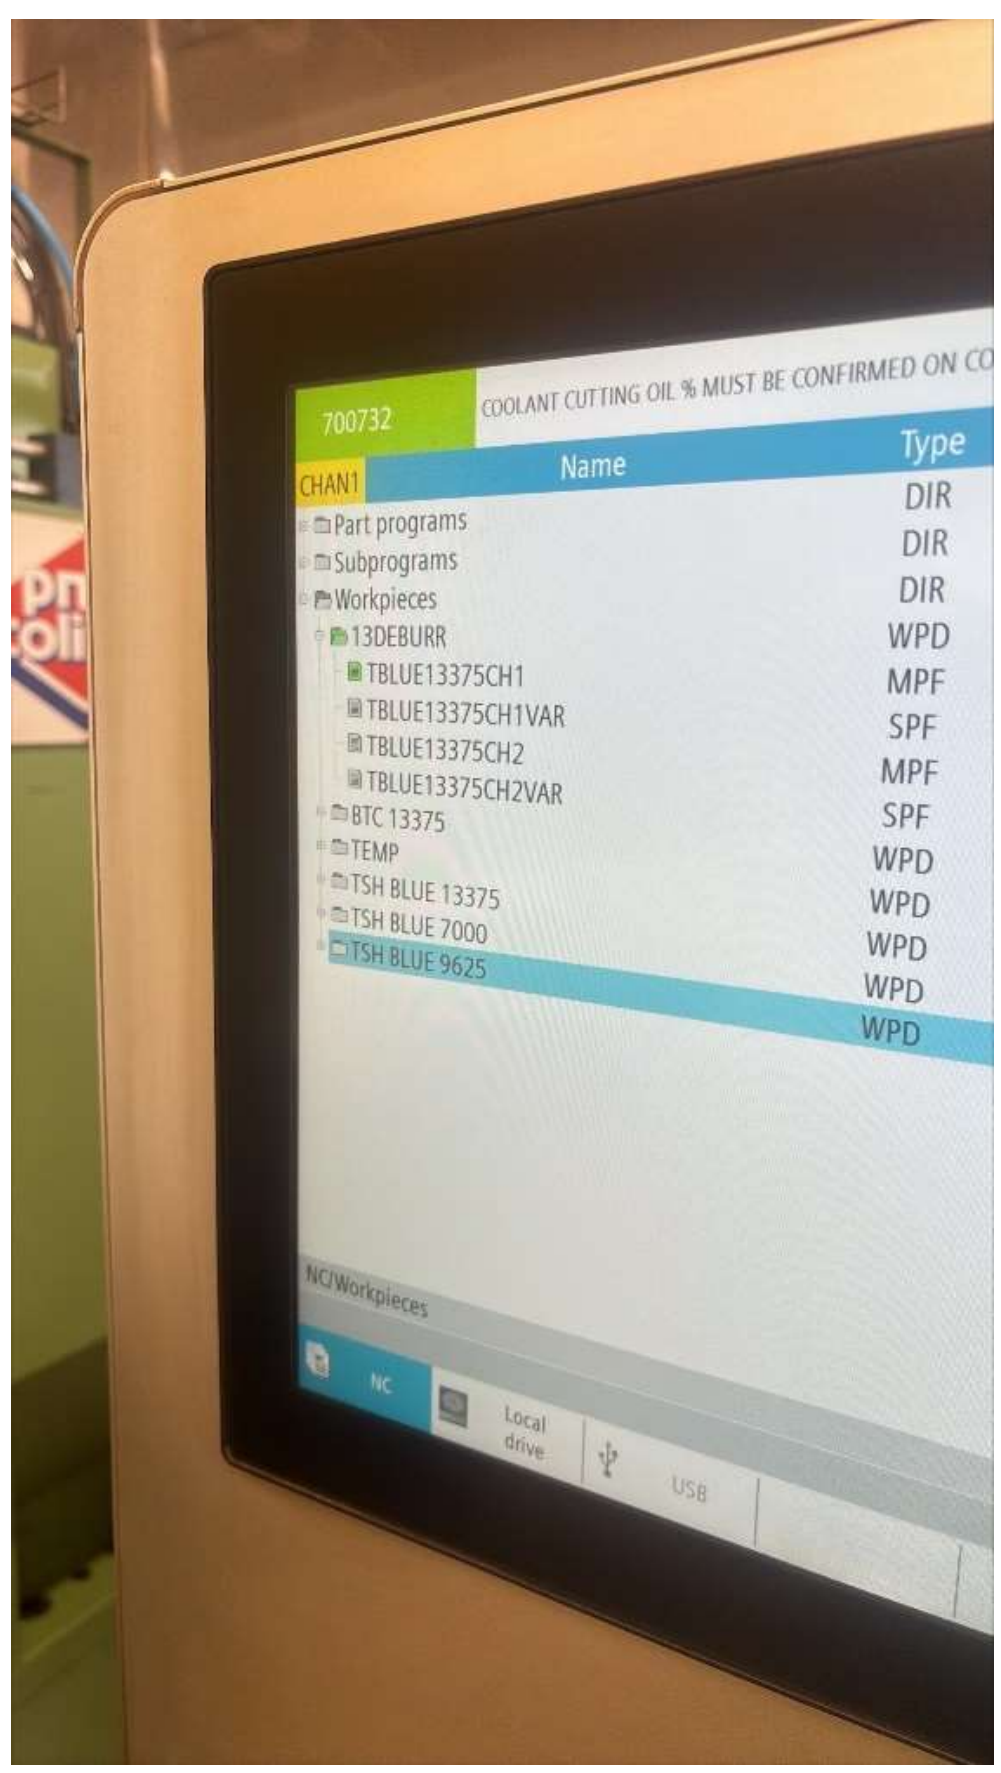

Unfolder the program

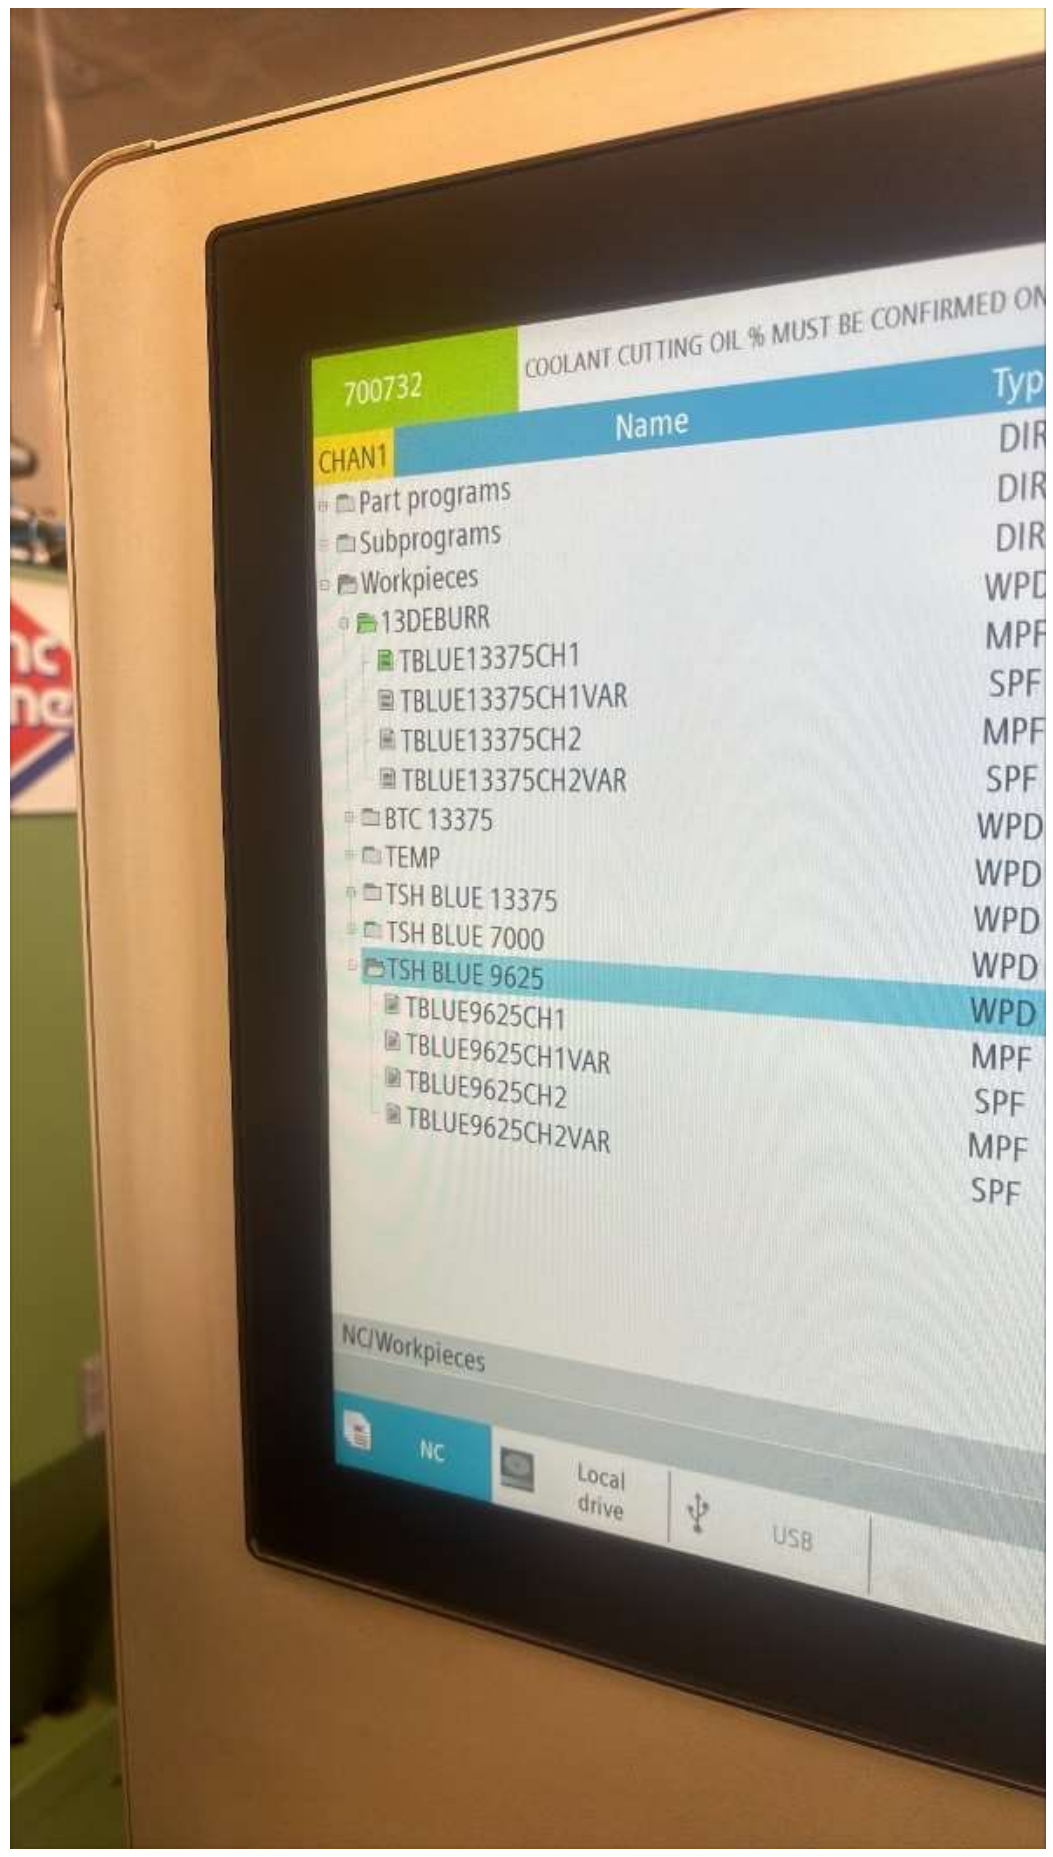

Select the CH1 program

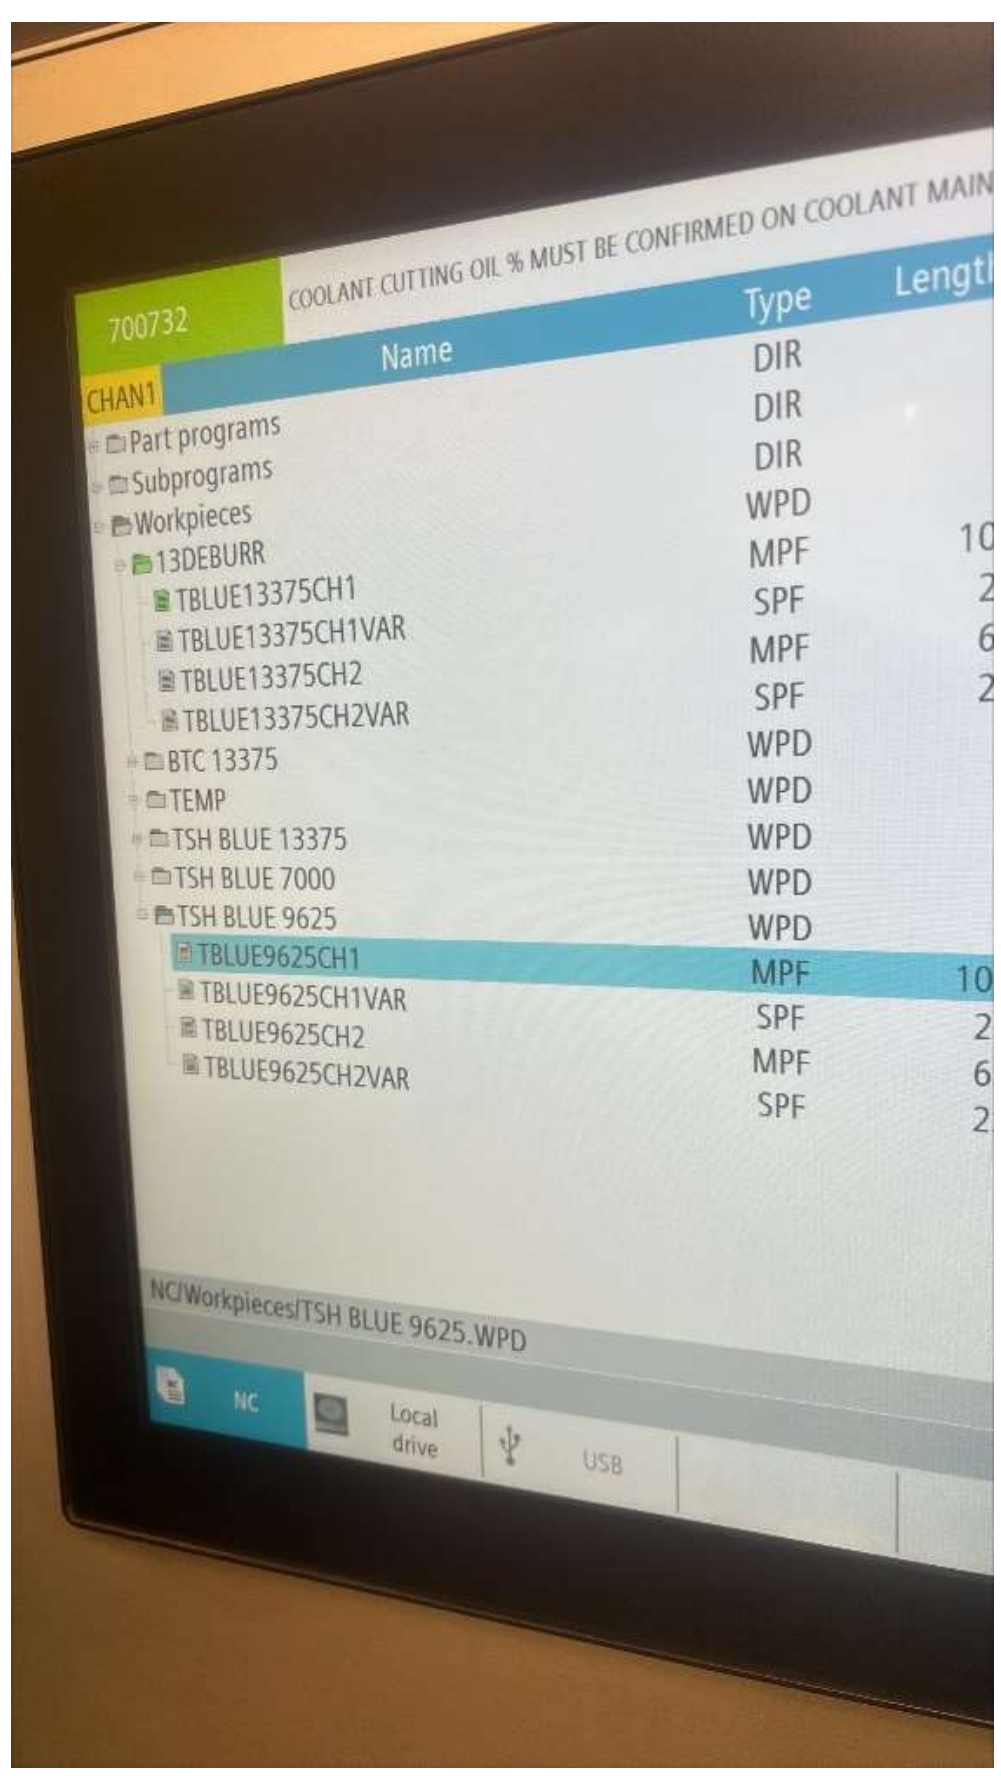

Execute it

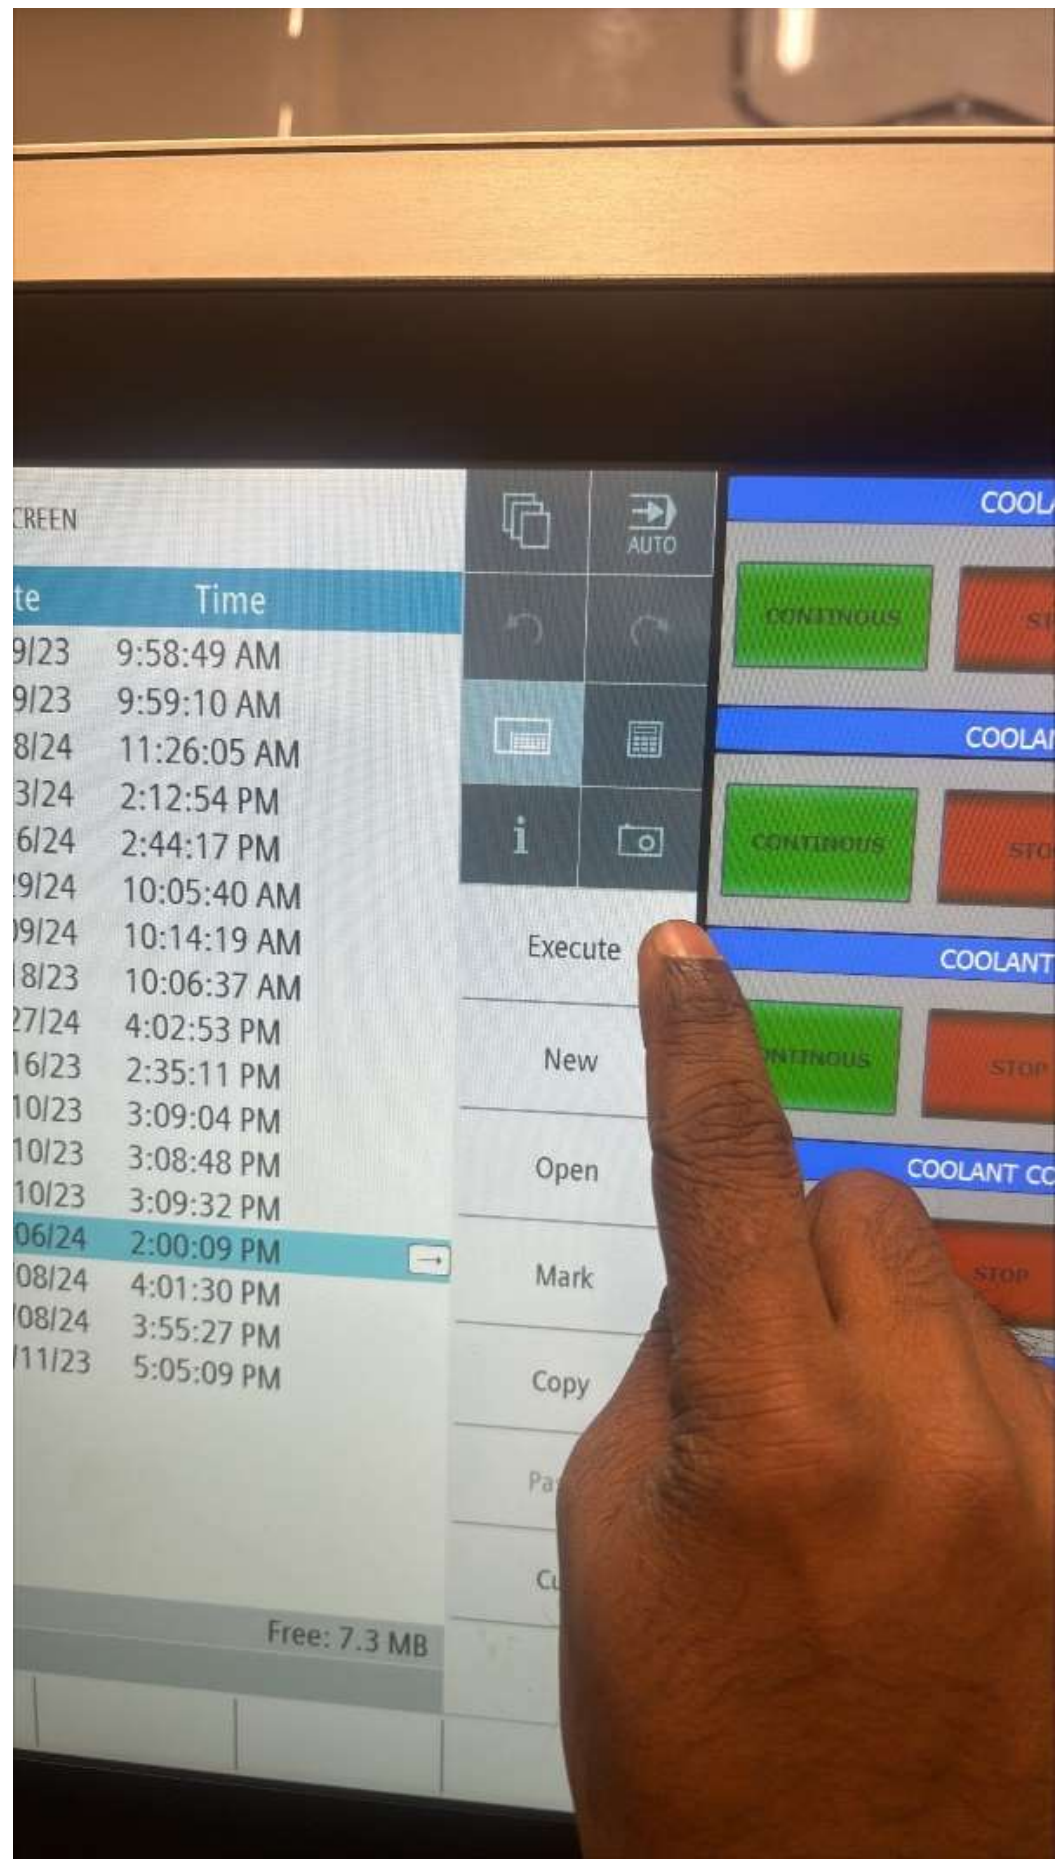
AUTO
COOL
Time
9:58:49 AM
9:59:10 AM
11:26:05 AM
2:12:54 PM
2:44:17 PM
10:05:40 AM
10:14:19 AM
10:06:37 AM
4:02:53 PM
2:35:11 PM
3:09:04 PM
3:08:48 PM
3:09:32 PM
2:00:09 PM
4:01:30 PM
3:55:27 PM
5:05:09 PM
Execute
New
Open
Mark
Copy
COOLANT
STOP
Free: 7.3 MB

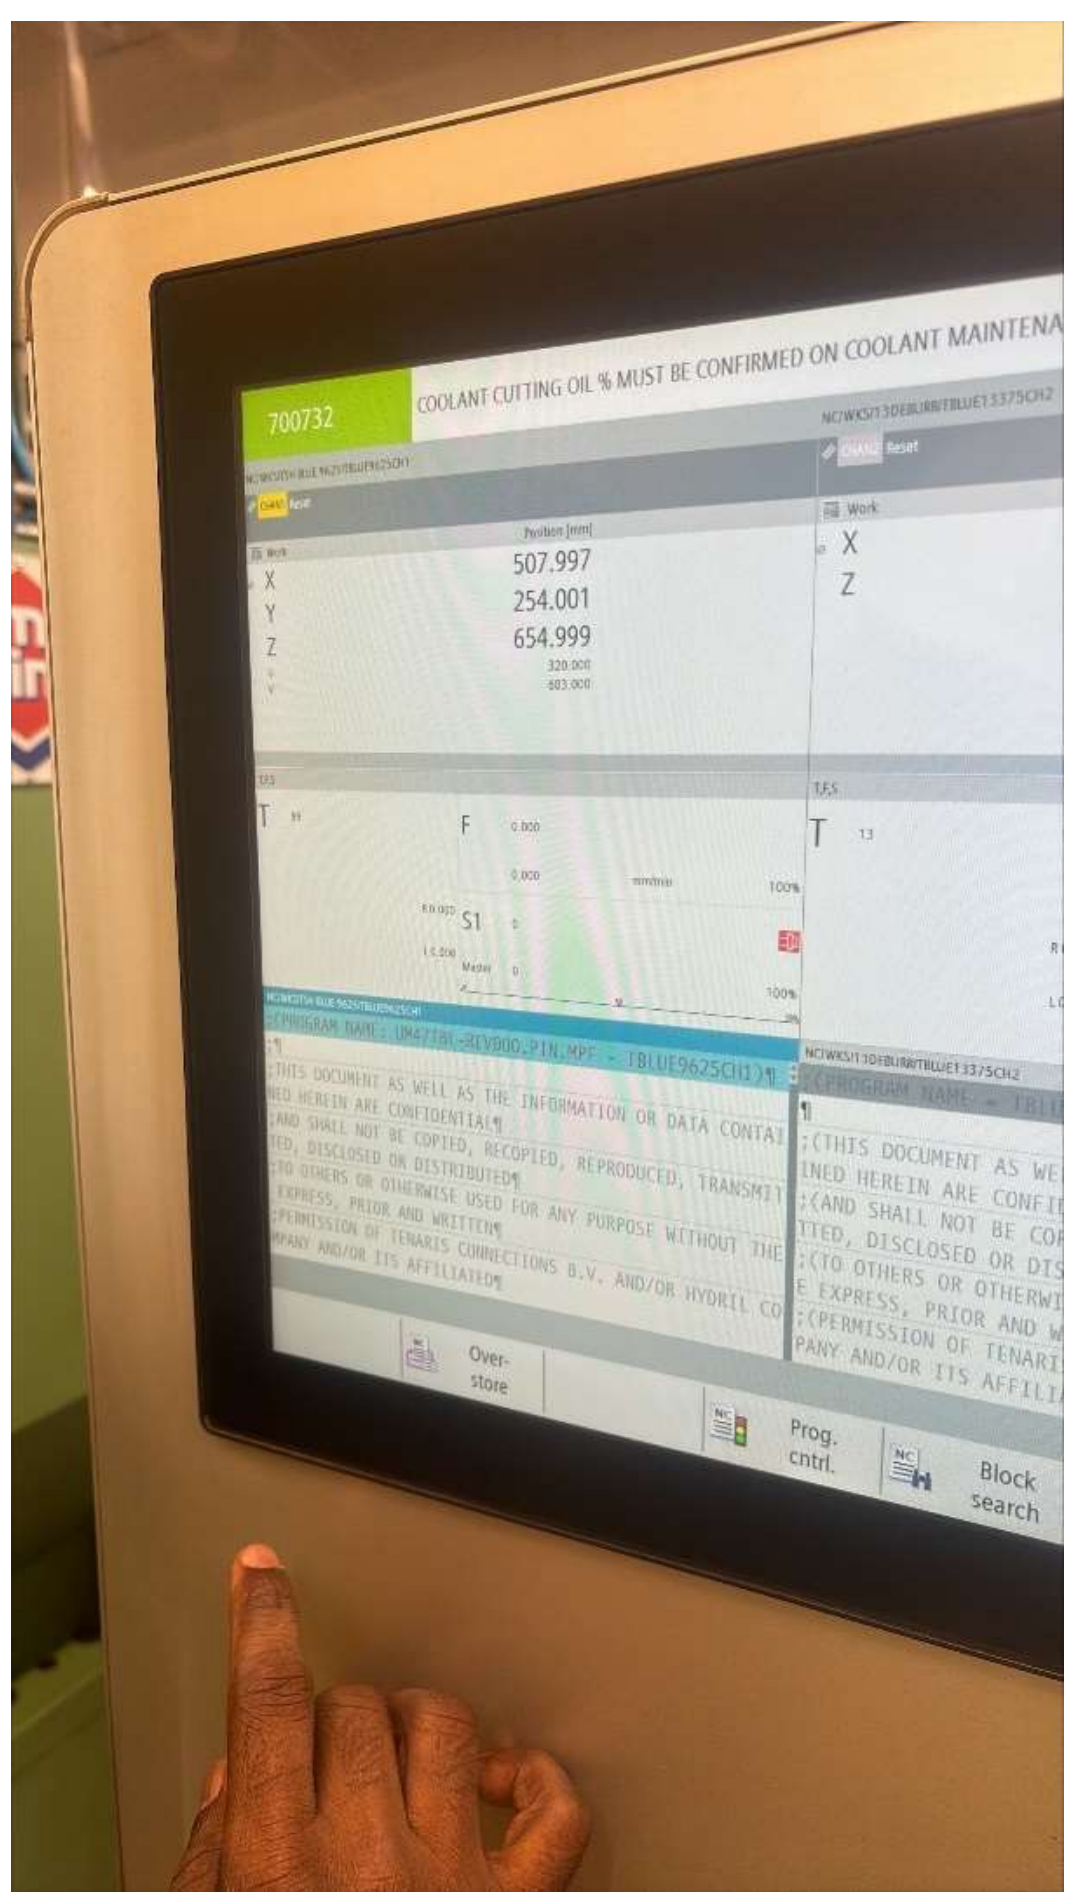
700732
COOLANT CUTTING OIL % MUST BE CONFIRMED ON COOLANT MAINTENA
X
Y
Z
507.997
254.001
654.999
T
F
S1
X
Z
Over-
store
Prog.
cntrl.
Block
search

Select the CH2

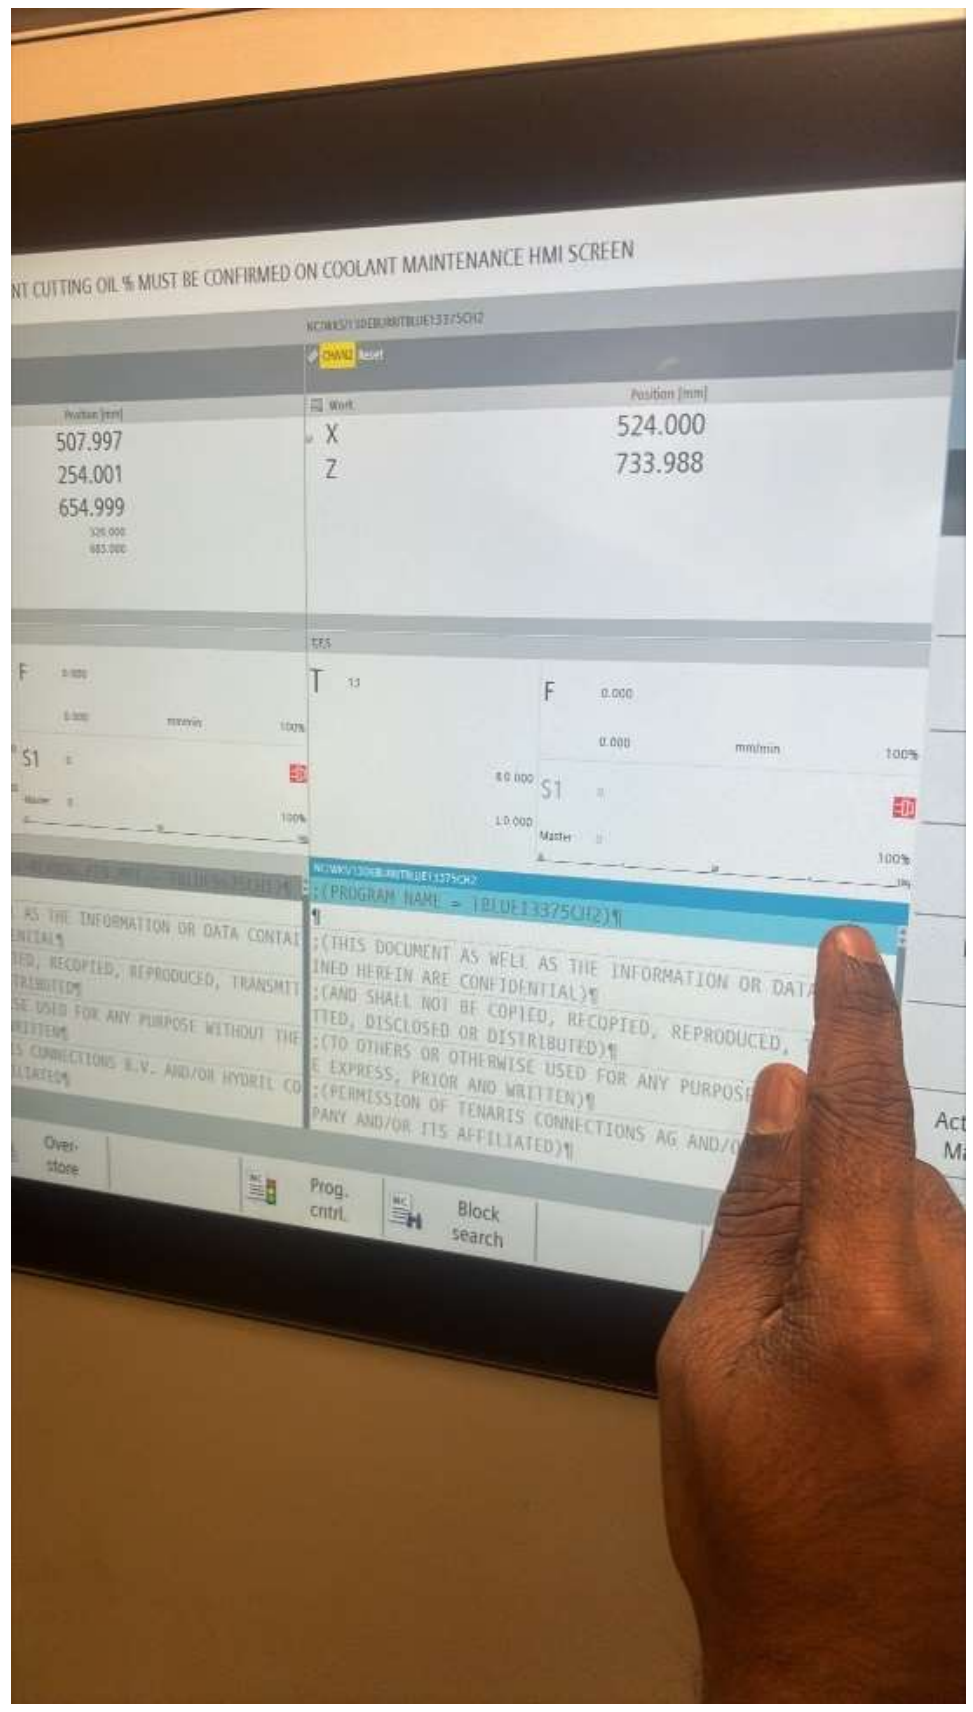

Go to Machine in touch screen

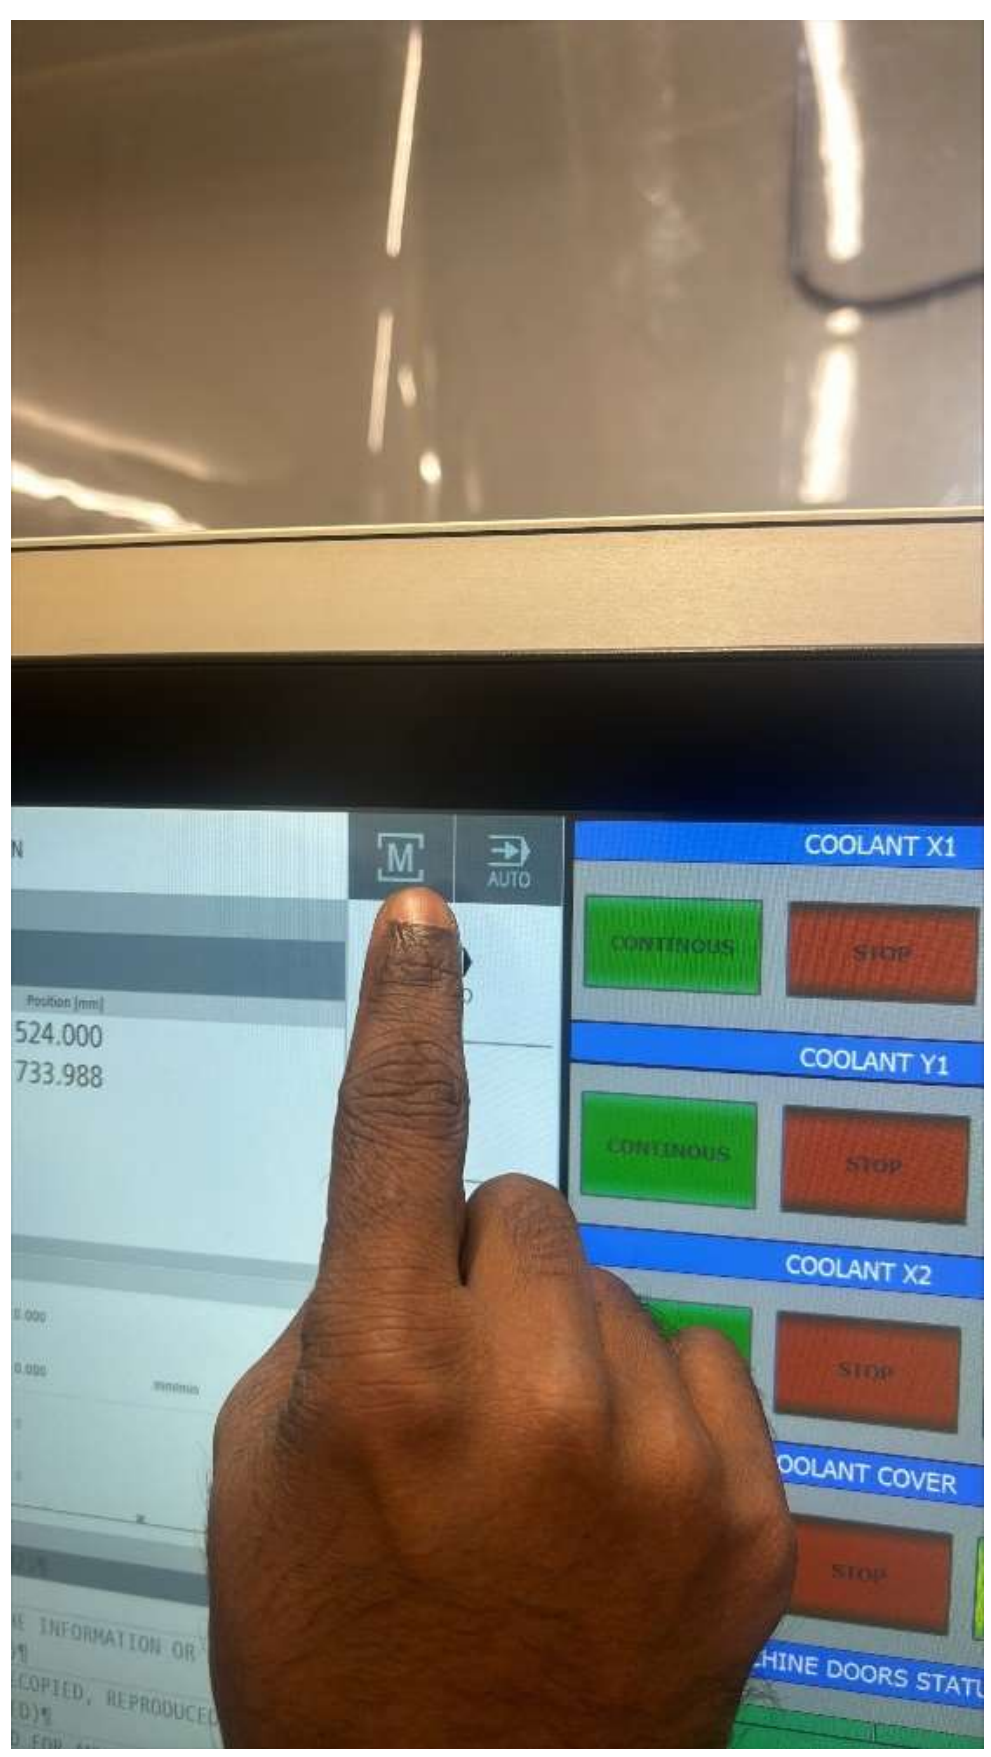

Go to need program

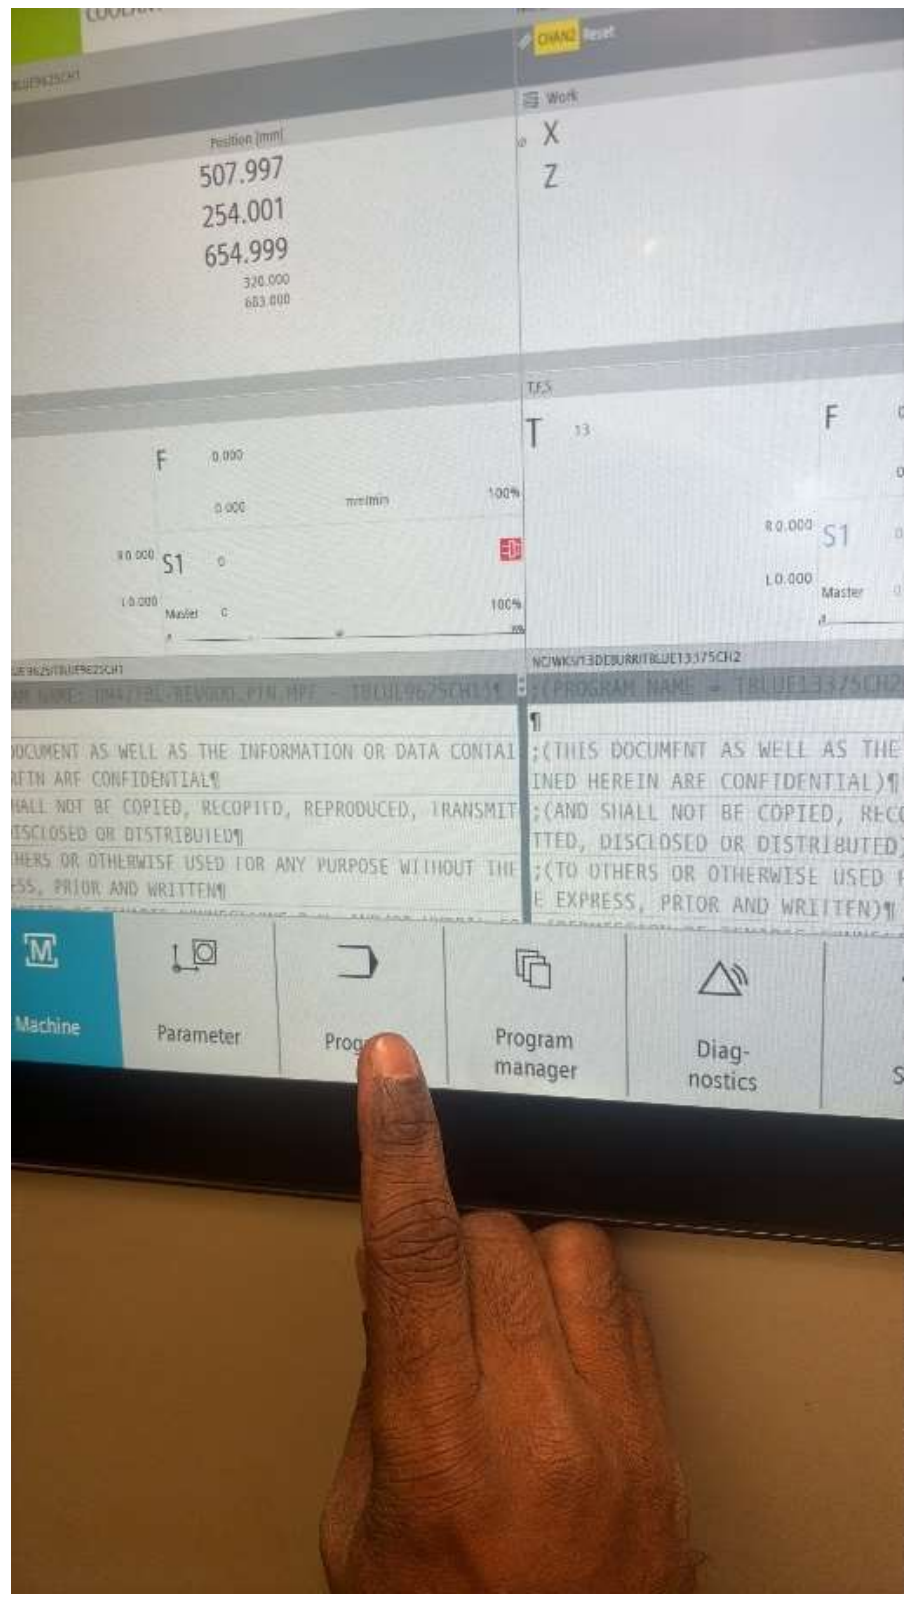

Select CH2 program

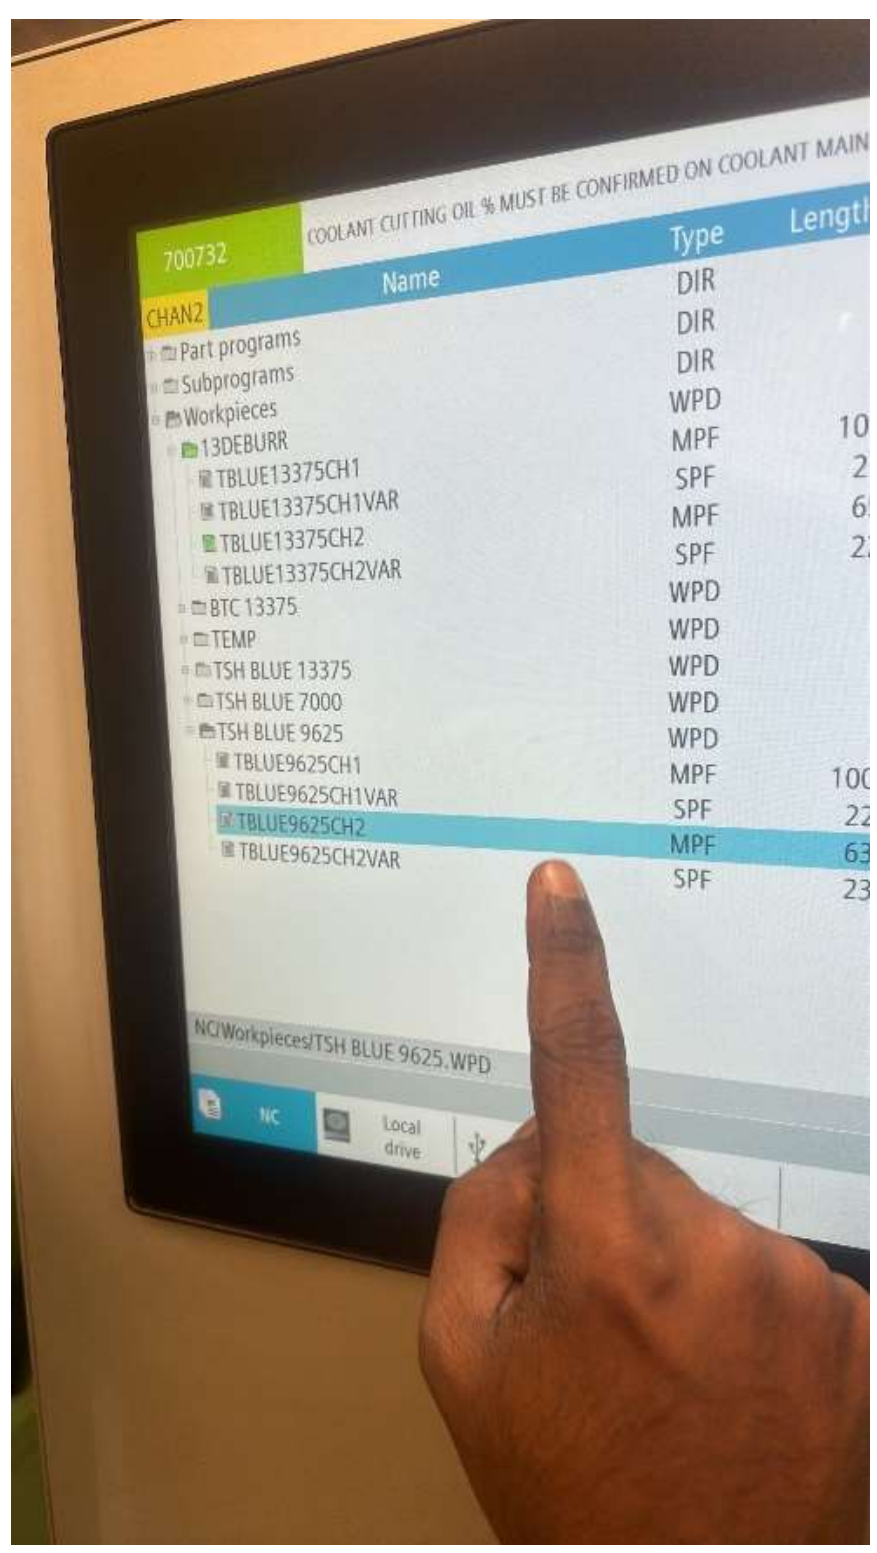

Execute it

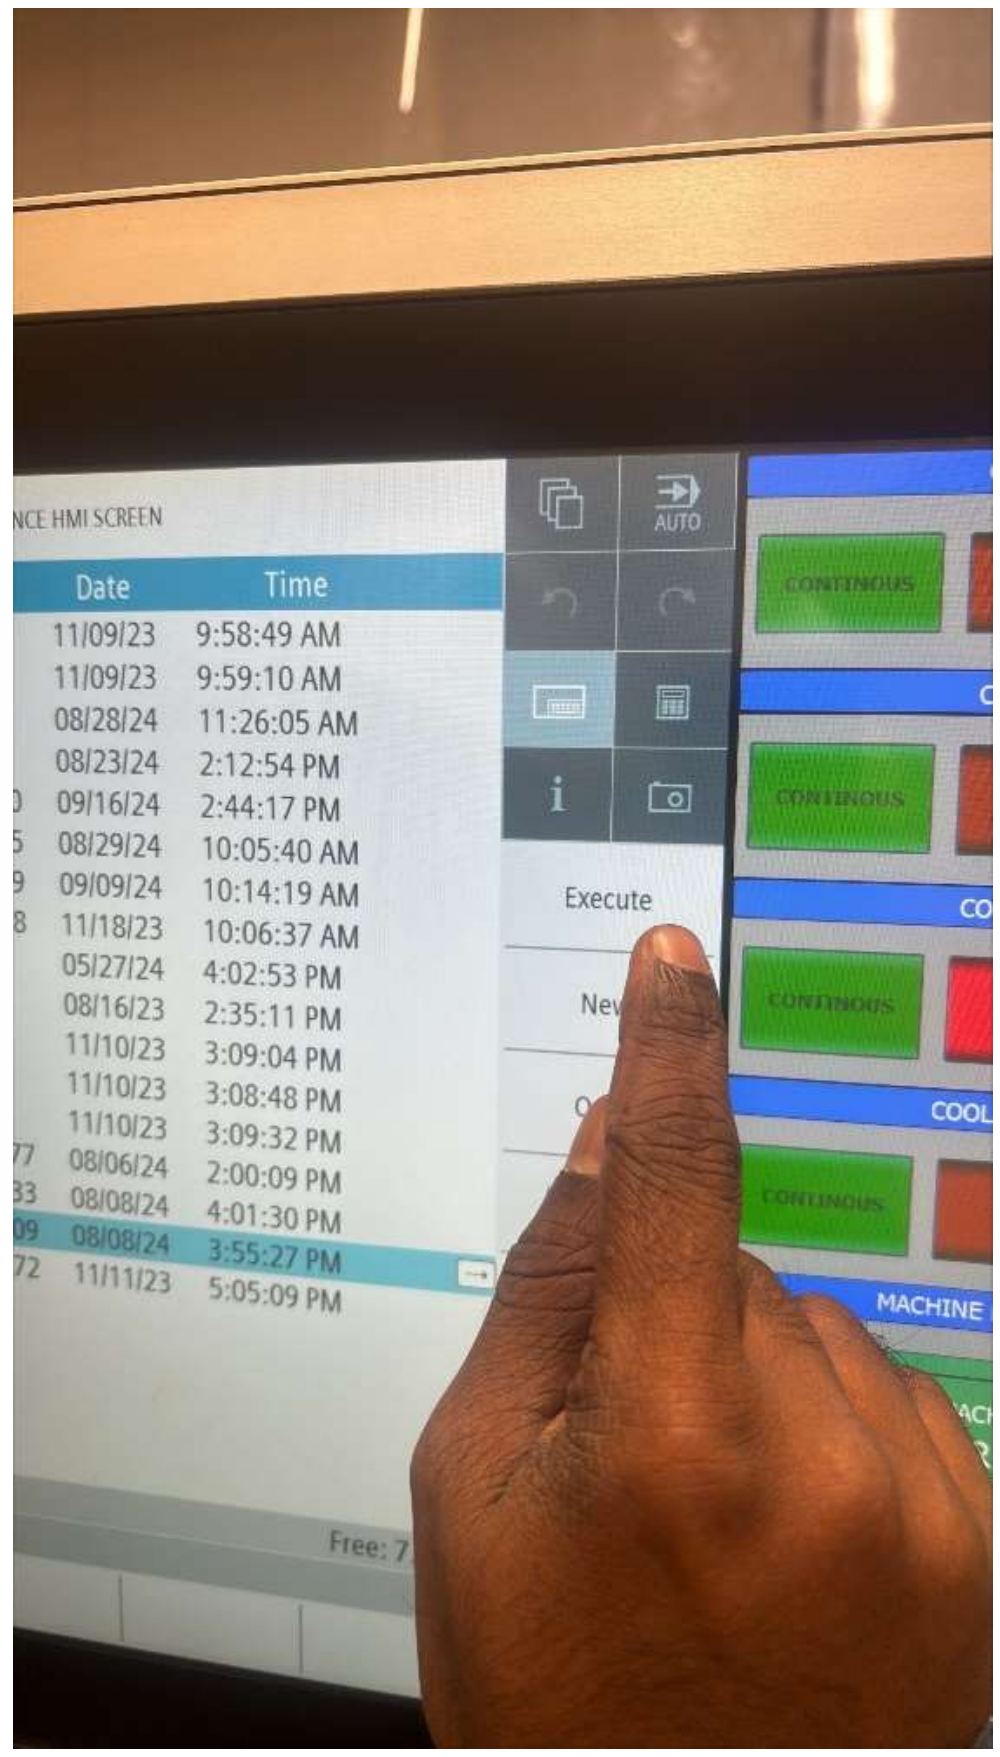

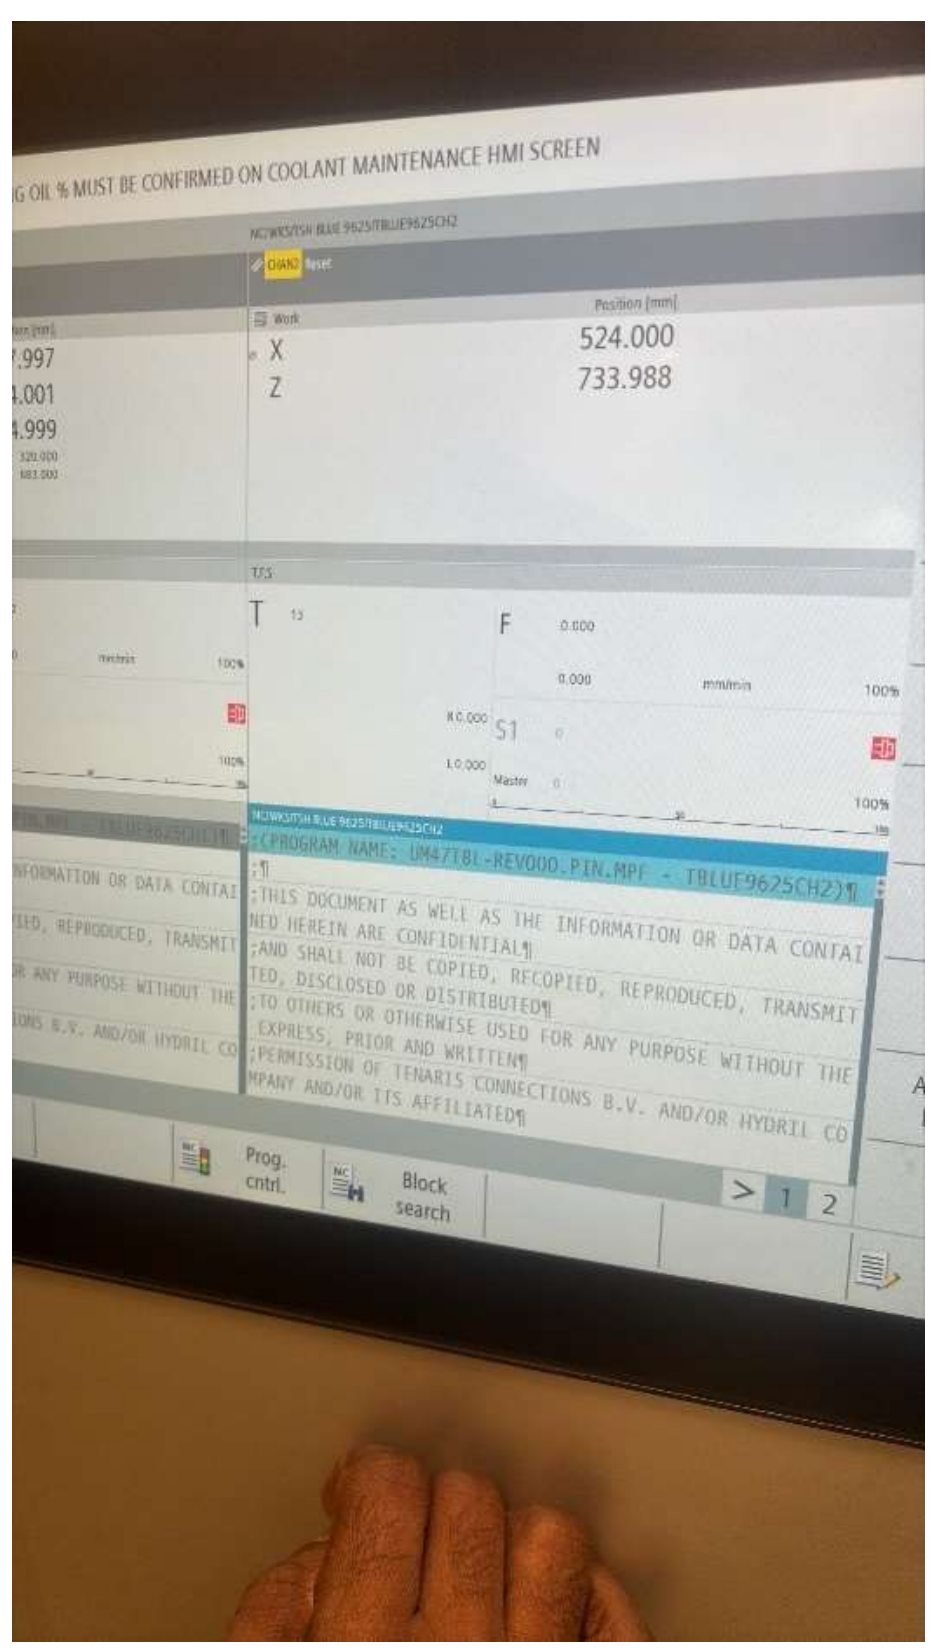

36. Tool selection

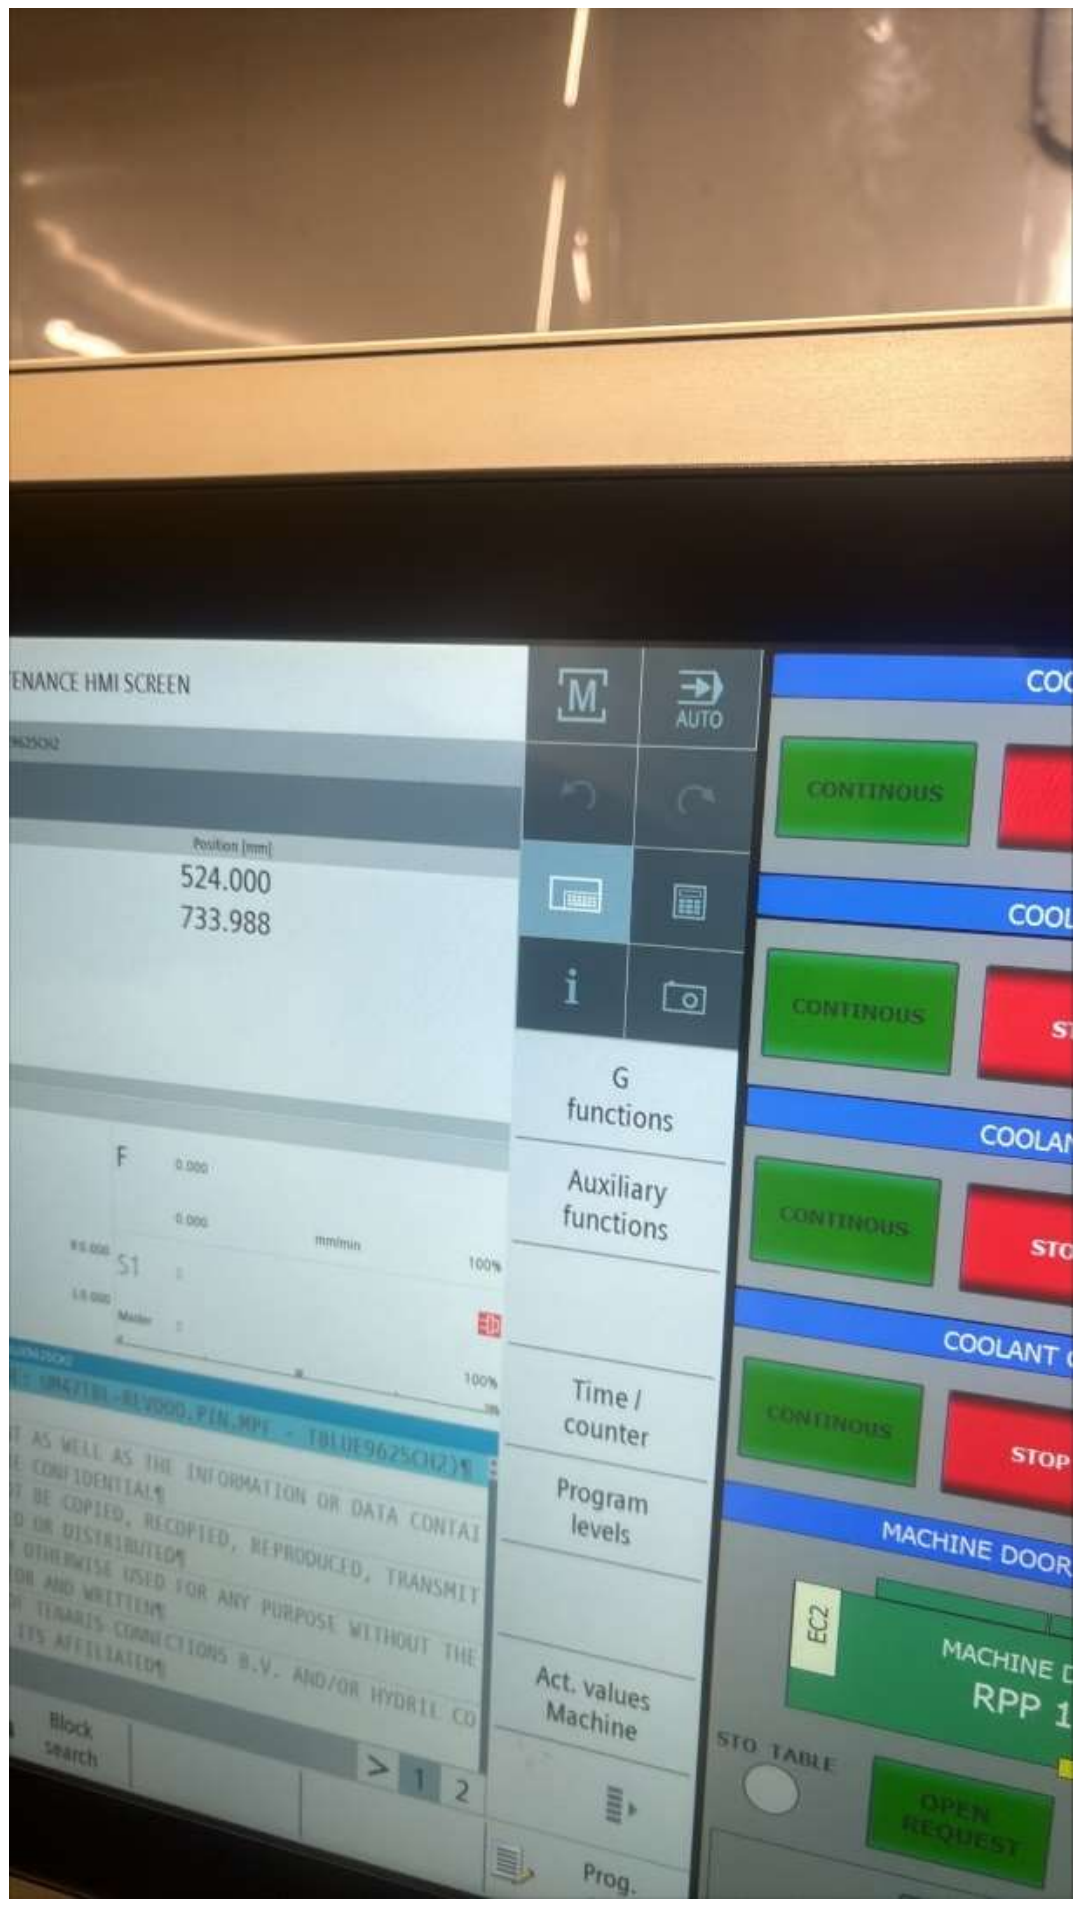

Go to Machine on touch screen

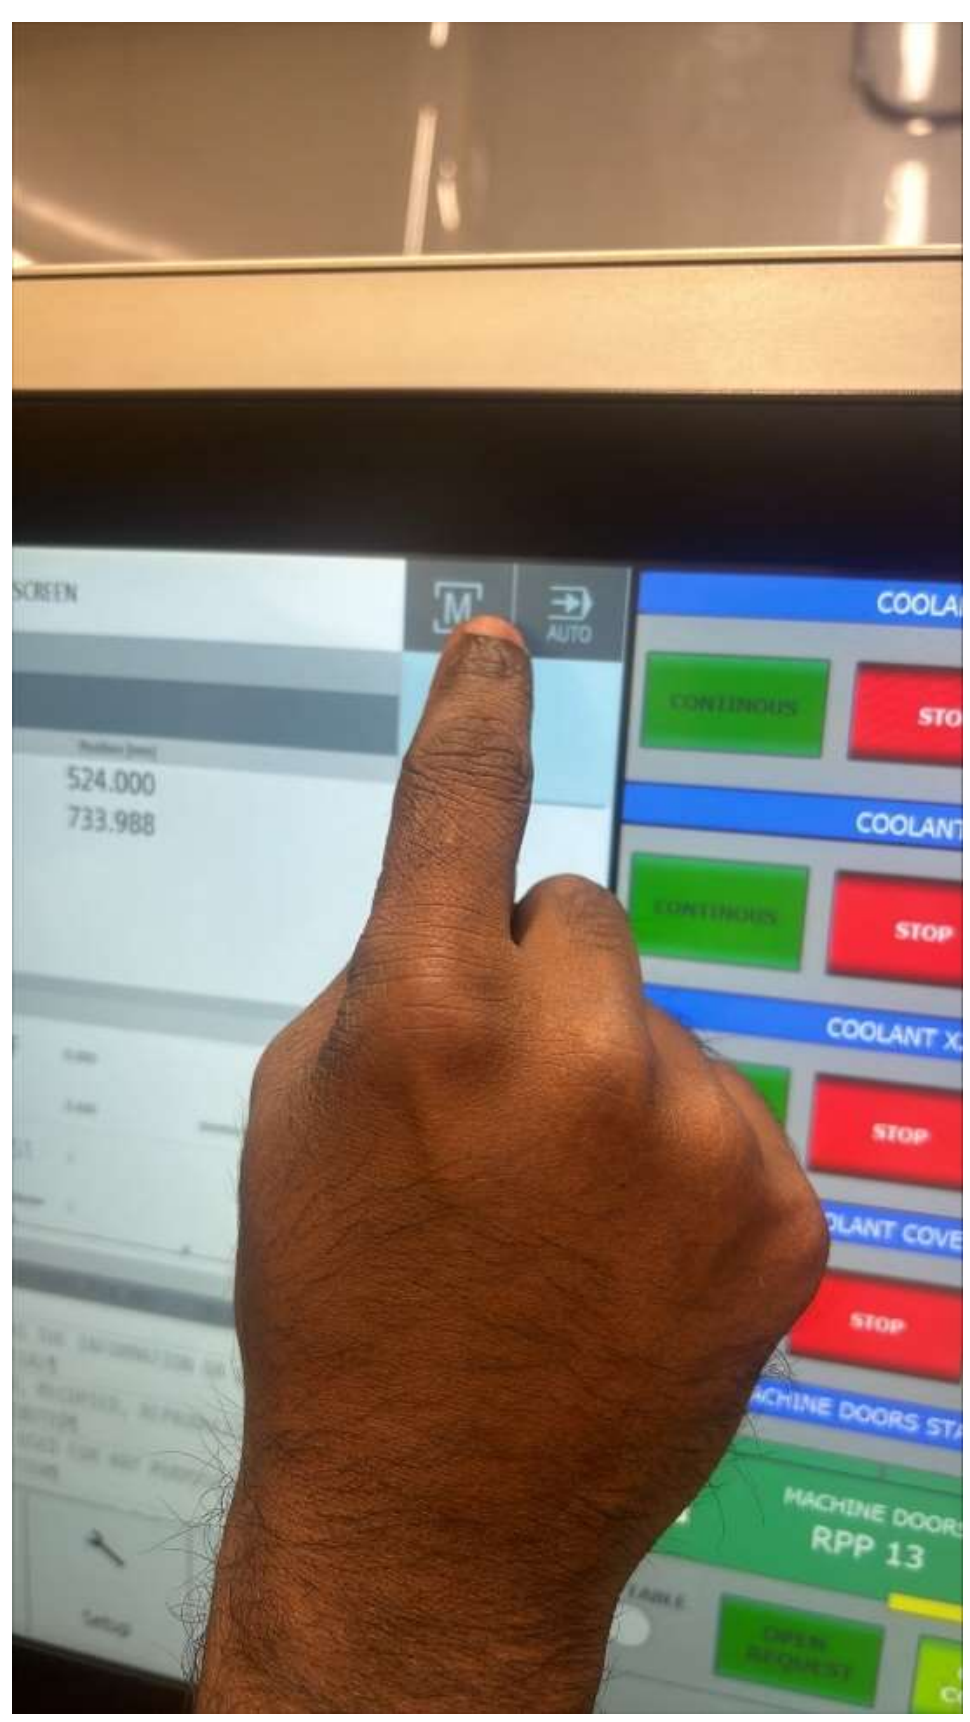

Go to Parameter

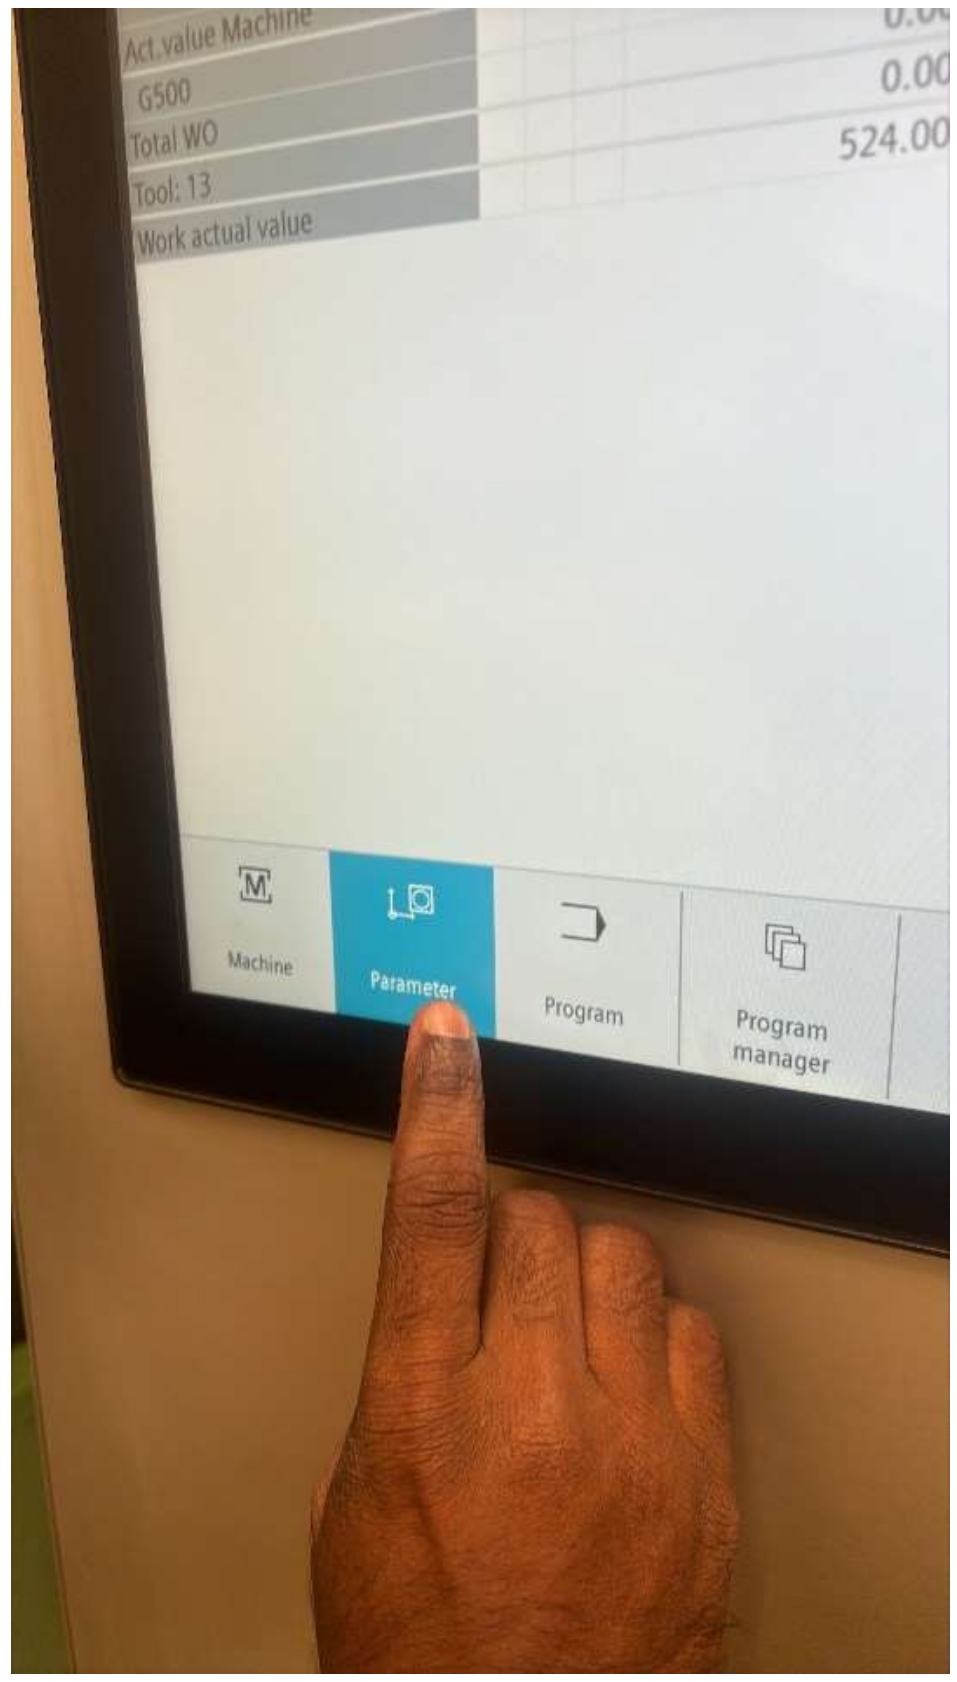

Go to Tool Wear

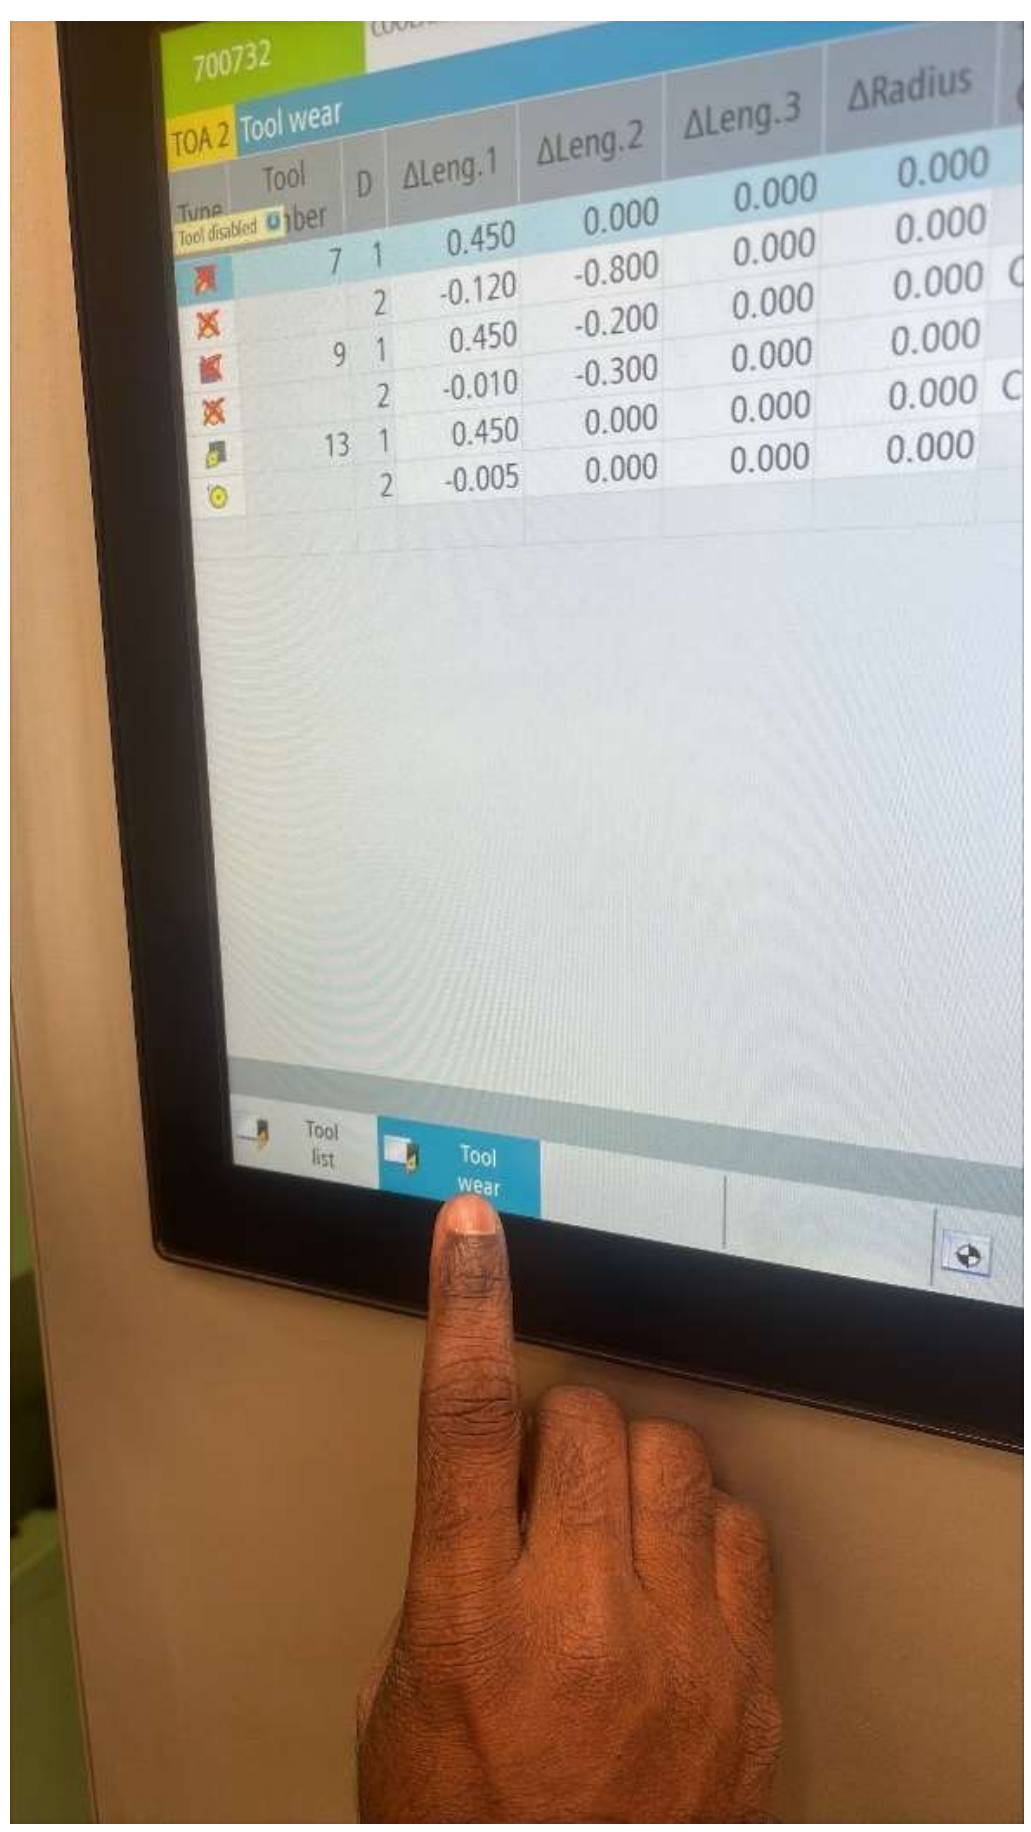

Unselect the needed tool

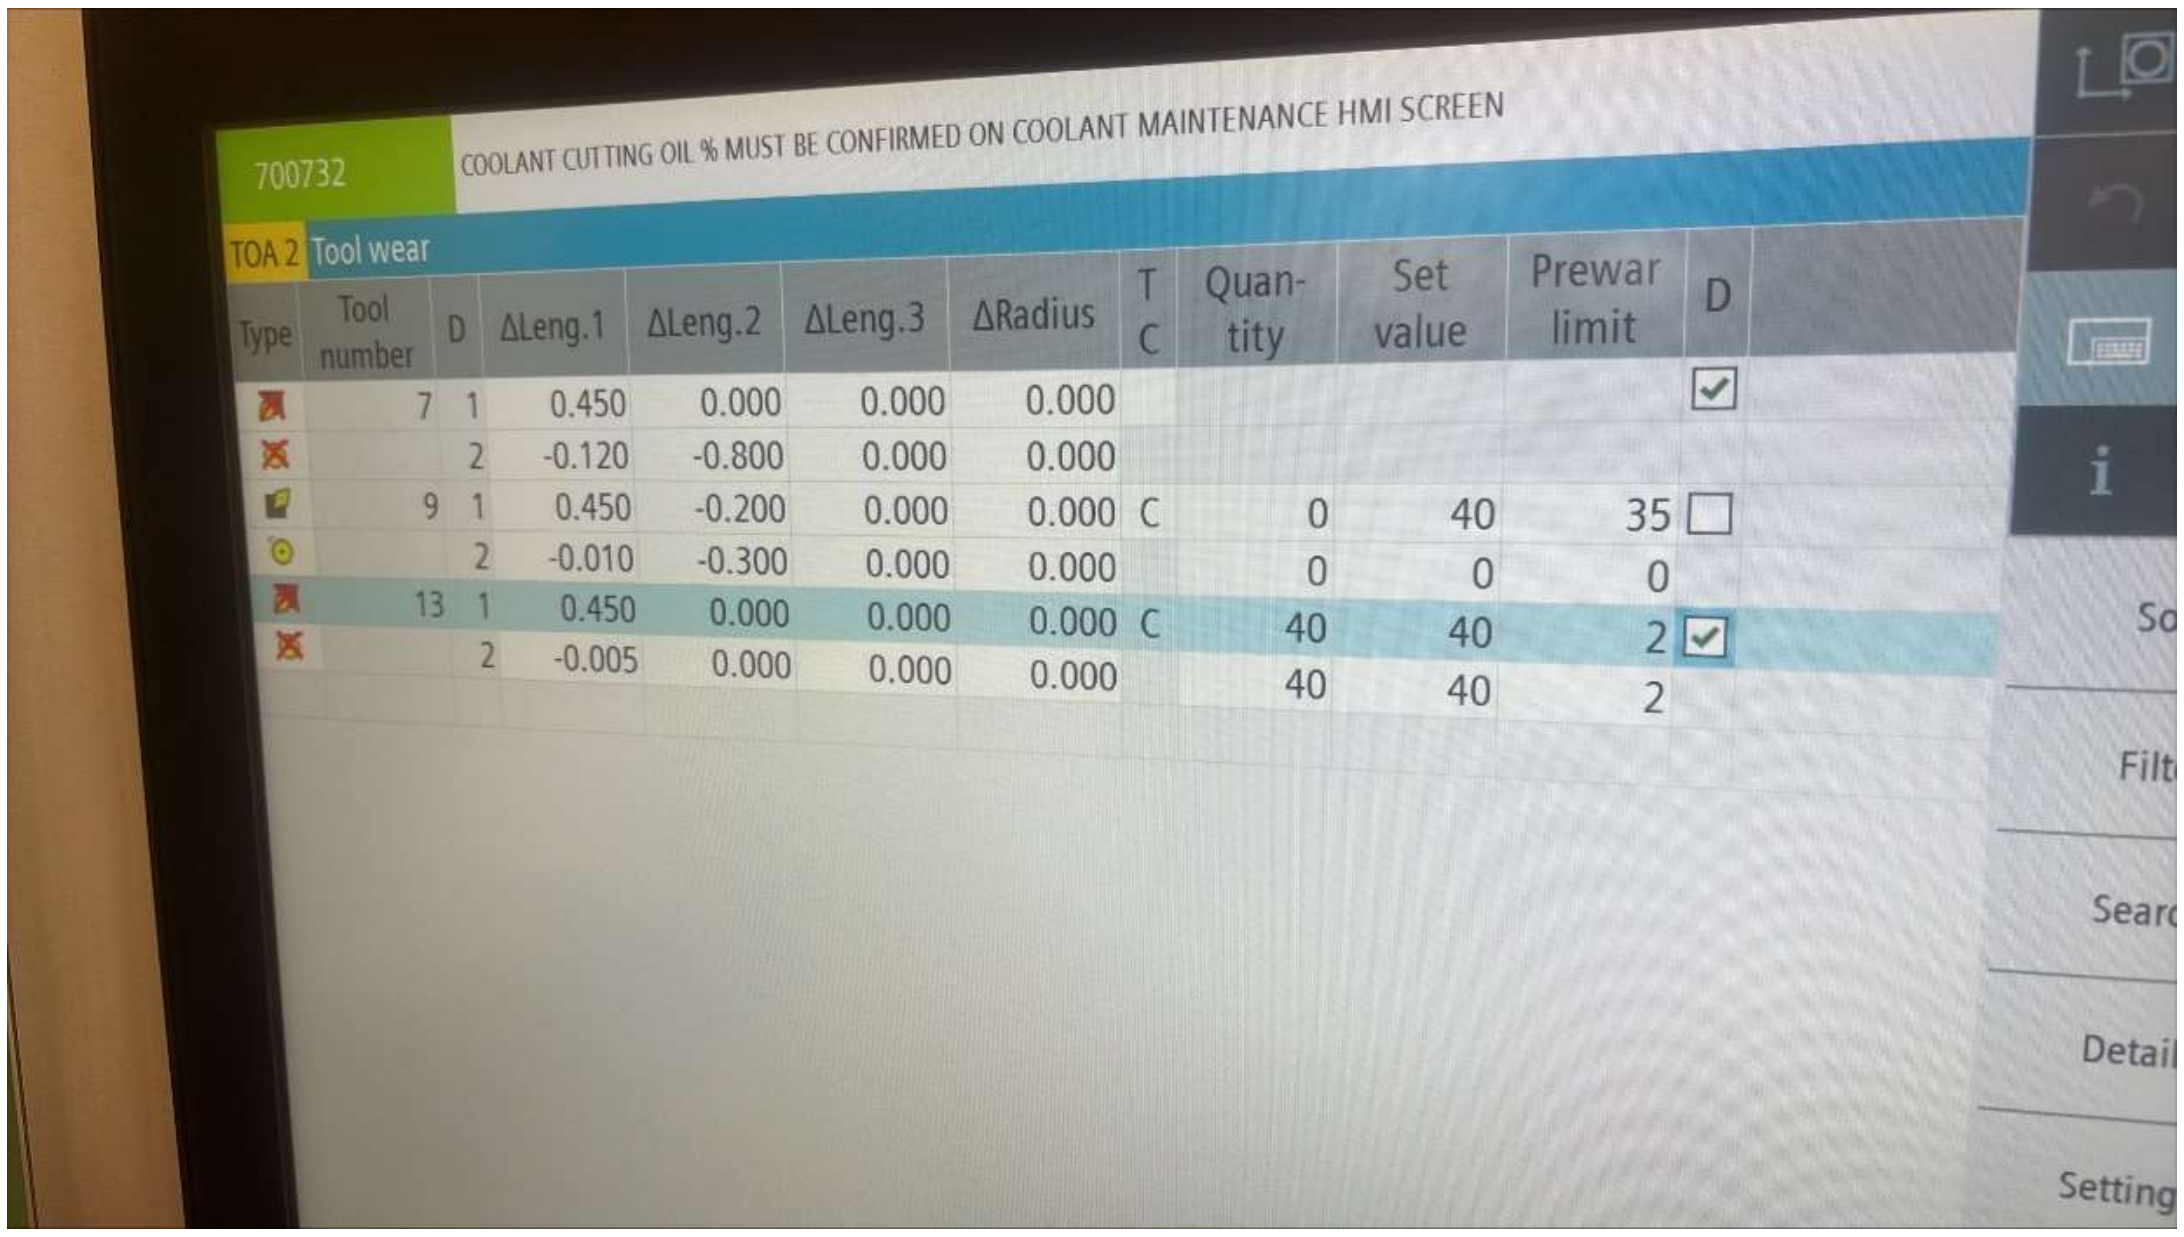

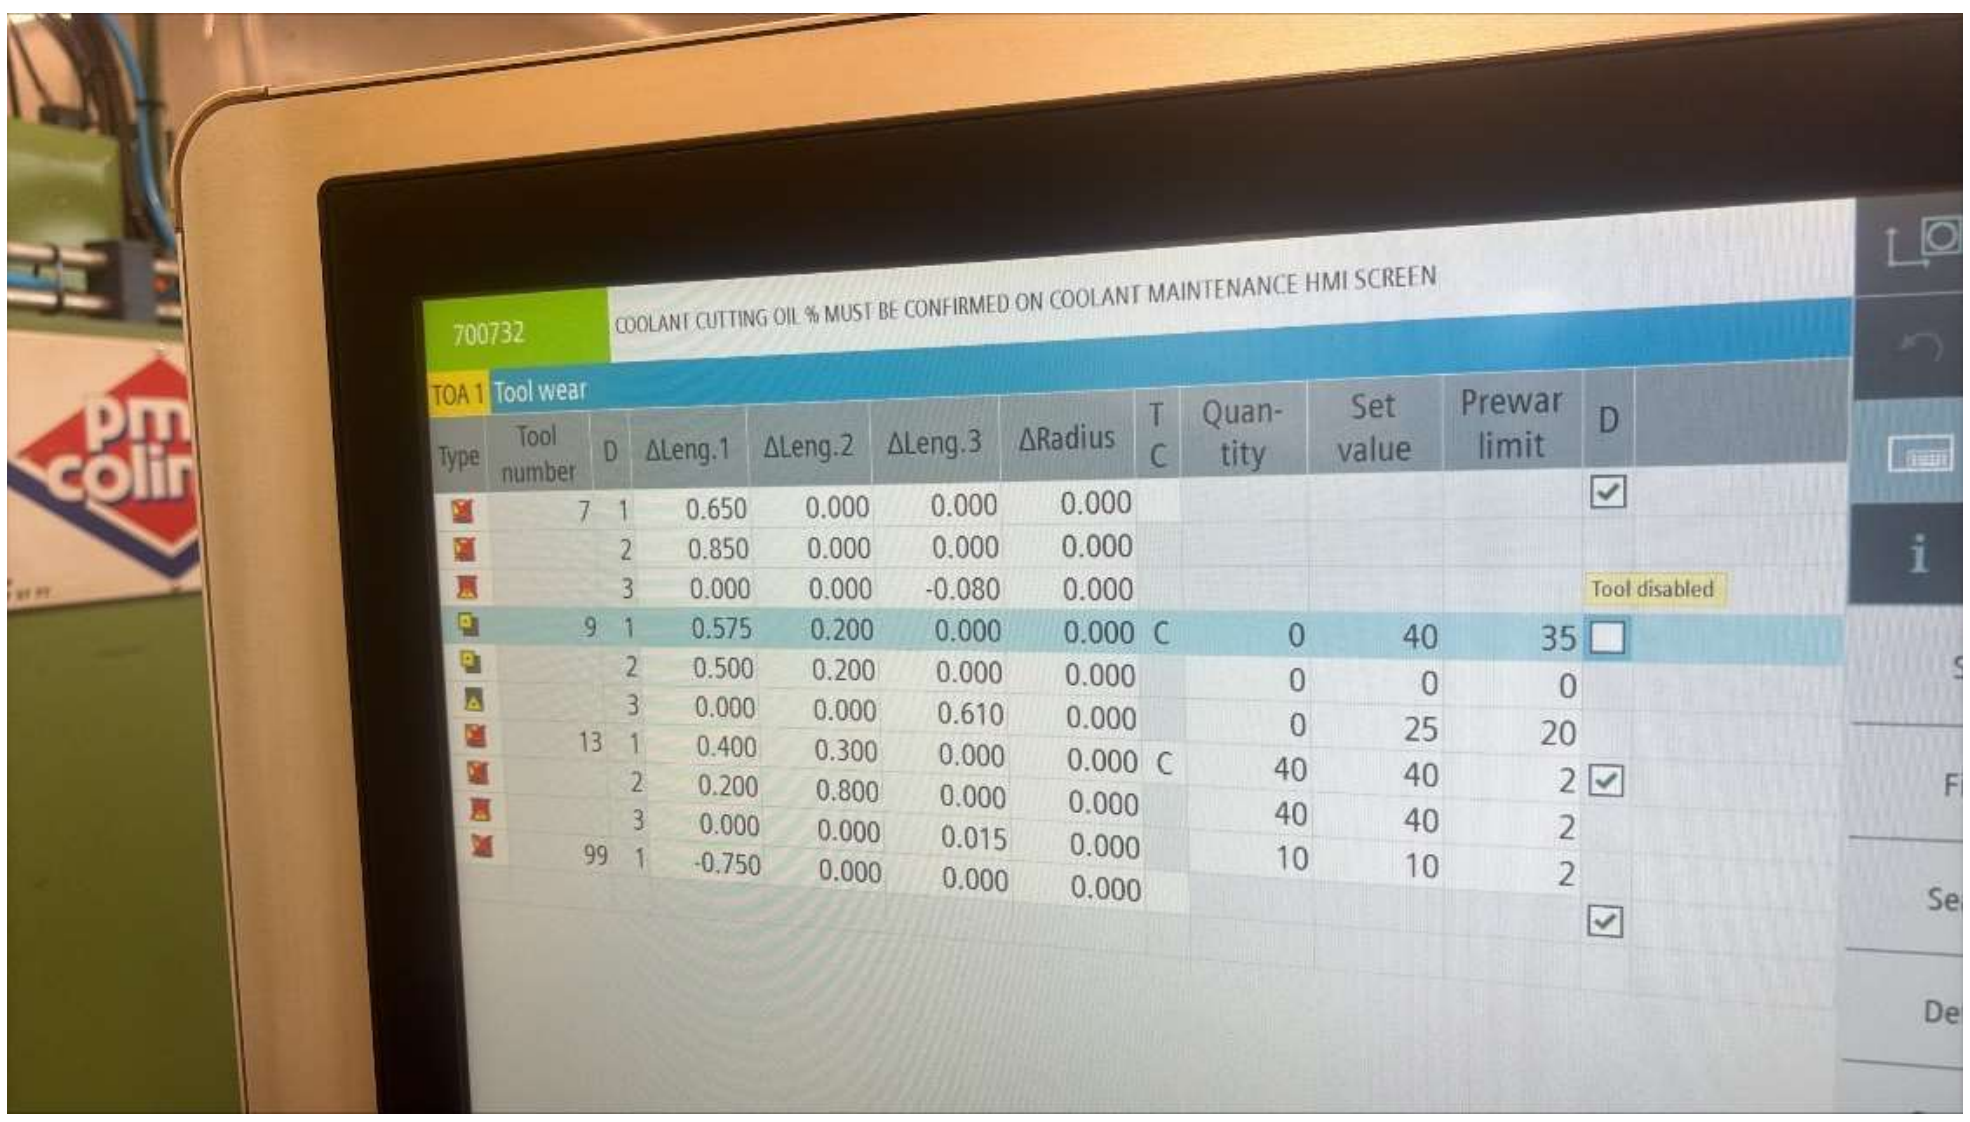

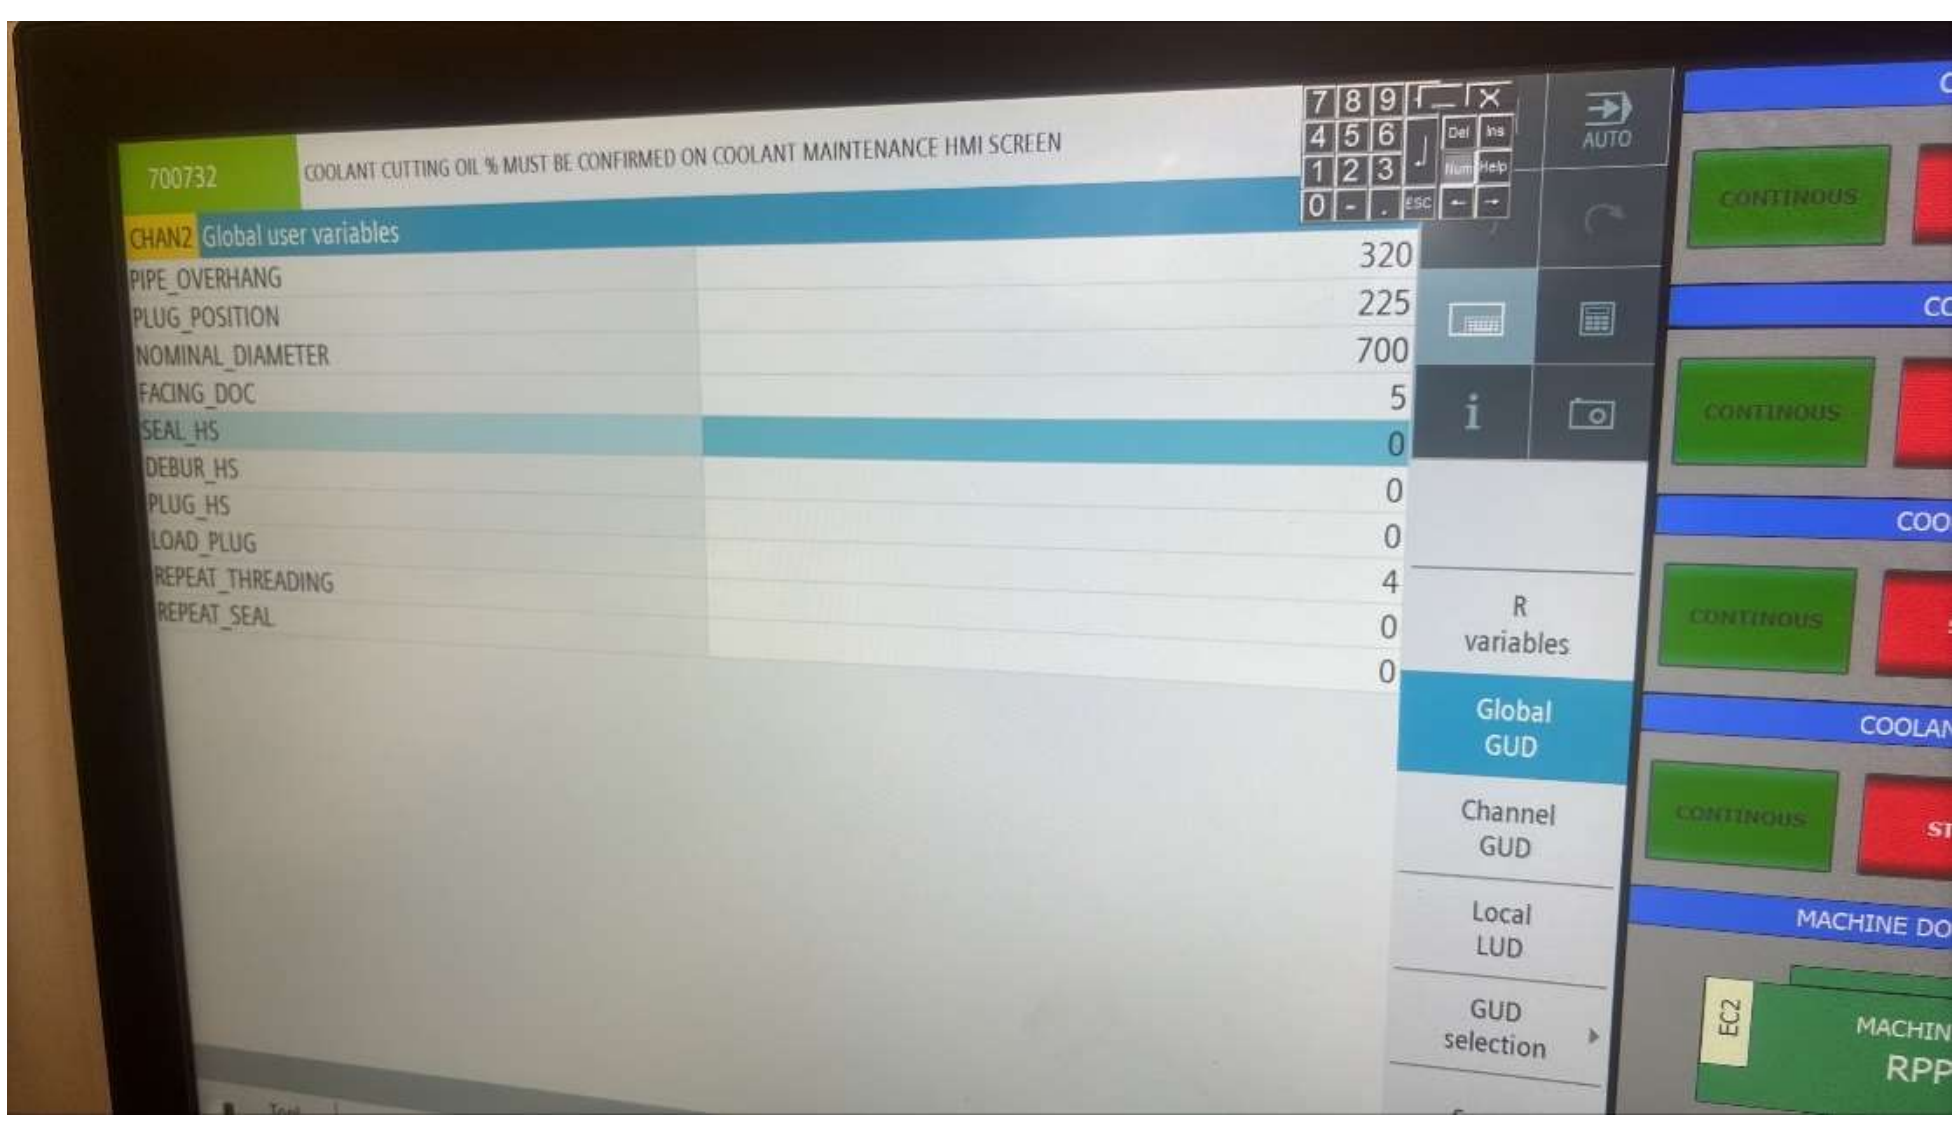

Put 5mm facing