



Real PSU vs synthetic detector-feature domain audit


A Real data are farther from synthetic train

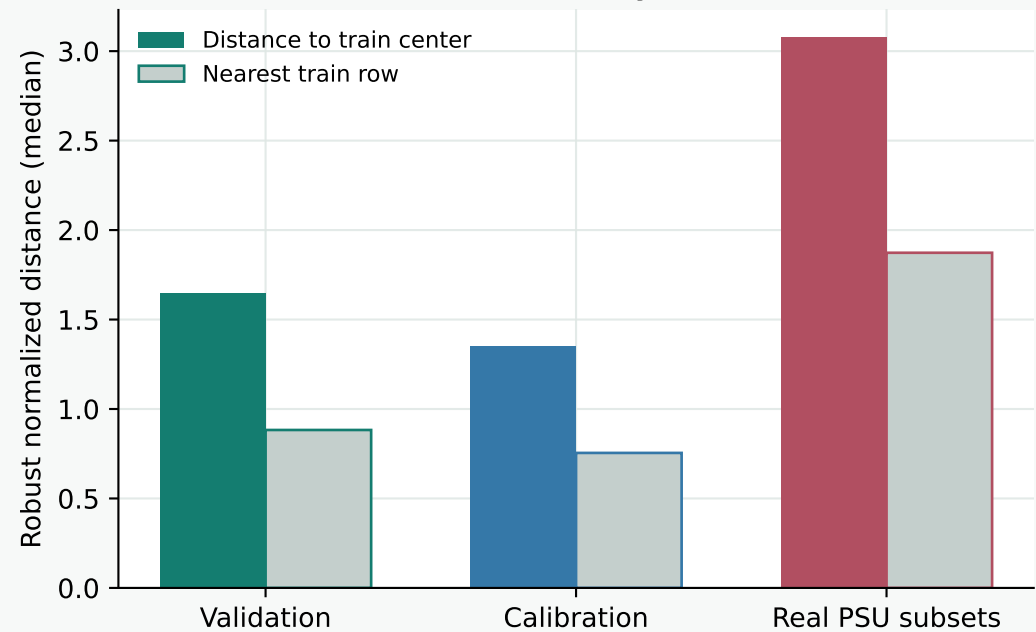

B Every real camera subset leaves the envelope

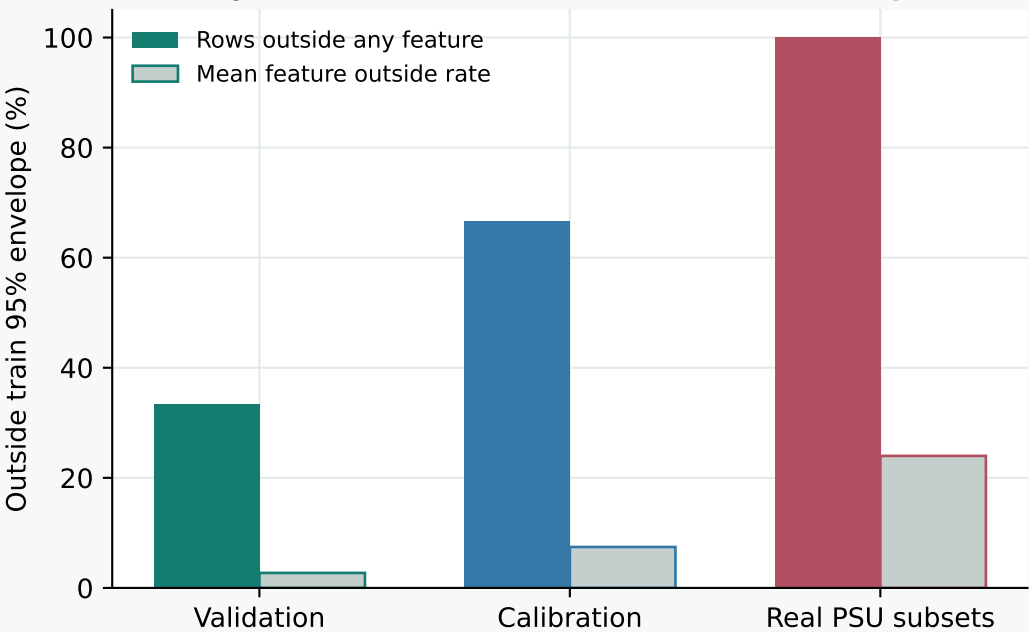

C Real local contrast and Jacobian exceed the synthetic range

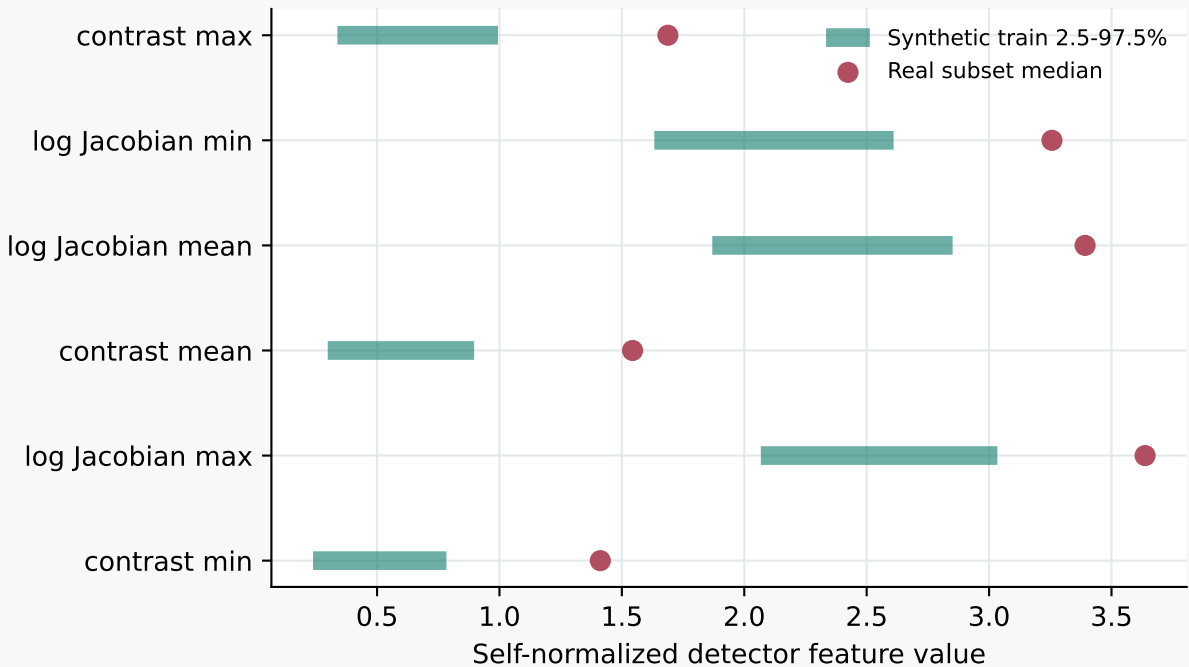

D Decision: repair the data model before the neural model

Independent real physical fields

1

LIMIT

Deterministic camera subsets

130

NOT IID

Real center / nearest median distance

3.076 / 1.873

OOD

Wall time / peak RSS

1.15 s / 397 MB

LOCAL

One real physical flow field under 130 deterministic camera subsets; per-view RMS normalization is not measured noise whitening. No reconstruction or route training.