PRODUCT DATASHEET

SOB light with Built-in chip protection stents

1892LM/m | 10mm | 24V | ≥90Ra | 17.2W/m | 110LM/W | 33.3mm/Cut | 5000mm

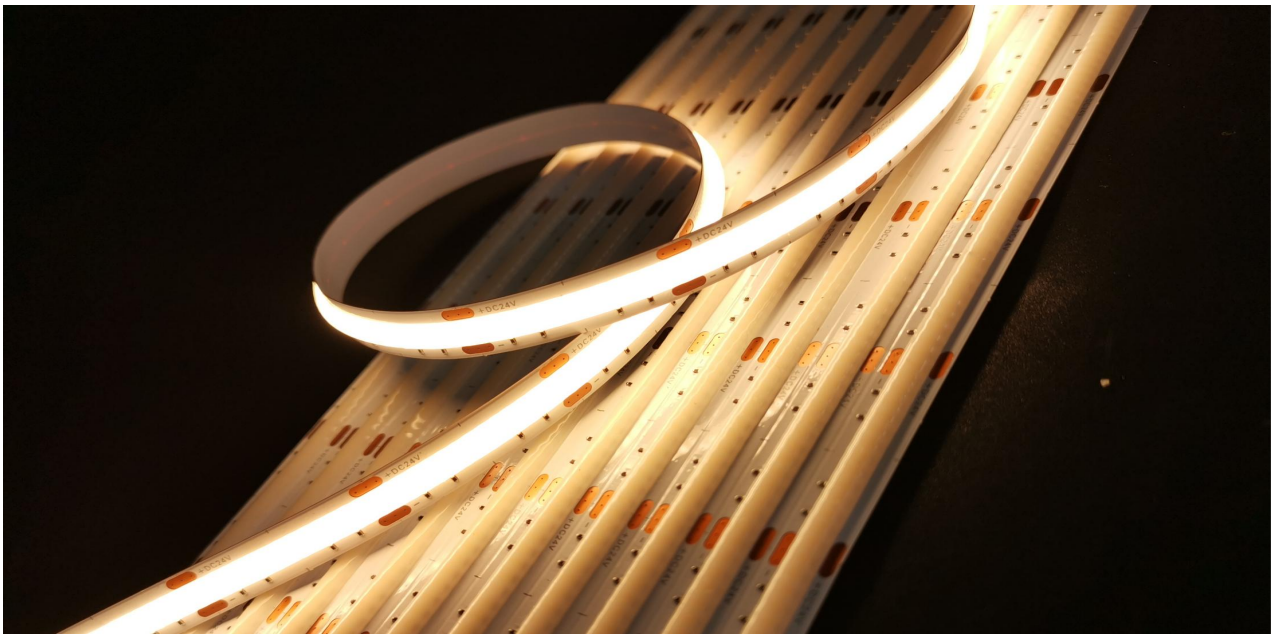

Product Advantages:

- Highly bending relibility SOB Liner light. With thicker PCB, better for heat dissipation, keep the good consitent brightness from begin to end.
- Special surface provide uniform luminescence and anti-glare.
- With built-in chip protection stents, make it higher power available. Special power is customizable.
- Wide CCT range for option from 1800K~7500K. Customizable full spectrum, 120° view angel high color efficiency.
- High CRI95, Full specturm is also available.

No need extra covers. Perfect for area with low clearance or reflective surfaces to eliminate spot-glare.

Product Features

- Input voltage: DC 24V
- CRI: ≥90
- Rated power: 17.2W(1m)/73W(5m)
- Rated current: 0.716A(1m)
- Copper foil: 3oz
- Cutting unit: 14LEDs/33.33mm(1.31")
- LED pitch: 2.381mm(0.09")
- Warranty: 3 years (Warranty is based on indoor use)
- IP Rate: IP20/IP65/IP67
- Max.length: 5m(16.4')
- Ta: -20~40°C; Tc=75°(max)
- On-off times: 10000 (test times)
- Min. bend diameter: Φ60mm(2.36")

Light Distribution

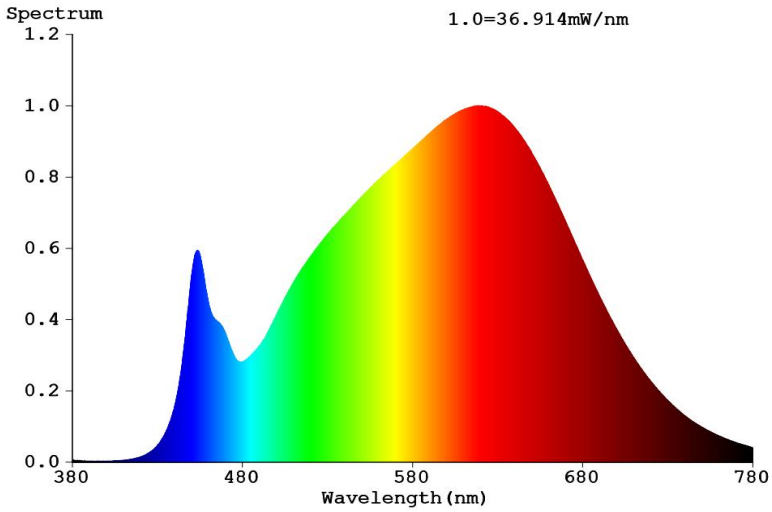

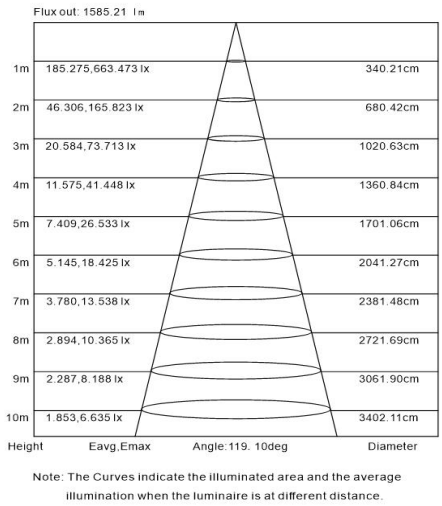

Product mechanical parameters

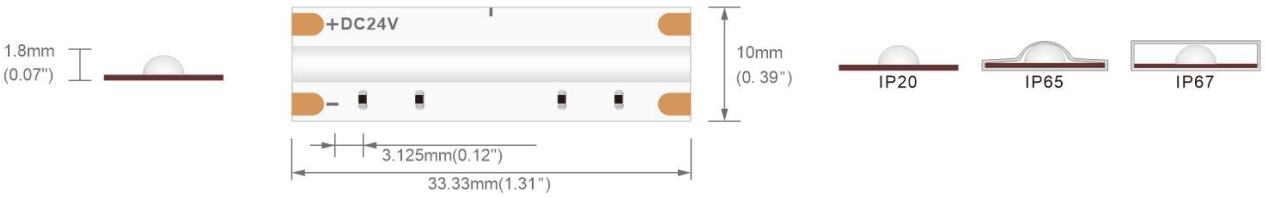

Electrical Data

Nominal wattage per meter	17.2W
Nominal voltage	24 Vdc
Input voltage range	23-25 Vdc
Nominal current per meter	716 mA

Photometrical Data

Luminous efficacy	110 lm/W
Luminous flux per meter	1892 lm

Module Information

Number of LEDs per meter	420
Number of LEDs per module	2100
Number of LEDs per smallest unit	14

Dimensions & Weight

Max.Length	5000 mm
Length – Min. unit	33.33 mm
Cable length	150 mm
Width	10 mm
Height	1.8 mm
Prewired	Yes
Conductor cross section	0.5 mm^2
LED pitch	2.381 mm
Short pitch	No
Product weight	150g

Product Photo-Electric Parameters

Ra≥90

Power	CRI	Color	Color Temperature	LM/m	LM/W	Energy Efficiency Class
17.2W	Ra≥90	SWW	2700K	1720	100	E
17.2W	Ra≥90	WW	3000K	1806	105	E
17.2W	Ra≥90	NW	4000K	1892	110	E
17.2W	Ra≥90	PW	6500K	1806	105	E

1. The tolerance of output data is ±10%.
2. The above data is based on IP20 ,1meter.

Extreme Torsion Test

- Product test results: no damage, no degumming, super resistance to bending, super sturd.
- Note: The following test is to test the reliability of the product, it is not recommended to operate during use.

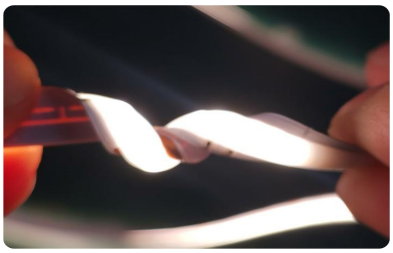

Twist test <1cm diameter

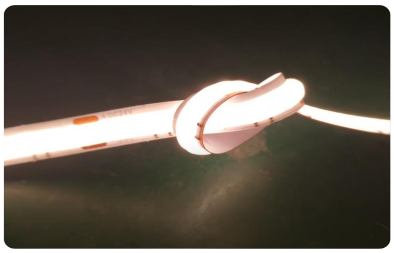

Knotting test

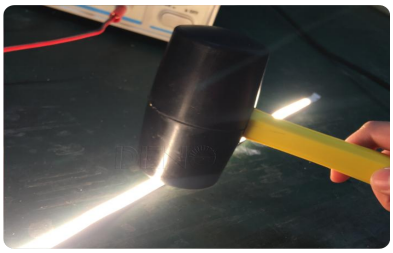

Gravity beat test

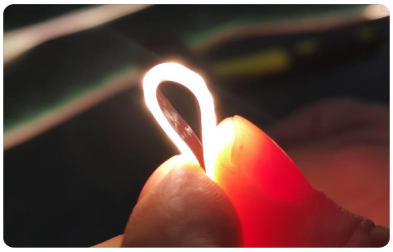

Bending test 1cm diameter

Bending test 3cm diameter

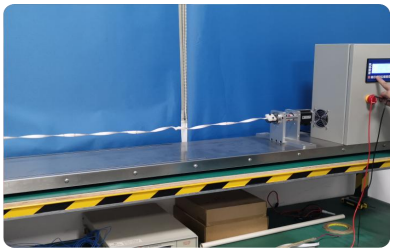

Twist test 720°

Packing

General customized package

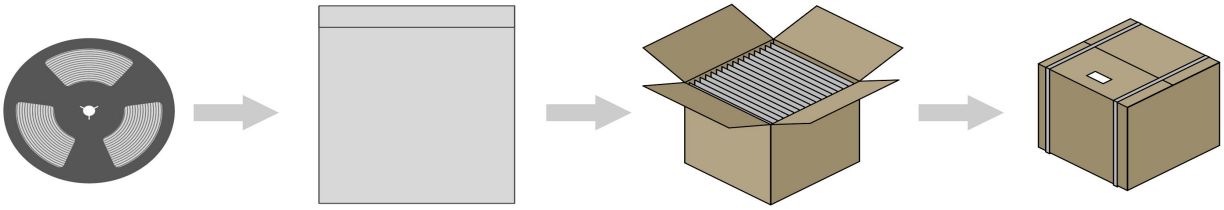

OEM package

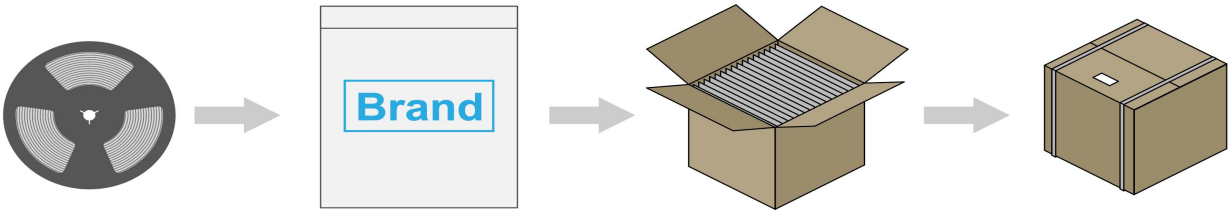

Precautions

- LED lights should be stored in dry, sealed environment. Please only unpack it before usage. Ambient temperature: -25˚C~40˚C. Storage temperature: 0˚C~60˚C. Please use the strips without waterproof within indoor environment with humidity less than 70%.
- Please do not bend the strip into an arc with a diameter less than 60mm to ensure the longevity and reliability.
- Please make sure the wire is connected to the anode and cathode correctly. The power output should be consistent with the voltage of the strip to avoid damage.
- Please be careful during operation. Do not touch the AC power supply in case of electric shock.
- Please leave at least 20% power for the power supply during using to ensure there is enough power supply to drive the product.
- Do not use any acid or alkaline adhesives to fix the product (e.g.: glass cement).
- Do not scratch the product when IP processof the product is NA. Ultraviolet rays will damage the nano-layers on the product and seriously affect the life of the product.
- Please drive the led strip with 24VDC isolated power, and the ripple of the constant voltage source should be less than 5%.
- Do not fold it in case any damage of LED beads.
- Do not pull the power wire hard to ensure the longevity. Any Crash may damage the LED light is prohibited.

Warranty

1. All LED lights are warranted to be free from defects in the product itself from the date of purchase.
2. Within this period, DENO reserves the right to repair or replace any components that fail due to correct use. Such repairs or replacements will be provided free of charge for parts only, provided that the customer is responsible for transportation costs of the goods.
3. This warranty does not cover failures due to abuse, misuse, improper handling, acts of nature, negligence, normal wear, accidental damage, modifications or repairs made by the purchaser, or incorrect voltage conditions.