

# 802.11h™

**IEEE Standard for  
Information technology—  
Telecommunications and information  
exchange between systems—  
Local and metropolitan area networks—  
Specific requirements**

**Part 11: Wireless LAN Medium Access Control  
(MAC) and Physical Layer (PHY) specifications**

**Amendment 5: Spectrum and Transmit Power  
Management Extensions in the 5 GHz band in  
Europe**

**IEEE Computer Society**

Sponsored by the  
LAN/MAN Standards Committee

This amendment is an approved IEEE  
Standard. It will be incorporated into the  
base standard in a future edition.



Published by  
The Institute of Electrical and Electronics Engineers, Inc.  
3 Park Avenue, New York, NY 10016-5997, USA

14 October 2003

Print: SH95172  
PDF: SS95172

Recognized as an  
American National Standard (ANSI)

**IEEE Std 802.11h™-2003**  
(Amendment to IEEE Std 802.11™, 1999 Edition (Reaff 2003),  
as amended by  
IEEE Stds 802.11a™-1999, 802.11b™-1999,  
802.11b™-1999/Cor 1-2001, 802.11d™-2001,  
and 802.11g™-2003)

**IEEE Standard for  
Information technology—  
Telecommunications and information  
exchange between systems—  
Local and metropolitan area networks—  
Specific requirements**

**Part 11: Wireless Medium Access Control (MAC)  
and Physical Layer (PHY) specifications:**

**Amendment 5: Spectrum and transmit power  
management extensions in the 5 GHz band in  
Europe**

Sponsor  
**LAN/MAN Committee**  
of the  
**IEEE Computer Society**

Approved 29 December 2003  
**American National Standard Institute**

Approved 11 September 2003  
**IEEE-SA Standards Board**

**Abstract:** This amendment specifies the extensions to IEEE 802.11™ for wireless local area networks (WLANs) providing mechanisms for dynamic frequency selection (DFS) and transmit power control (TPC) that may be used to satisfy regulatory requirements for operation in the 5 GHz band in Europe.

**Keywords:** dynamic frequency selection (DFS), local area network (LAN), transmit power control (TPC)

---

The Institute of Electrical and Electronics Engineers, Inc.  
3 Park Avenue, New York, NY 10016-5997, USA

Copyright © 2003 by the Institute of Electrical and Electronics Engineers, Inc.  
All rights reserved. Published 14 October 2003. Printed in the United States of America.

IEEE and 802 are registered trademarks in the U.S. Patent & Trademark Office, owned by the Institute of Electrical and Electronics Engineers, Incorporated.

Print: ISBN 0-7381-3818-5 SH95172  
PDF: ISBN 0-7381-3819-3 SS95172

*No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.*

**IEEE Standards** documents are developed within the IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (IEEE-SA) Standards Board. The IEEE develops its standards through a consensus development process, approved by the American National Standards Institute, which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of the Institute and serve without compensation. While the IEEE administers the process and establishes rules to promote fairness in the consensus development process, the IEEE does not independently evaluate, test, or verify the accuracy of any of the information contained in its standards.

Use of an IEEE Standard is wholly voluntary. The IEEE disclaims liability for any personal injury, property or other damage, of any nature whatsoever, whether special, indirect, consequential, or compensatory, directly or indirectly resulting from the publication, use of, or reliance upon this, or any other IEEE Standard document.

The IEEE does not warrant or represent the accuracy or content of the material contained herein, and expressly disclaims any express or implied warranty, including any implied warranty of merchantability or fitness for a specific purpose, or that the use of the material contained herein is free from patent infringement. IEEE Standards documents are supplied “**AS IS.**”

The existence of an IEEE Standard does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the IEEE Standard. Furthermore, the viewpoint expressed at the time a standard is approved and issued is subject to change brought about through developments in the state of the art and comments received from users of the standard. Every IEEE Standard is subjected to review at least every five years for revision or reaffirmation. When a document is more than five years old and has not been reaffirmed, it is reasonable to conclude that its contents, although still of some value, do not wholly reflect the present state of the art. Users are cautioned to check to determine that they have the latest edition of any IEEE Standard.

In publishing and making this document available, the IEEE is not suggesting or rendering professional or other services for, or on behalf of, any person or entity. Nor is the IEEE undertaking to perform any duty owed by any other person or entity to another. Any person utilizing this, and any other IEEE Standards document, should rely upon the advice of a competent professional in determining the exercise of reasonable care in any given circumstances.

**Interpretations:** Occasionally questions may arise regarding the meaning of portions of standards as they relate to specific applications. When the need for interpretations is brought to the attention of IEEE, the Institute will initiate action to prepare appropriate responses. Since IEEE Standards represent a consensus of concerned interests, it is important to ensure that any interpretation has also received the concurrence of a balance of interests. For this reason, IEEE and the members of its societies and Standards Coordinating Committees are not able to provide an instant response to interpretation requests except in those cases where the matter has previously received formal consideration.

Comments for revision of IEEE Standards are welcome from any interested party, regardless of membership affiliation with IEEE. Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments. Comments on standards and requests for interpretations should be addressed to:

Secretary, IEEE-SA Standards Board  
445 Hoes Lane  
P.O. Box 1331  
Piscataway, NJ 08855-1331  
USA

<p>Note: Attention is called to the possibility that implementation of this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken with respect to the existence or validity of any patent rights in connection therewith. The IEEE shall not be responsible for identifying patents for which a license may be required by an IEEE standard or for conducting inquiries into the legal validity or scope of those patents that are brought to its attention.</p>
---

Authorization to photocopy portions of any individual standard for internal or personal use is granted by the Institute of Electrical and Electronics Engineers, Inc., provided that the appropriate fee is paid to Copyright Clearance Center. To arrange for payment of licensing fee, please contact Copyright Clearance Center, Customer Service, 222 Rosewood Drive, Danvers, MA 01923 USA; +1 978 750 8400. Permission to photocopy portions of any individual standard for educational classroom use can also be obtained through the Copyright Clearance Center.

# Introduction

(This introduction is not part of IEEE 802.11h-2003, IEEE Standard for Information technology—Telecommunications and information exchange between systems—Local and metropolitan area networks—Specific requirements—Part 11: Wireless Medium Access Control (MAC) and Physical Layer (PHY) specifications: Amendment # 5: Spectrum and Transmit Power Management Extensions in the 5 GHz band in Europe.)

## IEEE Std 802.11h-2003

IEEE Std 802.11h-2003 provides mechanisms for dynamic frequency selection (DFS) and transmit power control (TPC) that may be used to satisfy regulatory requirements for operation in the 5 GHz band in Europe.

## Patents

Attention is called to the possibility that implementation of this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken with respect to the existence or validity of any patent rights in connection therewith. The IEEE shall not be responsible for identifying patents for which a license may be required by an IEEE standard or for conducting inquiries into the legal validity or scope of those patents that are brought to its attention. A patent holder has filed a statement of assurance that it will grant licenses under these rights without compensation or under reasonable rates and nondiscriminatory, reasonable terms and conditions to all applicants desiring to obtain such licenses. The IEEE makes no representation as to the reasonableness of rates and/or terms and conditions of the license agreements offered by patent holders. Further information may be obtained from the IEEE Standards Department.

## Interpretations and errata

Interpretations and errata associated with this amendment may be found at one of the following Internet locations:

- <http://standards.ieee.org/reading/ieee/interp/>
- <http://standards.ieee.org/reading/ieee/updates/errata/>

## Participants

When the IEEE 802.11 Working Group approved this amendment, it had the following membership:

**Stuart J. Kerry**, *Chair*  
**Al Petrick** and **Harry R. Worstell**, *Vice-Chairs*  
**Tim Godfrey**, *Secretary*  
**Brian Mathews**, *Publicity Standing Committee*  
**Teik-Kheong Tan**, *Wireless Next-Generation Standing Committee*

**John Fakatselis**, *Chair Task Group e*  
**Duncan Kitchin**, *Vice-Chair Task Group e*  
**David Bagby**, *Chair Task Group f*  
**Matthew B. Shoemake**, *Chair Task Group g*  
**David Halasz**, *Chair Task Group i*

When the IEEE 802.11 Working Group approved this amendment, the Task Group H had the following membership:

**Mika Kasslin, Chair**  
**Carl Temme, Study Group Chair**  
**Andrew Myles, Editor**  
**Evan Green, Secretary**

Steven Aafjes	Kevin M. Barry	Po-Lin Chiu
Osama Aboul-Magd	Charles R. Bartel	Sangsung Choi
Robert Achatz	Anuj Batra	Sunghyun Choi
Tomoko Adachi	Burak Baysal	Woo-Yong Choi
Hossam Afifi	Glenn R. Beckett	Ojas T. Choksi
Brian G. Agee	Tomer Bentzion	Per Christoffersson
Jae-Young Ahn	Mathilde Benveniste	Jim Christy
Hiroshi Akagi	Armen Berjikly	Mooi Chuah
Masaaki Akahane	Fred Berkowitz	Simon Chung
James Aldis	Brett Bernath	Simon Chun-Yu Chung
Thomas Alexander	Don Berry	Song Ci
Vali Ali	Jan Biermann	Frank Ciotti
Areg Alimian	A. Mark Bilstad	Richard Clayton
James Allen	Bjorn Bjerke	Ken Clements
James G. Allen	Simon Black	John T. Coffey
Richard Allen	Dennis Bland	Terry Cole
Keith Amann	Jan Boer	Anthony Collins
Song H. An	James Bohac	Paul Congdon
Dov Andelman	Satish Bommarreddy	Craig Conkling
Geoffrey T. Anderson	Herve Bonneville	Steven W. Conner
Merwyn Andrade	William M. Brasier	Dennis Connors
Carl F. Andren	Jennifer A Bray	Charles Cook
David C. Andrus	Jim Brennan	Todor Cooklev
Kofi Anim-Appiah	Jean-Claude Brien	Kenneth D. Cornett
Hidenori Aoki	Ronald Brockmann	Mary Cramer
Takashi Arakawa	Phillip Brownlee	William Crilly
Mitch Aramaki	Phillip Lynn Brownlee	Richard Cross
Takashi Aramaki	Alex Bugeja	Glen Crowder
William A. Arbaugh	Alistair G. Buttar	Steven Crowley
Larry Arnett	Pete Cain	Ramon Adriano Cruz
Hiroshi Asai	Richard Cam	Terence J. Cummings
Brian G. Asee	Nancy Cam-Winget	Anand Dabak
Mehdi Asgharzadeh	Bill Carney	Nora Dabbous
Naiel Askar	Pat Carson	William Dai
Arthur Astrin	Broady Cash	Bipin D. Dama
Malik Audeh	Michael Cave	Thomas V. D'Amico
Geert A. Awater	Anthony Caviglia	Khamphuc Daulasim
Ender Ayanoglu	Kiran Challiarali	Barry Davis
Shahrmaz Azizi	Ginny Chan	Rolf De Vegt
Floyd Backes	Jayant Chande	Javier del Prado
Jin-Seok Bae	Eugene Chang	Udi Delgoshen
David Bagby	Jeffrey Chang	Karl L. Denninghoff
Venkat Bahl	Kisoo Chang	Darryl Denton
Jay Bain	Shue-Lee Chang	Michael Derby
Dennis J. Baker	Chi-Chao Chao	Richard DeSalvo
Bala Balachander	Clint Chaplin	Jimmy H. Dho
John Balian	Hung-Kun Chen	Wim Diepstraten
Raja Banerjea	Jay Jui-Chieh Chen	Lakshminath Dondeti
Boyd Bangerter	Ye Chen	Bob Donnan
Simon Barber	Yi-Ming Chen	Glenn Dooley
Thomas Barber	Hong Cheng	Bretton Lee Douglas
Farooq Bari	Greg Chesson	Alon Drory
Sina Barkeshli	Lieshu Chiang	Simon John Duggins
Michael Barkway	Alan Chickinsky	Baris B. Dundar
David Barr	Francois Po_Shin Chin	Larry Dunn
John Barr	Aik Chindapol	Roger Durand

Eryk Dutkiewicz  
 Mary DuVal  
 Donald E. Eastlake III  
 Dennis Eaton  
 Peter Ecclesine  
 Brian S. Edmonston  
 Jon Edney  
 Jack Ehrhardt  
 Jan Eiliger  
 Natrajan Ekambaram  
 Jason L. Ellis  
 Darwin Engwer  
 Greg Ennis  
 Frederick Enns  
 Guy Erb  
 Vinko Erceg  
 Randal L. Erman  
 Noam Eshel  
 Javier Espinoza  
 Steven Ettles  
 Christoph Euscher  
 John Fakatselis  
 Lars Falk  
 Rainer Falk  
 Steve Fantaske  
 Charles S. Farlow  
 Augustin J. Farrugia  
 Alex Feldman  
 Weishi Feng  
 Andres Fernstedt  
 Nestor Fesas  
 Gerhard Fettweis  
 Mark W. Fidler  
 Norm Finn  
 Matthew James Fischer  
 Tom Flaherty  
 Jeff R. Foerster  
 Brian Forde  
 Ruben Formoso  
 David Fotland  
 Sheila E. Frankel  
 Martin Freedman  
 David Fridley  
 Michael Froning  
 Taketo Fukui  
 Shinya Fukuoka  
 John Nels Fuller  
 Marcus Gahler  
 Gilles Ganault  
 Rodrigo Garcés  
 James Gardner  
 Atul Garg  
 Sanchin Garg  
 Al Garrett  
 Michael Genossar  
 Noam Geri  
 Vafa Ghazi  
 Monisha Ghosh  
 Ian Gifford  
 James Gilb  
 Jeffrey Gilbert  
 Bindu Gill  
 Tim Godfrey

Yan Siang Goh  
 Wataru Gohda  
 Peter Goidas  
 Patrick S. Gonias  
 Jim Goodman  
 Gilbert Goodwill  
 Yuval Goren  
 Alex Gorokhov  
 Andrew J. Gowans  
 Rik Graulus  
 Martin Gravenstein  
 Gordon Gray  
 William H. Gray  
 John Green  
 Larry Green  
 Michael Green  
 Patrick Green  
 Kerry Greer  
 John Griesing  
 Daqing Gu  
 Srikanth Gummadi  
 Ajay Gummalla  
 Qiang Guo  
 Bert Gyselinck  
 Dongwoon Hahn  
 Fred Haisch  
 David Halasz  
 Steve D. Halford  
 Robert J Hall  
 Neil Hamady  
 Rabah Hamdi  
 Mark Hamilton  
 Robert E Hancock  
 Christopher J. Hansen  
 Yasuo Harada  
 Thomas Hardjono  
 Daniel N. Harkins  
 Thomas Haslestad  
 Amer A. Hassan  
 Vann Hasty  
 James P. Hauser  
 Yutaka Hayakawa  
 Morihiko Hayashi  
 Ryoji Hayashi  
 Kevin Hayes  
 Victor Hayes  
 Haixiang He  
 Xiaoning He  
 Robert Heile  
 Richard Hibbard  
 Gerrit Hiddink  
 Dan Hilberman  
 Garth Hillman  
 Christopher Hinsz  
 Jun Hirano  
 Mikael Hjelm  
 Jin-Meng Ho  
 James Hobza  
 Maarten Hoebe  
 Michael Hoghooghi  
 Allen Hollister  
 Keith Holt  
 Satoru Hori  
 William Horne

Srinath Hosur  
 Russell Housley  
 Frank P Howley, Jr  
 Chin-Yu Hsu  
 Dave Hudak  
 John Hughes  
 Grant Hulse  
 Ronald Hunt  
 David Hunter  
 Keith Huntington  
 Chuck Hwang  
 Eon Hwang  
 Gyung Ho Hwang  
 Hyosun Hwang  
 Syang-Myau Hwang  
 David Hytha  
 Young Guen Hyun  
 Hiroshi Ide  
 L. V. Jagannatha  
 Ho-In Jeon  
 Taehyun Jeon  
 Young-Sik Jeon  
 Moo Ryong Jeong  
 De Ji  
 Habetha Joerg  
 Henric A. Johnson  
 Walter Johnson  
 Cesar Augusto Johnston  
 David Johnston  
 Jari Jokela  
 Doug Jones  
 V. K. Jones  
 Bobby Jose  
 Tyan-Shu Jou  
 Seiji Kachi  
 Daryl Kaiser  
 Srinivas Kandala  
 You Kang  
 You Sung Kang  
 Martin Kappes  
 Isuke Karaki  
 Jeyhan Karaoguz  
 Kevin Karcz  
 Jaime E. Kardontchik  
 Murat Karsi  
 Scoff Kasin  
 Srinivas Katar  
 Yasuhiro Katsube  
 Eiji Kawase  
 Khurram Kazi  
 Kris Kelkar  
 Joy H. Kelly  
 Patrick Kelly  
 Richard Kennedy  
 Nick Kerry  
 Stuart J. Kerry  
 Vytas Kezys  
 Andrew K. Khieu  
 Jamshid Khun-Jush  
 Poh Boon Kiat  
 Ryoji Kido  
 Byoung-Jo Kim  
 Daeik Kim  
 Dongkyu Kim

Dooseok Kim  
 Dukhyun Kim  
 Edward Kim  
 Hyung-Jin Kim  
 Je Woo Kim  
 Joonsuk Kim  
 Myoung Soo Kim  
 Steve Kim  
 Sunny Kim  
 Yongbum Kim  
 Yong-Sun Kim  
 Young Kim  
 Young Hwan Kim  
 Young-Ju Kim  
 Young-soo Kim  
 Ziv Kimhi  
 Kursat Kimyacioglu  
 Eric J. King  
 Wayne King  
 Duncan Kitchin  
 Günter Kleindl  
 Mark Klerer  
 Kevin Klesenski  
 Cees Klik  
 David Kline  
 Julius Knapp  
 Toshiya Kobashi  
 Srinivasa Kocherla  
 Blaine Kohl  
 Philip S. Kossin  
 Lalit Kotecha  
 John M. Kowalski  
 Bruce P. Kraemer  
 Gopal Krishnan  
 Thomas Kuehnelt  
 Sandeep Kumar  
 Yutaka Kuno  
 Bill Kunz  
 Masahiro Kuroda  
 Denis Kuwahara  
 Dong-hoon Kwak  
 Joe Kwak  
 ChangYeul Kwon  
 Oh Sang Kwon  
 Paul A. Lambert  
 Kevin Lan  
 David S. Landeta  
 John B. Langley  
 Jim Lansford  
 Colin Lanzl  
 Kim Laraqui  
 Jon LaRosa  
 Choi Law  
 Lionel Le Scolan  
 David J. Leach, Jr.  
 Chun Lee  
 Dongjun Lee  
 Hyeon-Jae Lee  
 Insun Lee  
 Jay Hwa Lee  
 K. C. Lee  
 Kab Joo Lee  
 Ki-Cheol Lee  
 Myung Jong Lee

Nag Yeon Lee  
 Richard van Leeuwen  
 Martin Lefkowitz  
 Uriel Lemberger  
 Jean Luc Lemberg  
 Onno Letanche  
 Shmuel Levy  
 Mike Lewis  
 Liang Li  
 Pen Li  
 Quinn Li  
 Sheung Li  
 Jie Liang  
 John Liebetreu  
 Daniel B. Lieman  
 Peter J. Ligertwood  
 Jae-Woo Lim  
 Yong Je Lim  
 Isaac Lim Wei Lih  
 Huai-An Lin  
 Huashih A. Lin  
 Sheng Lin  
 Victor Chiwu Lin  
 Stanley Ling  
 Titus Lo  
 Manuel Lobeira  
 Peter Loc  
 Patrick Lopez  
 Fernando López-de-Victoria  
 Hui-Ling Lou  
 Marc Loutrel  
 Willie Lu  
 Xiaolin Lu  
 David Lucia  
 Luke Ludeman  
 Hui Luo  
 Yeong-Chang Maa  
 Takuji Maekawa  
 Akira Maeki  
 Osamu Maeshima  
 Mats Erik Magnusson  
 Tom M. Mahoney  
 Douglas Makishima  
 Tim Maleck  
 Majid Malek  
 Jouni Kalevi Malinen  
 Krishna Malladi  
 Alexander A. Maltsev  
 Stefan Mangold  
 Mahalingam Mani  
 Shrikant Manivannan  
 Paul Mantilla  
 Bob Mapes  
 Jonn Martell  
 Naotaka Maruyama  
 Paul Marzec  
 Ralph Mason  
 Brian Mathews  
 Jo-Ellen F. Mathews  
 Mark Mathews  
 Noriaki Matsuno  
 Sudheer Matta  
 Thomas Maufer  
 Conrad Maxwell

Michael McLaughlin  
 Justin McCann  
 Stephen McCann  
 Kelly McClellan  
 Gary McCoy  
 Bill McFarland  
 Gary McGarr  
 Timothy McGovern  
 Michael D. McInnis  
 Bill McIntosh  
 James Mclean  
 Frank McLinn  
 Justin P. McNew  
 Jorge Medina  
 Michael Medina  
 Mehul Mehta  
 Pratik Mehta  
 Robert C. Meier  
 Graham Melville  
 Klaus Meyer  
 David G. Michelson  
 Scott F Migaldi  
 Leonard E Miller  
 Robert Miller  
 Reiner Mim  
 Masahiro Mimura  
 Ral Xiao Min  
 Julian E. Minard  
 Lin Tzu Ming  
 Vinod R Mirchandani  
 Partho Mishra  
 David James Mitton  
 Shunji Miura  
 Fanny Mlinarsky  
 Sachin Mody  
 Sanjay Moghe  
 Behzad Mohebbi  
 Rishi Mohindra  
 Bryan Jeffery Moles  
 James Mollenauer  
 Peter R. Molnar  
 Anton Monk  
 Leo Monteban  
 Michael Montemurro  
 Jae Moon  
 Mike Moreton  
 Yuichi Morioka  
 Roy Morris  
 Robert Moskowitz  
 Oliver Muelhens  
 Joe Mueller  
 Michael Mueller  
 Takeshi Murakami  
 Peter Murphy  
 Boyd Murray  
 Peter Murray  
 Guruprasad I Naik  
 Ravi Narasimhan  
 Panos E. Nastou  
 Nersi Nazari  
 Slobodan Nedic

Kevin Negus  
 Robert J. Neilsen  
 Bahva Nelakanti  
 David B. Nelson  
 Dan Nemits  
 Chiu Ngo  
 Terry Ngo  
 Tuan Nguyen  
 Qiang Ni  
 Kazuaki Nimura  
 Toshi Nishida  
 Gunnar Nitsche  
 Puthiya Nizar  
 Erwin R. Noble  
 Hiroshi Nomura  
 Tzvetan D. Novkov  
 Ivan Oakes  
 Kei Obara  
 Hideaki Odadgiri  
 Paul Odlyzko  
 Karen O'Donoghue  
 Bob O'Hara  
 Yoshihiro Ohtani  
 Eric J. Ojard  
 Kazuhiro Okanoue  
 Dean E. Oliver  
 Kim J. Olsiewski  
 Chandra S. Olson  
 Tim Olson  
 Takeshi Onizawa  
 Lior Ophir  
 Ian Oppermann  
 Toshikuni Osogoe  
 Richard H. Paine  
 Mike Paljug  
 Stephen R. Palm  
 Carl Panasik  
 Aleksandar Pance  
 Subra Parameswaran  
 John B. Pardee  
 Jong Ae Park  
 Jonghun Park  
 Michael Park  
 Seung-Keun Park  
 Taegon Park  
 Alan Parrish  
 Glenn Parsons  
 Dave Patton  
 Jeff Paul  
 Lizy Paul  
 Eldad Perahia Perahia  
 Sebastien Perrot  
 Al Petrick  
 James Everett Pigg  
 Leo Pluswick  
 Dennis Yu Kiu Pong  
 Stephen Pope  
 James Portaro  
 Al Potter  
 Satish Premanathan  
 Mike Press  
 Clifford Prettie  
 James A. Proctor

Henry Ptasinski  
 Hugo Pues  
 Anuj Puri  
 Aleksandar Purkovic  
 Jim Raab  
 Raad Raad  
 Ali Raissinia  
 Thierry Rakotoarivelo  
 Murali Ramadoss  
 Ravindra Ranasinghe  
 Noman Rangwala  
 Murli M Rao  
 Yaron Rashi  
 Gregg Rasor  
 Kamlesh Rath  
 Stephen G. Rayment  
 Chakradher Reddy  
 Ivan Reede  
 Einan Regev  
 John Regnier  
 Stanley A. Reible  
 Anthony Reid  
 Joe Repice  
 Danny Rettig  
 Edward Reuss  
 Valentine Joseph Rhodes  
 Bill Rhyne  
 David B. Ribner  
 Mark Rich  
 Jim Richards  
 Terry Richards  
 David Richkas  
 Maximilian Riegel  
 John Rinderknecht  
 Carlos A. Rios  
 Benno Ritter  
 David Robak  
 Randy Roberts  
 Walt Roehr  
 Hyun Suk Roh  
 Benjamin Rolfe  
 Kent G. Rollins  
 Gregory Roman  
 Stefan Rommer  
 Gary Roosevelt  
 Jon Rosdahl  
 Pejman Roshan  
 Brian Rosnov  
 Philippe Rouzet  
 Reinhard Ruckriem  
 Mikael Rudberg  
 Chandos Rypinski  
 Michael J. Sabin  
 Ali Sadri  
 Shin Saito  
 Katsumi Sakai  
 Tetsu Sakata  
 Shoji Sakurai  
 Kenichi Sakusabe  
 Antonio E. Salloum Salazar  
 Janne Salmi  
 Hemanth Sampath  
 Yukitoshi Sanada  
 Sumeet Sandhu

Sunny Sandhu  
 John H. Santhoff  
 Anil K. Sanwalka  
 Nicholas J. Sargologos  
 Shanuj Sarin  
 Hideaki Sato  
 Masatoshi Sato  
 Takashi Sato  
 John Sauer  
 Kurt Sauter  
 Hans G. Schantz  
 Jerry Schoemann  
 Sid Schrum  
 Erik Schylander  
 Thomas Scribner  
 Michael Seals  
 Joe Sensoroff  
 Krishna Seshadri  
 Caspar Settels  
 Ankur Shah  
 Nimish Shah  
 N. K. Shankaranarayanan  
 Sandeep K. Sharma  
 S. Shelton  
 Tamara Shelton  
 Yangmin Shen  
 Veronica Sherard  
 Matthew Sherman  
 Tamara Sophia Sheton  
 Ming Sheu  
 Masaaki Shida  
 Shusaku Shimada  
 Brian Byung-Cheol Shin  
 Cheol ho Shin  
 Junho Shin  
 Daisuke Shinomiya  
 Etan A. Shirron  
 Guy Shochet  
 Matthew B. Shoemake  
 Lance Crispin Shrader  
 William Shvodia  
 Salvador Sibecas  
 Michael Sim  
 Sebastien Simoens  
 Floyd Simpson  
 Manoneet Singh  
 Sandeep K. Singhal  
 Hasse Sinivaara  
 Stan Skafidas  
 David Skellern  
 Roger Ray Skidmore  
 Donald I. Sloan  
 Kevin Smart  
 Andrew Smith  
 David Smith  
 Douglas A. Smith  
 Wendell Smith  
 Paul A. Snopko  
 Yoram Solomon  
 Ho-Kyung Son



Pyeong-Jung Song  
 Wei-Jei Song  
 Amjad Soomro  
 Massimo Sorbara  
 David F. Sorrells  
 Essam Sourour  
 Gary Spiess  
 Manikantan Srinivasan  
 Dorothy V. Stanley  
 William K. Steck  
 Greg Steele  
 Adrian Stephens  
 William M. Stevens  
 Carl R. Stevenson  
 Fred Stivers  
 Warren E. Strand  
 Paul F. Struhsaker  
 Thomas W. Studwell  
 Michael Su  
 Yuhsiang Su  
 Gary Sugar  
 Hiroki Sugimoto  
 Hajime Suzuki  
 Hirokazu Tagiri  
 Ehab Tahir  
 Masahiro Takagi  
 Mineo Takai  
 Katsumi Takaoka  
 Minoru Takemoto  
 Nir Tal  
 Tsuyoshi Tamaki  
 Jasper Tan  
 Pek-Yew Tan  
 Teik-Kheong Tan  
 Ming Tang  
 Takuma Tanimoto  
 Kenichi Taniuchi  
 Mamoru Tashiro  
 H. C. Taylor  
 Larry Taylor  
 Roger Teague  
 Carl Temme  
 John Terry  
 Walter Thirion  
 Kevin Thomaszios  
 Lars E. Thon  
 Peter Thornycroft  
 Jerry A. Thrasher  
 Yasuo Tobita  
 Troy Tom  
 James D. Tomcik  
 David W. Trainor  
 John Trick  
 Jonathon Trostle

Walt Trzaskus  
 Allen Tsai  
 Joseph Tsai  
 Jean Tsao  
 Chih C. Tsien  
 Tom Tsoulogiannis  
 Kwei Tu  
 Sandra Turner  
 Stephen E. Turner  
 Marcos Tzannes  
 Tomoyuki Udagawa  
 Takashi Ueda  
 Toru Ueda  
 Naoki Urano  
 Hidemi Usuba  
 Gary Vacon  
 Chandra Vaidyanathan  
 Harmen R. van As  
 Hans van der Ven  
 Niels Van Erven  
 Wim J. van Houtum  
 Richard van Nee  
 Lamar Van Wagenen  
 Patrick Vandenameele  
 Sarah Elizabeth Vargas-Hurlston  
 Dmitri Varsanofiev  
 Narasimhan Venkatesh  
 Jagannatha L. Venkatesha  
 Madan Venugopal  
 Ingrid Verbauwhede  
 Sarosh Vesuna  
 Fernando Victoria  
 Bhupender Virk  
 George Vlantis  
 Nanci Vogtli  
 Aleksey Voitovich  
 Dennis Volpano  
 Toan X. Vu  
 Klaus Wacker  
 Brian C. Wadell  
 Tim Wakeley  
 Jesse R. Walker  
 Brad Wallace  
 Thierry Walrant  
 Vivek G. Wandile  
 Chao-Chun Wang  
 Joe Wang  
 Stanley Wang  
 Wheng Wang  
 Christopher Ware  
 Fujio Watanabe  
 Katsumi Watanabe  
 Yoshinori Watanabe  
 Andrew Watts  
 Mati Wax

Mark Webster  
 Mathew Welborn  
 Kimberly Welch  
 Michael W. Wellman  
 Menzo Wentink  
 David A. Wheeler  
 Robert Whelan  
 Stephen R. Whitesell  
 Douglas L. Whiting  
 Michael Wilhoyte  
 Michael Glenn Williams  
 Peter K. Williams  
 Richard G. C. Williams  
 Steven D. Williams  
 Steven Wilson  
 Christopher Wingert  
 Jeffrey John Wojtiuk  
 Jin Kue Wong  
 Kensing Wong  
 Timothy G. Wong  
 Stephen R. Wood  
 Edward G Woodrow  
 Patrick A. Worfolk  
 Harry Worstell  
 Charles R. Wright  
 Micheal Wright  
 Frank Wu  
 Gang Wu  
 Liwen Wu  
 Shyhtsun Wu  
 Yang Xiao  
 Sheng-Bo Xu  
 Shugong Xu  
 Steven Xu  
 Hirohisa Yamaguchi  
 James Chih-Shi Yee  
 Jung Yee  
 Kazim O. Yildiz  
 Don Yonce  
 Kit Yong  
 Charles You  
 Albert Young  
 Heejung Yu  
 Patrick Yu  
 Hon Mo Yung  
 Erol Yurtkuran  
 Nakache Yves-paul  
 Chris Zegelin  
 Jin Zhang  
 Zhun Zhong  
 Glen Zorn  
 Bachar Zouari  
 Robert J. Zuccherato  
 Arnoud Zwemmer  
 Jim Zyren

Major contributions were received from the following individuals:

Simon Black  
Peter Ecclesine

Chris Hansen  
Bill MacFarland  
Andrew Myles

David Skellern  
Amjad Soomro

The following members of the balloting committee voted on this amendment. Balloters may have voted for approval, disapproval, or abstention.

Butch Anton  
David Bagby  
John Barnett  
Mitchell Buchman  
Todd Cooper  
Kimara Chin  
Keith Chow  
Terry Cole  
Michael Coletta  
Todor Cooklev  
Javier del Prado Pavon  
Guru Dutt Dhingra  
Thomas Dineen  
Peter Ecclesine  
Keng Fong  
Avraham Freedman  
Michele Gammel  
Andrew Germano  
James Gilb  
Tim Godfrey

Robert Heile  
Srinivas Kandala  
Stuart Kerry  
Cees Klik  
John Kowalski  
Pi-Cheng Law  
Daniel Levesque  
Kyle Maus  
George Miao  
Apurva Mody  
Mike Moreton  
Andrew Myles  
Paul Nikolich  
Erwin Noble  
Bob O'Hara  
Satoshi Oyama  
Sebastien Perrot  
Albert A. Petrick  
Subbu Ponnuswamy  
Hugo Pues  
Vikram Punj

Charles Rice  
Maximilian Riegel  
Jon Rosdahl  
Thomas Ruf  
Durga Prasad Satapathy  
Michael Seals  
Matthew J. Sherman  
Neil Shipp  
Kevin Smart  
Amjad Soomro  
Clay Stocklin  
Minoru Takemoto  
Jerry Thrasher  
Toru Ueda  
Dmitri Varsanofiev  
Hung-yu Wei  
Harry R. Worstell  
Jung Yee  
Oren Yuen  
Arnoud Zwemmer

When the IEEE-SA Standards Board approved this amendment on 11 September 2003, it had the following membership:

**Don Wright, *Chair***

**Howard M. Frazier, *Vice Chair***

**Judith Gorman, *Secretary***

H. Stephen Berger  
Joseph A. Bruder  
Bob Davis  
Richard DeBlasio  
Julian Forster\*  
Toshio Fukuda  
Arnold M. Greenspan  
Raymond Hapeman

Donald N. Heirman  
Laura Hitchcock  
Richard H. Hulett  
Anant Kumar Jain  
Lowell G. Johnson  
Joseph L. Koepfinger\*  
Tom McGean  
Steve M. Mills

Daleep C. Mohla  
William J. Moylan  
Paul Nikolich  
Gary S. Robinson  
Malcolm V. Thaden  
Geoffrey O. Thompson  
Doug Topping  
Howard L. Wolfman

\*Member Emeritus

Also included are the following nonvoting IEEE-SA Standards Board liaisons:

Alan Cookson, *NIST Representative*  
Satish K. Aggarwal, *NRC Representative*

Don Messina  
IEEE Standards Project Editor

# Contents

1.	Overview.....	1
1.2	Purpose.....	1
2.	Normative references.....	2
3.	Definitions .....	2
4.	Abbreviations and acronyms .....	3
5.	General description .....	3
5.3	Logical service interfaces .....	3
5.3.1	Station service (SS).....	3
5.4	Overview of the services.....	3
5.4.4	Spectrum management services.....	3
5.4.4.1	TPC.....	4
5.4.4.2	DFS.....	4
5.5	Relationships between services .....	4
5.7	Message information contents that support the services .....	5
5.7.2	Association.....	5
5.7.3	Reassociation .....	5
5.7.8	Spectrum management.....	5
7.	Frame formats .....	6
7.1	MAC frame formats.....	6
7.1.3	Frame fields .....	6
7.1.3.1	Frame Control field.....	6
7.2	Format of individual frame types.....	6
7.2.3	Management frames.....	6
7.2.3.1	Beacon frame format .....	6
7.2.3.4	Association Request frame format.....	7
7.2.3.6	Reassociation Request frame format .....	7
7.2.3.9	Probe Response frame format.....	7
7.2.3.12	Action frame format.....	8
7.3	Management frame body components .....	8
7.3.1	Fixed fields .....	8
7.3.1.4	Capability Information field .....	8
7.3.1.7	Reason Code field.....	9
7.3.1.9	Status Code field.....	9
7.3.1.11	Action field .....	10
7.3.2	Information elements .....	10
7.3.2.15	Power Constraint element.....	11
7.3.2.16	Power Capability element.....	11
7.3.2.17	TPC Request element.....	12
7.3.2.18	TPC Report element.....	12
7.3.2.19	Supported Channels element .....	13
7.3.2.20	Channel Switch Announcement element.....	13
7.3.2.21	Measurement Request element .....	14
7.3.2.22	Measurement Report element.....	17

7.3.2.23	Quiet element.....	22
7.3.2.24	IBSS DFS element.....	22
7.4	Action frame format details .....	23
7.4.1	Spectrum management action details .....	23
7.4.1.1	Measurement Request frame format.....	23
7.4.1.2	Measurement Report frame format.....	24
7.4.1.3	TPC Request frame format .....	24
7.4.1.4	TPC Report frame format .....	25
7.4.1.5	Channel Switch Announcement frame format.....	25
9.	MAC sublayer functional description.....	26
9.2	Distributed coordination function (DCF) .....	26
9.2.3	Interframe space (IFS) .....	26
9.2.3.2	Point coordination function (PCF) IFS (PIFS) .....	26
10.	Layer management.....	26
10.3	MAC sublayer management entity (MLME) service access point (SAP) interface.....	26
10.3.2	Scan.....	26
10.3.2.2	MLME-SCAN.confirm.....	26
10.3.6	Associate.....	27
10.3.6.1	MLME-ASSOCIATE.request.....	27
10.3.7	Reassociate.....	27
10.3.7.1	MLME-REASSOCIATE.request .....	27
10.3.10	Start.....	28
10.3.10.1	MLME-START.request.....	28
10.3.11	Spectrum management protocol layer model .....	29
10.3.12	Measurement request .....	33
10.3.12.1	MLME-MREQUEST.request.....	33
10.3.12.2	MLME-MREQUEST.confirm.....	34
10.3.12.3	MLME-MREQUEST.indication.....	35
10.3.13	Channel measurement.....	35
10.3.13.1	MLME-MEASURE.request .....	36
10.3.13.2	MLME-MEASURE.confirm .....	36
10.3.14	Measurement report .....	37
10.3.14.1	MLME-MREPORT.request.....	37
10.3.14.2	MLME-MREPORT.confirm.....	38
10.3.14.3	MLME-MREPORT.indication .....	39
10.3.15	Channel switch.....	39
10.3.15.1	MLME-CHANNELSWITCH.request .....	39
10.3.15.2	MLME-CHANNELSWITCH.confirm .....	40
10.3.15.3	MLME-CHANNELSWITCH.indication.....	41
10.3.15.4	MLME-CHANNELSWITCH.response.....	42
10.3.16	TPC request.....	42
10.3.16.1	MLME-TPCADAPT.request.....	43
10.3.16.2	MLME-TPCADAPT.confirm.....	43
11.	MLME .....	44
11.5	TPC procedures.....	44
11.5.1	Association based on transmit power capability.....	45
11.5.2	Specification of regulatory and local maximum transmit power levels .....	45
11.5.3	Selection of a transmit power .....	46

11.5.4	Adaptation of the transmit power .....	46
11.6	DFS procedures.....	46
11.6.1	Association based on supported channels.....	47
11.6.2	Quieting channels for testing .....	47
11.6.3	Testing channels for radars .....	48
11.6.4	Discontinuing operations after detecting radars .....	48
11.6.5	Detecting radars .....	48
11.6.6	Requesting and reporting of measurements.....	48
11.6.7	Selecting and advertising a new channel .....	49
11.6.7.1	Selecting and advertising a new channel in an infrastructure BSS.....	50
11.6.7.2	Selecting and advertising a new channel in an IBSS.....	50
17.	Orthogonal frequency division multiplexing (OFDM) PHY specification for the 5 GHz band .....	52
17.3	OFDM physical layer convergence procedure (PLCP) sublayer.....	52
17.3.8	Physical medium dependent (PMD) operating specifications (general) .....	52
17.3.8.3	Operating channel frequencies.....	52
17.3.9	PMD transmit specifications.....	53
17.3.9.1	Transmit power levels.....	53
Annex A (normative)	Protocol Implementation conformance Statement (PICS) proforma .....	54
A.4	PICS proforma—IEEE Std 802.11, 1999 Edition .....	54
A.4.3	IUT configuration .....	54
A.4.12	Spectrum management extensions.....	54
Annex D (normative)	ASN.1 encoding of the MAC and PHY MIB.....	57

## Figures

Figure 27—Capability Information fixed field.....	9
Figure 33a—Action field .....	10
Figure 46a—Power Constraint element format .....	11
Figure 46c—TPC Request element format.....	12
Figure 46d—TPC Report element format .....	12
Figure 46b—Power Capability element format.....	12
Figure 46e—Supported Channels element format.....	13
Figure 46g—Measurement Request element format .....	14
Figure 46h—Measurement Request Mode field.....	14
Figure 46f—Channel Switch Announcement element format .....	14
Figure 46i—Measurement Request field format for a basic request .....	16
Figure 46j—Measurement Request field format for a CCA request .....	17
Figure 46k—Measurement Request field format for a RPI histogram request .....	17
Figure 46l—Measurement Report element format .....	18
Figure 46m—Measurement Report Mode field.....	18
Figure 46n—Measurement Report field format for a basic report .....	19
Figure 46o—Map field format.....	19
Figure 46p—Measurement Report field format for a CCA report .....	20
Figure 46q—Measurement Report field format for an RPI histogram report .....	21
Figure 46r—Quiet element format .....	22
Figure 46s—IBSS DFS element format .....	22
Figure 46t—Channel Map field format .....	22
Figure 46v—Measurement Report frame body format .....	24
Figure 46u—Measurement Request frame body format .....	24
Figure 46x—TPC Report frame body format.....	25
Figure 46y—Channel Switch Announcement frame body format .....	25
Figure 46w—TPC Request frame body format .....	25
Figure 67a—Layer management model .....	29
Figure 67b—Measurement request—accepted.....	30
Figure 67c—Measurement request - rejected .....	31
Figure 67d—TPC adaptation .....	32
Figure 67e—Channel switch .....	33

## Tables

Table 1—Valid type and subtype combinations.....	6
Table 5—Beacon frame body .....	6
Table 7—Association Request frame body .....	7
Table 9—Reassociation Request frame body .....	7
Table 12—Probe Response frame body .....	7
Table 15a—Action frame body .....	8
Table 18—Reason codes .....	9
Table 19—Status codes .....	9
Table 19a—Category values.....	10
Table 20—Element IDs .....	10
Table 20a—Summary of use of Enable, Request, and Report bits.....	15
Table 20b—Measurement Type definitions for measurement requests .....	16
Table 20c—Measurement Type definitions for measurement reports .....	19
Table 20d—RPI definitions for an RPI histogram report.....	21
Table 20e—Spectrum management Action field values .....	23
Table 26a—Allowed measurement requests .....	48
Table 94—Valid operating channel numbers by regulatory domain and band .....	52
Table 95—Transmit power level for the United States by regulatory domain.....	53





**IEEE Standard for  
Information technology—  
Telecommunications and information  
exchange between systems—  
Local and metropolitan area networks—  
Specific requirements**

**Part 11: Wireless Medium Access Control (MAC)  
and Physical Layer (PHY) specifications:**

**Amendment 5: Spectrum and Transmit Power  
Management Extensions in the 5 GHz band in  
Europe**

[This amendment is based on IEEE Std 802.11™, 1999 Edition (Reaff 2003), as amended by IEEE Std 802.11a™-1999, IEEE Std 802.11b™-1999, IEEE Std 802.11b-1999/Cor 1-2001, IEEE Std 802.11d™-2001, and IEEE Std 802.11g™-2003.]

NOTE—The editing instructions contained in this amendment define how to merge the material contained herein into the existing base standard and its amendments to form the comprehensive standard.

The editing instructions are shown in ***bold italic***. Three editing instructions are used: change, delete, and insert. ***Change*** is used to make small corrections in existing text or tables. The editing instruction specifies the location of the change and describes what is being changed either by using ~~striketrough~~ (to remove old material) or underscore (to add new material). ***Delete*** removes existing material. ***Insert*** adds new material without disturbing the existing material. Insertions may require renumbering. If so, renumbering instructions are given in the editing instructions. Editorial notes will not be carried over into future editions.

## **1. Overview**

### **1.2 Purpose**

***Insert the following item at the end of the list at the end of 1.2:***

- Defines mechanisms for dynamic frequency selection (DFS) and transmit power control (TPC) that may be used to satisfy regulatory requirements for operation in the 5 GHz band in Europe. The regulations and conformance tests are listed in Clause 2.

## 2. Normative references

*Insert the following citations at the appropriate locations in Clause 2:*

ERC/DEC/(99)23, ERC Decision of 29 November 1999 on the harmonized frequency bands to be designated for the introduction of High Performance Radio Local Area Networks (HIPERLANs).<sup>1</sup>

ETSI EN 301 893, Broadband Radio Access Networks (BRAN); 5 GHz high performance RLAN; Part 2: Harmonized EN covering essential requirements of article 3.2 of the R&TTE Directive.<sup>2</sup>

## 3. Definitions

*Insert the following definitions in alphabetical order into Clause 3, renumbering as necessary:*

**3.53 dynamic frequency selection (DFS):** Facilities mandated to satisfy requirements in some regulatory domains for radar detection and uniform channel spreading in the 5 GHz band. These facilities may also be used for other purposes, such as automatic frequency planning.

**3.54 dynamic frequency selection (DFS) owner:** A station (STA) in an independent basic service set (IBSS) that takes responsibility for selecting the next channel after radar is detected operating in a channel. Due to the nature of IBSSs, it cannot be guaranteed that there will be a single DFS owner at any particular time and the protocol is robust to this situation.

**3.55 effective isotropic radiated power (EIRP):** The equivalent power of a transmitted signal in terms of an isotropic (omnidirectional) radiator. Normally the EIRP equals the product of the transmitter power and the antenna gain (reduced by any coupling losses between the transmitter and antenna).

**3.56 5 GHz band in Europe:** Refers to the nineteen 20 MHz channels between 5 GHz and 6 GHz in which wireless local area network (WLAN) operation is allowed in the CEPT regulatory domain.

**3.57 link margin:** Ratio of the received signal power to the minimum desired by the station (STA). The STA may incorporate rate information and channel conditions, including interference, into its computation of link margin. The specific algorithm for computing the link margin is implementation dependent.

**3.58 receive power:** Mean power measured at the antenna connector.

**3.59 received power indicator (RPI):** A quantized measure of the received power level as seen at the antenna connector.

**3.60 transmit power:** The effective isotropic radiated power (EIRP) when referring to the operation of a 5 GHz 802.11™ orthogonal frequency division multiplexing (OFDM) physical layer (PHY) in a country where so regulated.

**3.61 transmit power control (TPC):** Facilities mandated to satisfy requirements in some regulatory domains for maximum transmit power and transmit power mitigation in the 5 GHz band. These facilities may also be used for other purposes, e.g., reduction of interference, range control reduction of power consumption.

<sup>1</sup>ERC documents are available from European Radiocommunications Office, Midtermolen 1, DK-2100, Copenhagen, Denmark (<http://www.ero.dk>).

<sup>2</sup>ETSI documents are available from ETSI, 650 Route des Lucioles, F-06921 Sophia Antipolis Cedex, France (<http://www.etsi.org>).

**3.62 uniform spreading:** A regulatory requirement per ERC/DEC/(99)23 for a channel selection mechanism that provides uniform loading across a minimum set of channels in the regulatory domain.<sup>3</sup>

## 4. Abbreviations and acronyms

*Insert the following abbreviations in alphabetical order into Clause 4:*

DFS	dynamic frequency selection
RLAN	radio local area network
RPI	receive power indicator
TPC	transmit power control

## 5. General description

### 5.3 Logical service interfaces

*Insert the following items at the end of the list of architectural services in 5.3 as follows:*

- j) DFS
- k) TPC

#### 5.3.1 Station service (SS)

*Insert the following items at the end of the list of SSs in 5.3.1 as follows:*

- e) DFS
- f) TPC

### 5.4 Overview of the services

*Change the first paragraph in 5.4 as follows:*

There are ~~nine~~ several services specified by IEEE 802.11. Six of the services are used to support medium access control (MAC) service data unit (MSDU) delivery between stations (STAs). Three of the services are used to control IEEE 802.11 LAN access and confidentiality. Two of the services are used to provide spectrum management.

*Insert the following text for 5.4.4 through 5.4.4.2 after 5.4.3.3 as follows:*

#### 5.4.4 Spectrum management services

Two services are required to satisfy requirements in some regulatory domains for operation in the 5 GHz band. These services are called transmit power control (TPC) and dynamic frequency selection (DFS).

<sup>3</sup>For information on references, see Clause 2.

#### 5.4.4.1 TPC

ERC/DEC/(99)23 requires radio local area networks (RLANs) operating in the 5 GHz band to use transmitter power control, involving specification of a regulatory maximum transmit power and a mitigation requirement for each allowed channel, to reduce interference with satellite services. The TPC service is used to satisfy this regulatory requirement.

The TPC service provides for the following:

- Association of STAs with an access point (AP) in a basic service set (BSS) based on the STAs power capability.
- Specification of regulatory and local maximum transmit power levels for the current channel.
- Selection of a transmit power for each transmission in a channel within constraints imposed by regulatory requirements.
- Adaptation of transmit power based on a range of information, including path loss and link margin estimates.

#### 5.4.4.2 DFS

ERC/DEC/(99)23 requires RLANs operating in the 5 GHz band to implement a mechanism to avoid co-channel operation with radar systems and to ensure uniform utilization of available channels. The DFS service is used to satisfy these regulatory requirements.

The DFS service provides for the following:

- Association of STAs with an AP in a BSS based on the STAs' supported channels.
- Quieting the current channel so it can be tested for the presence of radar with less interference from other STAs.
- Testing channels for radar before using a channel and while operating in a channel.
- Discontinuing operations after detecting radar in the current channel to avoid interference with radar.
- Detecting radar in the current and other channels based on regulatory requirements.
- Requesting and reporting of measurements in the current and other channels.
- Selecting and advertising a new channel to assist the migration of a BSS or independent BSS (IBSS) after radar is detected.

### 5.5 Relationships between services

*Change the following list in 5.5 as follows:*

- a) Class 1 frames (permitted from within States 1, 2, and 3):
  - 2) Management frames
    - i) Probe request/response
    - ii) Beacon
    - iii) Authentication: Successful authentication enables a STA to exchange Class 2 frames. Unsuccessful authentication leaves the STA in State 1.
    - iv) Deauthentication: Deauthentication notification when in State 2 or State 3 changes the STA's state to State 1. The STA shall become authenticated again prior to sending Class 2 frames.
    - v) Announcement traffic indication message (ATIM)
    - vi) Action

## 5.7 Message information contents that support the services

### 5.7.2 Association

*Change the following list in 5.7.2 as follows:*

*Association request*

- Message type: Management
- Message subtype: Association request
- Information items:
  - IEEE address of the STA initiating the association
  - IEEE address of the AP with which the initiating STA will associate
  - ESS ID
  - Power capability
  - Supported channels
- Direction of message: From STA to AP

### 5.7.3 Reassociation

*Change the following list in 5.7.3 as follows:*

*Reassociation request*

- Message type: Management
- Message subtype: Reassociation request
- Information items:
  - IEEE address of the STA initiating the reassociation
  - IEEE address of the AP with which the initiating STA will reassociate
  - IEEE address of the AP with which the initiating STA is currently associated
  - ESS ID
  - Power capability
  - Supported channels
- Direction of message:
  - From STA to AP (The AP with which the STA is requesting reassociation)

*Insert the following text for 5.7.8 after 5.7.7 as follows:*

### 5.7.8 Spectrum management

The spectrum management services are supported by the following action message:

*Spectrum Management Action*

- Message type: Management
- Message subtype: Spectrum Management Action
- Information items:
  - Action identification
  - Dialog token
  - Action dependent information
  - Direction of message: From STA to STA

## 7. Frame formats

### 7.1 MAC frame formats

#### 7.1.3 Frame fields

##### 7.1.3.1 Frame Control field

##### 7.1.3.1.2 Type and Subtype fields

*Insert the Management/Action row before the Management/Reserved row and change the Management/Reserved row in Table 1 as follows:*

**Table 1—Valid type and subtype combinations**

Type value b3 b2	Type description	Subtype value b7 b6 b5 b4	Subtype description
00	Management	1101	Action
00	Management	<del>1101</del> 1110–1111	Reserved

### 7.2 Format of individual frame types

#### 7.2.3 Management frames

##### 7.2.3.1 Beacon frame format

*Change the order 11 information field and insert the order 14–18 information fields in Table 5 as follows:*

**Table 5—Beacon frame body**

Order	Information	Notes
11	Country	The Country information element shall be present when dot11MultiDomainCapabilityEnabled is true <u>or</u> dot11SpectrumManagementRequired is true.
14	Power Constraint	Power Constraint element shall be present if dot11SpectrumManagementRequired is true.
15	Channel Switch Announcement	Channel Switch Announcement element may be present if dot11SpectrumManagementRequired is true.
16	Quiet	Quiet element may be present if dot11SpectrumManagementRequired is true.
17	IBSS DFS	IBSS DFS element shall be present if dot11SpectrumManagementRequired is true in an IBSS.
18	TPC Report	TPC Report element shall be present if dot11SpectrumManagementRequired is true.

### 7.2.3.4 Association Request frame format

*Insert the order 6 and 7 information fields in Table 7 as follows:*

**Table 7—Association Request frame body**

Order	Information	Notes
6	Power Capability	The Power Capability element shall be present if dot11SpectrumManagementRequired is true.
7	Supported Channels	The Supported Channels element shall be present if dot11SpectrumManagementRequired is true.

### 7.2.3.6 Reassociation Request frame format

*Insert the order 7 and 8 information fields in Table 9 as follows:*

**Table 9—Reassociation Request frame body**

Order	Information	Notes
7	Power Capability	The Power Capability element shall be present if dot11SpectrumManagementRequired is true.
8	Supported Channels	The Supported Channels element shall be present if dot11SpectrumManagementRequired is true.

### 7.2.3.9 Probe Response frame format

*Change Table 12 from order 10 information field to the end of the table as follows:*

**Table 12—Probe Response frame body**

Order	Information	Notes
10	Country	Included if dot11MultiDomainCapabilityEnabled <u>or</u> dot11SpectrumManagementRequired is true.
11	FH Parameters	FH Parameters, as specified in 7.3.2.10, may be included if dot11MultiDomainCapabilityEnabled is true.
12	FH Pattern Table	FH Pattern Table information, as specified in 7.3.2.11, may be included if dot11MultiDomainCapability-Enabled is true.
<u>13</u>	<u>Power Constraint</u>	<u>Shall be included if dot11SpectrumManagementRequired is true.</u>
<u>14</u>	<u>Channel Switch Announcement</u>	<u>May be included if dot11SpectrumManagementRequired is true.</u>
<u>15</u>	<u>Quiet</u>	<u>May be included if dot11SpectrumManagementRequired is true.</u>

**Table 12—Probe Response frame body (continued)**

Order	Information	Notes
<u>16</u>	<u>IBSS DFS</u>	<u>Shall be included if dot11SpectrumManagementRequired is true in an IBSS.</u>
<u>17</u>	<u>TPC Report</u>	<u>Shall be included if dot11SpectrumManagementRequired is true.</u>
18		Reserved
19	ERP Information	The ERP Information element is present within Beacon frames generated by STAs using ERP PHYs and is optionally present in other cases.
20	Extended Supported Rates	The Extended Supported Rates element is present whenever there are more than eight supported rates, and it is optional otherwise.
<del>21</del> – <i>n</i>	Requested information elements	Elements requested by the Request information element of the Probe Request frame.

*Insert 7.2.3.12 after 7.2.3.11 as follows:*

### 7.2.3.12 Action frame format

The frame body of a management frame of subtype Action contains the information shown in Table 15a.

**Table 15a—Action frame body**

Order	Information
1	Action

## 7.3 Management frame body components

### 7.3.1 Fixed fields


#### 7.3.1.4 Capability Information field

*Change the second paragraph in 7.3.1.4 as follows:*

The length of the Capability Information field is 2 octets. The Capability Information field consists of the following subfields: extended service set (ESS), IBSS, contention-free (CF)-Pollable, CF-Poll Request, Privacy, Short Preamble, Packet Binary Convolutional Code (PBCC), Channel Agility, Spectrum Management, Short Slot Time, and DSSS-OFDM. The format of the Capability Information field is as illustrated in Figure 27. No subfield is supplied for ERP as a STA supports ERP operation if it includes all of the Clause 19 mandatory rates in its supported rate set.



*Change the contents of Figure 27 as shown:*

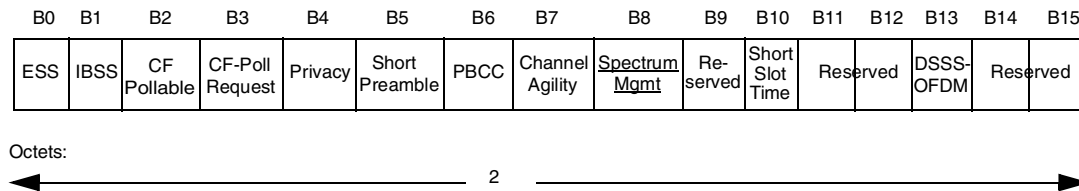

**Figure 27—Capability Information fixed field**

*Insert the following text after the paragraph that starts “Bit 7 of the ...” in 7.3.1.4:*

A STA shall set the Spectrum Management subfield in the Capability Information field to 1 if the STA's dot11SpectrumManagementRequired is true; otherwise, it shall be set to 0.

### 7.3.1.7 Reason Code field

*Insert reason codes 10 and 11 and change the Reserved reason code row in Table 18 as follows:*

**Table 18—Reason codes**

Reason code	Meaning
10	Disassociated because the information in the Power Capability element is unacceptable
11	Disassociated because the information in the Supported Channels element is unacceptable
<del>12</del> 65 535	Reserved

### 7.3.1.9 Status Code field

*Insert status codes 22-24 and change the Reserved status code row in Table 19 as follows:*


**Table 19—Status codes**

Status code	Meaning
22	Association request rejected because Spectrum Management capability is required
23	Association request rejected because the information in the Power Capability element is unacceptable
24	Association request rejected because the information in the Supported Channels element is unacceptable
<del>25</del> 65 535	Reserved

*Insert 7.3.1.11 after 7.3.1.10 and renumber figures and tables as necessary:*

### 7.3.1.11 Action field

The Action field provides a mechanism for specifying extended management actions. The format of the Action field is shown in Figure 33a.



**Figure 33a—Action field**

The Category field shall be set to one of the nonreserved values shown in Table 19a. If a STA receives a unicast Action frame with an unrecognized Category field or some other syntactic error and the most significant bit (MSB) of the Category field set to 0, then the STA shall return the Action frame to the source without change except that the MSB of the Category field shall be set to 1.

The Action Details field contains the details of the action. The details of the actions allowed in each category are described in the appropriate subclause referenced in Table 19a.

**Table 19a—Category values**

Name	Value	See subclause
Spectrum management	0	7.4.1
Reserved	1–127	—
Error	128–255	—

### 7.3.2 Information elements

*Change Table 20 from element identifier (ID) 17 to the end of the table as follows:*

**Table 20—Element IDs**

Information element	Element ID
Reserved	17– <u>31</u>
<u>Power Constraint</u>	<u>32</u>
<u>Power Capability</u>	<u>33</u>
<u>TPC Request</u>	<u>34</u>
<u>TPC Report</u>	<u>35</u>
<u>Supported Channels</u>	<u>36</u>
<u>Channel Switch Announcement</u>	<u>37</u>


**Table 20—Element IDs (*continued*)**

Information element	Element ID
<u>Measurement Request</u>	<u>38</u>
<u>Measurement Report</u>	<u>39</u>
<u>Quiet</u>	<u>40</u>
<u>IBSS DFS</u>	<u>41</u>
ERP Information	42
Reserved	43–49
Extended Supported Rates	50
Reserved	51–255

*Insert 7.3.2.15 through 7.4.1.5 after 7.3.2.14 and renumber figures and tables as appropriate:*

### 7.3.2.15 Power Constraint element

The Power Constraint element contains the information necessary to allow a STA to determine the local maximum transmit power in the current channel. The format of the Power Constraint element is shown in Figure 46a.



**Figure 46a—Power Constraint element format**

The Length field shall be set to 1.

The Local Power Constraint field shall be set to a value that allows the mitigation requirements to be satisfied in the current channel. The field is coded as an unsigned integer in units of decibels. The local maximum transmit power for a channel is thus defined as the maximum transmit power level specified for the channel in the Country element minus the local power constraint specified for the channel [from the management information base (MIB)] in the Power Constraint element.

The Power Constraint element is included in Beacon frames, as described in 7.2.3.1, and Probe Response frames, as described in 7.2.3.9. The use of Power Constraint elements is described in 11.5.2.

### 7.3.2.16 Power Capability element

The Power Capability element specifies the minimum and maximum transmit powers with which a STA is capable of transmitting in the current channel. The format of the Power Capability element is shown in Figure 46b.

The Length field shall be set to 2.




Figure 46b—Power Capability element format

The Minimum Transmit Power Capability field shall be set to the nominal minimum transmit power with which the STA is capable of transmitting in the current channel, with a tolerance  $\pm 5$  dB. The field is coded as a signed integer in units of decibels relative to 1 mW.

The Maximum Transmit Power Capability field shall be set to the nominal maximum transmit power with which the STA is capable of transmitting in the current channel, with a tolerance  $\pm 5$  dB . The field is coded as a signed integer in units of decibels relative to 1 mW.

The Power Capability element is included in Association Request frames, as described in 7.2.3.4, and Reassociation Request frames, as described in 7.2.3.6. The use of Power Capability elements is described in 11.5.1.

7.3.2.17 TPC Request element

The TPC Request element contains a request for a STA to report transmit power and link margin information using a TPC Report element. The format of the TPC Request element is shown in Figure 46c.




Figure 46c—TPC Request element format

The Length field shall be set to 0.

The TPC Request element is included in TPC Request frames, as described in 7.4.1.3. The use of TPC Request elements and frames is described in 11.5.4.

7.3.2.18 TPC Report element

The TPC Report element contains transmit power and link margin information sent in response to a TPC Request element. A TPC Report element is included in a Beacon frame or Probe Response frame without a corresponding request. The format of the TPC Report element is shown in Figure 46d.




Figure 46d—TPC Report element format

The Length field shall be set to 2.

The Transmit Power field shall be set to the transmit power used to transmit the frame containing the TPC Report element. The field is coded as a signed integer in units of decibels relative to 1 mW. The maximum tolerance for the transmit power value reported in the TPC Response element shall be  $\pm 5$  dB. This tolerance is defined as the difference, in decibels, between the reported power value and the actual EIRP of the STA (measured when transmitting 1500 octet frames).

The Link Margin field contains the link margin at the time and for the rate at which the frame containing the TPC Request element was received. The field is coded as a signed integer in units of decibels. The Link Margin field shall be set to 0 and shall be ignored when a TPC Report element is included in a Beacon frame or Probe Response frame. The measurement method of Link Margin is beyond the scope of this amendment.

The TPC Report element is included in TPC Report frames, as described in 7.4.1.4; Beacon frames, as described in 7.2.3.1; and Probe Response frames, as described in 7.2.3.9. The use of TPC Report elements and frames is described in 11.5.4.

7.3.2.19 Supported Channels element

The Supported Channels element contains a list of channel subbands (from those channels defined in 17.3.8.3.3) in which a STA is capable of operating. The format of the Supported Channels element is shown in Figure 46e.

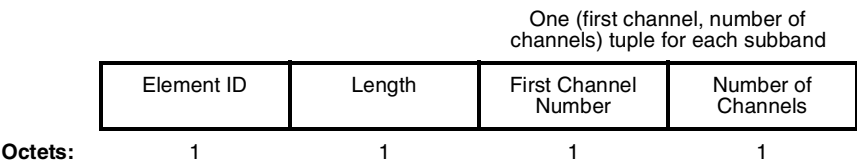


Figure 46e—Supported Channels element format

The Length field is variable and depends on the number of subbands, defined by a First Channel Number–Number of Channels pair, that are included in the element.

The First Channel Number field shall be set to the first channel (as defined in 17.3.8.3.3) in a subband of supported channels.

The Number of Channels field shall be set to the number of channels in a subband of supported channels.

The Supported Channels element is included in Association Request frames, as described in 7.2.3.4, and Reassociation Request frames, as described in 7.2.3.6. The use of the Supported Channels element is described in 11.6.1 and 11.6.7.

7.3.2.20 Channel Switch Announcement element

The Channel Switch Announcement element is used by an AP in a BSS or a STA in an IBSS to advertise when it is changing to a new channel and the channel number of the new channel. The format of the Channel Switch Announcement element is shown in Figure 46f.

The Length field shall be set to 3.




Figure 46f—Channel Switch Announcement element format

The Channel Switch Mode field indicates any restrictions on transmission until a channel switch. An AP in a BSS or a STA in an IBSS shall set the Channel Switch Mode field to either 0 or 1 on transmission. A Channel Switch Mode set to 1 means that the STA in a BSS to which the frame containing the element is addressed shall transmit no further frames within the BSS until the scheduled channel switch. A STA in an IBSS may treat a Channel Switch Mode field set to 1 as advisory. A Channel Switch Mode set to 0 does not impose any requirement on the receiving STA.

The New Channel Number field shall be set to the number of the channel to which the STA is moving (as defined in 17.3.8.3.3).

The Channel Switch Count field either shall be set to the number of target beacon transmission times (TBTTs) until the STA sending the Channel Switch Announcement element switches to the new channel or shall be set to 0. A value of 1 indicates that the switch will occur immediately before the next TBTT. A value of 0 indicates that the switch will occur at any time after the frame containing the element is transmitted.

The Channel Switch Announcement element is included in Channel Switch Announcement frames, as described in 7.4.1.5, and may be included in Beacon frames, as described in 7.2.3.1, and Probe Response frames, as described in 7.2.3.9. The use of Channel Switch Announcement elements and frames is described in 11.6.7.

7.3.2.21 Measurement Request element

The Measurement Request element contains a request that the receiving STA undertake the specified measurement action. The format of the Measurement Request element is shown in Figure 46g.

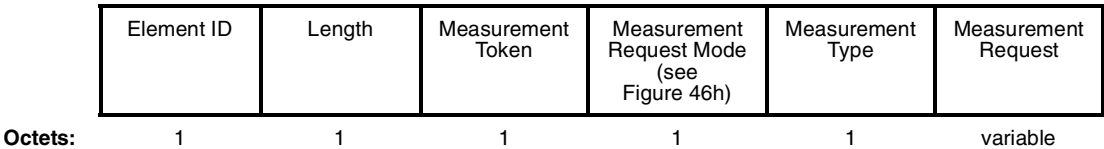


Figure 46g—Measurement Request element format




Figure 46h—Measurement Request Mode field

The Length field is variable and depends on the length of the Measurement Request field. The minimum value of the Length field is 3 (based on a minimum length for the Measurement Request field of 0 octets).

The Measurement Token shall be set to a nonzero number that is unique among the Measurement Request elements in a particular Measurement Request frame.

The Measurement Request Mode field (shown in Figure 46h) is a bit field with the following bits defined:

- Enable bit (bit 1) indicates whether this element is used to request the destination STA to enable or disable the sending of measurement requests and autonomous measurement reports of a specified type to this STA. The Enable bit shall be set to 1 when the Request bit and Report bit are valid. The Enable bit shall be set to 0 when the Request bit and Report bit are invalid.
- Request bit (bit 2) indicates whether the STA receiving the request shall enable or disable measurement requests of the type specified in the Measurement Type field. The Request bit shall be set to 1 when enabling a measurement request. The Request bit shall be set to 0 when disabling a measurement request or when the Request bit is invalid (i.e., when the Enable bit is set to 0 or when the Measurement Type field contains a reserved measurement request type value).
- Report bit (bit 3) indicates whether the STA receiving the request shall enable or disable autonomous measurement reports of the type corresponding to the measurement report specified in the Measurement Type field. The Report bit shall be set to 1 when enabling an autonomous measurement report. The Report bit shall be set to 0 when disabling an autonomous measurement report or when the Report bit is invalid (i.e., when the Enable bit is set to 0 or when the Measurement Type field contains a reserved measurement report type value).
- All other bits are reserved and shall be set to 0.

The use of the Enable, Request, and Report bits is also summarized in Table 20a. See 11.6.6 for the description of how a STA shall handle requests to enable or disable measurement requests and autonomous reports.

**Table 20a—Summary of use of Enable, Request, and Report bits**

Bits			Meaning of bits
Enable	Request	Report	
0	0	0	When Enable bit is set to 0, Request and Report bits are invalid and shall be set to 0.
0	0	1	Not allowed.
0	1	0	Not allowed.
0	1	1	Not allowed.
1	0	0	The transmitting STA is requesting that it be sent neither measurement requests nor autonomous measurement reports of the types indicated in the Measurement Type field.
1	1	0	The transmitting STA is indicating it will accept measurement requests and requesting it not be sent autonomous measurement reports of the types indicated in the Measurement Type field.
1	0	1	The transmitting STA is requesting it not be sent measurement requests and indicating it will accept autonomous measurement reports of the types indicated in the Measurement Type field.
1	1	1	The transmitting STA is indicating it will accept measurement requests and autonomous measurement reports of the type indicated in the Measurement Type field.

The Measurement Type field shall be set to a number that identifies a measurement request or a measurement report. The Measurement Types that have been allocated for measurement requests are shown in Table 20b and measurement reports are shown in Table 20c (in 7.3.2.22).

**Table 20b—Measurement Type definitions for measurement requests**


Name	Measurement Type
Basic request	0
Clear channel assessment (CCA) request	1
Receive power indication (RPI) histogram request	2
Reserved	3–255

The Measurement Request field shall be null when the Enable bit is set to 1 and shall contain the specification of the measurement request, as described in 7.3.2.21.1 through 7.3.2.21.3, when the Enable bit is set to 0.

The Measurement Request element is included in a Measurement Request frame as described in 7.4.1.1. The use of Measurement Request elements and frames is described in 11.6.6.

#### 7.3.2.21.1 Basic request

A Measurement Type in the Measurement Request element may indicate a basic request. The response to a basic request is a basic report. It is mandatory for a STA in a BSS to generate a basic report in response to a basic request if the request is received from the AP with which it is associated, except as specified in 11.6.6. The Measurement Request field corresponding to a basic request is shown in Figure 46i.



**Figure 46i—Measurement Request field format for a basic request**

The Channel Number field shall be set to the channel number for which the measurement request applies (as defined in 17.3.8.3.3).

The Measurement Start Time field shall be set to the timing synchronization function (TSF) timer at the time ( $\pm 32\mu\text{s}$ ) at which the requested basic request measurement shall start. A value of 0 shall indicate it shall start immediately.

The Measurement Duration field shall be set to the duration of the requested measurement, expressed in time units (TUs).



7.3.2.21.2 CCA request

A Measurement Type in the Measurement Request element may indicate a CCA request. A response to a CCA request is a CCA report. It is optional for a STA to generate a CCA report in response to a CCA Request. The Measurement Request field corresponding to a CCA request is shown in Figure 46j.




Figure 46j—Measurement Request field format for a CCA request

The Channel Number field shall be set to the channel number for which the measurement request applies (as defined in 17.3.8.3.3).

The Measurement Start Time field shall be set to the TSF at the time ( $\pm 32\mu s$ ) at which the requested CCA request measurement shall start. A value of 0 shall indicate it shall start immediately.

The Measurement Duration field shall be set to the duration of the requested measurement, expressed in TUs.

7.3.2.21.3 RPI histogram request

A Measurement Type in the Measurement Request element may indicate an RPI histogram request. A response to an RPI histogram request is an RPI histogram report. It is optional for a STA to generate a RPI histogram report in response to a RPI histogram request. The Measurement Request field corresponding to an RPI histogram request is shown in Figure 46k.




Figure 46k—Measurement Request field format for a RPI histogram request


The Channel Number field shall be set to the channel number for which the measurement request applies (as defined in 17.3.8.3.3).

The Measurement Start Time field shall be set to the TSF at the time ( $\pm 32\mu s$ ) at which the requested RPI histogram request measurement shall start. A value of 0 shall indicate it shall start immediately.


The Measurement Duration field shall be set to the duration of the requested measurement, expressed in TUs.

7.3.2.22 Measurement Report element

The Measurement Report element contains a measurement report. The format of the Measurement Report element is shown in Figure 46l.

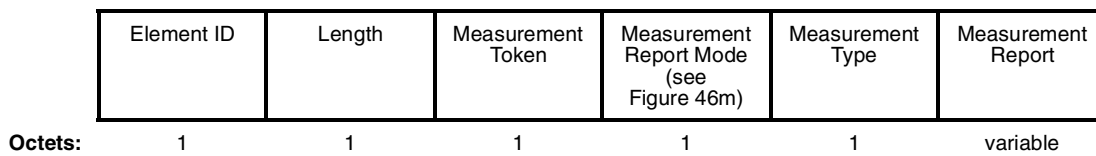

**Figure 46l—Measurement Report element format**



**Figure 46m—Measurement Report Mode field**

The Length field is variable and depends on the length of the Measurement Report field. The minimum value of the Length field is 3.

The Measurement Token field shall be set to the Measurement Token in the corresponding Measurement Request element. If the Measurement Report element is being sent autonomously, then the Measurement Token shall be set to 0.

The Measurement Report Mode field (shown in Figure 46m) is a bit field with the following bits defined:

- Late bit (bit 0) indicates whether this STA is unable to carry out a measurement request because it received the request after the requested measurement time. The Late bit shall be set to 1 to indicate the request was too late. The Late bit shall be set to 0 to indicate the request was received in time for the measurement to be executed.
- Incapable bit (bit 1) indicates whether this STA is incapable of generating a report of the type specified in the Measurement Type field that was previously requested by the destination STA of this Measurement Report element. The Incapable bit shall be set to 1 to indicate the STA is incapable. The Incapable bit shall be set to 0 to indicate the STA is capable or the report is autonomous.
- Refused bit (bit 2) indicates whether this STA is refusing to generate a report of the type specified in the Measurement Type field that was previously requested by the destination STA of this Measurement Report element. The Refused bit shall be set to 1 to indicate the STA is refusing. The Refused bit shall be set to 0 to indicate the STA is not refusing or the report is autonomous.
- All other bits are reserved and shall be set to 0.

The Measurement Type field shall be set to a number that identifies the measurement report. The Measurement Types that have been allocated are shown in Table 20c.

The Measurement Report field shall be null when the Late bit is set to 1, the Incapable bit is set to 1, or the Refused bit is set to 1. Otherwise, it shall contain the specification of the measurement report, as described in 7.3.2.22.1 through 7.3.2.22.3.


The Measurement Report element is included in a Measurement Report frame as described in 7.4.1.2. The use of Measurement Report elements and frames is described in 11.6.6.

**Table 20c—Measurement Type definitions for measurement reports**


Name	Measurement Type
Basic report	0
CCA report	1
RPI histogram report	2
Reserved	3–255

### 7.3.2.22.1 Basic report

A Measurement Type in the Measurement Report element may indicate a basic report. The format of the Measurement Report field corresponding to a basic report is shown in Figure 46n. It is mandatory for a STA to support the generation of this report.



**Figure 46n—Measurement Report field format for a basic report**

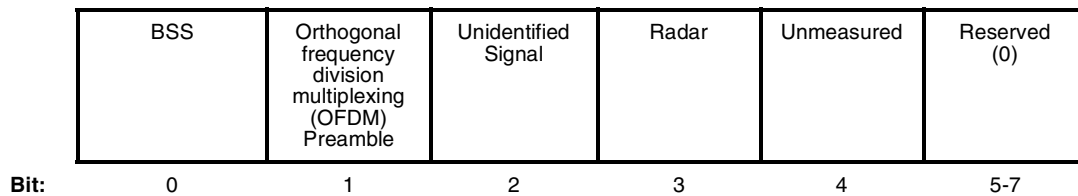

**Figure 46o—Map field format**

The Channel Number field shall be set to the channel number to which the basic report applies (as defined in 17.3.8.3.3).

The Measurement Start Time field shall be set to the TSF at the time ( $\pm 32\mu\text{s}$ ) at which the basic report measurement started.

The Measurement Duration field shall be set to the duration over which the basic report was measured, expressed in TUs.

The Map field is coded as a bit field, as shown in Figure 46o, and shall contain the following bits:


- BSS bit, which shall be set to 1 when at least one valid MAC protocol data unit (MPDU) was received in the channel during the measurement period from another BSS or IBSS. Otherwise, the BSS bit shall be set to 0.
- OFDM Preamble bit, which shall be set to 1 when at least one sequence of short training symbols, as defined in 17.3.3, was detected in the channel during the measurement period without a subsequent

valid Signal field (see 17.3.4). This may indicate the presence of an OFDM preamble, such as high-performance RLAN/2 (HIPERLAN/2). Otherwise, the OFDM Preamble bit shall be set to 0.

- Unidentified Signal bit, which may be set to 1 when significant power is detected in the channel during the measurement period that cannot be characterized as radar, an OFDM preamble, or a valid MPDU. Otherwise, the Unidentified Signal bit shall be set to 0. The definition of significant power is implementation dependent.
- Radar bit, which shall be set to 1 when radar was detected operating in the channel during the measurement period. The algorithm to detect radar shall satisfy regulatory requirements and is outside the scope of this amendment. Otherwise, the Radar bit shall be set to 0.
- Unmeasured bit, which shall be set to 1 when this channel has not been measured. Otherwise, the Unmeasured bit shall be set to 0. When the Unmeasured field is set to 1, all the other bit fields shall be set to 0.

### 7.3.2.22.2 CCA report

A Measurement Type in the Measurement Report element may indicate a CCA report. It is optional for a STA to support the generation of this report. The format of the Measurement Report field corresponding to a CCA report is shown in Figure 46p.



**Figure 46p—Measurement Report field format for a CCA report**

The Channel Number field shall contain the channel number to which the CCA report applies (as defined in 17.3.8.3.3).

The Measurement Start Time field shall be set to the TSF at the time ( $\pm 32\mu\text{s}$ ) at which the CCA report measurement started.

The Measurement Duration field shall be set to the duration over which the CCA report was measured, expressed in TUs.


The CCA Busy Fraction field shall contain the fractional duration over which CCA indicated the channel was busy during the measurement duration. The resolution of the CCA busy measurement is in microseconds. The CCA Busy Fraction value is defined as  $\text{Ceiling}(255 * [\text{Duration CCA indicated channel was busy (microseconds)}] / (1024 * [\text{Measurement duration (TUs)}]))$ .

### 7.3.2.22.3 RPI histogram report

A Measurement Type in the Measurement Report element may indicate an RPI histogram report. It is optional for a STA to support the generation of this report. The format of the Measurement Report field corresponding to an RPI histogram report is shown in Figure 46q.

The Channel Number field shall be set to the channel number to which the RPI histogram report applies (as defined in 17.3.8.3.3).

The Measurement Start Time field shall be set to the TSF at the time ( $\pm 32\mu\text{s}$ ) at which the RPI histogram report measurement started.

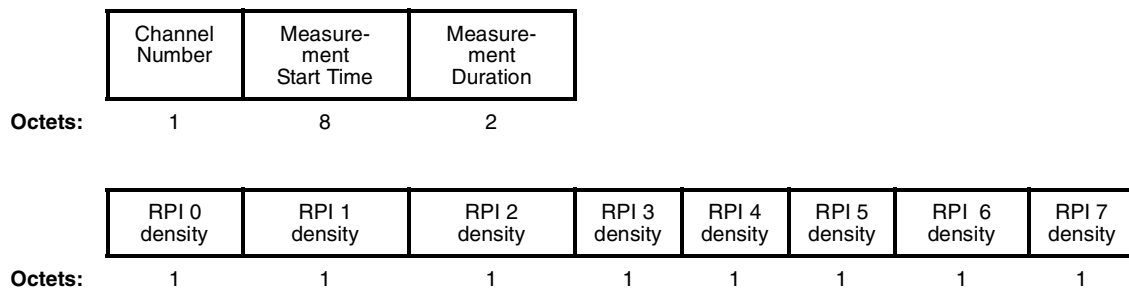

**Figure 46q—Measurement Report field format for an RPI histogram report**

The Measurement Duration field shall be set to the duration over which the RPI histogram report was measured, expressed in TUs.

The RPI histogram report shall contain the RPI densities observed in the channel for the eight RPI levels defined in Table 20d. To compute the RPI densities, the STA shall measure the received power level on the specified channel, as detected at the antenna connector, as a function of time over the measurement duration. The maximum tolerance of the received power measurements shall be  $\pm 5$  dB. Furthermore, the received signal power measurement should be a monotonic function of the actual power at the antenna. The time resolution of the received power measurements is in microseconds. The received power measurements are converted to a sequence of RPI values by quantizing the measurements according to Table 4. The RPI densities are then computed for each of the eight possible RPI values using Ceiling ( $255 * [\text{Duration receiving at RPI value (microseconds)} / (1024 * \text{Measurement duration})]$ ). The sum of the RPI densities will be approximately 255, but could be up to 262 because of rounding effects.


**Table 20d—RPI definitions for an RPI histogram report**

RPI	Power observed at the antenna (dBm)
0	Power $\leq -87$
1	$-87 < \text{Power} \leq -82$
2	$-82 < \text{Power} \leq -77$
3	$-77 < \text{Power} \leq -72$
4	$-72 < \text{Power} \leq -67$
5	$-67 < \text{Power} \leq -62$
6	$-62 < \text{Power} \leq -57$
7	$-57 < \text{Power}$

The RPI histogram report provides an additional mechanism for a STA to gather information on the state of a channel from other STAs. The STA may use this information to assist in the choice of new channel, to help avoid false radar detections, and to assess the general level of interference present on a channel.

### 7.3.2.23 Quiet element

The Quiet element defines an interval during which no transmission shall occur in the current channel. This interval may be used to assist in making channel measurements without interference from other STAs in the BSS or IBSS. The format of the Quiet element is shown in Figure 46r.



**Figure 46r—Quiet element format**

The Length field shall be set to 6.

The Quiet Count field shall be set to the number of TBTTs until the beacon interval during which the next quiet interval shall start. A value of 1 indicates the quiet interval will start during the beacon interval starting at the next TBTT. A value of 0 is reserved.

The Quiet Period field shall be set to the number of beacon intervals between the start of regularly scheduled quiet intervals defined by this Quiet element. A value of 0 indicates that no periodic quiet interval is defined.


The Quiet Duration field shall be set to the duration of the quiet interval, expressed in TUs.

The Quiet Offset field shall be set to the offset of the start of the quiet interval from the TBTT specified by the Quiet Count field, expressed in TUs. The value of the Quiet Offset field shall be less than one beacon interval.


The Quiet element may be included in Beacon frames, as described in 7.2.3.1, and Probe Response frames, as described in 7.2.3.9. The use of Quiet elements is described in 11.6.2.

### 7.3.2.24 IBSS DFS element

The IBSS DFS element contains information for DFS operation in an IBSS. The format of the IBSS DFS element is shown in Figure 46s.

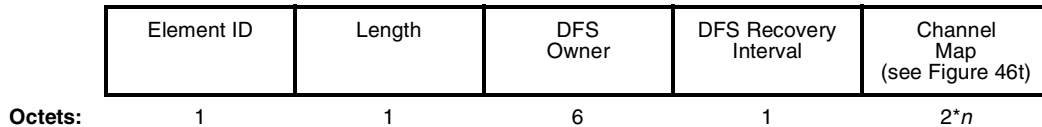

**Figure 46s—IBSS DFS element format**



**Figure 46t—Channel Map field format**

The Length field is variable.

The DFS Owner field shall be set to the individual IEEE MAC address of the STA that is the currently known DFS Owner in the IBSS.

The DFS Recovery Interval field indicates the time interval that shall be used for DFS owner recovery, expressed as an integral number of beacon intervals. The DFS Recovery Interval value is static throughout the lifetime of the IBSS and is determined by the STA that starts the IBSS.

The Channel Map field shown in Figure 46t shall contain a Channel Number field and a Map field (see 7.3.2.22.1) for each channel supported by the STA transmitting the IBSS DFS element. Note that  $n$  in Figure 46s is the number of channels supported by the STA.

The IBSS DFS element may be included in Beacon frames, as described in 7.2.3.1, and Probe Response frames, as described in 7.2.3.9. The use of IBSS DFS elements is described in 11.6.7.2.

## 7.4 Action frame format details

This subclause describes the Action frame formats, including the Action Details field, allowed in each of the action categories defined in Table 19a in 7.3.1.11.

### 7.4.1 Spectrum management action details

Five Action frame formats are defined for spectrum management. An Action field, in the octet field immediately after the Category field, differentiates the five formats. The Action field values associated with each frame format are defined in Table 20e.

**Table 20e—Spectrum management Action field values**


Action field value	Description
0	Measurement Request
1	Measurement Report
2	TPC Request
3	TPC Report
4	Channel Switch Announcement
5–255	Reserved

#### 7.4.1.1 Measurement Request frame format

The Measurement Request frame uses the Action frame body format and is transmitted by a STA requesting another STA to measure one or more channels. The format of the Measurement Request frame body is shown in Figure 46u.

The Category field shall be set to 0 (representing spectrum management).

The Action field shall be set to 0 (representing a Measurement Request frame).




**Figure 46u—Measurement Request frame body format**

The Dialog Token field shall be set to a nonzero value chosen by the STA sending the measurement request to identify the request/report transaction.

The Measurement Request Elements field shall contain one or more of the Measurement Request elements described in 7.3.2.21. The number and length of the Measurement Request elements in a Measurement Request frame is limited by the maximum allowed MAC management PDU (MMPDU) size.

#### 7.4.1.2 Measurement Report frame format

The Measurement Report frame uses the Action frame body format and is transmitted by a STA in response to a Measurement Request frame or by a STA autonomously providing measurement information. The format of the Measurement Report frame body is shown in Figure 46v.



**Figure 46v—Measurement Report frame body format**

The Category field shall be set to 0 (representing spectrum management).

The Action field shall be set to 1 (representing a Measurement Report frame).

The Dialog Token field shall be set to the value in any corresponding Measurement Request frame. If the Measurement Report frame is not being transmitted in response to a Measurement Request frame, then the Dialog token shall be set to 0.

The Measurement Report Elements field shall contain one or more of the Measurement Report elements described in 7.3.2.22. The number and length of the Measurement Report elements in a Measurement Report frame is limited by the maximum allowed MMPDU size.


#### 7.4.1.3 TPC Request frame format

The TPC Request frame uses the Action frame body format and is transmitted by a STA requesting another STA for transmit power and link margin information. The format of the TPC Request frame body is shown in Figure 46w.

The Category field shall be set to 0 (representing spectrum management).

The Action field shall be set to 2 (representing a TPC Request frame).






**Figure 46w—TPC Request frame body format**

The Dialog Token field shall be set to a nonzero value chosen by the STA sending the request to identify the transaction.

The TPC Request element shall be set as described in 7.3.2.17.

#### 7.4.1.4 TPC Report frame format

The TPC Report frame uses the Action frame body format and is transmitted by a STA in response to a TPC Request frame. The format of the TPC Report frame body is shown in Figure 46x.



**Figure 46x—TPC Report frame body format**

The Category field shall be set to 0 (representing spectrum management).


The Action field shall be set to 3 (representing a TPC Report frame).

The Dialog Token field shall be set to the Dialog Token value in the corresponding TPC Request frame.

The TPC Report element shall be set as described 7.3.2.18.

#### 7.4.1.5 Channel Switch Announcement frame format

The Channel Switch Announcement frame uses the Action frame body format and is transmitted by an AP in a BSS or a STA in an IBSS to advertise a channel switch. The format of the Channel Switch Announcement frame body is shown in Figure 46y.



**Figure 46y—Channel Switch Announcement frame body format**

The Category field shall be set to 0 (representing spectrum management).

The Action field shall be set to 4 (representing a Channel Switch Announcement frame).

The Channel Switch Announcement element shall be set as described 7.3.2.20.

## 9. MAC sublayer functional description

### 9.2 Distributed coordination function (DCF)

#### 9.2.3 Interframe space (IFS)

##### 9.2.3.2 Point coordination function (PCF) IFS (PIFS)

*Change the first paragraph of 9.2.3.2 as follows:*

The PIFS shall be used only by STAs operating under the PCF to gain priority access to the medium at the start of the contention-free period (CFP) or by a STA to transmit a Channel Switch Announcement frame. A STA using the PCF shall be allowed to transmit CF traffic after its carrier sense (CS) mechanism (see 9.2.1) determines that the medium is idle at the TxPIFS slot boundary as defined in 9.2.10. A STA may also transmit a Channel Switch Announcement frame after its CS mechanism (see 9.2.1) determines that the medium is idle at the TxPIFS slot boundary. The use of the PIFS by STAs operating under the PCF is described in 9.3. The use of PIFS by STAs transmitting a Channel Switch Announcement frame is described in 11.6.7.1.

## 10. Layer management

### 10.3 MAC sublayer management entity (MLME) service access point (SAP) interface

#### 10.3.2 Scan

##### 10.3.2.2 MLME-SCAN.confirm

##### 10.3.2.2.2 Semantics of the service primitive

*Insert the following elements at the end of the untitled table listing the elements of BSSDescription in 10.3.2.2.2:*

Name	Type	Valid range	Description
Country	As defined in the Country element	As defined in the Country element	The information required to identify the regulatory domain in which the STA is located and to configure its physical layer (PHY) for operation in that regulatory domain.  Present only when TPC functionality is required, as specified in 11.5, or when dot11MultiDomainCapabilityEnabled is true.
IBSS DFS Recovery Interval	Integer	1–255	Only present if BSSType = INDEPENDENT. The time interval that shall be used for DFS recovery. Present only when DFS functionality is required, as specified in 11.6.

## 10.3.6 Associate

### 10.3.6.1 MLME-ASSOCIATE.request

#### 10.3.6.1.2 Semantics of the service primitive

*Change the following primitive parameter list in 10.3.6.1.2:*

```
MLME-ASSOCIATE.request(  
    PeerSTAAddress,  
    AssociateFailureTimeout,  
    CapabilityInformation,  
    ListenInterval,  
    Supported Channels  
)
```

*Insert the following row at the end of the untitled table defining the primitive parameters in 10.3.6.1.2:*

Name	Type	Valid range	Description
Supported Channels	As defined in the Supported Channels element	As defined in the Supported Channels element	The list of channels in which the STA is capable of operating. Present only when DFS functionality is required, as specified in 11.6.

## 10.3.7 Reassociate

### 10.3.7.1 MLME-REASSOCIATE.request

#### 10.3.7.1.2 Semantics of the service primitive

*Change the following primitive parameter list in 10.3.7.1.2:*

```
MLME-REASSOCIATE.request(  
    NewAPAddress,  
    ReassociateFailureTimeout,  
    CapabilityInformation,  
    ListenInterval,  
    Supported Channels  
)
```

*Insert the following row at the end of the untitled table defining the primitive parameters in 10.3.7.1.2:*

Name	Type	Valid range	Description
Supported Channels	As defined in the Supported Channels element	As defined in the Supported Channels element	The list of channels in which the STA is capable of operating. Present only when DFS functionality is required, as specified in 11.6.

### 10.3.10 Start

#### 10.3.10.1 MLME-START.request

##### 10.3.10.1.2 Semantics of the service primitive

*Change the following primitive parameter list in 10.3.10.1.2:*

```
MLME-START.request(
    SSID,
    BSSType,
    BeaconPeriod,
    DTIMPeriod,
    CF parameter set,
    PHY parameter set,
    IBSS parameter set,
    ProbeDelay,
    CapabilityInformation,
    BSSBasicRateSet,
    OperationalRateSet,
    Country,
    IBSS DFS Recovery Interval
)
```


*Insert the following rows at the end of the untitled table defining the primitive parameters in 10.3.10.1.2:*

Name	Type	Valid range	Description
Country	As defined in the Country element	As defined in the Country element	The information required to identify the regulatory domain in which the STA is located and to configure its PHY for operation in that regulatory domain. Present only when TPC functionality is required, as specified in 11.5, or when dot11MultiDomainCapabilityEnabled is true.
IBSS DFS Recovery Interval	Integer	1–255	Present only if BSSType = INDEPENDENT. The time interval that shall be used for DFS recovery. Present only when DFS functionality is required, as specified in 11.6.

*Insert 10.3.11 through 10.3.16.2.4 after 10.3.10.2.4 as follows:*

### 10.3.11 Spectrum management protocol layer model

The layer management extensions for measurement and channel switching assume a certain partition of spectrum management functionality between the MLME and station management entity (SME). This partitioning assumes that policy decisions (e.g., regarding measurement and channel switching) reside in the SME, while the protocol for measurement, switch timing, and the associated frame exchanges resides within the MLME (see Figure 67a).

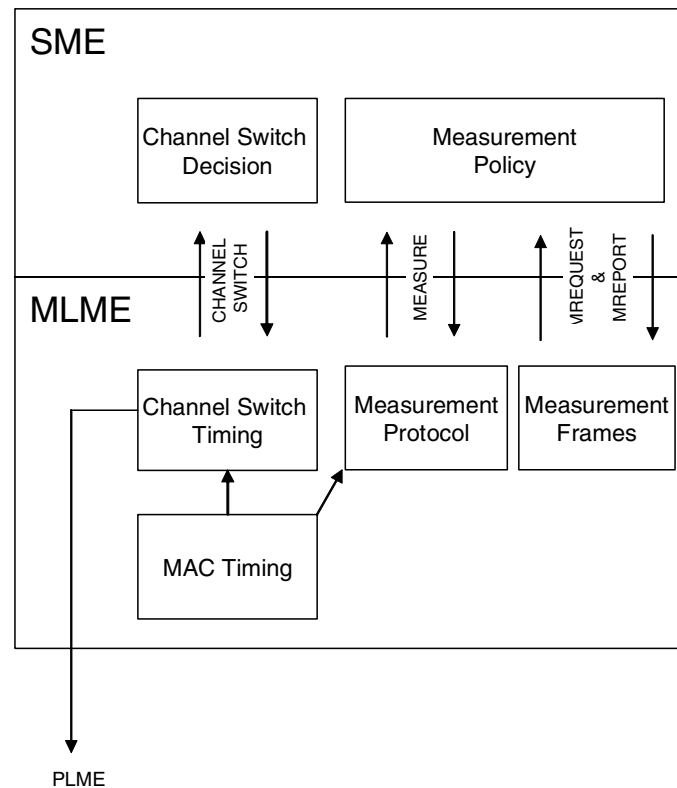

**Figure 67a—Layer management model**

The informative diagrams within this subclause further illustrate the spectrum management protocol model adopted. Figure 67b and Figure 67c depict the measurement process for a peer STA to accept and reject a measurement request, respectively. Figure 67d illustrates the TPC adaptation process. Lastly, Figure 67e depicts the management process for a channel switch using a Channel Switch Announcement frame.

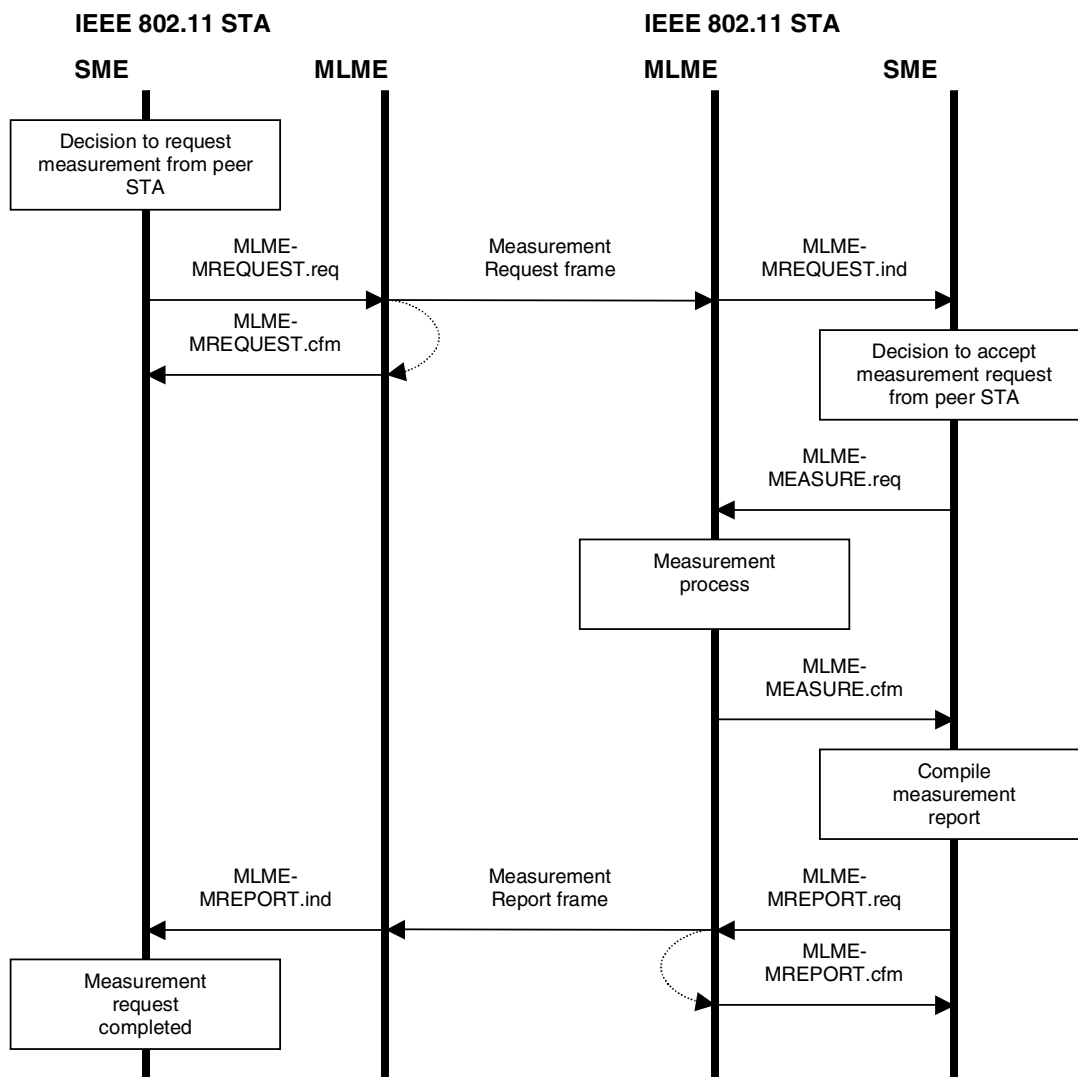


Figure 67b—Measurement request—accepted

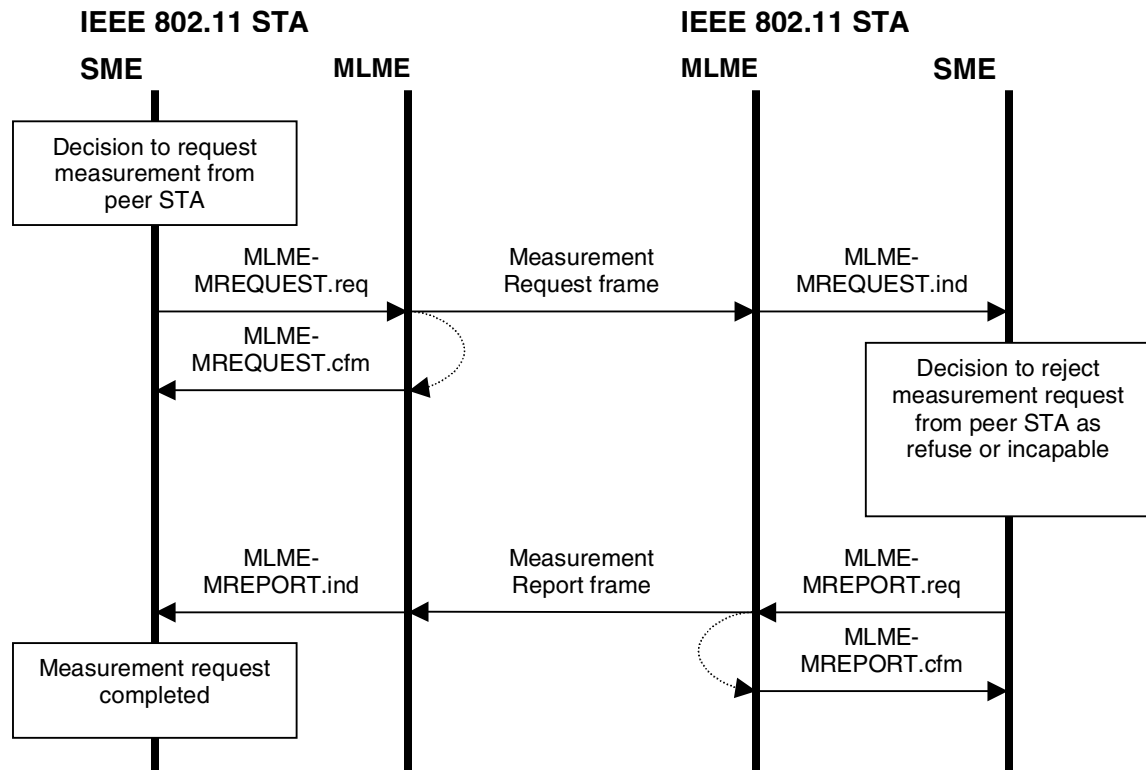


Figure 67c—Measurement request - rejected

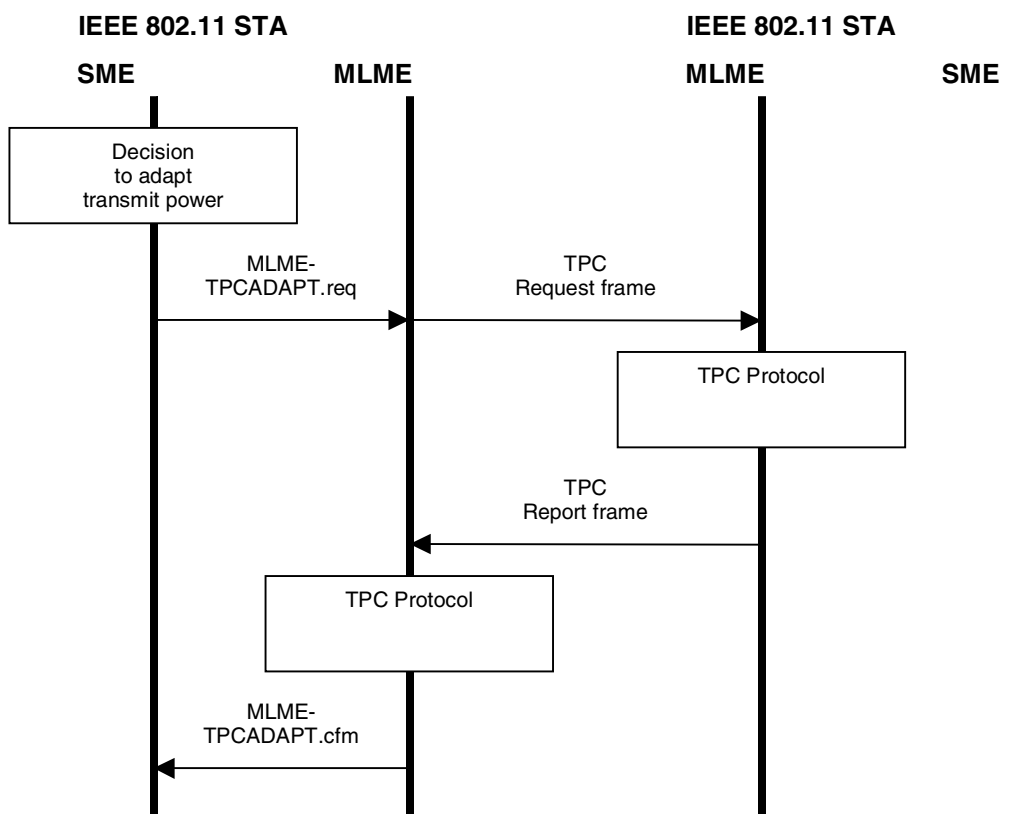


Figure 67d—TPC adaptation



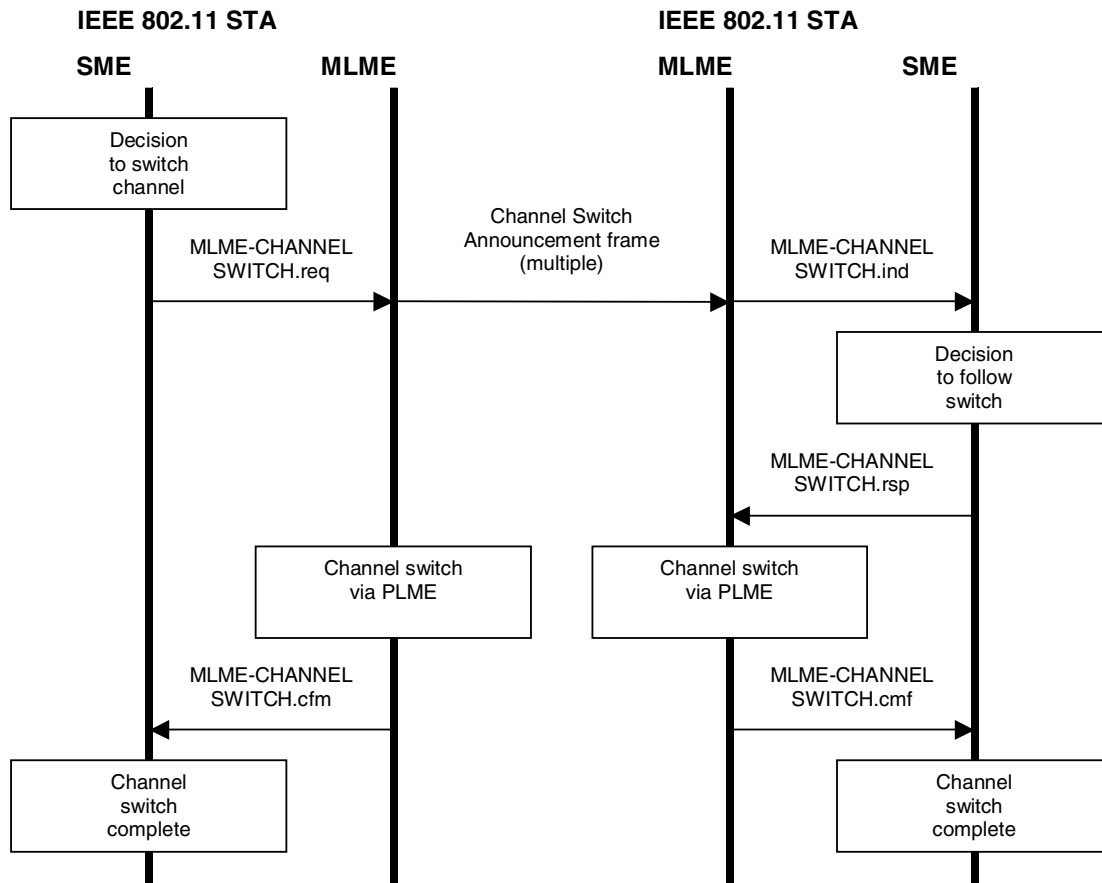


Figure 67e—Channel switch

### 10.3.12 Measurement request

This set of primitives supports the signaling of measurement requests between peer SMEs.

#### 10.3.12.1 MLME-MREQUEST.request

##### 10.3.12.1.1 Function

This primitive requests the transmission of a measurement request to a peer entity.

##### 10.3.12.1.2 Semantics of the service primitive

The primitive parameters are as follows:

```

MLME-MREQUEST.request(
    Peer MAC Address,
    Dialog Token,
    Measurement Request Set
)
    
```

Name	Type	Valid range	Description
Peer MAC Address	MACAddress	Any valid individual or group MAC Address	The address of the peer MAC entity to which the measurement request shall be set.
Dialog Token	Integer	0–255	The dialog token to identify the measurement transaction.
Measurement Request Set	Set of measurement requests, each as defined in the Measurement Request element	Set of measurement requests, each as defined in the Measurement Request element	A set of measurement requests, each containing a Measurement Token, Measurement Request Mode, Measurement Type, and a Measurement Request.

#### 10.3.12.1.3 When generated

This primitive is generated by the SME to request that a Measurement Request frame be sent to a peer entity to initiate one or more measurements.

#### 10.3.12.1.4 Effect of receipt

On receipt of this primitive, the MLME shall construct a Measurement Request frame containing the set of Measurement Request elements specified. This frame shall then be scheduled for transmission.

### 10.3.12.2 MLME-MREQUEST.confirm

#### 10.3.12.2.1 Function

This primitive reports the result of a request to send a Measurement Request frame.

#### 10.3.12.2.2 Semantics of the service primitive

The primitive parameters are as follows:

```
MLME-MREQUEST.confirm(
                                ResultCode
                                )
```

Name	Type	Valid range	Description
ResultCode	Enumeration	SUCCESS, INVALID PARAMETERS, or UNSPECIFIED FAILURE	Reports the outcome of a request to send a Measurement Request frame.

#### 10.3.12.2.3 When generated

This primitive is generated by the MLME when the request to transmit a Measurement Request frame completes.

On receipt of this primitive, the SME shall evaluate the result code.

### 10.3.12.3.1 Function

This primitive indicates that a Measurement Request frame has been received requesting the measurement of one or more channels.

The primitive parameters are as follows:

```
MLME-MREQUEST.indication(
    Peer MAC Address,
    Dialog Token,
    Measurement Request Set
)
```

Name	Type	Valid range	Description
Peer MAC Address	MACAddress	Any valid individual Address	The address of the peer MAC entity from which the measurement request was received.
Dialog Token	Integer	0–255	The dialog token to identify the measurement transaction.
Measurement Request Set	Set of measurement requests, each as defined in the Measurement Request element	Set of measurement requests, each as defined in the Measurement Request element	A set of measurement requests, each containing a Measurement Token, Measurement Request Mode, Measurement Type, and a Measurement Request.

This primitive is generated by the MLME when a valid Measurement Request frame is received.

On receipt of this primitive, the SME shall either reject the request or commence the requested measurements.

This set of primitives supports the requesting and reporting of measurement data.

### 10.3.13.1 MLME-MEASURE.request

#### 10.3.13.1.1 Function

This primitive is generated by the SME to request that the MLME initiate specified measurements.

#### 10.3.13.1.2 Semantics of the service primitive

The primitive parameters are as follows:

```
MLME-MEASURE.request(
                                Dialog Token,
                                Measurement Request Set
                                )
```

Name	Type	Valid range	Description
Dialog Token	Integer	0–255	The Dialog Token to identify the measurement transaction.
Measurement Request Set	Set of measurement requests, each as defined in the Measurement Request element	Set of measurement requests, each as defined in the Measurement Request element	A set of measurement requests, each containing a Measurement Token, Measurement Request Mode, Measurement Type, and a Measurement Request.

#### 10.3.13.1.3 When generated

This primitive is generated by the SME to request that the MLME initiate the specified measurements.

#### 10.3.13.1.4 Effect of receipt

On receipt of this primitive, the MLME shall commence the measurement process.

### 10.3.13.2 MLME-MEASURE.confirm

#### 10.3.13.2.1 Function

This primitive reports the result of a measurement.

#### 10.3.13.2.2 Semantics of the service primitive

The primitive parameters are as follows:

```
MLME-MEASURE.confirm(
                                ResultCode,
                                Dialog Token,
                                Measurement Report Set
                                )
```

Name	Type	Valid range	Description
ResultCode	Enumeration	SUCCESS, INVALID PARAMETERS, or UNSPECIFIED FAILURE	The outcome of the measurement request.
Dialog Token	Integer	0–255	The dialog token to identify the measurement transaction.
Measurement Report Set	Set of measurement reports, each as defined in the Measurement Report element	Set of measurement reports, each as defined in the Measurement Report element	A set of measurement reports, each containing a Measurement Token, Measurement Report Mode, Measurement Type, and a Measurement Report.

### 10.3.13.2.3 When generated

This primitive is generated by the MLME to report the results when a measurement set completes.

### 10.3.13.2.4 Effect of receipt

On receipt of this primitive, the SME shall evaluate the result code and, if appropriate, shall store the channel measurements pending communication to the requesting entity or for local use.

## 10.3.14 Measurement report

This set of primitives supports the signaling of measurement reports.

### 10.3.14.1 MLME-MREPORT.request

#### 10.3.14.1.1 Function

This primitive supports the signaling of measurement reports between peer SMEs.

#### 10.3.14.1.2 Semantics of the service primitive

The primitive parameters are as follows:

```
MLME-MREPORT.request(
    Peer MAC Address,
    Dialog Token,
    Measurement Report Set
)
```

Name	Type	Valid range	Description
Peer MAC Address	MACAddress	Any valid individual MAC Address	The address of the peer MAC entity to which the measurement report shall be set.
Dialog Token	Integer	0–255	The dialog token to identify the measurement transaction. Set to 0 for an autonomous report.
Measurement Report Set	Set of measurement reports, each as defined in the Measurement Report element	Set of measurement reports, each as defined in the Measurement Report element	A set of measurement reports, each containing a Measurement Token, Measurement Report Mode, Measurement Type, and a Measurement Report.

#### 10.3.14.1.3 When generated

This primitive is generated by the SME to request that a frame be sent to a peer entity to report the results of measuring one or more channels.

#### 10.3.14.1.4 Effect of receipt

On receipt of this primitive, the MLME shall construct a Measurement Report frame containing the set of measurement reports. This frame shall then be scheduled for transmission.

#### 10.3.14.2 MLME-MREPORT.confirm

##### 10.3.14.2.1 Function

This primitive reports the result of a request to send a Measurement Report frame.

##### 10.3.14.2.2 Semantics of the service primitive

The primitive parameters are as follows:

```
MLME-MREPORT.confirm(
                                ResultCode
                                )
```

Name	Type	Valid range	Description
ResultCode	Enumeration	SUCCESS, INVALID PARAMETERS, or UNSPECIFIED FAILURE	Reports the outcome of a request to send a Measurement Request frame.

##### 10.3.14.2.3 When generated

This primitive is generated by the MLME when the request to transmit a Measurement Report frame completes.

#### 10.3.14.2.4 Effect of receipt

On receipt of this primitive, the SME shall evaluate the result code.

#### 10.3.14.3 MLME-MREPORT.indication

##### 10.3.14.3.1 Function

This primitive indicates that a Measurement Report frame has been received from a peer entity. This management report may be in response to an earlier measurement request (e.g., MLME-MREQUEST.request) or may be an autonomous report.

##### 10.3.14.3.2 Semantics of the service primitive

The primitive parameters are as follows:

MLME-MREPORT.indication(  
     Peer MAC Address,  
     Dialog Token,  
     Measurement Report Set  
 )

Name	Type	Valid range	Description
Peer MAC Address	MACAddress	Any valid individual MAC Address	The address of the peer MAC entity from which the Measurement Report frame was received.
Dialog Token	Integer	0–255	The dialog token to identify the measurement transaction. Set to 0 for an autonomous report.
Measurement Report Set	Set of measurement reports, each as defined in the Measurement Report element	Set of measurement reports, each as defined in the Measurement Report element	A set of measurement reports, each containing a Measurement Token, Measurement Report Mode, Measurement Type, and a Measurement Report.

##### 10.3.14.3.3 When generated

This primitive is generated by the MLME when a valid Measurement Report frame is received.

##### 10.3.14.3.4 Effect of receipt

On receipt of this primitive, measurement data may be available for SME processes, such as channel selection.

#### 10.3.15 Channel switch

##### 10.3.15.1 MLME-CHANNELSWITCH.request

##### 10.3.15.1.1 Function

This primitive requests a switch to a new operating channel.

### 10.3.15.1.2 Semantics of the service primitive

The primitive parameters are as follows:

```
MLME-CHANNELSWITCH.request(
    Mode,
    Channel Number,
    Channel Switch Count
)
```

Name	Type	Valid range	Description
Mode	Integer	0, 1	Channel switch mode, as defined for the Channel Switch Announcement element.
Channel Number	Integer	As defined in 17.3.8.3.3	Specifies the new channel number.
Channel Switch Count	Integer	0–255	Specifies the number of TBTTs until the channel switch event, as described for the Channel Switch Announcement element.

### 10.3.15.1.3 When generated

This primitive is generated by the SME to schedule a channel switch and announce this switch to peer entities in the BSS.

### 10.3.15.1.4 Effect of receipt

On receipt of this primitive, the MLME shall schedule the channel switch event and announce this switch to other STAs in the BSS using the Channel Switch Announcement frame or element. The MLME shall ensure the timing of frame transmission takes into account the activation delay. The actual channel switch may be achieved at the appropriate time through the MLME-PLME interface using the PLME-SET primitive of the dot11CurrentFrequency MIB attribute.

## 10.3.15.2 MLME-CHANNELSWITCH.confirm

### 10.3.15.2.1 Function

This primitive reports the result of a request to switch channel.

### 10.3.15.2.2 Semantics of the service primitive

The primitive parameters are as follows:

```
MLME-CHANNELSWITCH.confirm(
    ResultCode
)
```



Name	Type	Valid range	Description
ResultCode	Enumeration	SUCCESS, INVALID PARAMETERS, or UNSPECIFIED FAILURE	Reports the result of a channel switch request.

### 10.3.15.2.3 When generated

This primitive is generated by the MLME when a channel switch request completes. Possible unspecified failure causes include an inability to schedule a channel switch announcement.

### 10.3.15.2.4 Effect of receipt

The SME is notified of the results of the channel switch procedure.

## 10.3.15.3 MLME-CHANNELSWITCH.indication

### 10.3.15.3.1 Function

This primitive indicates that a channel switch announcement has been received from a peer entity.

### 10.3.15.3.2 Semantics of the service primitive

The primitive parameters are as follows:

MLME-CHANNELSWITCH.indication(  
     Peer MAC Address,  
     Mode,  
     Channel Number,  
     Channel Switch Count  
     )

Name	Type	Valid range	Description
Peer MAC Address	MACAddress	Any valid individual MAC Address	The address of the peer MAC entity from which the Measurement Report frame was received.
Mode	Integer	0, 1	Channel switch mode, as defined for the Channel Switch Announcement element.
Channel Number	Integer	As defined in 17.3.8.3.3	Specifies the new channel number.
Channel Switch Count	Integer	0–255	Specifies the number of TBTTs until the channel switch event, as described for the Channel Switch Announcement element.

#### 10.3.15.3.3 When generated

This primitive is generated by the MLME when a valid Channel Switch Announcement frame is received.

#### 10.3.15.3.4 Effect of receipt

On receipt of this primitive, the SME shall decide whether to accept the switch.

#### 10.3.15.4 MLME-CHANNELSWITCH.response

##### 10.3.15.4.1 Function

This primitive is used to schedule an accepted channel switch.

##### 10.3.15.4.2 Semantics of the service primitive

The primitive parameters are as follows:

```
MLME-CHANNELSWITCH.response(  
                                Mode,  
                                Channel Number,  
                                Channel Switch Count  
                                )
```

Name	Type	Valid range	Description
Mode	Integer	0, 1	Channel switch mode, as defined for the Channel Switch Announcement element.
Channel Number	Integer	As defined in 17.3.8.3.3	Specifies the new channel number.
Channel Switch Count	Integer	0–255	Specifies the number of TBTTs until the channel switch event, as described for the Channel Switch Announcement element.

##### 10.3.15.4.3 When generated

This primitive is generated by the SME to schedule an accepted channel switch request.

##### 10.3.15.4.4 Effect of receipt

On receipt of this primitive, the MLME shall schedule the channel switch. The actual channel switch may be achieved at the appropriate time through the MLME-PLME interface using the PLME-SET primitive of the dot11CurrentFrequency MIB attribute.

#### 10.3.16 TPC request

This set of primitives supports the adaptation of transmit power between peer entities as described in 11.5.4.

### 10.3.16.1 MLME-TPCADAPT.request

#### 10.3.16.1.1 Function

This primitive supports the adaptation of transmit power between peer entities as specified in 11.5.4.

#### 10.3.16.1.2 Semantics of the service primitive

The primitive parameters are as follows:

```
MLME-TPCADAPT.request(  

    Peer MAC Address,  

    Dialog Token  

)
```

Name	Type	Valid range	Description
Peer MAC Address	MACAddress	Any valid individual or group MAC Address	The address of the peer MAC entity to which the TPC request shall be set.
Dialog Token	Integer	0–255	The dialog token to identify the TPC transaction.

#### 10.3.16.1.3 When generated

This primitive is generated by the SME to request that a TPC Request frame be sent to a peer entity to request that entity to report transmit power and link margin information.

#### 10.3.16.1.4 Effect of receipt

On receipt of this primitive, the MLME shall construct a TPC Request frame. This frame shall then be scheduled for transmission.

### 10.3.16.2 MLME-TPCADAPT.confirm

#### 10.3.16.2.1 Function

This primitive reports the result of the TPC adaptation procedure.

#### 10.3.16.2.2 Semantics of the service primitive

The primitive parameters are as follows:

```
MLME-TPCADAPT.confirm(  

    ResultCode  

)
```

Name	Type	Valid range	Description
ResultCode	Enumeration	SUCCESS, INVALID PARAMETERS, or UNSPECIFIED FAILURE	Reports the outcome of a request to send a TPC Request frame.

### 10.3.16.2.3 When generated

This primitive is generated by the MLME when the TPC adaptation procedure completes.

### 10.3.16.2.4 Effect of receipt

The SME is notified of the results of the TCP adaptation procedure.

## 11. MLME

*Insert 11.5 through 11.6.7.2 after 11.4 as follows and renumber figures and tables, as appropriate:*

### 11.5 TPC procedures

ERC/DEC/(99)23 requires RLANs operating in the 5 GHz band to use transmitter power control, involving specification of a regulatory maximum transmit power and a mitigation requirement for each allowed channel, to reduce interference with satellite services. This amendment describes such a mechanism, referred to as transmit power control (TPC).

This subclause describes TPC procedures that may be used to satisfy these and similar future regulatory requirements in Europe. The procedures may also satisfy comparable needs in other regulatory domains and other frequency bands and may be useful for other purposes (e.g., reduction of interference, range control, reduction of power consumption).

STAs shall use the TPC procedures defined in this subclause if dot11SpectrumManagementRequired is true. dot11SpectrumManagementRequired shall be set to TRUE when regulatory authorities require TPC. It may also be set to TRUE in other circumstances. The TPC procedures provide for the following:

- Association of STAs with an AP in a BSS based on the STA's power capability (see 11.5.1).
- Specification of regulatory and local maximum transmit power levels for the current channel (see 11.5.2).
- Selection of a transmit power for each transmission in a channel within constraints imposed by regulatory and local requirements (see 11.5.3).
- Adaptation of transmit power based on a range of information, including path loss and link margin estimates (see 11.5.4).

For the purposes of TPC, the following statements apply:

- A STA with dot11SpectrumManagementRequired set to TRUE shall not operate in a BSS or IBSS unless the Spectrum Management bit is set to 1 in the Capability Information field in Beacon frames and Probe Response frames received from other STAs in the BSS or IBSS, *with the following exception.*

- A STA may operate when the Spectrum Management bit is set to 0 if the STA can determine that it is in a regulatory domain that does not require TPC or can ensure that it will meet regulatory requirements even if TPC is not employed. Potential methods for determining the regulatory domain include receiving a country indication in the beacon, user confirmation, or configuration information within the device. Potential methods to ensure regulations are met even if TPC is not employed include using a transmit power that is below the legal maximum (including any mitigation factor).
- A STA shall set dot11SpectrumManagementRequired to TRUE before associating with a BSS or IBSS in which the Spectrum Management bit is set to 1 in the Capability Information field in Beacon frames and Probe Response frames received from the BSS or IBSS.
- APs may allow association of devices that do not have the Spectrum Management bit set to 1 in the Capability Information field in Association Request frames and Reassociation Request frames received from the STA to account for the existence of legacy devices that do not support TPC, but do meet regulatory requirements.

### 11.5.1 Association based on transmit power capability

A STA shall provide an AP with its minimum and maximum transmit power capability for the current channel when associating or reassociating, using a Power Capability element in Association Request frames or Reassociation Request frames.

An AP may use the minimum and maximum transmit power capability of associated STAs as an input into the algorithm used to determine the local transmit power constraint for any BSS it maintains. The specification of the algorithm is beyond the scope of this amendment.

An AP may reject an association or reassociation request from a STA if it considers the STA's minimum or maximum transmit power capability is unacceptable. For example, a STA's power capability might be unacceptable if it violates local regulatory constraints or increases the probability of hidden stations by a significant degree. The criteria for accepting or rejecting an association or reassociation on the basis of transmit power capability are beyond the scope of this amendment.

### 11.5.2 Specification of regulatory and local maximum transmit power levels

A STA shall determine a regulatory maximum transmit power for the current channel. The STA shall use the minimum of the following:

- Any regulatory maximum transmit power received in a Country element from the AP in its BSS or another STA in its IBSS and
- Any regulatory maximum transmit power for the channel in the current regulatory domain known by the STA from other sources.

A STA shall determine a local maximum transmit power for the current channel. The STA shall use the minimum of the following:

- Any local maximum transmit power received in the combination of a Country element and a Power Constraint element from the AP in its BSS or another STA in its IBSS and
- Any local maximum transmit power for the channel regulatory domain known by the STA from other sources.

Any calculation of the local maximum transmit power for the channel shall ensure the mitigation requirements for the channel in the current regulatory domain can be satisfied. The conservative approach is to set the local maximum transmit power level equal to the regulatory maximum transmit power level minus the mitigation requirement. However, it may be possible to satisfy the mitigation requirement using a higher local maximum transmit power level. A lower local maximum transmit power level may be used for other purposes (e.g., range control, reduction of interference).

The regulatory and local maximum transmit powers may change in a STA during the life of a BSS. However, network stability should be considered when deciding how often or by how much these maximums are changed. The regulatory and local maximum transmit powers shall not change during the life of an IBSS.

An AP in a BSS and a STA in an IBSS shall advertise the regulatory maximum transmit power for the current channel in Beacon frames and Probe Response frames using a Country element. An AP in a BSS and a STA in an IBSS shall advertise the local maximum transmit power for the current channel in Beacon frames and Probe Response frames using the combination of a Country element and a Power Constraint element.

### 11.5.3 Selection of a transmit power

A STA may select any transmit power for transmissions in a channel within the following constraints:

- A STA shall determine a regulatory maximum transmit power and a local maximum transmit power for a channel in the current regulatory domain before transmitting in the channel.
- An AP shall use a transmit power less than or equal to the regulatory maximum transmit power level for the channel. However, the AP shall also ensure the regulatory mitigation requirement is met.
- A STA that is not an AP shall use a transmit power less than or equal to the local maximum transmit power level for the channel.

### 11.5.4 Adaptation of the transmit power

A STA may use any criteria, and in particular any path loss and link margin estimates, to dynamically adapt the transmit power for transmissions of an MPDU to another STA. The adaptation methods or criteria are beyond the scope of this amendment.

A STA may use a TPC Request frame to request another STA to respond with a TPC Report frame containing link margin and transmit power information. A STA receiving a TPC Request frame shall respond with a TPC Report frame containing the power used to transmit the response in the Transmit Power field and the estimated link margin in a Link Margin field.

An AP in a BSS or a STA in an IBSS shall autonomously include a TPC Report element with the Link Margin field set to 0 and containing transmit power information in the Transmit Power field in any Beacon frame or Probe Response frame it transmits.

## 11.6 DFS procedures

ERC/DEC/(99)23 requires RLANs operating in the 5 GHz band to implement a mechanism to avoid co-channel operation with radar systems and to ensure uniform utilization of available channels. This amendment describes such a mechanism, referred to as dynamic frequency selection (DFS).

This subclause describes DFS procedures that may be used to satisfy these and similar future regulatory requirements in Europe. The procedures may also satisfy comparable needs in other regulatory domains and frequency bands and may be useful for other purposes.

STAs shall use the DFS procedures defined in this subclause if `dot11SpectrumManagementRequired` is true. `dot11SpectrumManagementRequired` shall be set to TRUE when regulatory authorities require DFS. It may also be set to TRUE in other circumstances. The DFS procedures provide for the following:

- Associating STAs with an AP in a BSS based on the STAs' supported channels (see 11.6.1).
- Quieting the current channel so it can be tested for the presence of radar with less interference from other STAs (see 11.6.2).
- Testing channels for radar before using a channel and while operating in a channel (see 11.6.3).

- Discontinuing operations after detecting radar in the current channel to avoid further interfering with the radar (see 11.6.4).
- Detecting radar in the current and other channels based on regulatory requirements (see 11.6.5).
- Requesting and reporting measurements in the current and other channels (see 11.6.6).
- Selecting and advertising a new channel to assist the migration of a BSS or IBSS after radar is detected (see 11.6.7).

For the purposes of DFS, the following statements apply:

- A STA with dot11SpectrumManagementRequired set to TRUE shall not operate in a BSS or IBSS unless the Spectrum Management bit is set to 1 in the Capability Information field in Beacon frames and Probe Response frames received from other STAs in the BSS or IBSS, *with the following exception*.
- A STA may operate when the Spectrum Management bit is set to 0 if the STA can determine that it is in a regulatory domain that does not require DFS or can ensure that it will meet regulatory requirements even if DFS is not employed. Potential methods for determining the regulatory domain include receiving a country indication in the beacon, user confirmation, or configuration information within the device. Potential methods to ensure regulations are met even if DFS is not employed include independently detecting radar and ceasing operation on channels on which radar is detected.
- A STA shall set dot11SpectrumManagementRequired to TRUE before associating with a BSS or IBSS in which the Spectrum Management bit is set to 1 in the Capability Information field in Beacon frames and Probe Response frames received from the BSS or IBSS.
- APs may allow association of devices that do not have the Spectrum Management bit set to 1 in the Capability Information field in Association Request frames and Reassociation Request frames received from a STA to account for the existence of legacy devices that do not support DFS, but do meet regulatory requirements.

### 11.6.1 Association based on supported channels

A STA shall provide an AP with a list of the channels in which it can operate when associating or reassociating using a Supported Channels element in Association Request frames or Reassociation Request frames.

An AP may use the supported channels list for associated STAs as an input into an algorithm used to select a new channel for the BSS. The specification of the algorithm is beyond the scope of this amendment.

An AP may reject an association or reassociation request from a STA if it considers the STA's supported channel list is unacceptable. For example, a STA's supported channel list might be unacceptable if it can operate only in a limited number of channels. The criteria for accepting or rejecting associations or reassociations are beyond the scope of this amendment.

### 11.6.2 Quieting channels for testing

An AP in a BSS may schedule quiet intervals by transmitting one or more Quiet elements in Beacon frames and Probe Response frames. The AP may stop scheduling quiet intervals or change the value of the Quiet Period field, the Quiet Duration field, and the Quiet Offset field in Quiet elements as required. Only the most recently received Beacon frame or Probe Response frame defines all future quiet intervals; therefore, quiet intervals based on older Beacon frames or Probe Response frames shall be discarded.

Only the STA starting an IBSS may specify a schedule of quiet intervals, by transmitting one or more Quiet elements in the first Beacon frame establishing the IBSS. All STAs in an IBSS shall continue these quiet interval schedules by including appropriate Quiet elements in any transmitted Beacon frames or Probe Response frames.

Multiple independent quiet intervals may be scheduled, to ensure that not all quiet intervals have the same timing relationship to TBTT, by including multiple Quiet elements in Beacon frames or Probe Response frames.

Control of the channel is lost at the start of a quiet interval, and the network allocation vector (NAV) is set by all the STAs in the BSS or IBSS for the length of the quiet interval. Transmission of any MPDU and any associated acknowledgment shall be complete before the start of the quiet interval. If, before starting transmission of an MPDU, there is not enough time remaining to allow the transmission to complete before the quiet interval starts, the STA shall defer the transmission by selecting a random backoff time, using the present contention window (CW) (without advancing to the next value in the series). The short retry counter and long retry counter for the MSDU are not affected.

### 11.6.3 Testing channels for radars

A STA shall not transmit in a channel unless it has been tested for the presence of radars according to regulatory requirements (see ETSI EN 301 893).

### 11.6.4 Discontinuing operations after detecting radars

If a STA is operating in a channel and detects radar operating in the channel or accepts that another STA has detected radar operating in the channel then the STA shall discontinue transmissions according to regulatory requirements (see ETSI EN 301 893).

### 11.6.5 Detecting radars

The methods to detect radars operating in a channel that satisfy regulatory requirements (see ETSI EN 301 893) are beyond the scope of this amendment.

### 11.6.6 Requesting and reporting of measurements

A STA may measure one or more channels itself or a STA may request other STAs in the same BSS or IBSS to measure one or more channels on its behalf, either in a quiet interval or during normal operation.

When requesting other STAs to measure one or more channels, a STA shall use a Measurement Request frame containing one or more Measurement Request elements. The measurement request may be sent to an individual or group destination address. Addressing requests to multiple STAs should be used with care to avoid a reply storm.

The measurement requests effectively allowed by these rules are shown in Table 26a.

**Table 26a—Allowed measurement requests**

Service set	Source of request	Destination of request	Type of measurement request allowed
BSS	AP	STA	Individual or group
	STA	AP	Individual only
	STA	STA	None
IBSS	STA	STA	Individual or group



A STA that successfully requests another STA to perform a measurement on another channel should not transmit MSDUs or MMPDUs to that STA during the interval defined for the measurement plus any required channel switch intervals. In determining this period, a STA shall assume that any required channel switches take less than `dot11ChannelSwitchTime` per switch.

A STA that receives a Measurement Request frame from a STA in its BSS or IBSS shall parse the frame's Measurement Request elements in order, with measurements starting at the times specified by the Measurement Request elements. A STA may ignore any group addressed Measurement Request frames.

Any result of a measurement request shall be returned without undue delay to the requesting STA in Measurement Report elements using one or more Measurement Report frames. The result may be the completed measurement or an indication that the STA is unable to complete the measurement request.

A STA shall report it is too late to undertake a measurement request if it receives the request after the specified starting time for the measurement.

A STA shall report it is refusing a measurement request if all of the following conditions exist:

- The STA is capable of undertaking a measurement request,
- The STA does not want to undertake the measurement request at this time, and
- The measurement request is not mandatory (NOTE: measurements are specified as mandatory or optional in 7.3.2.19).

A STA shall report it is incapable a measurement request if any of the following conditions exists:

- The STA is incapable of undertaking an optional measurement request, or
- The STA does not support the channel specified in a mandatory measurement request, or
- The STA does not support any requested parallel measurements in the same or different channels.

The Measurement Report frames shall contain the same Dialog Token field as the corresponding Measurement Request frame, and each Measurement Report element shall contain the same Measurement Token field as the corresponding Measurement Request element.

A STA may autonomously report measurements to another STA in its BSS or IBSS using a Measurement Report frame with a Dialog Token field set to 0 with one or more Measurement Report elements. A STA in an IBSS may also autonomously report measurements to other STAs in the IBSS using the Channel Map field in the IBSS DFS element in a Beacon frame or Probe Response frame.

A STA may enable or disable measurement requests or autonomous measurement reports from another STA by transmitting Measurement Request elements with the Enable bit set to 1 and the Request bit and Report bit set to 0 or 1, as appropriate. These elements do not require a corresponding Measurement Report element in a Measurement Report frame. All measurement requests and reports are enabled by default. An AP may ignore a request to disable a mandatory measurement request. All others requests shall be honored.

### 11.6.7 Selecting and advertising a new channel

An attempt may be made to move a BSS to a new operating channel. It is an objective that disruption to the BSS is minimized in this process, although it should be recognized that a channel switch might not successfully move all STAs. It should also be stressed that the channel switch process is distinct from the regulatory requirement to cease transmission on a particular channel in the presence of radar.

### 11.6.7.1 Selecting and advertising a new channel in an infrastructure BSS

The decision to switch to a new operating channel in an infrastructure BSS shall be made only by the AP. An AP may make use of the information in Supported Channel elements and the results of measurements undertaken by the AP and other STAs in the BSS to assist the selection of the new channel. The algorithm to choose a new channel is beyond the scope of this amendment, but shall satisfy applicable regulatory requirements, including uniform spreading rules and channel testing rules. The AP shall attempt to select a new channel that is supported by all associated STAs, although it should be noted that this might not always be possible.

An AP shall inform associated STAs that the AP is moving to a new channel and maintain the association by advertising the switch using Channel Switch Announcement elements in Beacon frames, Probe Response frames, and Channel Switch Announcement frames until the intended channel switch time. The AP may force STAs in the BSS to stop transmissions until the channel switch takes place using the Channel Switch Mode field in the Channel Switch Announcement element. If possible, the channel switch should be scheduled so that all STAs in the BSS, including STAs in power save mode, have the opportunity to receive at least one Channel Switch Announcement element before the switch. The AP may send the Channel Switch Announcement frame in a BSS without performing a backoff, after determining the wireless medium (WM) is idle for one PIFS period.

A STA that receives a Channel Switch Announcement element may choose not to perform the specified switch, but to take alternative action. For example, it may choose to move to a different BSS.

A STA in a BSS that is not the AP shall not transmit the Channel Switch Announcement element.

### 11.6.7.2 Selecting and advertising a new channel in an IBSS

DFS in an IBSS is complicated by the following:

- There is no central AP function for collating measurements or coordinating a channel switch. If STAs make independent decisions to switch channel in the presence of radar, there is a danger that all STAs will announce a switch to differing channels if several of them detect the radar.
- There is no association protocol that can be used to
  - Exchange supported channel information and
  - Determine membership of the IBSS at a given instant for requesting measurements.
- Beaconing is a shared process; therefore, it cannot be guaranteed that a STA that has something to send (e.g., a channel switch message) will be the next STA to beacon.

The DFS owner service, IBSS DFS element, and Channel Switch Announcement frame address these complications.

- The DFS owner service provides a central point of coordination for a channel switch. It attempts to minimize the probability that multiple STAs concurrently decide to switch to different channels. The DFS Owner field and DFS Recovery Interval field within the IBSS DFS element support the DFS owner service.
- Each STA shall include a Channel Map field within the IBSS DFS elements that it transmits. The channel map communicates the STA-supported channel set and basic measurement reports for that STA.
- The ability to send a Channel Switch Announcement element within a management frame other than a Beacon frame or Probe Response frame is essential.

The potential for hidden nodes within an IBSS means that the IBSS channel switch protocol is best effort. All members of an IBSS shall have an individual responsibility to cease transmission on a particular channel in the presence of radar.

A STA at which an IBSS is started shall be a DFS owner in that IBSS. That STA shall include its MAC address in the DFS Owner field of the IBSS DFS element and DFS Recovery Interval field from the MLME.START.request parameter. The purpose of the DFS owner is to coordinate a channel switch when required. All STAs within a spectrum-managed IBSS shall have the ability to become DFS owner.

Each STA in an IBSS shall adopt the DFS owner and the DFS owner recovery interval from any valid IBSS DFS element when the frame contained a matching service set identifier (SSID) and the value of the timestamp is later than the STA's TSF timer. The STA shall include the adopted values within the IBSS DFS elements it transmits. Because all STAs in an IBSS participate in sending Beacon frames, this process will always, over a number of beacon intervals, result in a unified view of one DFS owner throughout the IBSS.

If a STA detects radar and wants to attempt a channel switch using the DFS owner, the STA shall broadcast one or more Measurement Report frames indicating the presence of the radar.

A DFS owner receiving a Measurement Report frame indicating the presence of radar in the current channel shall select and advertise a new operating channel (including the possibility of no change). The DFS owner may make use of information received in Channel Map fields and from measurements undertaken by other members of the IBSS to assist the selection of the new channel. The algorithm to choose a new channel is beyond the scope of this amendment, but shall satisfy any regulatory requirements, including uniform spreading rules and channel testing rules. The DFS owner shall attempt to select a new channel that is supported by all members of the IBSS. It should be noted that this process might be imperfect in that the DFS owner may have incomplete knowledge and there may be no suitable channel.

The DFS owner shall attempt to make the members of the IBSS aware of the new operating channel by broadcasting at least one Channel Switch Announcement frame. The DFS owner shall also include the Channel Switch Announcement element in all Beacon frames, Probe Response frames, or Channel Switch Announcement frames until the intended channel switch time. A STA that receives a valid Channel Switch Announcement element shall repeat this element in all Beacon frames and Probe Response frames that it transmits. The DFS owner may attempt to silence STAs in the IBSS until the channel switch takes place using the Channel Switch Mode field in the Channel Switch Announcement element. If possible, the channel switch should be scheduled so that all STAs in the IBSS, including STAs in power save mode, have the opportunity to receive at least one Channel Switch Announcement element before the switch.

If a STA does not receive a valid Channel Switch Announcement element from the DFS owner within DFS recovery time measured from the end of the frame within which radar notification was first transmitted by the STA or received from another STA, then it shall enter a DFS owner recovery mode. In DFS owner recovery mode, the STA shall assume the role of DFS owner, shall select a new operating channel, and shall advertise the new channel by transmitting a Channel Switch Announcement frame using the contention resolution algorithm defined for beacon transmission at TBTT in 11.1.2.2. The STA shall also include the Channel Switch Announcement element in all Beacon frames and Probe Response frames until the intended channel switch time. A STA that is not the DFS owner shall not initiate a channel switch.

If the STA receives a valid Channel Switch Announcement element from another member of the IBSS, the STA shall leave DFS owner recovery mode prior to the channel switch and adopt the received channel switch information. If the Channel Switch Announcement element was within a Beacon frame or Probe Response frame, the STA shall also adopt the DFS owner address from the IBSS DFS element. If the Channel Switch Announcement element was within a Channel Switch Announcement frame, the STA shall adopt the DFS owner from the transmitter address (TA) of the received frame.

There are several circumstances when DFS owner recovery is required (e.g., if the original DFS owner has left the network or if the original measurement report was not received by the initial DFS owner). It should be noted that DFS owner recovery might temporarily give rise to more than one DFS owner within the IBSS. This risk is mitigated by the random nature of the IBSS DFS recovery mechanism. However, because all

STAs in an IBSS participate in sending Beacon frames, over a number of beacon periods, there will be convergence from multiple DFS owners to one DFS owner.

## 17. Orthogonal frequency division multiplexing (OFDM) PHY specification for the 5 GHz band

### 17.3 OFDM physical layer convergence procedure (PLCP) sublayer

#### 17.3.8 Physical medium dependent (PMD) operating specifications (general)

##### 17.3.8.3 Operating channel frequencies

##### 17.3.8.3.3 Channelization

*Change first two rows and insert a new third row in Table 94 as follows:*

**Table 94—Valid operating channel numbers by regulatory domain and band**

Regulatory domain	Band (GHz)	Operating channel numbers	Channel center frequencies (MHz)
United States <u>CEPT</u>	U-NII lower band (5.15–5.25)	36 40 44 48	5180 5200 5220 5240
United States <u>CEPT</u>	U-NII middle band (5.25–5.35)	52 56 60 64	5260 5280 5300 5320
CEPT	(5.47–5.725)	100 104 108 112 116 120 124 128 132 136 140	5500 5520 5540 5560 5580 5600 5620 5640 5660 5680 5700

*Delete the first paragraph after Table 94:*

Figure 123 shows the channelization scheme for this standard, which shall be used with the FCC U-NII frequency allocation. The lower and middle U-NII sub-bands accommodate eight channels in a total bandwidth of 200 MHz. The upper U-NII band accommodates four channels in a 100 MHz bandwidth. The centers of the outermost channels shall be at a distance of 30 MHz from the band's edges for the lower and middle U-NII bands, and 20 MHz for the upper U-NII band.

*Change the third paragraph after Table 94 as follows:*

The center frequency is indicated in Figure 123 for the US frequency channel plan; however, no subcarrier is allocated on the center frequency as described in Figure 121.

### 17.3.9 PMD transmit specifications

#### 17.3.9.1 Transmit power levels

*Change the first paragraph of 17.3.9.1 as follows:*

The maximum allowable output power ~~according to FCC regulations~~ by regulatory domain is shown in Table 95.

*Change Table 95 as follows:*

**Table 95—Transmit power level ~~for the United States~~ by regulatory domain**

Frequency band (GHz)	<u>United States</u> (Maximum output power with up to 6 dBi antenna gain) (mW)	<u>CEPT</u> (EIRP)
5.15–5.25	40 (2.5 mW/MHz)	<u>200 mW</u>
5.25–5.35	200 (12.5 mW/MHz)	<u>200 mW</u>
<u>5.470–5.725</u>	=	<u>1 W</u>
5.725–5.825	800 (50 mW/MHz)	=

## Annex A

(normative)

### Protocol Implementation Conformance Statement (PICS) proforma<sup>4</sup>

#### A.4 PICS proforma—IEEE Std 802.11, 1999 Edition

##### A.4.3 IUT configuration

*Insert the following at the end of the table in A.4.3:*

Item	IUT configuration	References	Status	Support
*CF10	Is spectrum management operation supported?	7.3.1.4, 11.6	CF6:O	Yes, No

*Insert A.4.12 after A.4.11 as follows:*

##### A.4.12 Spectrum management extensions

Item	IUT configuration	References	Status	Support
SM1	Country, Power Constraint, and transmit power control (TPC) Report elements included in Beacon and Probe Response frames	7.2.3.1, 7.2.3.9, 7.3.2.9, 7.3.2.13, 7.3.2.16	CF9: M	Yes, No
SM2	Spectrum Management Capability bit	7.3.1.4	CF9: M	Yes, No
SM3	Power Capability and Supported Channels elements in Association and Reassociation frames	7.2.3.4, 7.2.3.5, 11.6.1	CF9:M	Yes, No
SM4	Action frame protocol for spectrum management actions	7.3.1.11, 7.4	CF9:M	Yes, No
	Measurement Request frame	7.4.1.1	CF9:M	Yes, No
	Measurement Report frame	7.4.1.2	CF9:M	Yes, No
	TPC Request frame	7.4.1.3	CF9:M	Yes, No
	TPC Report frame	7.4.1.4	CF9:M	Yes, No
	Channel Switch Announcement frame	7.4.1.5	CF9:M	Yes, No

<sup>4</sup>Copyright release for PICS proformas: Users of this standard may freely reproduce the PICS proforma in this annex so that it can be used for its intended purpose and may further publish the completed PICS.

Item	IUT configuration	References	Status	Support
SM5	Measurement requests Basic request Clear channel assessment (CCA) request Receive power indication (RPI) histogram Enabling/disabling requests and reports	7.3.2.19.1 7.3.2.19.2 7.3.2.19.3 7.3.2.19	CF9:M CF9:O CF9:O CF9:M	Yes, No Yes, No, N/A Yes, No, N/A Yes, No
SM6	Measurement reports Basic report CCA report RPI histogram report Refusal to measure	7.3.2.20.1 7.3.2.20.2 7.3.2.20.3 7.3.2.20	CF9:M CF9:O CF9:O CF9:M	Yes, No Yes, No, N/A Yes, No, N/A Yes, No
SM7	Quiet interval Access point (AP)-defined Quiet interval  Station (STA)-defined Quiet interval  STA support for Quiet interval	7.2.3.1, 7.2.3.9, 7.3.2.21, 11.6.2  7.2.3.1, 7.2.3.9, 7.3.2.21, 11.6.2  7.2.3.1, 7.2.3.9, 7.3.2.21, 11.6.2	(CF1 and CF9):M  (CF2 and CF9):M  CF9:M	Yes, No  Yes, No  Yes, No
SM8	Association control based on spectrum management capability	11.5, 11.6	(CF1 and CF9):M	Yes, No
SM9	Association control based on transmit power capability	11.5.1	(CF1 and CF9):M	Yes, No
SM10	Maximum transmit power Levels AP determination and communication of local maximum transmit power level STA determination and communication of local maximum transmit power level	11.5.2 11.5.2	(CF1 and CF9):M (CF2 and CF9):M	Yes, No Yes, No
SM11	Selection of transmit power	11.5.3	CF9:M	Yes, No
SM12	Adaptation of transmit power TPC report in Beacon and Probe Response frames Dynamic transmit power adaptation	11.5.4 11.5.4	CF9:M CF9:O	Yes, No Yes, No, N/A
SM13	Testing channels for radars	11.6.3	CF9:M	Yes, No
SM14	Detecting and discontinuing operations after detection of a radar	11.6.4	CF9:M	Yes, No
SM15	Requesting and reporting of measurements	11.6.6	CF9:M	Yes, No
SM16	Autonomous reporting of radars	11.6.6	CF9:M	Yes, No
SM17	Independent basic service set (IBSS) dynamic frequency selection (DFS) Element including channel map	7.3.2.22	(CF2 and CF9): M	Yes, No
SM18	DFS owner function	11.6.7	(CF2 and CF9): M	Yes, No

Item	IUT configuration	References	Status	Support
SM19	DFS owner recovery procedure	11.6.7	(CF2 and CF9): M	Yes, No
SM20	Channel switch procedure Transmission of channel switch announcement and channel switch procedure by an AP	11.6.7	(CF1 and CF9): M	Yes, No
	Transmission of channel switch announcement and channel switch procedure by a STA	11.6.7	(CF2 and CF9): M	Yes, No
	Reception of channel switch announcement and channel switch procedure by a STA	11.6.7	CF9:M	Yes, No



## Annex D

(normative)

### ASN.1 encoding of the MAC and PHY MIB

*In “Major Sections” of Annex D, add the following text to the end of the Station Management attributes:*

```
dot11SpectrumManagementTable ::= {dot11smt 8}
```

*In the dot11StationConfig table of Annex D, change the dot11StationConfigEntry sequence list as follows:*

```
Dot11StationConfigEntry ::=
    SEQUENCE {
        dot11StationID                MacAddress,
        dot11MediumOccupancyLimit      INTEGER,
        dot11CFPPollable                TruthValue,
        dot11CFPPeriod                  INTEGER,
        dot11CFPMaxDuration              INTEGER,
        dot11AuthenticationResponseTimeout Unsigned32,
        dot11PrivacyOptionImplemented   TruthValue,
        dot11PowerManagementMode        INTEGER,
        dot11DesiredSSID                 OCTET STRING,
        dot11DesiredBSSType              INTEGER,
        dot11OperationalRateSet          OCTET STRING,
        dot11BeaconPeriod                INTEGER,
        dot11DTIMPeriod                 INTEGER,
        dot11AssociationResponseTimeout Unsigned32,
        dot11DisassociateReason          INTEGER,
        dot11DisassociateStation         MacAddress,
        dot11DeauthenticateReason        INTEGER,
        dot11DeauthenticateStation       MacAddress,
        dot11AuthenticateFailStatus      INTEGER,
        dot11AuthenticateFailStation     MacAddress,
        dot11MultiDomainCapabilityImplemented TruthValue,
        dot11MultiDomainCapabilityEnabled TruthValue,
        dot11CountryString               OCTET STRING,
        dot11SpectrumManagementImplemented TruthValue,
        dot11SpectrumManagementRequired   TruthValue }
```

*Insert the following elements to the end of the dot11StationConfigEntry element definitions after dot11CountryString:*

```
dot11SpectrumManagementImplemented OBJECT-TYPE
    SYNTAX TruthValue
    MAX-ACCESS read-write
    STATUS current
    DESCRIPTION
        "This attribute, when TRUE, indicates that the station
        implementation is capable of supporting spectrum management."
```

The capability is disabled otherwise. The default value of this attribute is FALSE."  
 ::= { dot11StationConfigEntry 24 }

dot11SpectrumManagementRequired OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"A STA will use the defined TPC and DFS procedures if and only if this attribute is TRUE. The default value of this attribute is FALSE."

::= { dot11StationConfigEntry 25 }

***Insert the following dot11SpectrumManagement table after the end of the dot11MultiDomainCapability table:***

```
-- *****
-- * dot11SpectrumManagement TABLE
-- *****
```

dot11SpectrumManagementTable OBJECT-TYPE

SYNTAX SEQUENCE OF Dot11SpectrumManagementEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"(Conceptual) table of attributes for spectrum management"

::= { dot11smt 8 }

dot11SpectrumManagementEntry OBJECT-TYPE

SYNTAX Dot11SpectrumManagementEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An entry (conceptual row) in the Spectrum Management Table.  
 IfIndex - Each 802.11 interface is represented by an ifEntry.  
 Interface tables in this MIB are indexed by ifIndex."

INDEX {ifIndex, dot11SpectrumManagementIndex}

::= { dot11SpectrumManagementTable 1 }

Dot11SpectrumManagementEntry ::=

SEQUENCE {

dot11SpectrumManagementIndex	Integer32,
dot11MitigationRequirement	Integer32,
dot11ChannelSwitchTime	Integer32,
dot11PowerCapabilityMax	Integer32,
dot11PowerCapabilityMin	Integer32 }

dot11SpectrumManagementIndex OBJECT-TYPE

SYNTAX Integer32

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

```

        "The auxiliary variable used to identify instances of the
        columnar objects in the Spectrum Management Table."
 ::= { dot11SpectrumManagementEntry 1 }

dot11MitigationRequirement OBJECT-TYPE
    SYNTAX Integer32
    MAX-ACCESS read-write
    STATUS current
    DESCRIPTION
        "This attribute shall indicate the mitigation requirement in dB
        required. The default value of this attribute shall be 3 dB."
 ::= { dot11SpectrumManagementEntry 2 }

dot11ChannelSwitchTime OBJECT-TYPE
    SYNTAX Integer32
    MAX-ACCESS read-write
    STATUS current
    DESCRIPTION
        "This attribute shall indicate assumed channel switch time,
        measured in TUs. The unit of this attribute is TUs. The default
        value of this attribute shall be 2 TUs. The minimum value shall
        be 1 TU."
 ::= { dot11SpectrumManagementEntry 3 }

dot11PowerCapabilityMax OBJECT-TYPE
    SYNTAX Integer32
    MAX-ACCESS read-only
    STATUS current
    DESCRIPTION
        "This attribute shall indicate the maximum transmit Power
        Capability of this station. The unit of this attribute is dBm.
        The default value of this attribute shall be 0 dBm."
 ::= { dot11SpectrumManagementEntry 4 }

dot11PowerCapabilityMin OBJECT-TYPE
    SYNTAX Integer32
    MAX-ACCESS read-only
    STATUS current
    DESCRIPTION
        "This attribute shall indicate the minimum transmit Power
        Capability of this station. The unit of this attribute is dBm.
        The default value of this attribute shall be -100 dBm."
 ::= { dot11SpectrumManagementEntry 5 }

-- *****
-- * End of dot11SpectrumManagement TABLE
-- *****

```