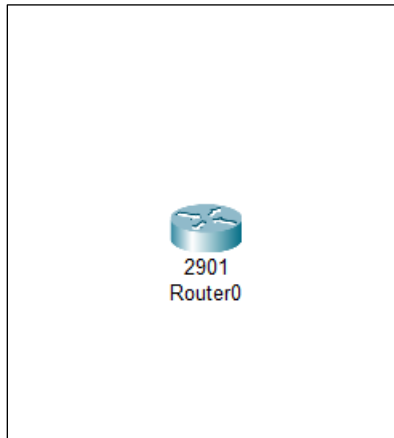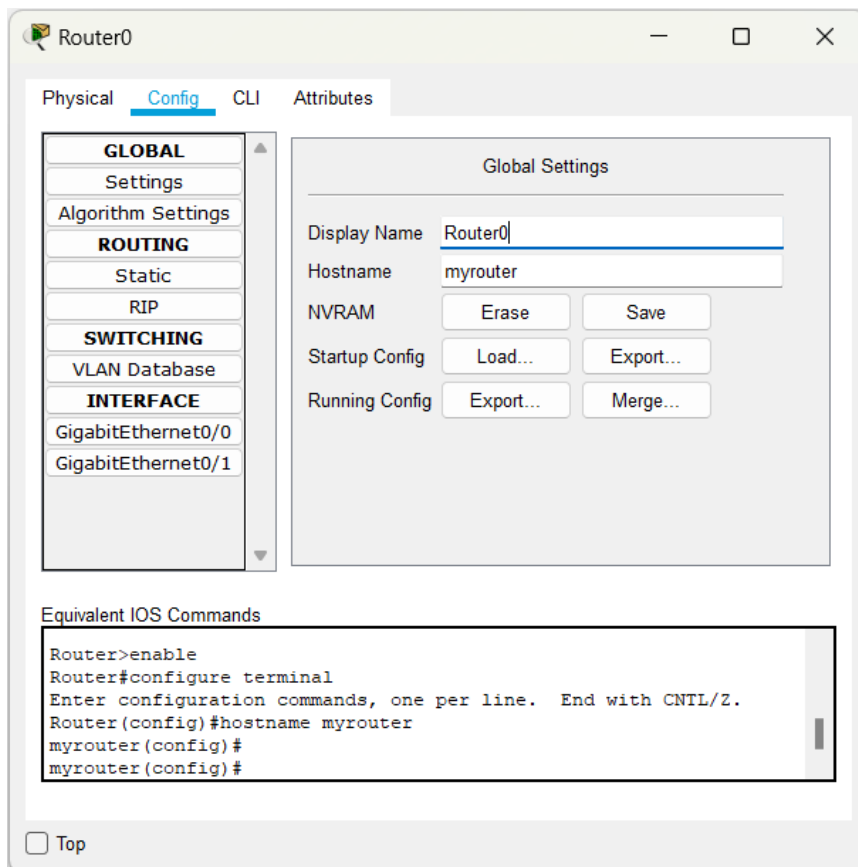# Practical No: 9
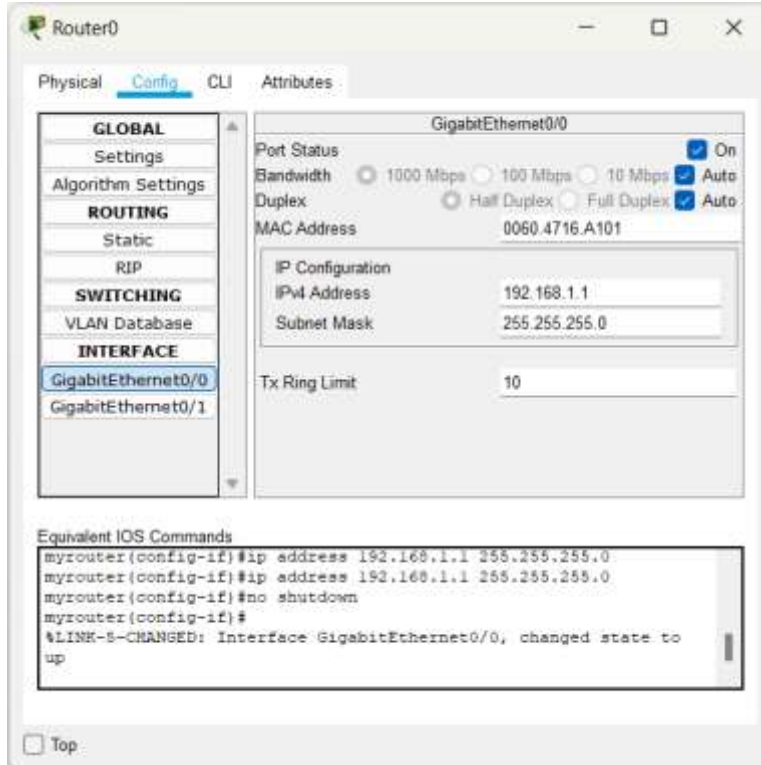# Aim: Configure Radio Interfaces through the GUI.

Step 1: Take router 2901.

Step 2: Click on Router0 > config > change Hostname to myrouter.

Step 3: Click on Router0 > config >GigabitEthernet0/0 > Enter IPv4 Address 192.168.1.1 and make Port status on.

Step 3: Click on Router0 > config >GigabitEthernet0/0 > Enter IPv4 Address 10.1.1.1 and make Port status on.