
new india electricals ltd.®

Our Products



MOTORS

AC | DC | Rolling Mill | Roller Table

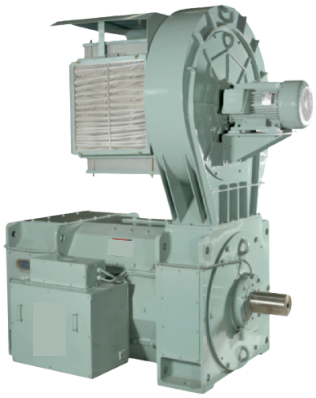

PUMPS

Centrifugal | Gear | Fire Fighting



TRANSFORMERS

Official Partner

transformers & rectifiers (india) ltd



PANELS

Licensed ABB House
Low & Medium Voltage
Panels up to 33kV

Please scan the QR codes below to get to know how New India Electricals Ltd works.

A Glimpse of Infrastructure

New India's Global Customers

New India's Product Range & Application

Substations · Turnkey projects · Design Consultancy

India's Largest Stockist · 50+ years of trust

In a NUTSHELL

- Serving since 54 years.
- Exporting to 45 Countries.
- Star Export House for more than 10 years.
- In house fully equipped Pump assembly unit
- 50,000 sq ft of fully equipped Motor warehouse space.
- ABB Licensed - 30,000 sft Medium Voltage & Low Voltage Panel assembly unit.

Motors

We can offer the full complement of Motors for all STEEL and Power plant applications. Right from a High Voltage 10MW Mill Main Drive motor to 1MW DC Mill Stand motor to the Sophisticated and robust Shear Motors to Fan Drive - Squirrel Cage TEFC motors to Roller table motors and right upto the Pump drive / Water complex SPDP motors. We have it all.



THREE PHASE INDUCTION MOTORS

Range	:	Upto 8000KW
Voltage	:	415/660/3300/6600/11000V
RPM	:	3000/1500/1000/750/600
Insulation	:	Class "F"
Mounting	:	Horizontal/Vertical Flange/ Foot cum Flange
Enclosure	:	IP 22 / IP 55
Cooling	:	IC 01/411/511/611




AC MILL DUTY MOTORS

Range	:	110 to 2000kW
Voltage	:	0.415/3.3/6.6kV
RPM	:	1000/750/600
Insulation	:	Class "F"
Mounting	:	Horizontal
Enclosure	:	IP 23
Cooling	:	IC 01
Applications:		Steel Mills, Rolling Mills, SugarMills, Paper Mills, Cement, Fertilizer



AC MOTORS - CAGE ROTOR

Range	:	0.37 to 2500 kW
Voltage	:	0.38, 0.415/3.3/6.6kV
RPM	:	3000/1500/1000/750/600
Insulation	:	Class "F"
Mounting	:	Horizontal/Vertical Flange/ Foot cum Flange
Enclosure	:	IP 22 / IP 55
Cooling	:	IC 01/411/511/611



AC MOTORS - WOUND ROTOR

Range	:	7.5 to 20000 kW
Voltage	:	0.38/0.415/3.3/6.6kV
RPM	:	1500/1000/750/600
Insulation	:	Class "F"
Mounting	:	Horizontal
Enclosure	:	IP 22 / IP 55
Cooling	:	IC 01/411/511/611
Duty	:	SI



ROLLER TABLE MOTORS

Range	:	0.37 to 37 kW
Voltage	:	380 & 415 Volts
RPM	:	1500/1000/750
Insulation	:	Class "F"
Mounting	:	Horizontal/Vertical Flange
Enclosure	:	IP 55
Cooling	:	IC 01/411/511/611



DC MOTORS

Range	:	Up to 3000 kW
Voltage	:	180 to 1000V
RPM	:	1800/1000/600
Insulation	:	Class "F" / "H"
Mounting	:	Horizontal Foot / Vertical Flange
Enclosure	:	IP 21 /22 23 / 44
Cooling	:	IC 01/06/0041/0141/0666
Types	:	Laminated / Solid yoke
Duty	:	S1/S4



BRAKE MOTORS

Range	:	0.18 to 20 kW
Voltage	:	380 & 415 Volts
RPM	:	1500/1000/750
Insulation	:	Class "F"
Mounting	:	Horizontal/Vertical Flange/ Foot cum Flange
Enclosure	:	IP 55
Cooling	:	IC 411

AC/DC Brakes



CRANE DUTY MOTORS

Range	:	0.37 to 1000 kW
Duty	:	S3, S4, S5
Starts/Hour	:	6/150/300
CDF	:	25%, 40%, 60%, 100%
Type	:	Cage / Slipring
Insulation	:	Class "F"
Enclosure	:	IP 55
Cooling	:	IC 411

Pumps & Valves



End Suction Pump
SERIES : DB / DB (Large)

RANGE

Delivery Size	:	up to 300 mm
Capacity	:	up to 1900 m³ / hr
Head	:	up to 100 mtrs.
Temperature	:	(-) 10°C to 100°C

FEATURES

- Back pull - out design
- Conforming to DIN 24255
- End Suction
- Gland packed / Mechanical seal
- 3500 to 1500 rpm
- Available in various material combinations

APPLICATION

- Air conditioning
- Fire Fighting
- Booster service
- Water
- Brine, Oils etc.



End Suction Pump
SERIES : CE

RANGE

Delivery Size	:	upto 125 mm
Capacity	:	up to 660 m³ / hr
Head	:	up to 100 meters
Temperature	:	(-) 10°C to 140°C

FEATURES

- Back Pullout Design
- Confirming to DIN 24256 and ISO 2858
- Single stage with back pull - out type design.
- Suitable for 3500 / 1500 rpm
- Gland packed / Mechanical Seal

APPLICATION

- Air conditioning
- Fire Fighting
- Condensate water supply
- Booster Services
- Handling clear and turbid water up to 3000 ppm



Horizontal Multistage Pump
SERIES : RKB

RANGE

Delivery Size	:	up to 200 mm
Capacity	:	up to 850 m³ /hr
Head	:	up to 850 metres
Temperature	:	(-) 40°C to 140°C

FEATURES

- Gland packed/Mechanical Seal
- Suction flange can be directed left or right
- Enclosed impellers
- Also available in Vertical Execution

APPLICATION

- Fire-fighting
- Booster Service
- Mine Dewatering
- Boiler feed
- Sprinkler Irrigation



Vertical Turbine Pump
SERIES : BHR/BHQ/BHM/BHMa/BHA

RANGE

Delivery Size	:	up to 2200 mm
Capacity	:	up to 40,000 m3/hr
Head range	:	up to 240 metres
Temperature	:	(-) 10oC to 90oC

FEATURES

- Dry pit / wet pit arrangement available
- Low submergence
- Gland packed / Mechanical Seal
- Redial / Axial / Mixed flow type

APPLICATION

- Irrigation
- Water supply
- Dry docks
- Refineries
- Fire fighting



Horizontal Axially Split Casing Pump
SERIES : UP/UPL/UPH/UP (T)

RANGE

Delivery Size	:	up to 1100 mm
Capacity	:	up to 20,000 m³/hr
Head range	:	up to 160 metres
Temperature	:	(-) 10°C to 90°C

FEATURES

- Gland packed/Mechanical Seal
- Easy maintenance
- Rugged and sturdy
- Bottom Suction branch
- Low NPSH

APPLICATION

- Water supply
- Irrigation
- Air-conditioning
- Power plants
- Fire fighting



Horizontal Axially Split Casing Pump
SERIES : DSM/DSM (T)

RANGE

Delivery Size	:	up to 150 mm
Capacity	:	up to 470 m³/hr
Head	:	up to 180 metres
Temperature	:	(-) 10°C to 90°C

FEATURES

- Gland packed/Mechanical Seal
- Easy maintenance
- Two stage
- Stable characteristics
- Low NPSW

APPLICATION

- Water supply
- Irrigation schemas
- Air-conditioning
- Fire fighting



Sluice Valve

RANGE

Size : 50 to 1300 mm
Pressure : PN 1.0 and PN 1.6
Conforming to : IS : 780 & IS 2906
Rating PN 16 Conforming to
BS 5163

FEATURES

- Rigid and sturdy design
- Low pressure loss
- Available in Non Rising as well as in Rising Spindle type
- Long service life
- Resilient Seated valves available

APPLICATION

- Water
- Effluent



Butterfly Valve

RANGE

Size : 50 to 2500 mm
Pressure upto PN 16
Conforming to BS : 5155
Pressure up to Class 250
Conforming to AWWA C 504
Higher pressure on request

FEATURES

- Available in Centric design up to 600 mm. single. Double Eccentric design from sizes 65 mm to 2500 mm
- Less wear and tear
- Self cleaning and non jamming seat design
- Low operating torque
- Rigid and sturdy design

APPLICATION


- Water
- Effluent
- Sewage
- Chemical and petrochemical

Transformers

Transformers being an integral part of any industry. New India Electricals Ltd has made alliances with some of the mature manufacturers to ensure the right quality. Our Transformers are manufactured with specific Low- Loss & High Efficiency designs.

Our aim is to provide a comprehensive range of Transformers to our valued customers.


DISTRIBUTION TRANSFORMERS



Specification

- 3Phase, 50 Hz in voltages of 11 kV, 22kV and 33kV
- Off-circuit tap changer to provide+5% to - 10%
- On-load tap changer to provide +7% to - 21% taps in steps of 1.75%
- Class A insulated
- Vector group Dyn 11
- Continuos duty
- Copper wound / Aluminium wound
- Painting as per IS / IEC standards
- HV side cable box
- LV side cable box / bus duct
- Standard fittings as per IS 2026 / IEC 76

POWER TRANSFORMERS

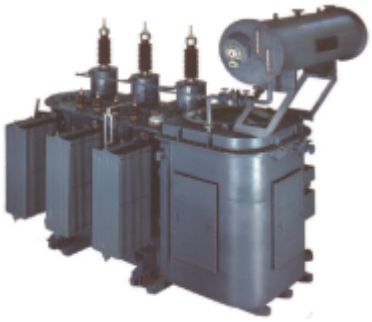

Specification

- 3Phase, 50 Hz in voltages of 11 kV, 22kV and 33kV, 66kV & 111kV
- Off-circuit tap changer to provide + 5% to - + 7.5% & + 5% to - 10% taps in steps of 2.5%
- On-load tap changer to provide + 5% to - 15% taps in steps of 1.25%
- Class A, uniform / non-uniform insulated
- Vector group Dyn 11, YNd 11, YNyn 0
- Continuous duty, double copper wound
- Painting as per IS/IEC standards
- Both HV & LV side outdoor bushings or cable boxes
- Cooling radiators / fans.
- Standard fittings as per IS / IEC standard df
- Buchholz relay with alarm and trip contact with shut off valves
- Oil temperature indicator with alarm and trip contact
- Magnetic oil level gauge with alarm contact
- Mashalling box to house oil temperature indicator and winding temperature indicator
- Cooler control unit
- Neutral current transformer

FURNACE TRANSFORMERS



Specification

- 3Phase, 50 Hz in voltages of 11 kV, 22kV and 33kV
- Off-circuit tap changer to provide + 5% to - + 7.5% & + 5% to - 10% taps in steps of 2.5%
- On-load tap changer to provide +5% to - 15% taps in steps of 1.25%
- Class A, uniform / non-uniform insulated
- Vector group Dyn 11, YNd 11, Dd0y11
- Continuous duty, double copper wound
- Painting as per IS / IEC standards
- Both HV & LV side outdoor bushings / cable box / bus ducts / bus bar risers
- Standard fittings as per IS / IEC standards

Main Features

- Transformers are designed for induction furnace, arc furnace & submerged arc furnace application
- Magnetic circuit - lamination CRGO M3 to M5 type
- Electric circuit - electrolytic grade 99.9% pure copper with transposition in LV coil for current sharing in parallel conductors
- Dielectric circuits - Electric grade press paper, boards and mineral oil
- Thermal circuit - adequate cooling ducts are provided radially & axially for the smooth flow of oil internally. Radiator cooling banks are provided for natural air cooling ONAN & additional fans for ONAF cooling. High current transformers are provided with OFW cooling

Panels

Our aim is to provide a comprehensive range of highly reliable POWER equipments to Utilities, Contractors, Industry users, OEMs and Projects. With the right mix of T&D products, a WORLD-CLASS Team and a REPUTABLE name for engineering and project management, we can provide you with the ideal solution for your particular power supply & distribution networks, whether standardized or customized.

Product Range



Low Voltage Panels

- Power control center panel {PCC}
- Motor control center panel {MCC}
- Drive panels {VFD}
- Soft starter
- Marshalling panel
- ARC duct
- Control & Relay panel
- Neutral Grounding resistors system
- Automatic power factor corrections panel
- Fire fighting Panel
- Alternatives current distribution board{ACDB}



Medium Voltage Panels

- 3.3KV - 11KV 630A(upto 3000A) VCB indoor & outdoor Kiosk
- 33KV 630A(upto 1250A) VCB indoor & outdoor Kiosk

Features



- Ingress Protection(IP) - 33KV ., 36/70/170 kVpk, upto IP55
- Applicable standard IEC 62271 - 200 standard
- Vaccuum circuit breaker rating : 630- 3150 A
- Short circuit current rating upto - 40KA
- Insulation level - 11KV , 12/28/75 kVpk
- CPRI Type tested panel : Short circuit test
- Temperature rise test
- Lightning impact test

Applications

- Transformer protection
- Motor Protection
- Generator Protection
- Line Protection