NIEP

Power+

Whether you generate, distribute or consume power, **Power+** will give you a versatile and cost effective range of Medium Voltage Switchgear panels, and other accessories with ratings and features comparable with the best in the world.



Power+ VO



Power+ V



Power+ F3



Power+ F

PRODUCT RANGE

Power+ V	VCB Panels Indoor type up to 12 KV
Power+ F	SF6 Panels Indoor type up to 36 KV
Power+ M	VCB HT Motor Starter Panels
Power+ VO	VCB Panels Outdoor type up to 12 KV
Power+ F3	SF6 Panels Outdoor type up to 36 KV
Power+ R	Relay and Control Panels
Power+ N	Neutral Grounding Resistor Panels
Power+ B	MV BUS-DUCT

UKAS QUALITY MANAGEMENT 062

NIE POWER & ENGINEERING (P) LTD. REGISTERED FIRM ISO 9001 2008

INTRODUCTION

Our aim is to provide a comprehensive range of highly reliable POWER equipments to Utilities, Contractors, Industry users, OEMs and Projects.

With the right mix of T&D products, a WORLD-CLASS Team and a REPUTABLE name for engineering and project management, we can provide you with the ideal solution for your particular power supply & distribution networks, whether standardized or customized.

Buying equipments from New India Electricals means gaining a partner you can rely on for your equipment's lifetime. We shall help you make decisions regarding your needs right from the early design stage, to the actual delivery phase and throughout its life cycle.

Our field of expertise covers the entire END-toEND solution for POWER DISTRIBUTION & TRANSMISSION upto 400KV. Design, Manufacture, Source, Supply, Erect, Test, Commission, Handover & Maintain.

Our equipments are manufactured under the most stringent quality processes with a clear focus on performance and longevity. This is why we source sub components from global leaders like ABB, AREV A, SIEMENS, ALSTHOM and the like.

We design and manufacture Metal Clad Medium Voltage Panels with a simple philosophy of: Longevity & Reliability. Our Specifications conform to relevant IS / BS & IEC Standards. Our units are designed to withstand a higher degree of electrical impulses, short circuit forces, thermal and dynamic stresses. With Optimum utilization of active material we achieve compactness & efficiency in performance. With special design features developed over many years of practical experience we are able to offer trouble-free performance during surges & frequent short circuits. By Standardising manufacturing techniques we ensure cost effectiveness & reliability in performance.

All our units are TYPE-TESTED at Central Power Research Institute, INDIA.

Switchgear Type Power+ V/F

3.3 KV to 36 KV Air Insulated Indoor Vacuum / SF6 Switchgear

SALIENT FEATURES

- > Metal clad construction- all segregated compartments
- > P4X degree of protection externally & IP2X between compartments
- > Independent exhaust vents for all HT compartment
- > Modular Construction for expansions with bolted structure
- > Type Tested for BIL & short circuit as per IEC 62271/200/2003
- > Lipped-edge construction for additional strength
- > Rodent proof
- > Optional integral earth switch line side
- > Maintenance friendly
- > Foundation frame as standard supply




Power+ F



Power+ V

DESCRIPTION	UNIT	Power+ V	Power+ F	Power+ F3	Power+ V3*
Rated Voltage	KV	3.3 to 12	3.3 to 12	36	36
Rated Frequency	Hz	50	50	50	50
Rated Busbar Current	A	Upto 3000 A	3000 A	2000 A	2000 A
Short time	KA	26.2/40	40	31.5	31.5
Withstand Current	KAb	66/100	100		
Insulation Levels	KVrms/KVp	28/75	28/75	70/140	70/140
Dimensions L×D×H	mm	600×1450×2350 800×1450×2350	800×1450×2350	1220×2300×2300	1200×2300×2200
Degree of Protection * Enclosure * Between Compartments		 IP4× IP2×	 IP4× IP2×	 IP4× IP2×	 IP4× IP2×
Weight with Breaker (App)	KG	750	850	1300	1200

*To be launched soon

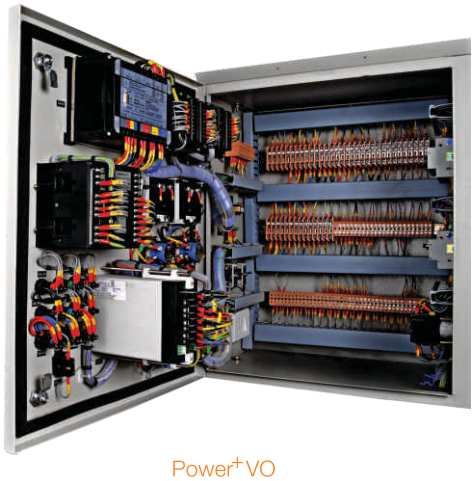

Power+ VO



Power+ F3



Power+VO



Power+F3O

Kiosk Type Power+ VO & FO

3.3 KV to 36 KV Air Insulated Outdoor Kiosk Type Vacuum / SF6 Switchgear

SALIENT FEATURES

> Kiosk Type construction with double door in the front
> Rear door is both hinged and bolted for safety
> Adequate slope given on top roof to drain water, dust and particles
> Robust weather & dust proof-IP5X degree of protection externally and IP2X between compartments
> Fully welded construction, duly Powder painted after seven tank process pre-treatment
> Type tested for BIL and Short circuit as per IEC 62271/200/2003
> Kiosk available in both Cable in / Out design, and side extendable kiosks
> Rodent proof
> Lockable front main door
> Maintenance friendly
> Foundation frame as standard supply

DESCRIPTION	UNIT	Power+ VO	Power+ FO	Power+ F30
Rated Voltage	KV	3.3 to 12	3.3 to 12	36
Rated Frequency	Hz	50	50	50
Rated Busbar Current	A	Upto 2000 A	3000 A	2000 A
Short time	KA	26.2/40	40	31.5
Withstand Current	KAb	66/100	100	
Insulation Levels	KVrms/KVp	28/75	28/75	70/140
Dimensions L×D×H	mm	700×1450×2350	800×1450×2350	1220×2300×2300
Degree of Protection * Enclosure * Between Compartments		 IP54 IP2×	 IP54 IP2×	 IP54 IP2×
Weight with Breaker (App)	KG	900	1000	1500



Power+VO


Neutral Grounding Resistor Panel

SALIENT FEATURES

> Metal clad construction
> IP31 degree of protection
> Available for both SS Grade and 304 and 410
> Lipped edge construction for additional strength
> Rodent proof



NGR Panels

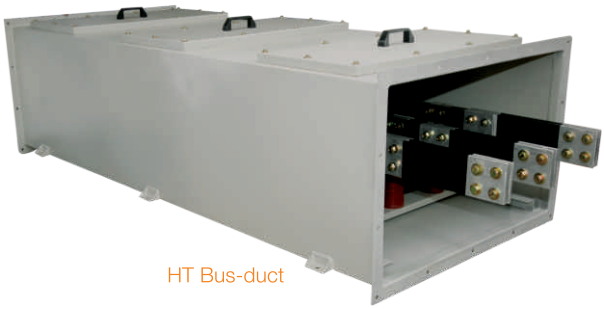

HT Bus-duct

Non-Phase Segregated Bus-Duct

SALIENT FEATURES

> Metal enclosed construction
> IP4X for Indoor and IP52 for Outdoor
> Sleeved Busbars
> Type tested for BIL & temperature rise as per IS at CPRI, Bangalore strength

Relay and Control Panel

SALIENT FEATURES

> For voltage up to 132 KV
> Complete Metering and Indication
> Custom made for any specialisation



NGR Panel



Relay & Control Panel

Type tested at CPRI India

New India Electricals Ltd.
Power House, # 18, J.C. Road, Bangalore - 560 002. INDIA

Tel : +91 80 42434343, 22235434 **Fax** : +91 80 22226666
Mail : **National :** sales@newindiaelectricals.com
International : export@newindiaelectricals.com
Site : www.nielgroup.com / www.newindiaelectricals.com