

Technical Specification & Rider

Project: Somatic Sentience



Figure 1: *Somatic Sentience in situ at Røverstaden*

Artist/Lead: Gaute Holen / Naboklage
Contact: gaute.ah@gmail.com — +47 41275472

Last Updated: April 28, 2026

Abstract

This document outlines the physical, electrical, and data requirements for the installation of **Somatic Sentience**. It is intended for site managers, production technicians, and safety officers.

Contents

1	Technical Summary (TL;DR)	3
2	Brain box	4
3	Tentacles	4
4	Frames and mounting	4
5	Physical & Spatial Requirements	4
5.1	Dimensions & Weight	4
5.2	Mounting & Rigging	4
6	Electrical & Signal Specifications	4
6.1	Power Requirements	4
6.2	Signal & Control	5
7	Operational Guidelines	5
7.1	Environmental Constraints	5
7.2	Startup/Shutdown Procedure	5
8	Health & Safety	5

1 Technical Summary (TL;DR)

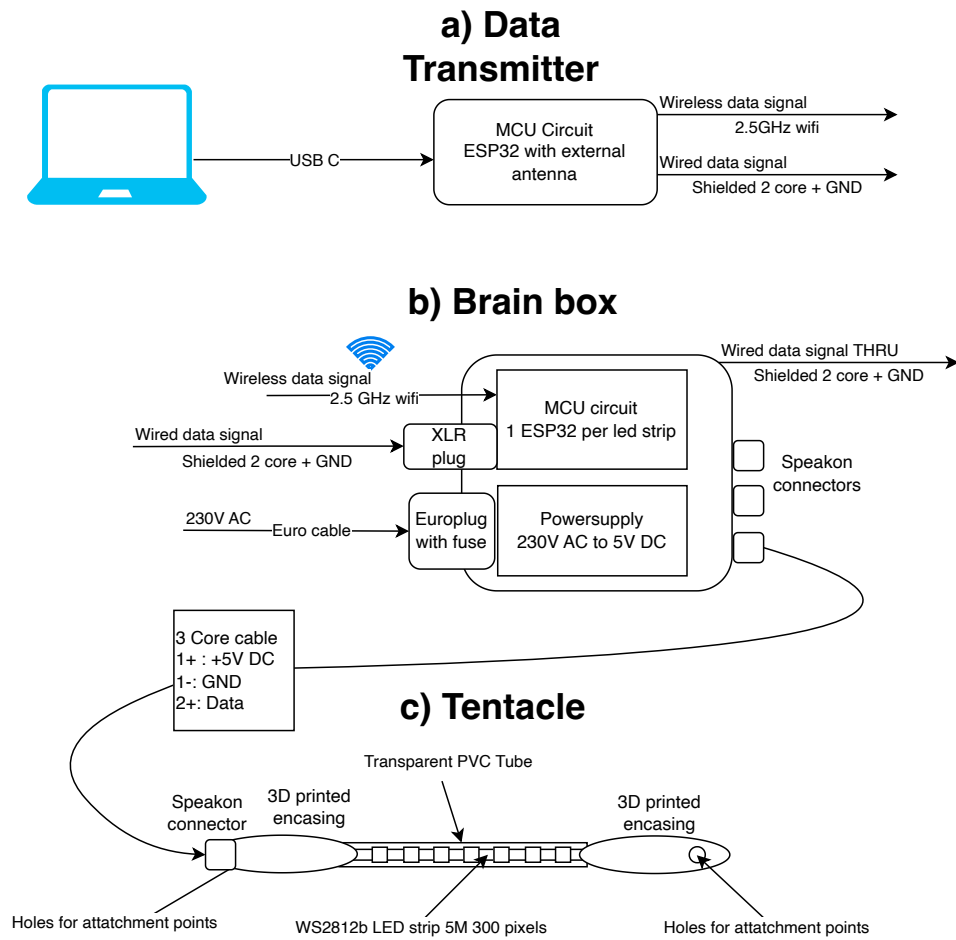


Figure 2: *

Fig 1: Somatic Sentence in situ at Røverstaden

Parameter	Requirement
Power Consumption	[e.g., 1.2kW @ 230V]
Footprint	[e.g., 2m x 2m]
Total Weight	[e.g., 45kg]
Signal Required	[e.g., DMX512 / Art-Net / Standalone]
Setup Time	[e.g., 4 Hours]
Rigging	[e.g., 2x M10 Eye-bolts / Floor Standing]

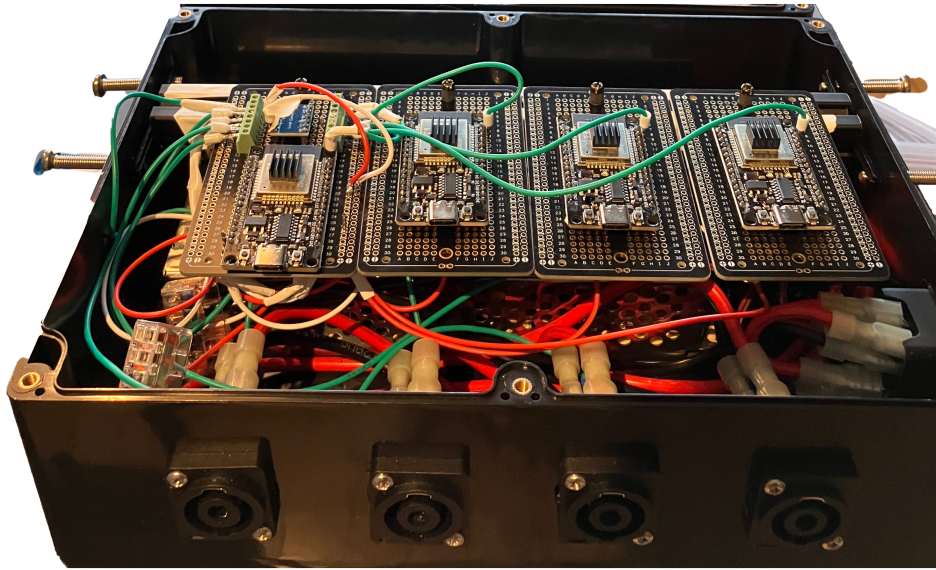


Figure 3: *Somatic Sentence in situ at Røverstaden*

2 Brain box

3 Tentacles

4 Frames and mounting

5 Physical & Spatial Requirements

5.1 Dimensions & Weight

Detail the size when assembled. Include a "Clearance Zone" if the lights are moving or hot.

- **Assembled Dimensions:** [W] x [D] x [H] cm.
- **Safety Perimeter:** [X] meters from the public.
- **Static Load:** [X] kg (Weight of the unit).

5.2 Mounting & Rigging

How does it stay up?

- **Mounting Points:** [e.g., Standard 50mm truss clamps].
- **Safety:** [e.g., Secondary safety bond required at point X].

6 Electrical & Signal Specifications

6.1 Power Requirements

- **Connector Type:** [e.g., PowerCON, IEC, or Schuko].
- **Voltage:** [e.g., 110-240V AC, 50/60Hz].

- **Peak Current Draw:** [X] Amps.

6.2 Signal & Control

How does the venue talk to your lights?

- **Protocol:** [e.g., DMX512-A].
- **Channel Map:** [e.g., 12 Channels / Universe 1].
- **Connectivity:** [e.g., 5-pin XLR Male/Female].

7 Operational Guidelines

7.1 Environmental Constraints

- **IP Rating:** [e.g., IP20 - Indoor use only].
- **Operating Temp:** [e.g., 10°C to 35°C].
- **Haze/Smoke:** [e.g., Compatible with water-based haze].

7.2 Startup/Shutdown Procedure

Briefly explain how the venue staff can turn it on/off safely.

8 Health & Safety

- **Fire Safety:** [e.g., All materials treated with fire retardant NFPA 701].
- **Emergency Stop:** Location of the hard kill-switch.