



▲ LED SPECS	UNITS	RED
FORWARD CURRENT	mA	20
FORWARD VOLTAGE @20mA	V	1.5-2.4
LUMINOUS INTENSITY @ 10mA	MCD	300




T	D
1.0-2.0	8.0-8.2
2.0-2.5	8.2-8.4
2.5-3.0	8.4-8.6



NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: $X.X \pm 0.4$
 $X.XX \pm 0.25$
- RATING: 30VDC @ 100mA
- CONTACT RESISTANCE: 50m Ω MAX.
- INSULATION RESISTANCE: 100M Ω MIN@500VDC.
- OPERATING FORCE: 250 \pm 100gf
- TRAVEL: 1.8 \pm 0.3mm
- OPERATING TEMPERATURE: -40°C TO 85°C
- OPERATING LIFE: 50,000 CYCLES
- LED: RED
- ▲ DENOTES CRITICAL PARAMETERS
- 2002/95/EC (ROHS) COMPLIANT

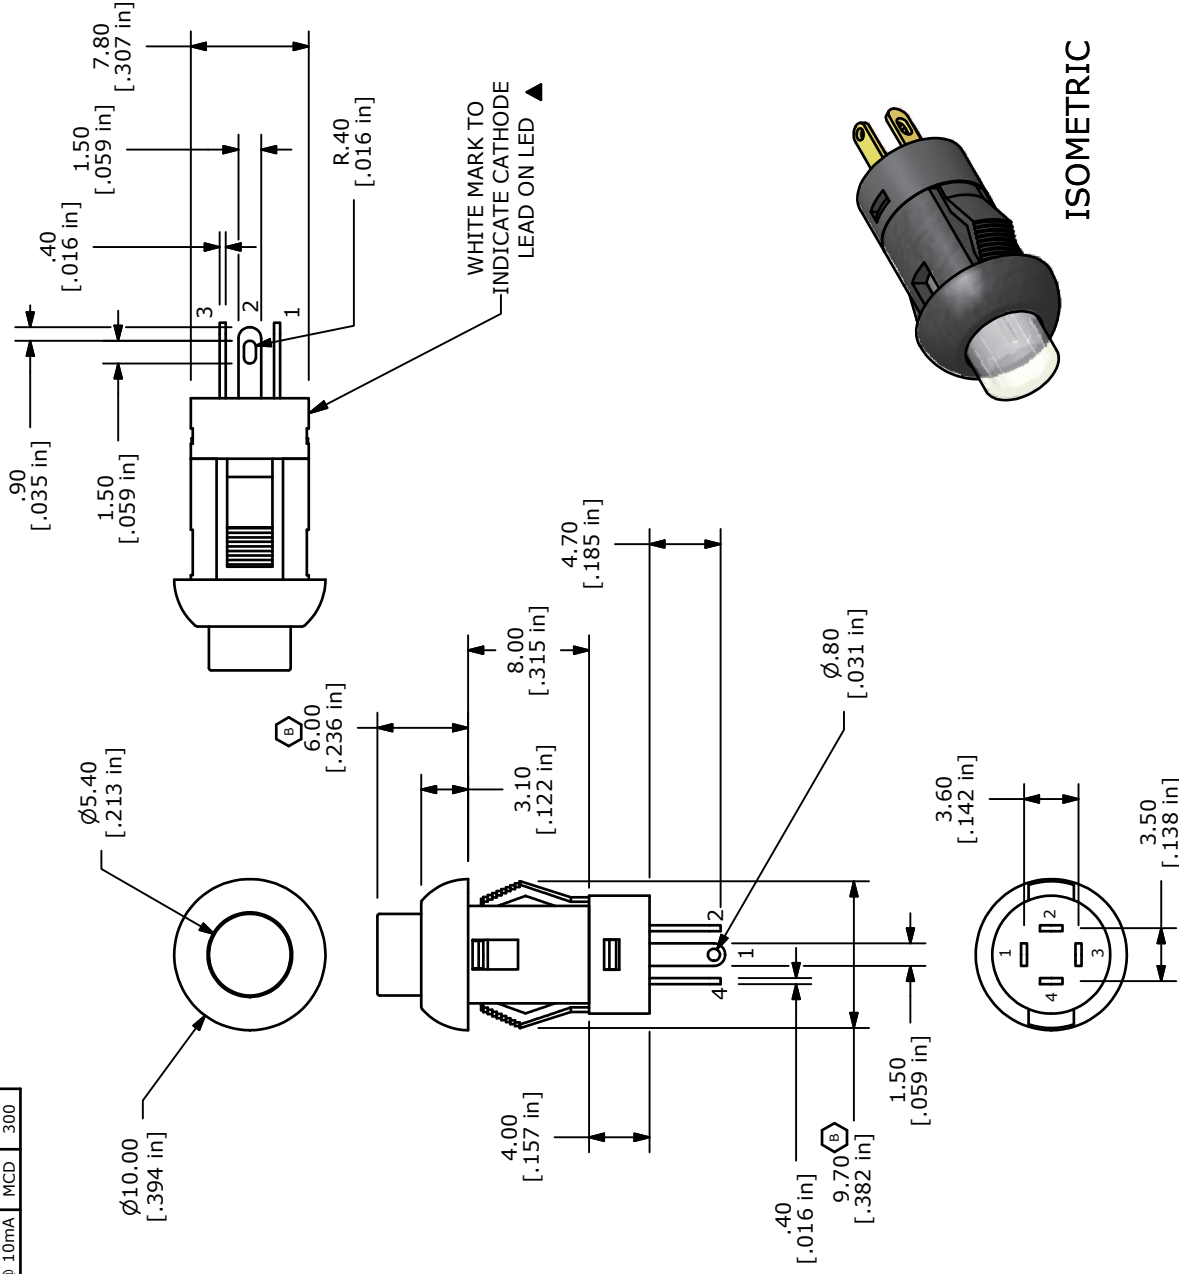

ISOMETRIC



E-SWITCH™

TITLE LP10A1AR

B	19582	CHANGED DIMS: was 9.6 & 6.1	1/13/11	BGL
A	18259	New Release	9/24/08	rc
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 2=1

DATE 7/10/2008

DR rc

DWG B200200

REV B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[LP1OA1AR](#)