2-Bit Bidirectional Voltage-Level Translator for Open-Drain and Push-Pull Application

UM3202Q *DFN8 1.70×1.35*

UM3202A *QFN10 1.80×1.40*

UM3202H *CSP8 1.90×0.90*

General Description

The UM3202Q/3202A/3202H is ±15kV dual channel ESD-protected level translator provide the level shifting necessary to allow data transfer in a multi-voltage system. Externally applied voltages, V_{CCB} and V_{CCA}, set the logic levels on either side of the device. A low-voltage logic signal present on the V_{CCA} side of the device appears as a high-voltage logic signal on the V_{CCB} side of the device, and vice-versa. The UM3202Q/3202A/3202H bidirectional level translator utilizes a transmission-gate based design to allow data translation in either direction (V_{CCA}↔V_{CCB}) on any single data line. The UM3202Q/3202A/3202H accepts V_{CCA} from +1.65V to +3.6V and V_{CCB} from +2.3V to +5.5V, making it ideal for data transfer between low-voltage ASICs / PLDs and higher voltage systems.

The UM3202Q/3202A/3202H enters a three-state output mode to reduce supply current when output enable (OE) is low. The UM3202Q/3202A/3202H is designed so that the OE input circuit is supplied by V_{CCA}. ±15kV ESD protection on the V_{CCB} side for greater protection in applications that route signals externally.

The UM3202Q is a dual level translator available in DFN8 1.70×1.35, the UM3202A is a dual level translator available in QFN10 1.80×1.40, and the UM3202H is a dual level translator available in CSP8 1.90×0.90 package.

Applications

- SPI, MICROWIRE, and I^2C Level Translation
- Low-Voltage ASIC Level Translation
- Smart Card Readers
- Cell-phone Cradles
- Portable POS Systems
- Portable Communication Devices
- Low-Cost Serial Interfaces
- Cell-Phones
- GPS
- Telecommunications Equipment

Features

- Max Data Rates:
  24Mbps(Push Pull),
  2Mbps(Open Drain)
- Bidirectional Level Translation
- 1.65V to 3.6V on A port and 2.3V to 5.5V on B port (V_{CCA}≤V_{CCB})
- ±15kV ESD Protection on B port
- No Power-Supply Sequencing Required V_{CCA} or V_{CCB} Can Be Ramped First
- DFN8, QFN10 and CSP8 Packages

Pin Configurations **Top View**

(Top View)



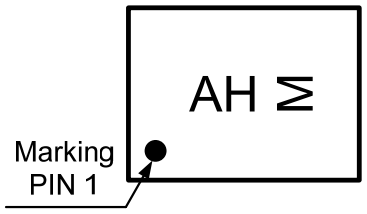

M: Month Code
UM3202Q DFN8 1.70×1.35

(Top View)

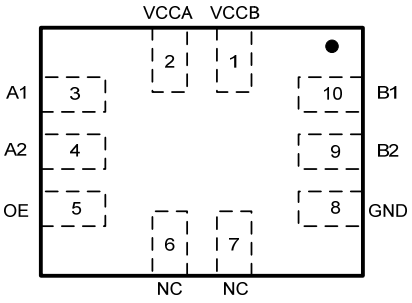

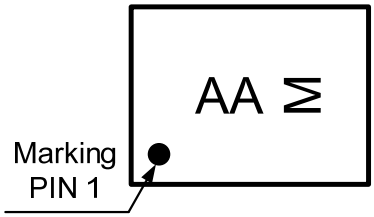

M: Month Code
UM3202A QFN10 1.80×1.40

(Bottom View)



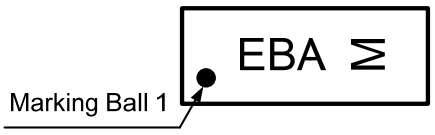

M: Month Code
UM3202H CSP8 1.90×0.90

Pin Description

Pin Name	Function
V_{CCA}	A-Port supply voltage. 1.65V≤V_{CCA}≤3.6V and V_{CCA}≤V_{CCB}
A1	Input/Output 1. Referenced to V_{CCA}
A2	Input/Output 2. Referenced to V_{CCA}
GND	Ground
OE	3-state output enable. Pull OE low to place all outputs in 3-state mode. Referenced to V_{CCA}
B2	Input/Output 2. Referenced to V_{CCB}
B1	Input/Output 1. Referenced to V_{CCB}
V_{CCB}	B-Port supply voltage. 2.3V≤V_{CCB}≤5.5V

Ordering Information

Part Number	Packaging Type	Marking Code	Shipping Qty
UM3202Q	DFN8	AH	3000pcs/7Inch Tape & Reel
UM3202A	QFN10	AA	3000pcs/7Inch Tape & Reel
UM3202H	CSP8	EBA	3000pcs/7Inch Tape & Reel

Absolute Maximum Ratings (Note 1)

Over operating free-air temperature range (unless otherwise noted)

Symbol	Parameter		Value	Unit
V_{CCA}	Supply Voltage Range		-0.5 to +4.5	V
V_{CCB}	Supply Voltage Range		-0.5 to +6.5	V
V_I	Input Voltage Range	A ports	-0.5 to +4.5	V
		B ports	-0.5 to +6.5	
V_O	Voltage Range applied to any output in the high-impedance or power-off state	A ports	-0.5 to +4.5	V
		B ports	-0.5 to +6.5	
V_O	Voltage Range applied to any output in the high or low state (Note 2)	A ports	-0.5 to (V_{CCA}+0.5)	V
		B ports	-0.5 to (V_{CCB}+0.5)	
I_{IK}	Input Clamp Current	V_I＜0	-50	mA
I_{OK}	Output Clamp Current	V_O＜0	-50	mA
I_O	Continuous Output Current		±50	mA
	Continuous Current through V_{CCA}, V_{CCB}, or GND		±100	mA
T_{OP}	Operating Temperature Range		-40 to +85	°C
T_{STG}	Storage Temperature Range		-65 to +150	°C

Note1. Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

Note2. The value of V_{CCA} and V_{CCB} are provided in the recommended operating conditions table.

Recommended Operating Conditions (Note 1, 2)

Symbol	Parameter		V_{CCA}	V_{CCB}	Min	Max	Unit
V_{CCA}	Supply Voltage				1.65	3.6	V
V_{CCB}					2.3	5.5	V
V_{IH}	High Level Input Voltage	A- Port	1.65V to 1.95V	2.3V to 5.5V	V_{CCI} -0.2	V_{CCI}	
			2.3V to3.6V		V_{CCI} -0.4	V_{CCI}	
		B- Port	1.65V to 3.6V	2.3V to 5.5V	V_{CCI} -0.4	V_{CCI}	V
		OE			V_{CCA}×0.65	5.5	V
V_{IL}	Low Level Input Voltage	A- Port	1.65V to 3.6V	2.3V to 5.5V	0	0.15	
		B- Port			0	0.15	V
		OE			0	V_{CCA}×0.35	V
Δt/Δv	Input Transition Rise or Fall Time	A-Port push-pull driving	1.65V to 3.6V	2.3V to 5.5V		10	
		B-Port push-pull driving				10	ns/V
		Control input				10	

Note1. V_{CCI} is the supply voltage associated with the input port.
Note2. V_{CCA} must be less than or equal to V_{CCB} and must not exceed 3.6 V.

Electrical Characteristics (Note 1, 2, 3)

Over recommended operating free-air temperature range (unless otherwise noted)

Parameter		Test Conditions	V_{CCA}	V_{CCB}	T_A=25℃		-40℃ to 85℃		Unit
					Typ	Max	Min	Max	
V_{OHA}		I_{OH}=-20μA	1.65V to 3.6V	2.3V to 5.5V			V_{CCA}×0.8		V
V_{OLA}		I_{OL}=1mA	1.65V to 3.6V	2.3V to 5.5V				0.4	V
V_{OHB}		IOH=-20μA	1.65V to 3.6V	2.3V to 5.5V			V_{CCB}×0.8		V
V_{OLB}		I_{OL}=1mA	1.65V to 3.6V	2.3V to 5.5V				0.4	V
I_I	OE	V_I=V_{CCI} or GND	1.65V to 3.6V	2.3V to 5.5V		±1		±2	μA
I_{OZ}	A or B Port	OE=V_{IL}	1.65V to 3.6V	2.3V to 5.5V		±1		±2	μA
I_{CCA}		V_I=V_O=open, I_O=0	1.65V to V_{CCB}	2.3V to 5.5V				2.4	μA
			3.6V	0V				2.2	
			0V	5.5V				-1	
I_{CCB}		V_I=V_O=open, I_O=0	1.65V to V_{CCB}	2.3V to 5.5V				12	μA
			3.6V	0V				-1	
			0V	5.5V				1	
I_{CCA} +I_{CCB}		V_I=V_O=open, I_O=0	1.65V to 3.6V	2.3V to 5.5V				14.4	μA
C_i	OE		3.3V	3.3V	2.5			3.5	pF
C_{iO}	A Port		3.3V	3.3V	5			6.5	pF
	B Port				12			16.5	

Note1. V_{CCI} is the supply voltage associated with the input port.
Note2. V_{CCO} is the supply voltage associated with the output port.
Note3. V_{CCA} must be less than or equal to V_{CCB} and must not exceed 3.6 V.

Timing Requirements

Over recommended operating free-air temperature range, V_{CCA}= 1.8V±0.15V (unless otherwise noted)

			V_{CCB}=2.5V ±0.2V		V_{CCB}=3.3V ±0.3V		V_{CCB}=5V ±0.5V		Unit
			Min	Max	Min	Max	Min	Max	
Data Rate	Push-pull driving			24		24		24	Mbps
	Open-drain driving			2		2		2	
t_w Pulse duration	Push-pull driving	Data inputs	41		41		41		ns
	Open-drain driving		500		500		500		

Timing Requirements

Over recommended operating free-air temperature range, V_{CCA}= 2.5V±0.2V (unless otherwise noted)

			V_{CCB}=2.5V ±0.2V		V_{CCB}=3.3V ±0.3V		V_{CCB}=5V ±0.5V		Unit
			Min	Max	Min	Max	Min	Max	
Data Rate	Push-pull driving			24		24		24	Mbps
	Open-drain driving			2		2		2	
t_w Pulse duration	Push-pull driving	Data inputs	41		41		41		ns
	Open-drain driving		500		500		500		

Timing Requirements

Over recommended operating free-air temperature range, V_{CCA}= 3.3V±0.3V (unless otherwise noted)

			V_{CCB}=3.3V ±0.3V		V_{CCB}=5V ±0.5V		Unit
			Min	Max	Min	Max	
Data Rate	Push-pull driving			24		24	Mbps
	Open-drain driving			2		2	
t_w Pulse duration	Push-pull driving	Data inputs	41		41		ns
	Open-drain driving		500		500		

Switching Characteristics

Over recommended operating free-air temperature range, V_{CCA}= 1.8V±0.15V (unless otherwise noted)

Parameter	From (Input)	To (Output)	Test Conditions	V_{CCB}=2.5V ±0.2V		V_{CCB}=3.3V ±0.3V		V_{CCB}=5V ±0.5V		Unit
				Min	Max	Min	Max	Min	Max	
t_{PHL}	A	B	Push-pull		4.6		4.7		5.8	ns
			Open-drain	2.9	8.8	2.9	9.6	3	10	
t_{PLH}			Push-pull		6.8		6.8		7	
			Open-drain	45	260	36	208	27	198	
t_{PHL}	B	A	Push-pull		4.4		4.5		4.7	ns
			Open-drain	1.9	5.3	1.1	4.4	1.2	4	
t_{PLH}			Push-pull		5.3		4.5		0.5	
			Open-drain	45	175	36	140	27	102	
t_{en}	OE	A			200		200		200	ns
		B			200		200		200	
t_{dis}	OE	A			50		40		35	ns
		B			50		40		35	
t_{rA}	A port rise time		Push-pull	3.2	9.5	2.3	9.3	2	7.6	ns
			Open-drain	38	165	30	132	22	95	
t_{rB}	B port rise time		Push-pull	4	10.8	2.7	9.1	2.7	7.6	ns
			Open-drain	34	145	23	106	10	58	
t_{fA}	A port fall time		Push-pull	2	5.9	1.9	6	1.7	13.3	ns
			Open-drain	4.4	6.9	4.3	6.4	4.2	6.1	
t_{fB}	B port fall time		Push-pull	2.9	7.6	2.8	7.5	2.8	8.8	ns
			Open-drain	6.9	13.8	7.5	16.2	7	16.2	
$t_{SK(O)}$	Channel-to-channel				1		1		1	ns
Max data rate			Push-pull		24		24		24	
			Open-drain		2		2		2	Mbps

Switching Characteristics

Over recommended operating free-air temperature range, V_{CCA}= 2.5V±0.2V (unless otherwise noted)

Parameter	From (Input)	To (Output)	Test Conditions	V_{CCB}=2.5V ±0.2V		V_{CCB}=3.3V ±0.3V		V_{CCB}=5V ±0.5V		Unit
				Min	Max	Min	Max	Min	Max	
t_{PHL}	A	B	Push-pull		3.2		3.3		3.4	ns
			Open-drain	1.7	6.3	2	6	2.1	5.8	
t_{PLH}			Push-pull		3.5		4.1		4.4	
			Open-drain	43	250	36	206	27	190	
t_{PHL}	B	A	Push-pull		3		3.6		4.3	ns
			Open-drain	1.8	4.7	2.6	4.2	1.2	4	
t_{PLH}			Push-pull		2.5		1.6		0.7	
			Open-drain	44	170	37	140	27	103	
t_{en}	OE	A			200		200		200	ns
		B			200		200		200	
t_{dis}	OE	A			50		40		35	ns
		B			50		40		35	
t_{rA}	A port rise time		Push-pull	2.8	7.4	2.6	6.6	1.8	5.6	ns
			Open-drain	34	149	28	121	24	89	
t_{rB}	B port rise time		Push-pull	3.2	8.3	2.9	7.2	2.4	6.1	ns
			Open-drain	35	151	24	112	12	64	
t_{fA}	A port fall time		Push-pull	1.9	5.7	1.9	5.5	1.8	5.3	ns
			Open-drain	4.4	6.9	4.3	6.2	4.2	5.8	
t_{fB}	B port fall time		Push-pull	2.2	7.8	2.4	6.7	2.6	6.6	ns
			Open-drain	5.1	8.8	5.4	9.4	5.4	10.4	
$t_{SK(O)}$	Channel-to-channel				1		1		1	ns
Max data rate			Push-pull	24		24		24		
			Open-drain	2		2		2		Mbps

Switching Characteristics

Over recommended operating free-air temperature range, V_{CCA}= 3.3V±0.3V (unless otherwise noted)

Parameter	From (Input)	To (Output)	Test Conditions	V_{CCB}=3.3V ±0.3V		V_{CCB}=5V ±0.5V		Unit
				Min	Max	Min	Max	
t_{PHL}	A	B	Push-pull		2.4		3.1	ns
			Open-drain	1.2	4.2	1.4	4.6	
t_{PLH}			Push-pull		4.2		4.4	
			Open-drain	36	204	28	165	
t_{PHL}	B	A	Push-pull		2.5		3.3	ns
			Open-drain	1	124	1	97	
t_{PLH}			Push-pull		2.5		2.6	
			Open-drain	3	139	3	105	
t_{en}	OE	A			200		200	ns
		B			200		200	
t_{dis}	OE	A			40		35	ns
		B			40		35	
t_{rA}	A port rise time		Push-pull	2.3	5.6	1.9	4.8	ns
			Open-drain	25	116	19	85	
t_{rB}	B port rise time		Push-pull	2.5	6.4	2.1	7.4	ns
			Open-drain	26	116	14	72	
t_{fA}	A port fall time		Push-pull	2	5.4	1.9	5	ns
			Open-drain	4.3	6.1	4.2	5.7	
t_{fB}	B port fall time		Push-pull	2.3	7.4	2.4	7.6	ns
			Open-drain	5	7.6	4.8	8.3	
$t_{SK(O)}$	Channel-to-channel				1		1	ns
Max data rate			Push-pull	24		24		
			Open-drain	2		2		Mbps

.

Applications Information

The UM3202Q/3202A/3202H can be used in level-translation applications for interfacing devices or systems operating at different interface voltages with one another. The UM3202Q/3202A/3202H is ideal for use in application where an open-drain driver is connected to the data I/Os. The UM3202Q/3202A/3202H can also be used in applications where a push-pull driver is connected to the data I/Os, but the UM3302 might be a better option for such push-pull applications.

Block Diagram

The UM3202Q/3202A/3202H (block diagram see Figure 1) does not require a direction-control signal to control the direction of data flow from A to B or from B to A. Each A-port I/O has an internal 10-kΩ pullup resistor to V_{CCA}, and each B-port I/O has an internal 10-kΩ pullup resistor to V_{CCB}. During a rising edge, the one-shot turns on the PMOS transistors (PU1, PU2) for a short duration, which speeds up the low-to-high transition.

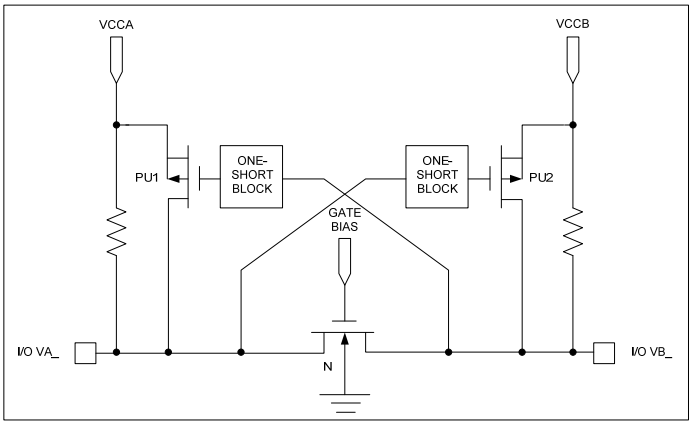

Figure 1 Block Diagram of UM3202Q/3202A/3202H I/O Cell

Input Driver Requirements

The fall time (t_{fA}, t_{fB}) of a signal depends on the output impedance of the external device driving the data I/Os of the UM3202Q/3202A/3202H. Similarly, the t_{PHL} and the maximum date rates also depend on the output impedance of the external driver. The values for t_{fA}, t_{fB}, t_{PHL}, and the maximum date rates in the data sheet assume that the output impedance of the external driver is less than 50Ω.

Power Up

During operation, ensure that $V_{CCA} \leqslant V_{CCB}$ at all times. During power-up sequencing, $V_{CCA} \geqslant V_{CCB}$ does not damage the device, so any power supply can be ramped up first.

Enable and Disable

The UM3202Q/3202A/3202H has an OE input that is used to disable the device by setting OE = low, which places all I/Os in the high-impedance (Hi-Z) state. The disable time (tdis) indicates the delay between the time when OE goes low and when the outputs actually get disabled (Hi-Z). The enable time (ten) indicates the amount of time the user must allow for the one-shot circuitry to become operational after OE is taken high.

Pullup or Pulldown Resistors on I/O Lines

Each A-port I/O has an internal 10-kΩ pullup resistor to V_{CCA}, and each B-port I/O has an internal 10-kΩ pullup resistor to V_{CCB}. If a smaller value of pullup resistor is required, an external resistor must be added from the I/O to V_{CCA} or V_{CCB} (in parallel with the internal 10-kΩ resistor).

Test Circuits

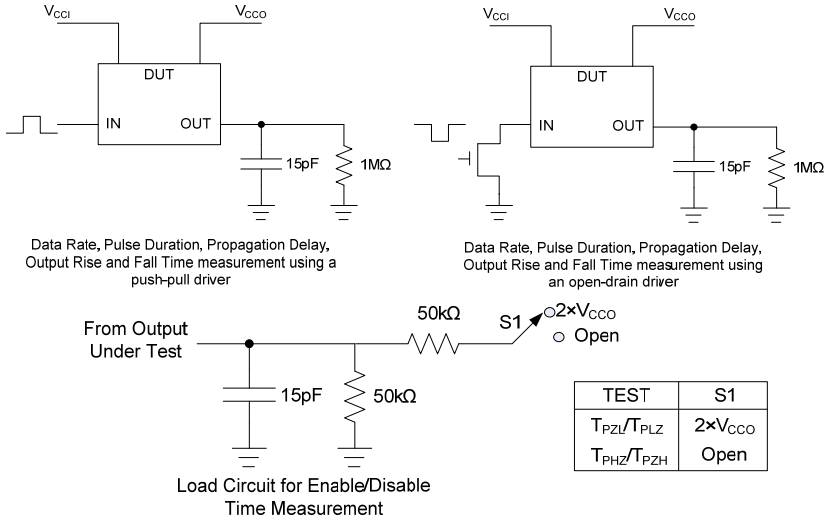

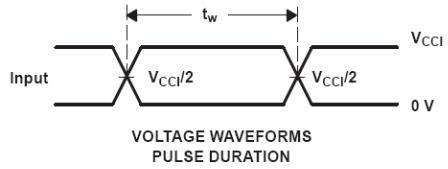

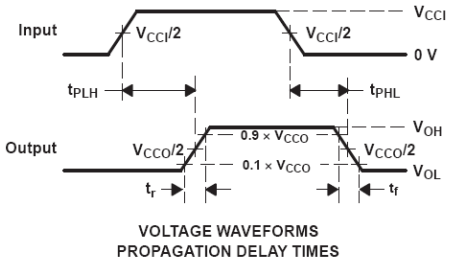

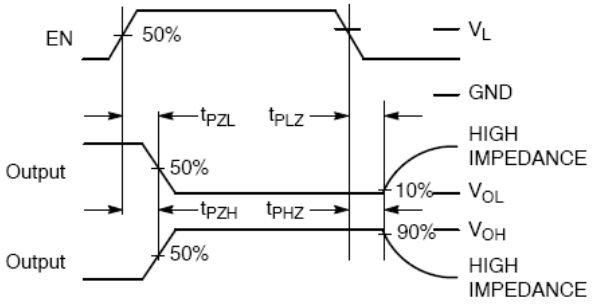

A. C_L includes probe and jig capacitances.
B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control.
Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
C. All input pulses are supplied by generators having the following characteristics: PRR≤100MHz, Z_O=50Ω, dv/dt≥1V/ns.
D. The outputs are measured one at a time, with one transition per measurement.
E. T_{PLZ} and T_{PHZ} are the same as tdis.
F. T_{PZL} and T_{PZH} are the same as ten.
G. T_{PLH} and T_{PHL} are the same as tpd.
H. V_{CCI} is the V_{CC} associated with the input port.
I. V_{CCO} is the V_{CC} associated with the output port.
J. All parameters and waveforms are not applicable to all devices.

Figure 2 Load Circuits and Voltage Waveforms

Package Information

UM3202Q: DFN8 1.70×1.35

Outline Drawing

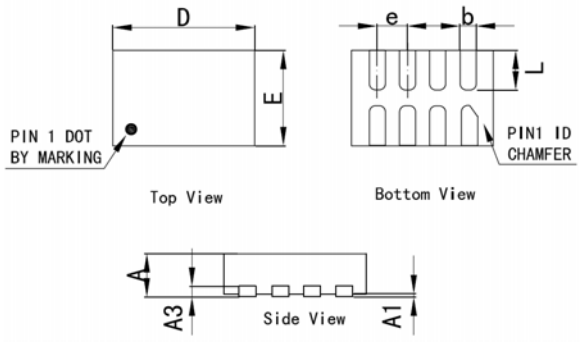

DIMENSIONS			
Symbol	Millimeters		
	Min	Typ	Max
A	0.50	0.55	0.60
A1	0.00	-	0.05
A3		0.15REF	
D	1.65	1.70	1.75
E	1.30	1.35	1.40
e		0.40BSC	
b	0.15	0.20	0.25
L	0.45	0.50	0.55

Land Pattern

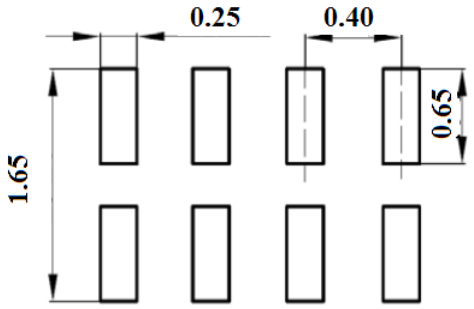

NOTES:
1. Compound dimension: 1.70×1.35;
2. Unit: mm;
3. General tolerance ±0.05mm unless otherwise specified;
4. The layout is just for reference.

Tape and Reel Orientation

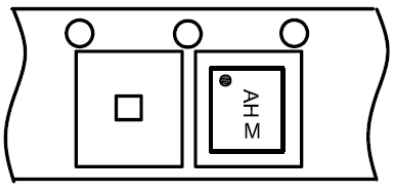

Package Information

UM3202A QFN10 1.80x1.40

Outline Drawing

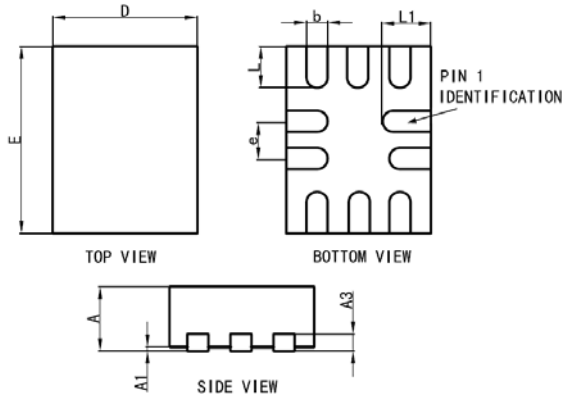

DIMENSIONS			
Symbol	MILLIMETERS		
	MIN	TYP	MAX
A	0.50	0.55	0.60
A1	0.00	-	0.05
A3		0.15REF	
D	1.35	1.40	1.45
E	1.75	1.80	1.85
b	0.15	0.20	0.25
L	0.30	0.40	0.50
L1	0.40	0.50	0.60
e		0.40BSC	

Land Pattern

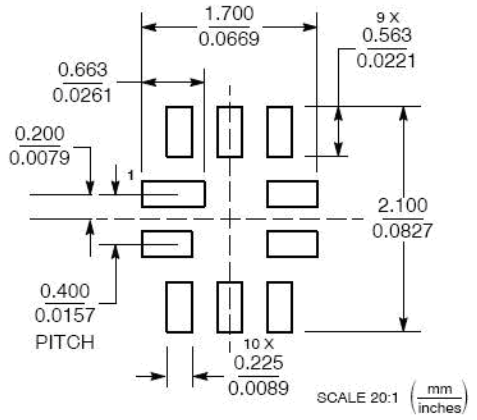

NOTES:
1. Compound dimension: 1.40×1.80;
2. Unit: mm
3. General tolerance ±0.05mm unless otherwise specified;
4. The layout is just for reference.

Tape and Reel Orientation

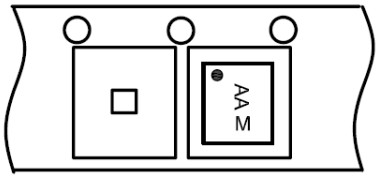

Package Information

UM3202H: CSP8 1.90x0.90

Outline Drawing

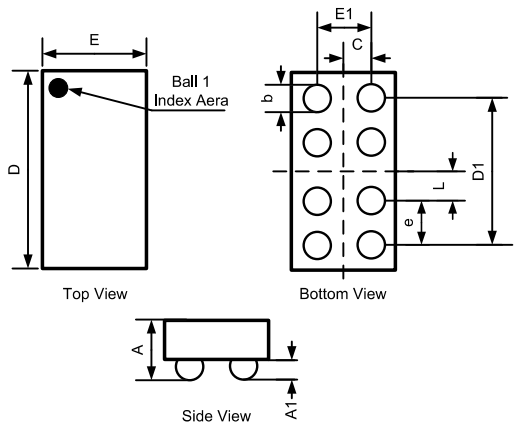

DIMENSIONS				
Symbol	Millimeters		Inch	
	Min	Max	Min	Max
A		0.65		0.026
A1	0.21	0.24	0.008	0.010
D	1.85	1.95	0.074	0.078
E	0.85	0.95	0.034	0.038
D1	1.50BSC		0.06BSC	
E1	0.50BSC		0.020BSC	
e	0.50BSC		0.02BSC	
b	0.27	0.32	0.011	0.013
C	0.25BSC		0.01BSC	
L	0.25BSC		0.01BSC	

Land Pattern

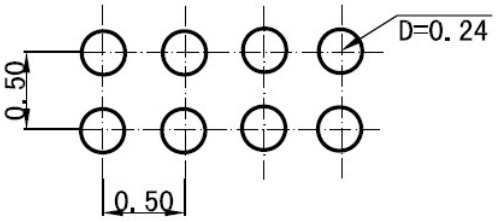

NOTES:
1. Bump is Lead Free Sn/Ag/Cu.
2. Unit: mm;
3. Non-solder mask defined copper landing pad.
4. Laser Mark on silicon die back; back-lapped.

Tape and Reel Orientation

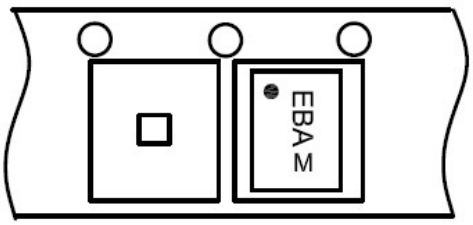

IMPORTANT NOTICE

The information in this document has been carefully reviewed and is believed to be accurate. Nonetheless, this document is subject to change without notice. Union assumes no responsibility for any inaccuracies that may be contained in this document, and makes no commitment to update or to keep current the contained information, or to notify a person or organization of any update. Union reserves the right to make changes, at any time, in order to improve reliability, function or design and to attempt to supply the best product possible.

Union Semiconductor, Inc

Add: 2F, No. 3, Lane 647 Songtao Road, Shanghai 201203

Tel: 021-51093966

Fax: 021-51026018

Website: www.union-ic.com