

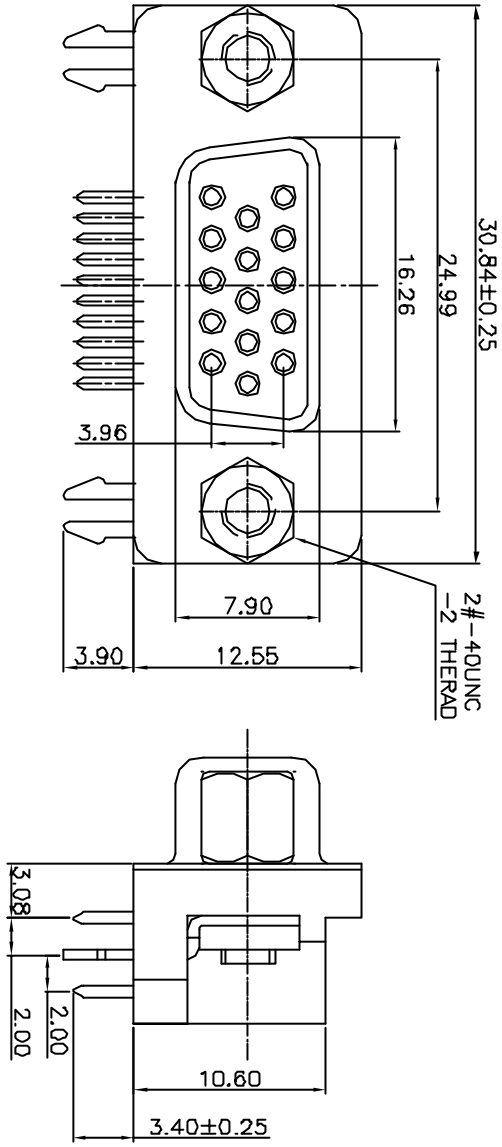


REV	ECN NO.	B Y	DATE
1	NEW-DWG	Jans	06/29/05

NOTE
MECHANICAL
INSERTION FORCE: 340 GRAMS MAX PER CONTACT PAIR.
WITHDRAWAL FORCE: 21 GRAMS MIN PER CONTACT PAIR
CURRENT RATING: 3A;
CONTACT RESISTANCE: 25m MAX.
INSULATION RESISTANCE:1000M MIN,AT DC 500V.
DIELECTRIC WITHSTANDING VOLTAGE:AC 1000/60sec.R.M.S.
PART NO. DESCRIPTION:10415F01B-G44

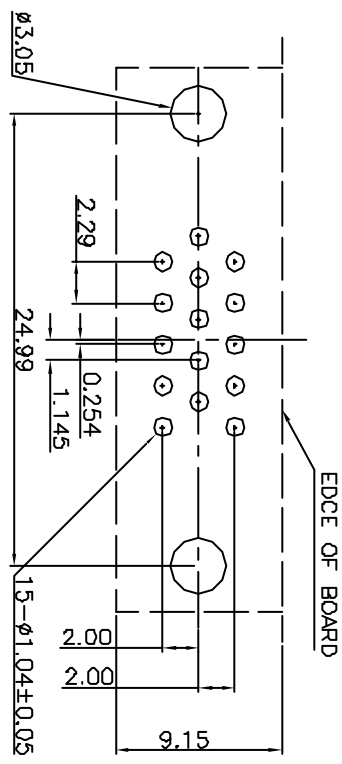

Color: B:Blue U:White
Y:Yellow K:Black
J:Green R:Red
1.CLOCK NUT TYPE
2.NOT CLOCK NUT TYPE

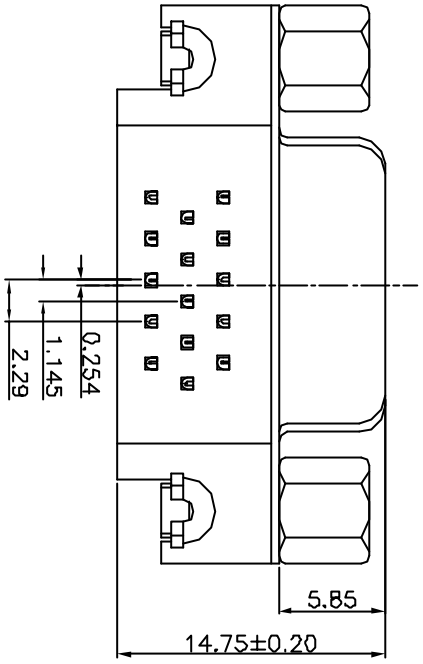

RECOMMENDED P.C.B. LAYOUT

-TOLERANCES- UNLESS OTHERWISE SPECIFIED			TITLE: HOR 15P/F(3.08) 鉗鎖式成品		
XX ±0.30	XX' ±5°	APRD:	PRODUCT NO:	10415F01B-G44	
XX ±0.15	XX' ±1°	CHECK:	DATE	SCALE	UNIT TYPE PAGE
XXX ±0.10	XXX' ±0.5°	DRAW:	06/29/05	IRER	MM Z 1