ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

life.augmented

LSM6DS3

iNEMO inertial module: always-on 3D accelerometer and 3D gyroscope

Datasheet - preliminary data



LGA-14L (2.5 x 3 x 0.86 mm)

Features

- Power consumption: 0.9 mA in combo normal mode and 1.25 mA in combo high-performance mode up to 1.6 kHz.
- "Always on" experience with low power consumption for both accelerometer and gyroscope
- Smart FIFO up to 8 kbyte based on features set
- Compliant with Android K and L
- Hard, soft ironing for external magnetic sensor corrections
- ±2/±4/±8/±16 *g* full scale
- ±125/±245/±500/±1000/±2000 dps full scale
- Analog supply voltage: 1.71 V to 3.6 V
- Independent IOs supply (1.62 V)
- Compact footprint, 2.5 mm x 3 mm x 0.8 mm
- SPI/I^2C serial interface with main processor data synchronization feature
- Embedded temperature sensor
- ECOPACK®, RoHS and "Green" compliant

Applications

- Pedometer, step detector and step counter
- Significant motion and tilt functions
- Indoor navigation
- Tap and double-tap detection
- IoT and connected devices
- Intelligent power saving for handheld devices
- Vibration monitoring and compensation
- Free-fall detection
- 6D orientation detection

Description

The LSM6DS3 is a system-in-package featuring a 3D digital accelerometer and a 3D digital gyroscope performing at 1.25 mA (up to 1.6 kHz ODR) in high-performance mode and enabling always-on low-power features for an optimal motion experience for the consumer.

The LSM6DS3 supports main OS requirements, offering real, virtual and batch sensors with 8 kbyte for dynamic data batching. Memory space can be allocated to batching of sensors or additional run-time calibration.

ST's family of MEMS sensor modules leverages the robust and mature manufacturing processes already used for the production of micromachined accelerometers and gyroscopes.

The various sensing elements are manufactured using specialized micromachining processes, while the IC interfaces are developed using CMOS technology that allows the design of a dedicated circuit which is trimmed to better match the characteristics of the sensing element.

The LSM6DS3 has a full-scale acceleration range of ±2/±4/±8/±16 *g* and an angular rate range of ±125/±245/±500/±1000/±2000 dps.

High robustness to mechanical shock makes the LSM6DS3 the preferred choice of system designers for the creation and manufacturing of reliable products.

The LSM6DS3 is available in a plastic land grid array (LGA) package.

Table 1. Device summary

Part number	Temperature range [°C]	Package	Packing
LSM6DS3	-40 to +85	LGA-14L (2.5 x 3 x 0.86 mm)	Tray
LSM6DS3TR	-40 to +85		Tape & Reel

ST confidential DRAFT

This is preliminary information on a new product now in development or undergoing evaluation. Details are subject to change without notice.

www.st.com

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

Contents

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

ST confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

ST confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

List of tables

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

ST confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

ST confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

st confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

List of figures

ST Confidential
DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

1 Overview

The LSM6DS3 is a system-in-package featuring a high-performance 3-axis digital accelerometer and 3-axis digital gyroscope.

The integrated power-efficient modes are able to reduce the power consumption down to 1.25 mA in high-performance mode, combining always-on low power features with superior sensing precision for an optimal motion experience for the consumer thanks to ultra-low noise performance for both the gyroscope and accelerometer.

The LSM6DS3 delivers best-in-class motion sensing that can detect orientation and gestures in order to empower application developers and consumers with features and capabilities that are more sophisticated than simply orienting their devices to portrait and landscape mode.

The event-detection interrupts enable efficient and reliable motion tracking and contextual awareness implementing hardware recognition of free-fall events, 6D orientation, tap and double-tap sensing, activity or inactivity, and wakeup events.

The LSM6DS3 supports main OS requirements, offering real, virtual and batch mode sensors. In addition, the LSM6DS3 can efficiently run the sensors-related features specified in Android, saving power and enabling faster reaction time. In particular, the LSM6DS3 has been designed to implement hardware features such as significant motion, tilt, pedometer functions, time stamping and to support the data acquisition of an external magnetometer with ironing correction (hard, soft).

The LSM6DS3 offers hardware flexibility to connect the pins with different mode connections to external sensors to expand functionalities such as adding a sensor hub, auxiliary SPI, etc.

Up to 8 kbyte of FIFO with dynamic allocation of significant data (i.e. external sensors, time stamp, etc.) allows overall power saving of the system.

Like the entire portfolio of MEMS sensor modules, the LSM6DS3 leverages ~~on~~ the robust and mature in-house manufacturing processes already used for the production of micromachined accelerometers and gyroscopes. The various sensing elements are manufactured using specialized micromachining processes, while the IC interfaces are developed using CMOS technology that allows the design of a dedicated circuit which is trimmed to better match the characteristics of the sensing element.

The LSM6DS3 is available in a small plastic land grid array (LGA) package of 2.5 x 3.0 x 0.86 mm to address ultra-compact solutions.

ST confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

2 Embedded low-power features

The LSM6DS3 has been designed to be fully compliant with Android, featuring the following on-chip functions:

- 8 kbyte data buffering
  - 100% efficiency with flexible configurations and partitioning
  - possibility to store time stamp
- Event-detection interrupts (fully configurable):
  - free-fall
  - wakeup
  - 6D orientation
  - tap and double-tap sensing
  - activity / inactivity recognition
- Specific IP blocks with negligible power consumption and high-performance:
  - pedometer functions: step detector and step counters
  - tilt (Android compliant, refer to *Section 2.1: Tilt detection* for additional info
  - significant motion (Android compliant)
- Sensor hub
  - up to 6 total sensors (2 external sensors in FIFO and 2 external sensors in volatile registers)
- Data rate synchronization with external trigger for reduced sensor access and enhanced fusion

2.1 Tilt detection

The tilt function helps detecting activity change and has been implemented in hardware using only the accelerometer to achieve both the targets of ultra-low power consumption and robustness during short duration of dynamic accelerations.

It is based on a trigger of an event each time the device's tilt changes. For a more customized user experience, in the LSM6DS3 the tilt function is configurable through:

- programmable average window
- programmable angle threshold

Tilt function can be used with different scenarios, for example:

a) Trigger when phone is in a front pants pocket and someone goes from sitting to standing or standing to sitting;

b) Doesn't trigger when phone is in a front pants pocket and someone is walking, running or going upstairs.

ST confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

3 Pin description

Figure 1. Pin connections

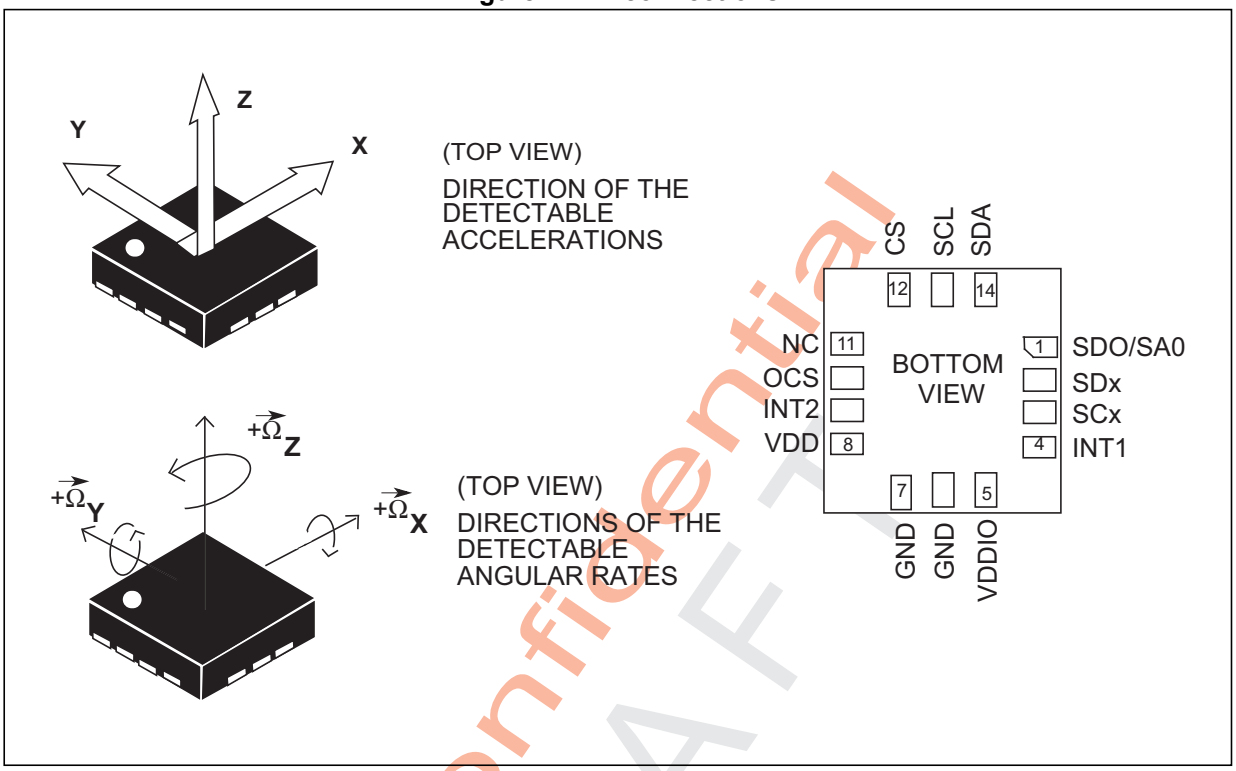

LSM6DS3 offers the flexibility to connect the pins in order to have three different mode connections and functionalities. In detail:

- **Mode 1**: I^2C slave interface or SPI (3- and 4-wire) serial interface is available;
- **Mode 2**: I^2C slave interface or SPI (3- and 4-wire) serial interface and I^2C interface master for external sensors connections are available;
- **Mode 3**: I^2C slave interface and auxiliary SPI (3-wire) serial interface for external sensor connection (i.e. EIS application) are available.

In the following table each mode is described for the pin connection and function.

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

Table 2. Pin description

Pin#	Name	Mode 1 function	Mode 2 function	Mode 3 function
1	SDO/SA0	SPI 4-wire interface serial data output (SDO) I^2C least significant bit of the device address (SA0)	SPI 4-wire interface serial data output (SDO) I^2C least significant bit of the device address (SA0)	I^2C least significant bit of the device address (SA0)
2	SDx	Connect to VDDIO or GND	I^2C serial data master (MSDA)	Auxiliary SPI 3-wire interface serial data input (SDI) and serial data output (SDO)
3	SCx	Connect to VDDIO or GND	I^2C serial clock master (MSCL)	Auxiliary SPI 3-wire interface serial port clock (SPC)
4	INT1	Programmable interrupt 1		
5	VDDIO(1)	Power supply for I/O pins		
6	GND	0 V supply		
7	GND	0 V supply		
8	VDD(2)	Power supply		
9	INT2	Programmable interrupt 2 (INT2)/ Data enable (DEN)	Programmable interrupt 2 (INT2)/ Data enable (DEN)/ I^2C master external synchronization signal (MDRDY)	Programmable interrupt 2 (INT2)/ Data enable (DEN)
10	OCS	Leave unconnected	Leave unconnected	Auxiliary SPI 3-wire interface enable
11	NC	Leave unconnected		
12	CS	I^2C/SPI mode selection (1: SPI idle mode / I^2C communication enabled; 0: SPI communication mode / I^2C disabled)	I^2C/SPI mode selection (1: SPI idle mode / I^2C communication enabled; 0: SPI communication mode / I^2C disabled)	Leave unconnected
13	SCL	I^2C serial clock (SCL) SPI serial port clock (SPC)	I^2C serial clock (SCL) SPI serial port clock (SPC)	I^2C serial clock (SCL)
14	SDA	I^2C serial data (SDA) SPI serial data input (SDI) 3-wire interface serial data output (SDO)	I^2C serial data (SDA) SPI serial data input (SDI) 3-wire interface serial data output (SDO)	I^2C serial data (SDA)

1. Recommended 100 nF filter capacitor.
2. Recommended 100 nF capacitor.

ST confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

4 Module specifications

4.1 Mechanical characteristics

@ Vdd = 1.8 V, T = 25 °C unless otherwise noted.

Table 3. Mechanical characteristics

Symbol	Parameter	Test conditions	min	Typ.(1)	max	Unit
LA_FS	Linear acceleration measurement range			±2		*g*
				±4		
				±8		
				±16		
G_FS	Angular rate measurement range			±125		dps
				±245		
				±500		
				±1000		
				±2000		
LA_So	Linear acceleration sensitivity	FS = ±2		0.061		mg/LSB
		FS = ±4		0.122		
		FS = ±8		0.244		
		FS = ±16		0.488		
G_So	Angular rate sensitivity	FS = ±125		4.375		mdps/LSB
		FS = ±245		8.75		
		FS = ±500		17.50		
		FS = ±1000		35		
		FS = ±2000		70		
LA_SoDr	Linear acceleration sensitivity change vs. temperature	from -40° to +85° delta from T=25°		±1		%
G_SoDr	Angular rate sensitivity change vs. temperature	from -40° to +85° delta from T=25°		±1.5		%
LA_TyOff	Linear acceleration typical zero-*g* level offset accuracy(2)			±40		mg
G_TyOff	Angular rate typical zero-rate level(3)			±10		dps
LA_OffDr	Linear acceleration zero-*g* level change vs. temperature			±0.5		mg/ °C
G_OffDr	Angular rate typical zero-rate level change vs. temperature			±0.05		dps/°C
Rn	Rate noise density			7		mdps/√Hz
An	Acceleration noise density	FS= ±2 *g* ODR = 100 Hz		90		µg/√Hz

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

Table 3. Mechanical characteristics (continued)

Symbol	Parameter	Test conditions	min	Typ.(1)	max	Unit
LA_ODR	Linear acceleration output data rate			13 26 52 104 208 416 833 1666 3332 6664		Hz
G_ODR	Angular rate output data rate			13 26 52 104 208 416 833 1666		
Top	Operating temperature range		-40		+85	°C
Trise	Time for power supply rising(4)		0.01		100	ms
Twait	Time delay between Vdd_IO and Vdd(4)		0		1	s

1. Typical specifications are not guaranteed.
2. Values after soldering.
3. Values after soldering.
4. Please refer to *Section 4.1.1: Recommended power-up sequence* for more details.

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

4.1.1 Recommended power-up sequence

For the power-up sequence please refer to the following figure, where:

- Trise is the time for the power supply to rise from 10% to 90% of its final value
- Twait is the time delay between the end of the Vdd_IO ramp (90% of its final value) and the start of the Vdd ramp

Figure 2. Recommended power-up sequence

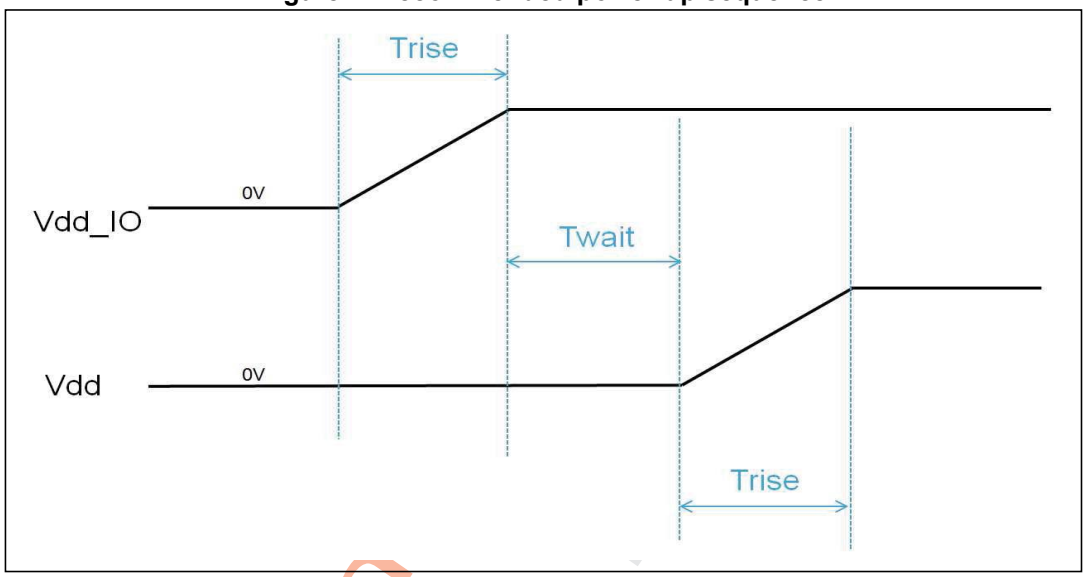

ST con
DRA

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

4.2 Electrical characteristics

@ Vdd = 1.8 V, T = 25 °C unless otherwise noted.

Table 4. Electrical characteristics

Symbol	Parameter	Test conditions	Min.	Typ.(1)	Max.	Unit
Vdd	Supply voltage		1.71	1.8	3.6	V
Vdd_IO	Power supply for I/O		1.62		3.6	V
IddHP	Gyroscope and accelerometer in high-performance mode	up to ODR = 1.6 kHz		1.25		mA
IddNM	Gyroscope and accelerometer in normal mode	ODR = 208 Hz		0.9		mA
IddLP	Gyroscope and accelerometer in low-power mode	ODR = 13 Hz		0.6		mA
LA_IddHP	Accelerometer current consumption in high-performance mode	up to ODR = 1.6 kHz		240		µA
LA_IddNM	Accelerometer current consumption in normal mode	ODR = 104 Hz		70		µA
LA_IddLM	Accelerometer current consumption in low-power mode	ODR < 52 Hz		24		µA
IddPD	Gyroscope and accelerometer in power down			6		µA
Top	Operating temperature range		-40		+85	°C

1. Typical specifications are not guaranteed.

For details related to the LSM6DS3 operating modes, refer to *5.2: Gyroscope power modes* and *5.3: Accelerometer power modes*.

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

4.3 Communication interface characteristics

4.3.1 SPI - serial peripheral interface

Subject to general operating conditions for Vdd and Top.

Table 5. SPI slave timing values

Symbol	Parameter	Value(1)		Unit
		Min	Max	
$t_{c(SPC)}$	SPI clock cycle	100		ns
$f_{c(SPC)}$	SPI clock frequency		10	MHz
$t_{su(CS)}$	CS setup time	5		ns
$t_{h(CS)}$	CS hold time	20		
$t_{su(SI)}$	SDI input setup time	5		
$t_{h(SI)}$	SDI input hold time	15		
$t_{v(SO)}$	SDO valid output time		50	
$t_{h(SO)}$	SDO output hold time	5		
$t_{dis(SO)}$	SDO output disable time		50	

1. Values are guaranteed at 10 MHz clock frequency for SPI with both 4 and 3 wires, based on characterization results, not tested in production

Figure 3. SPI slave timing diagram

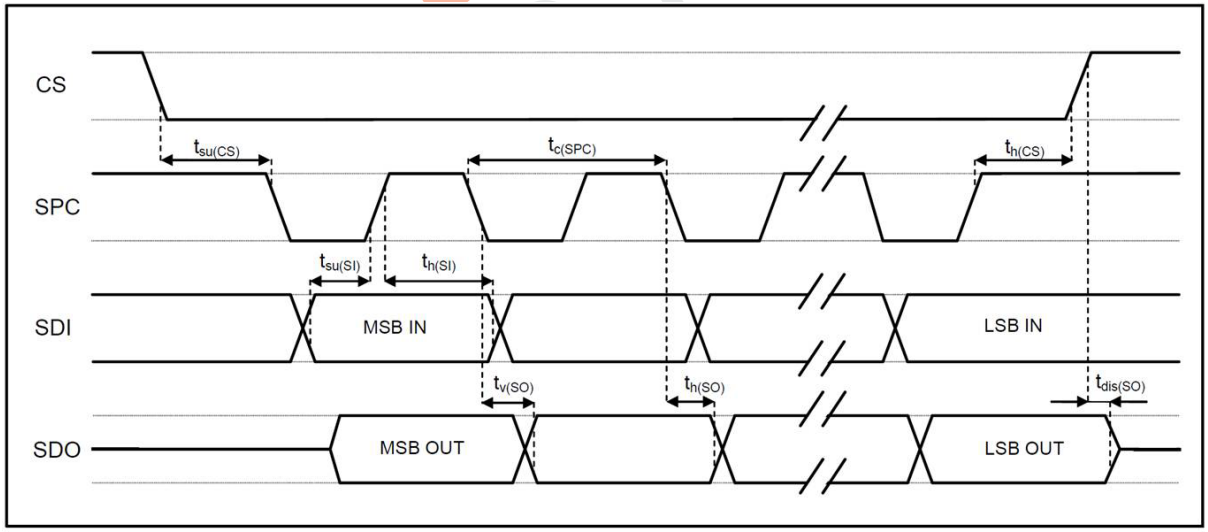

Note: Measurement points are done at 0.2·Vdd_IO and 0.8·Vdd_IO, for both input and output ports.

Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

4.3.2 I²C - inter-IC control interface

Subject to general operating conditions for Vdd and Top.

Table 6. I²C slave timing values

Symbol	Parameter	I²C Standard mode(1)		I²C Fast mode (1)		Unit
		Min	Max	Min	Max	
$f_{(SCL)}$	SCL clock frequency	0	100	0	400	kHz
$t_{w(SCLL)}$	SCL clock low time	4.7		1.3		µs
$t_{w(SCLH)}$	SCL clock high time	4.0		0.6		
$t_{su(SDA)}$	SDA setup time	250		100		ns
$t_{h(SDA)}$	SDA data hold time	0	3.45	0	0.9	µs
$t_{h(ST)}$	START condition hold time	4		0.6		µs
$t_{su(SR)}$	Repeated START condition setup time	4.7		0.6		
$t_{su(SP)}$	STOP condition setup time	4		0.6		
$t_{w(SP:SR)}$	Bus free time between STOP and START condition	4.7		1.3		

1. Data based on standard I²C protocol requirement, not tested in production.

Figure 4. I²C slave timing diagram

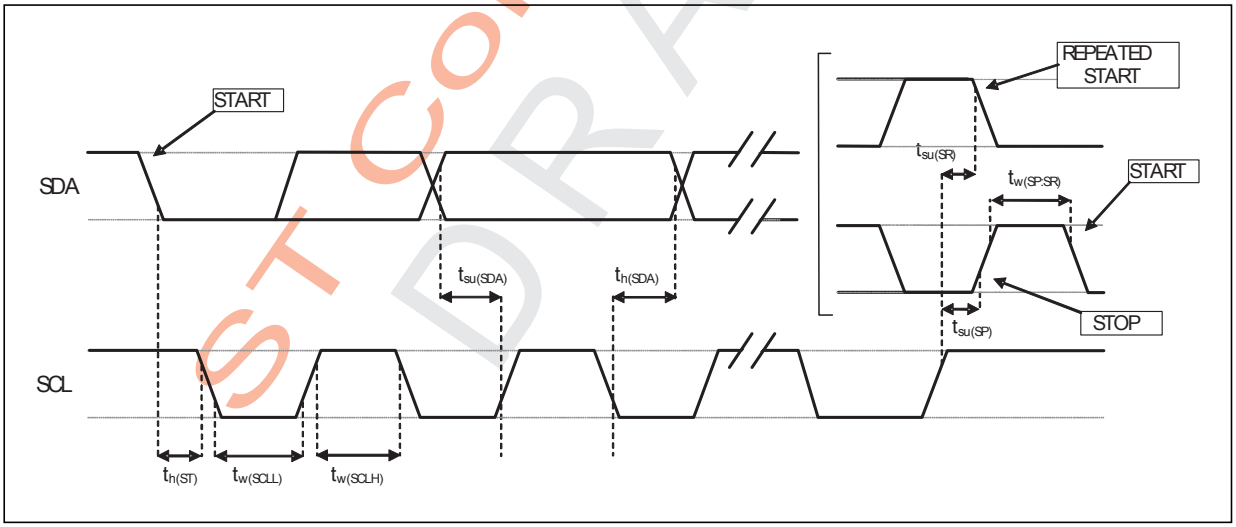

Note: Measurement points are done at 0.2·Vdd_IO and 0.8·Vdd_IO, for both ports.

ST confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

4.4 Absolute maximum ratings

Stresses above those listed as “Absolute maximum ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device under these conditions is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

Table 7. Absolute maximum ratings

Symbol	Ratings	Maximum value	Unit
Vdd	Supply voltage	-0.3 to 4.8	V
T_{STG}	Storage temperature range	-40 to +125	°C
Sg	Acceleration *g* for 0.1 ms	10,000	*g*
ESD	Electrostatic discharge protection (HBM)	2	kV
Vin	Input voltage on any control pin (including CS, SCL/SPC, SDA/SDI/SDO, SDO/SA0)	0.3 to Vdd_IO +0.3	V

Note: Supply Voltage on any pin should never exceed 4.8 V.

This device is sensitive to mechanical shock, improper handling can cause permanent damage to the part

This device is sensitive to electrostatic discharge (ESD), improper handling can cause permanent damage to the part

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

4.5 Terminology

4.5.1 Sensitivity

Linear acceleration sensitivity can be determined, for example, by applying 1 *g* acceleration to the device. Because the sensor can measure DC accelerations, this can be done easily by pointing the selected axis towards the ground, noting the output value, rotating the sensor 180 degrees (pointing towards the sky) and noting the output value again. By doing so, ±1 *g* acceleration is applied to the sensor. Subtracting the larger output value from the smaller one, and dividing the result by 2, leads to the actual sensitivity of the sensor. This value changes very little over temperature and over time. The sensitivity tolerance describes the range of sensitivities of a large number of sensors.

An angular rate gyroscope is device that produces a positive-going digital output for counterclockwise rotation around the axis considered. Sensitivity describes the gain of the sensor and can be determined by applying a defined angular velocity to it. This value changes very little over temperature and time.

4.5.2 Zero-*g* and zero-rate level

Linear acceleration zero-*g* level offset (TyOff) describes the deviation of an actual output signal from the ideal output signal if no acceleration is present. A sensor in a steady state on a horizontal surface will measure 0 *g* on both the X-axis and Y-axis, whereas the Z-axis will measure 1 *g*. Ideally, the output is in the middle of the dynamic range of the sensor (content of OUT registers 00h, data expressed as 2's complement number). A deviation from the ideal value in this case is called zero-*g* offset.

Offset is to some extent a result of stress to MEMS sensor and therefore the offset can slightly change after mounting the sensor onto a printed circuit board or exposing it to extensive mechanical stress. Offset changes little over temperature, see "Linear acceleration zero-*g* level change vs. temperature" in *Table 3*. The zero-*g* level tolerance (TyOff) describes the standard deviation of the range of zero-*g* levels of a group of sensors.

Zero-rate level describes the actual output signal if there is no angular rate present. The zero-rate level of precise MEMS sensors is, to some extent, a result of stress to the sensor and therefore the zero-rate level can slightly change after mounting the sensor onto a printed circuit board or after exposing it to extensive mechanical stress. This value changes very little over temperature and time.

ST confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

5 Functionality

5.1 Operating modes

The LSM6DS3 has three operating modes available:

- only accelerometer active and gyroscope in power-down
- only gyroscope active and accelerometer in power-down
- both accelerometer and gyroscope sensors active with independent ODR

The accelerometer is activated from power down by writing ODR_XL[3:0] in *CTRL1_XL (10h)* while the gyroscope is activated from power-down by writing ODR_G[3:0] in *CTRL2_G (11h)*. For combo mode the ODRs are totally independent.

5.2 Gyroscope power modes

In the LSM6DS3, the gyroscope can be configured in four different operating modes: power-down, low-power, normal mode and high-performance mode. The operating mode selected depends on the value of the G_HM_MODE bit in *CTRL7_G (16h)*. If G_HM_MODE is set to '0', high-performance mode is valid for all ODRs (from 13 Hz up to 1.6 kHz).

To enable the low-power and normal mode, the G_HM_MODE bit has to be set to '1'. Low-power mode is available for lower ODR (13, 26, 52 Hz) while normal mode is available for ODRs equal to 104 and 208 Hz.

5.3 Accelerometer power modes

In the LSM6DS3, the accelerometer can be configured in four different operating modes: power-down, low-power, normal mode and high-performance mode. The operating mode selected depends on the value of the XL_HM_MODE bit in *CTRL6_G (15h)*. If XL_HM_MODE is set to '0', high-performance mode is valid for all ODRs (from 13 Hz up to 6.66 kHz).

To enable the low-power and normal mode, the XL_HM_MODE bit has to be set to '1'. Low-power mode is available for lower ODRs (13, 26, 52 Hz) while normal mode is available for ODRs equal to 104 and 208 Hz.

5.4 FIFO

The presence of a FIFO allows consistent power saving for the system since the host processor does not need continuously poll data from the sensor, but it can wake up only when needed and burst the significant data out from the FIFO.

LSM6DS3 embeds 8 kbytes data FIFO to store data up to four sensors:

- accelerometer
- gyroscope
- first external sensor
- second external sensor

ST confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

If the FIFO is used to store accelerometer and/or gyroscope data, it is possible to specify an ODR set by the user (see *FIFO_CTRL5 (0Ah)*).

The ODR must be lower than both accelerometer and gyroscope ODRs.

Each sensor data can be stored at a decimated data rate compared to FIFO ODR and it is configurable by the user, setting the registers *FIFO_CTRL3 (08h)* and *FIFO_CTRL4 (09h)*. The available decimation factors are 2, 3, 4, 8, 16, 32.

Programmable FIFO threshold can be set in *FIFO_CTRL1 (06h)* and *FIFO_CTRL2 (07h)* using the FTH [11:0] bits.

To monitor the FIFO status, dedicated registers (*FIFO_STATUS1 (3Ah)*, *FIFO_STATUS2 (3Bh)*, *FIFO_STATUS3 (3Ch)*, *FIFO_STATUS4 (3Dh)*) can be read to detect FIFO overrun events, FIFO full status, FIFO empty status, FIFO threshold status and number of unread samples stores in the FIFO. To generate dedicated interrupts on the INT1 and INT2 pads of these status events, the configuration can be set in *INT1_CTRL (0Dh)* and *INT2_CTRL (0Eh)*.

FIFO buffer can be configured according to five different modes:

- Bypass mode
- FIFO mode
- Continuous mode
- Continuous-to-FIFO mode
- Bypass-to-continuous mode

Each mode is selected by the FIFO_MODE_[2:0] in *FIFO_CTRL5 (0Ah)* register. To guarantee the correct acquisition of data during the switching into and out of FIFO mode, the first sample acquired must be discarded.

5.4.1 Bypass mode

In Bypass mode (*FIFO_CTRL5 (0Ah)* (FIFO_MODE_[2:0] = 000), the FIFO is not operational and it remains empty.

Bypass mode is also used to reset the FIFO when in FIFO mode.

5.4.2 FIFO mode

In FIFO mode (*FIFO_CTRL5 (0Ah)* (FIFO_MODE_[2:0] = 001) data from the output channels are stored in the FIFO until it is overwritten.

To reset FIFO content, Bypass mode should be selected by writing *FIFO_CTRL5 (0Ah)* (FIFO_MODE_[2:0]) to '000' After this reset command, it is possible to restart FIFO mode by writing *FIFO_CTRL5 (0Ah)* (FIFO_MODE_[2:0]) to '001'.

FIFO buffer memorizes 4096 samples of 16 bits each but the depth of the FIFO can be resized by setting the FTH [11:0] bits in *FIFO_CTRL1 (06h)* and *FIFO_CTRL2 (07h)*. If the STOP_ON_FTH bit in *CTRL4_C (13h)* is set to '1', FIFO depth is limited to FTH [11:0] bits in *FIFO_CTRL1 (06h)* and *FIFO_CTRL2 (07h)* +1 sample.

A FIFO threshold interrupt can be enabled (INT1_OVR bit in *INT1_CTRL (0Dh)*) in order to be raised when the FIFO stops collecting data. When the FIFO overrun interrupt occurs, the first data has been overwritten and the FIFO stops collecting data from the input channels.

ST confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

5.4.3 Continuous mode

Continuous mode (*FIFO_CTRL5 (0Ah)* (FIFO_MODE_[2:0] = 110) provides a continuous FIFO update: as new data arrives, the older data is discarded.

A FIFO threshold flag *FIFO_STATUS2 (3Bh)*(FTH) is asserted when the number of unread samples in FIFO is greater than or equal to *FIFO_CTRL1 (06h)* and *FIFO_CTRL2 (07h)*(FTH [11:0]).

It is possible to route *FIFO_STATUS2 (3Bh)* (FTH) to the INT1 pin by writing in register *INT1_CTRL (0Dh)* (INT1_FTH) = ‘1’ or to the INT2 pin by writing in register *INT2_CTRL (0Eh)* (INT2_FTH) = ‘1’.

A full-flag interrupt can be enabled, *INT1_CTRL (0Dh)* (INT_FULL_FLAG) = '1', in order to indicate FIFO saturation and eventually read its content all at once.

If an overrun occurs, the oldest sample in FIFO is overwritten and the OVER_RUN flag in *FIFO_STATUS2 (3Bh)* is asserted.

In order to empty the FIFO before it is full, it is also possible to pull from FIFO the number of unread samples available in *FIFO_STATUS1 (3Ah)* and *FIFO_STATUS2 (3Bh)* (DIFF_FIFO[11:0]).

5.4.4 Continuous-to-FIFO mode

In Continuous-to-FIFO mode (*FIFO_CTRL5 (0Ah)* (FIFO_MODE_[2:0] = 011), FIFO behavior changes according to the trigger event detected in one of the following interrupt registers *SENSORHUB13_REG (4Dh)*, *TAP_SRC (1Ch)* and *WAKE_UP_SRC (1Bh)* .

When the selected trigger bit is equal to '1', FIFO operates in FIFO mode.

When the selected trigger bit is equal to '0', FIFO operates in Continuous mode.

5.4.5 Bypass-to-Continuous mode

In Bypass-to-Continuous mode (*FIFO_CTRL5 (0Ah)* (FIFO_MODE_[2:0] = '100'), data measurement storage inside FIFO operates in Continuous mode when selected triggers in one of the following interrupt registers *SENSORHUB13_REG (4Dh)*, *TAP_SRC (1Ch)* and *WAKE_UP_SRC (1Bh)* are equal to '1', otherwise FIFO content is reset (Bypass mode).

5.4.6 FIFO reading procedure

The data stored in FIFO are accessible from dedicated registers (*FIFO_DATA_OUT_L (3Eh)* and *FIFO_DATA_OUT_H (3Fh)*) and each FIFO sample is composed of 16 bits.

All FIFO status registers (*FIFO_STATUS1 (3Ah)*, *FIFO_STATUS2 (3Bh)*, *FIFO_STATUS3 (3Ch)*, *FIFO_STATUS4 (3Dh)*) can be read at the start of a reading operation, minimizing the intervention of the application processor.

In FIFO can store up to four sensors:

- accelerometer
- gyroscope
- first external sensor
- second external sensor

The external sensors are read by an integrated auxiliary I^2C master (sensor hub) and only the first 12 bytes are saved in the FIFO.

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

Data stored from each sensor is composed of six bytes (3 FIFO samples); the data can be stored synchronically according to ODR_FIFO_[3:0] in *FIFO_CTRL5 (0Ah)* and the decimation for each sensor.

ST Confidential
DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

6 Digital interfaces

The registers embedded inside the LSM6DS3 may be accessed through both the I^2C and SPI serial interfaces. The latter may be SW configured to operate either in 3-wire or 4-wire interface mode.

The serial interfaces are mapped onto the same pins. To select/exploit the I^2C interface, the CS line must be tied high (i.e connected to Vdd_IO).

Table 8. Serial interface pin description

Pin name	Pin description
CS	SPI enable I^2C/SPI mode selection (1: SPI idle mode / I^2C communication enabled; 0: SPI communication mode / I^2C disabled)
SCL/SPC	I^2C Serial Clock (SCL) SPI Serial Port Clock (SPC)
SDA/SDI/SDO	I^2C Serial Data (SDA) SPI Serial Data Input (SDI) 3-wire Interface Serial Data Output (SDO)
SDO/SA0	SPI Serial Data Output (SDO) I^2C less significant bit of the device address

6.1 I^2C serial interface

The LSM6DS3 I^2C is a bus slave. The I^2C is employed to write the data to the registers, whose content can also be read back.

The relevant I^2C terminology is provided in the table below.

Table 9. I^2C terminology

Term	Description
Transmitter	The device which sends data to the bus
Receiver	The device which receives data from the bus
Master	The device which initiates a transfer, generates clock signals and terminates a transfer
Slave	The device addressed by the master

There are two signals associated with the I^2C bus: the serial clock line (SCL) and the Serial DAta line (SDA). The latter is a bidirectional line used for sending and receiving the data to/from the interface. Both the lines must be connected to Vdd_IO through external pull-up resistors. When the bus is free, both the lines are high.

The I^2C interface is implemeted with fast mode (400 kHz) I^2C standards as well as with the standard mode.

In order to disable the I^2C block, (I2C_disable) = 1 must be written in *CTRL4_C (13h)*.

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

6.1.1 I²C operation

The transaction on the bus is started through a START (ST) signal. A START condition is defined as a HIGH to LOW transition on the data line while the SCL line is held HIGH. After this has been transmitted by the master, the bus is considered busy. The next byte of data transmitted after the start condition contains the address of the slave in the first 7 bits and the eighth bit tells whether the master is receiving data from the slave or transmitting data to the slave. When an address is sent, each device in the system compares the first seven bits after a start condition with its address. If they match, the device considers itself addressed by the master.

The Slave ADdress (SAD) associated to the LSM6DS3 is 110101xb. The SDO/SA0 pin can be used to modify the less significant bit of the device address. If the SDO/SA0 pin is connected to the supply voltage, LSb is '1' (address 1101011b); else if the SDO/SA0 pin is connected to ground, the LSb value is '0' (address 1101010b). This solution permits to connect and address two different inertial modules to the same I²C bus.

Data transfer with acknowledge is mandatory. The transmitter must release the SDA line during the acknowledge pulse. The receiver must then pull the data line LOW so that it remains stable low during the HIGH period of the acknowledge clock pulse. A receiver which has been addressed is obliged to generate an acknowledge after each byte of data received.

The I²C embedded inside the LSM6DS3 behaves like a slave device and the following protocol must be adhered to. After the start condition (ST) a slave address is sent, once a slave acknowledge (SAK) has been returned, an 8-bit sub-address (SUB) is transmitted. The increment of the address is configured by the *CTRL3_C (12h)* (IF_INC).

The slave address is completed with a Read/Write bit. If the bit is '1' (Read), a repeated START (SR) condition must be issued after the two sub-address bytes; if the bit is '0' (Write) the master will transmit to the slave with direction unchanged. *Table 10* explains how the SAD+Read/Write bit pattern is composed, listing all the possible configurations.

Table 10. SAD+Read/Write patterns

Command	SAD[6:1]	SAD[0] = SA0	R/W	SAD+R/W
Read	110101	0	1	11010101 (D5h)
Write	110101	0	0	11010100 (D4h)
Read	110101	1	1	11010111 (D7h)
Write	110101	1	0	11010110 (D6h)

Table 11. Transfer when master is writing one byte to slave

Master	ST	SAD + W		SUB		DATA		SP
Slave			SAK		SAK		SAK	

Table 12. Transfer when master is writing multiple bytes to slave

Master	ST	SAD + W		SUB		DATA		DATA		SP
Slave			SAK		SAK		SAK		SAK	

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

Table 13. Transfer when master is receiving (reading) one byte of data from slave

Master	ST	SAD + W		SUB		SR	SAD + R			NMAK	SP
Slave			SAK		SAK			SAK	DATA		

Table 14. Transfer when master is receiving (reading) multiple bytes of data from slave

Master	ST	SAD+W		SUB		SR	SAD+R			MAK		MAK		NMAK	SP
Slave			SAK		SAK			SAK	DATA		DATA		DATA		

Data are transmitted in byte format (DATA). Each data transfer contains 8 bits. The number of bytes transferred per transfer is unlimited. Data is transferred with the Most Significant bit (MSb) first. If a receiver can't receive another complete byte of data until it has performed some other function, it can hold the clock line, SCL LOW to force the transmitter into a wait state. Data transfer only continues when the receiver is ready for another byte and releases the data line. If a slave receiver doesn't acknowledge the slave address (i.e. it is not able to receive because it is performing some real-time function) the data line must be left HIGH by the slave. The master can then abort the transfer. A LOW to HIGH transition on the SDA line while the SCL line is HIGH is defined as a STOP condition. Each data transfer must be terminated by the generation of a STOP (SP) condition.

In the presented communication format MAK is Master acknowledge and NMAK is No Master Acknowledge.

6.2 SPI bus interface

The LSM6DS3 SPI is a bus slave. The SPI allows writing and reading the registers of the device.

The serial interface communicates to the application using 4 wires: **CS**, **SPC**, **SDI** and **SDO**.

Figure 5. Read and write protocol

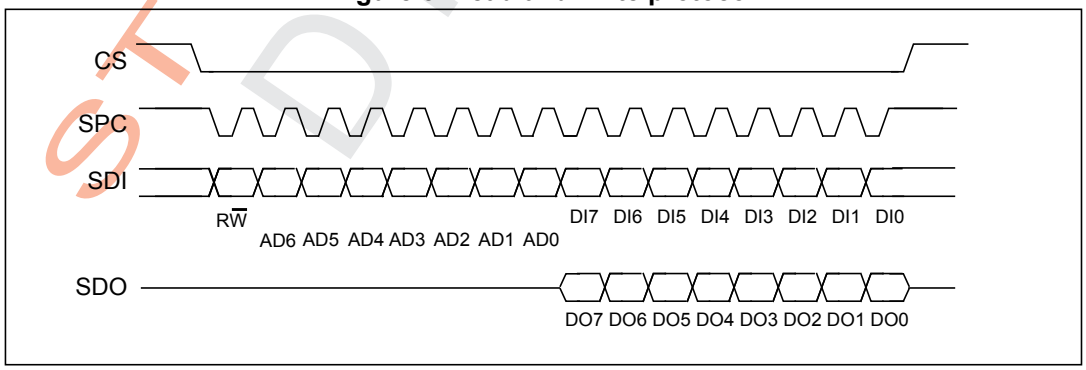

CS is the serial port enable and it is controlled by the SPI master. It goes low at the start of the transmission and goes back high at the end. **SPC** is the serial port clock and it is controlled by the SPI master. It is stopped high when **CS** is high (no transmission). **SDI** and **SDO** are, respectively, the serial port data input and output. Those lines are driven at the falling edge of **SPC** and should be captured at the rising edge of **SPC**.

ST confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

Both the read register and write register commands are completed in 16 clock pulses or in multiples of 8 in case of multiple read/write bytes. Bit duration is the time between two falling edges of **SPC**. The first bit (bit 0) starts at the first falling edge of **SPC** after the falling edge of **CS** while the last bit (bit 15, bit 23, ...) starts at the last falling edge of SPC just before the rising edge of **CS**.

bit 0: R$\overline{W}$ bit. When 0, the data DI(7:0) is written into the device. When 1, the data DO(7:0) from the device is read. In latter case, the chip will drive **SDO** at the start of bit 8.

bit 1-7: address AD(6:0). This is the address field of the indexed register.

bit 8-15: data DI(7:0) (write mode). This is the data that is written into the device (MSb first).

bit 8-15: data DO(7:0) (read mode). This is the data that is read from the device (MSb first).

In multiple read/write commands further blocks of 8 clock periods will be added. When the *CTRL3_C (12h)* (IF_INC) bit is '0', the address used to read/write data remains the same for every block. When the *CTRL3_C (12h)* (IF_INC) bit is '1', the address used to read/write data is increased at every block.

The function and the behavior of **SDI** and **SDO** remain unchanged.

6.2.1 SPI read

Figure 6. SPI read protocol

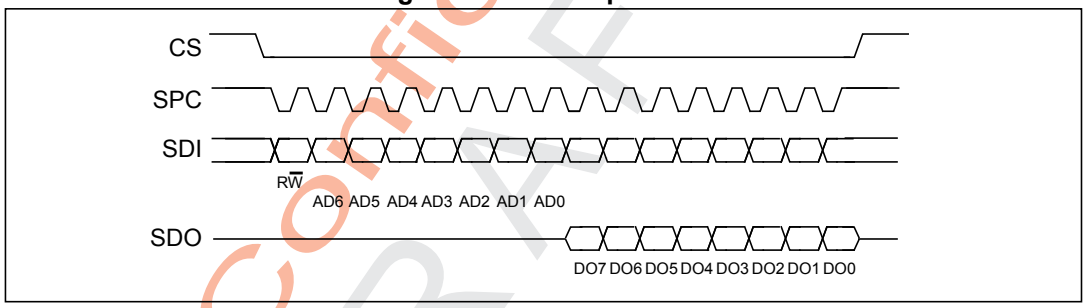

The SPI Read command is performed with 16 clock pulses. A multiple byte read command is performed by adding blocks of 8 clock pulses to the previous one.

bit 0: READ bit. The value is 1.

bit 1-7: address AD(6:0). This is the address field of the indexed register.

bit 8-15: data DO(7:0) (read mode). This is the data that will be read from the device (MSb first).

bit 16-...: data DO(...-8). Further data in multiple byte reads.

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

Figure 7. Multiple bytes SPI read protocol (2-byte example)

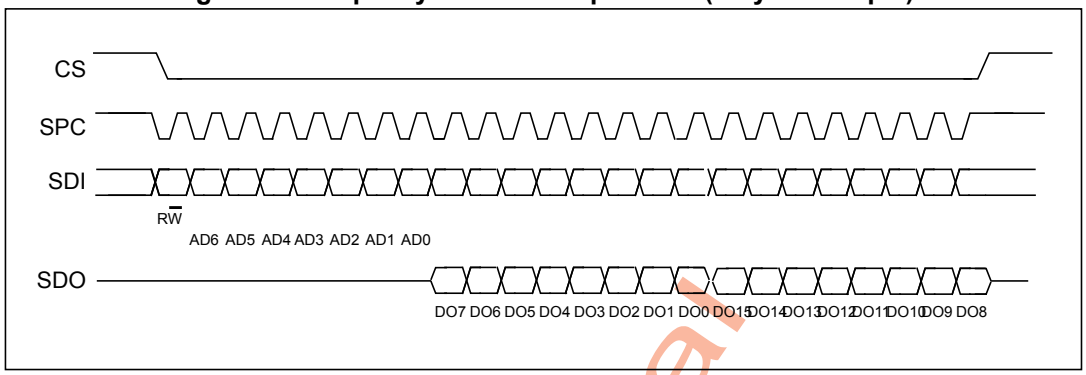

6.2.2 SPI write

Figure 8. SPI write protocol

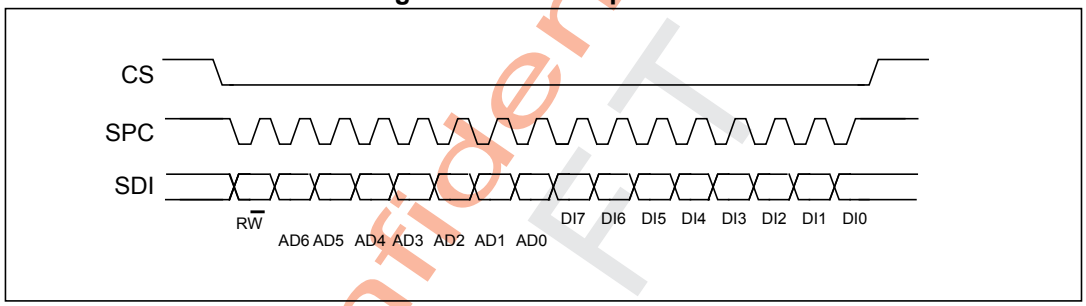

The SPI Write command is performed with 16 clock pulses. A multiple byte write command is performed by adding blocks of 8 clock pulses to the previous one.

bit 0: WRITE bit. The value is 0.

bit 1 -7: address AD(6:0). This is the address field of the indexed register.

bit 8-15: data DI(7:0) (write mode). This is the data that is written inside the device (MSb first).

bit 16-... : data DI(...-8). Further data in multiple byte writes.

Figure 9. Multiple bytes SPI write protocol (2-byte example)

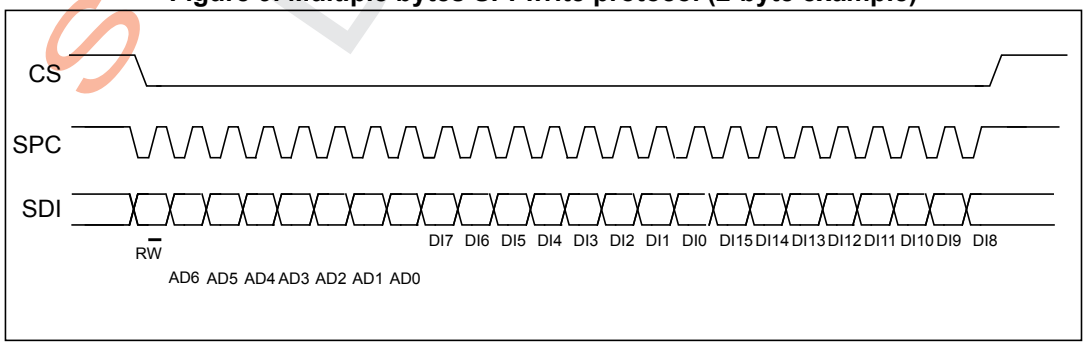

6.2.3 SPI read in 3-wire mode

A 3-wire mode is entered by setting the *CTRL3_C (12h)* (SIM) bit equal to ‘1’ (SPI serial interface mode selection).

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

Figure 10. SPI read protocol in 3-wire mode

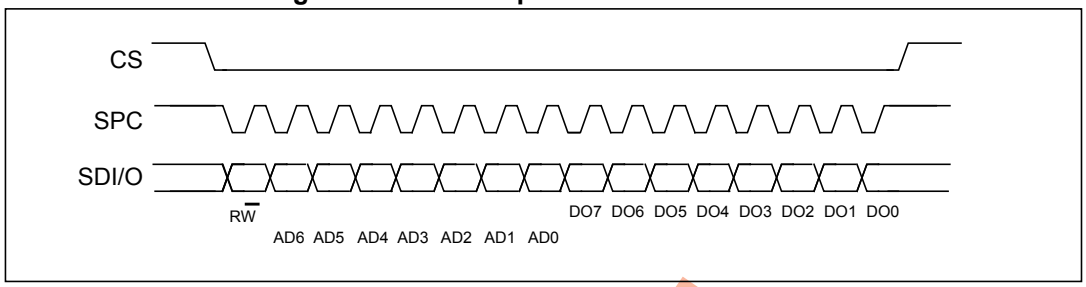

The SPI read command is performed with 16 clock pulses:

bit 0: READ bit. The value is 1.

bit 1-7: address AD(6:0). This is the address field of the indexed register.

bit 8-15: data DO(7:0) (read mode). This is the data that is read from the device (MSb first).

A multiple read command is also available in 3-wire mode.

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

7 Application hints

7.1 LSM6DS3 electrical connections in Mode 1

Figure 11. LSM6DS3 electrical connections in Mode 1

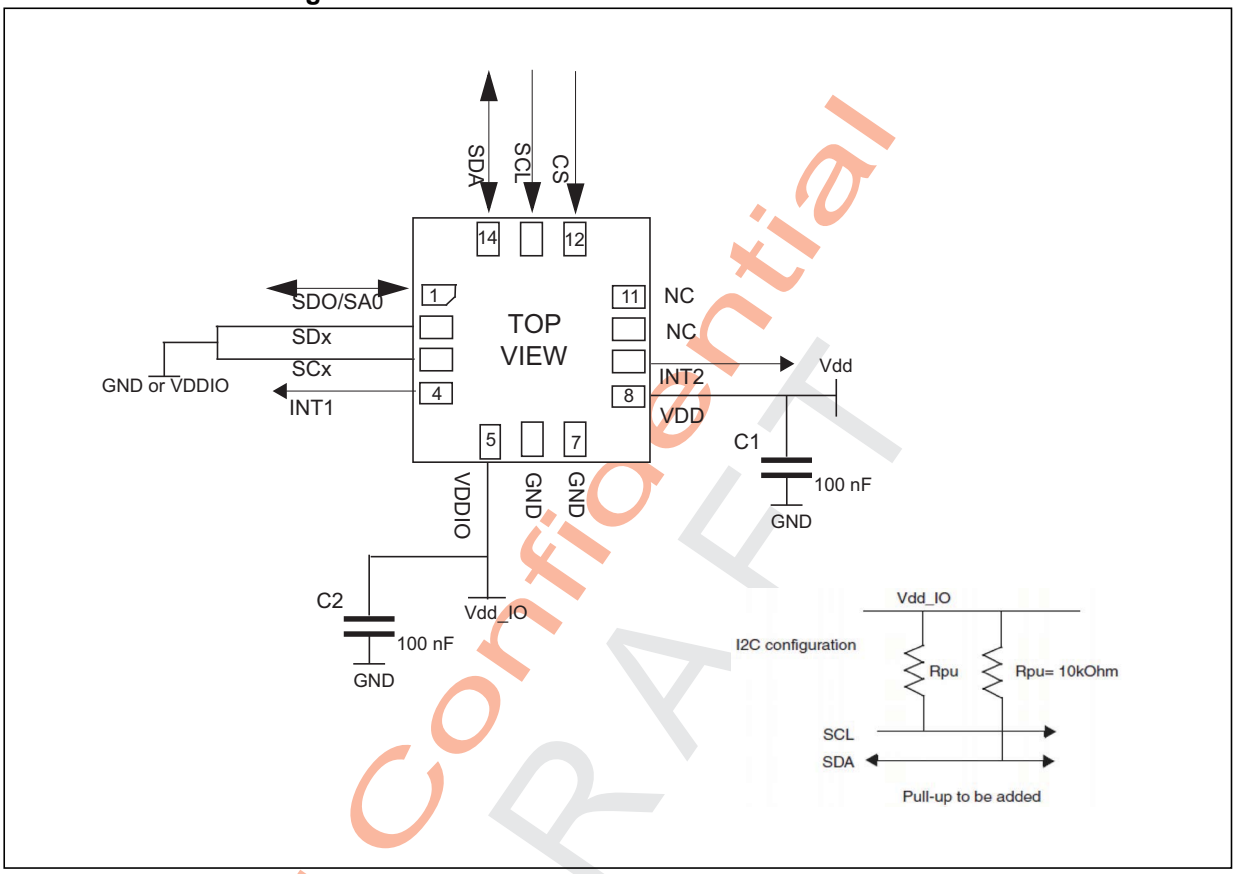

The device core is supplied through the Vdd line. Power supply decoupling capacitors (C1, C2 = 100 *nF* ceramic) should be placed as near as possible to the supply pin of the device (common design practice).

The functionality of the device and the measured acceleration/angular rate data is selectable and accessible through the SPI/I^2C interface.

The functions, the threshold and the timing of the two interrupt pins for each sensor can be completely programmed by the user through the SPI/I^2C interface.

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

7.2 LSM6DS3 electrical connections in Mode 2

Figure 12. LSM6DS3 electrical connections in Mode 2

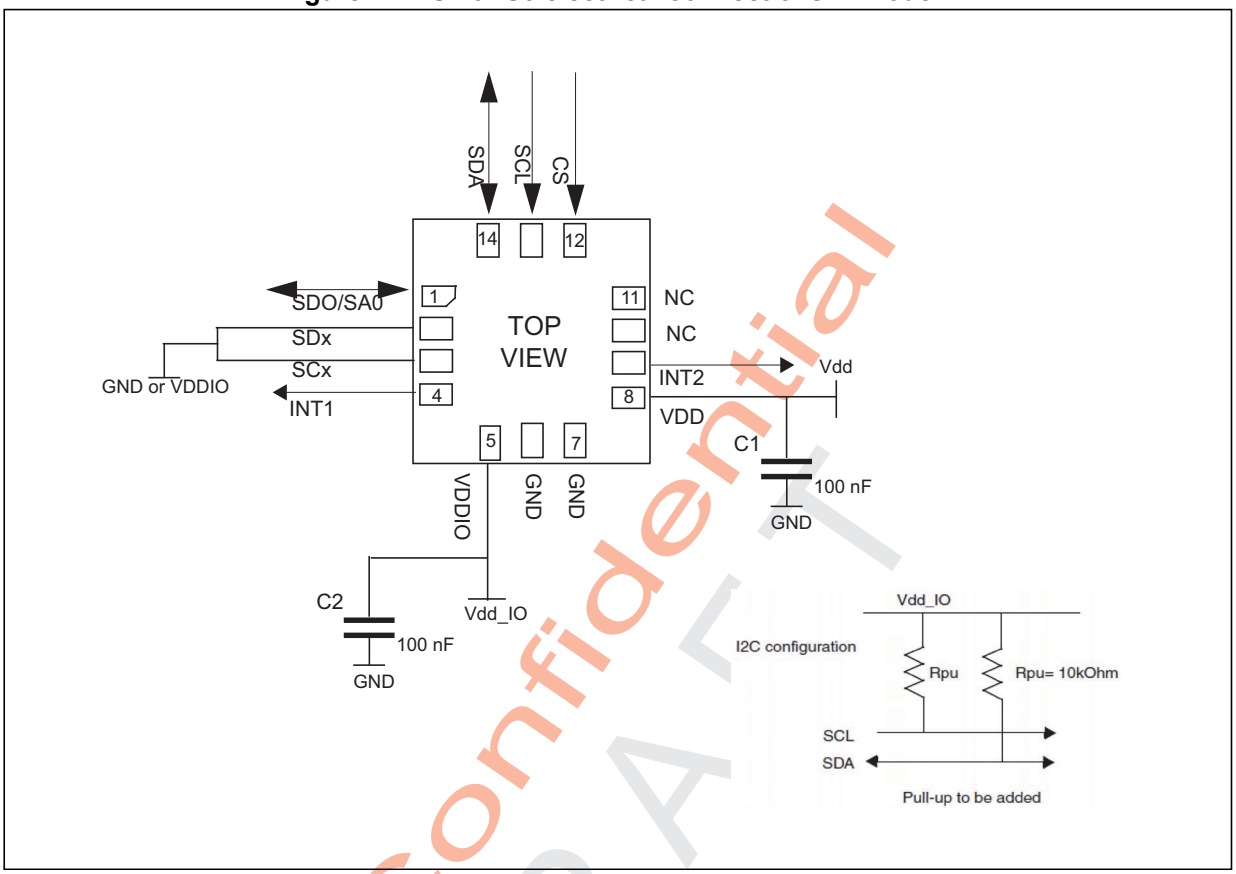

The device core is supplied through the Vdd line. Power supply decoupling capacitors (C1, C2 = 100 *nF* ceramic) should be placed as near as possible to the supply pin of the device (common design practice).

The functionality of the device and the measured acceleration/angular rate data is selectable and accessible through the SPI/I^{2}C interface.

The functions, the threshold and the timing of the two interrupt pins for each sensor can be completely programmed by the user through the SPI/I^{2}C interface.

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

7.3 LSM6DS3 electrical connections in Mode 3

Figure 13. LSM6DS3 electrical connections in Mode 3

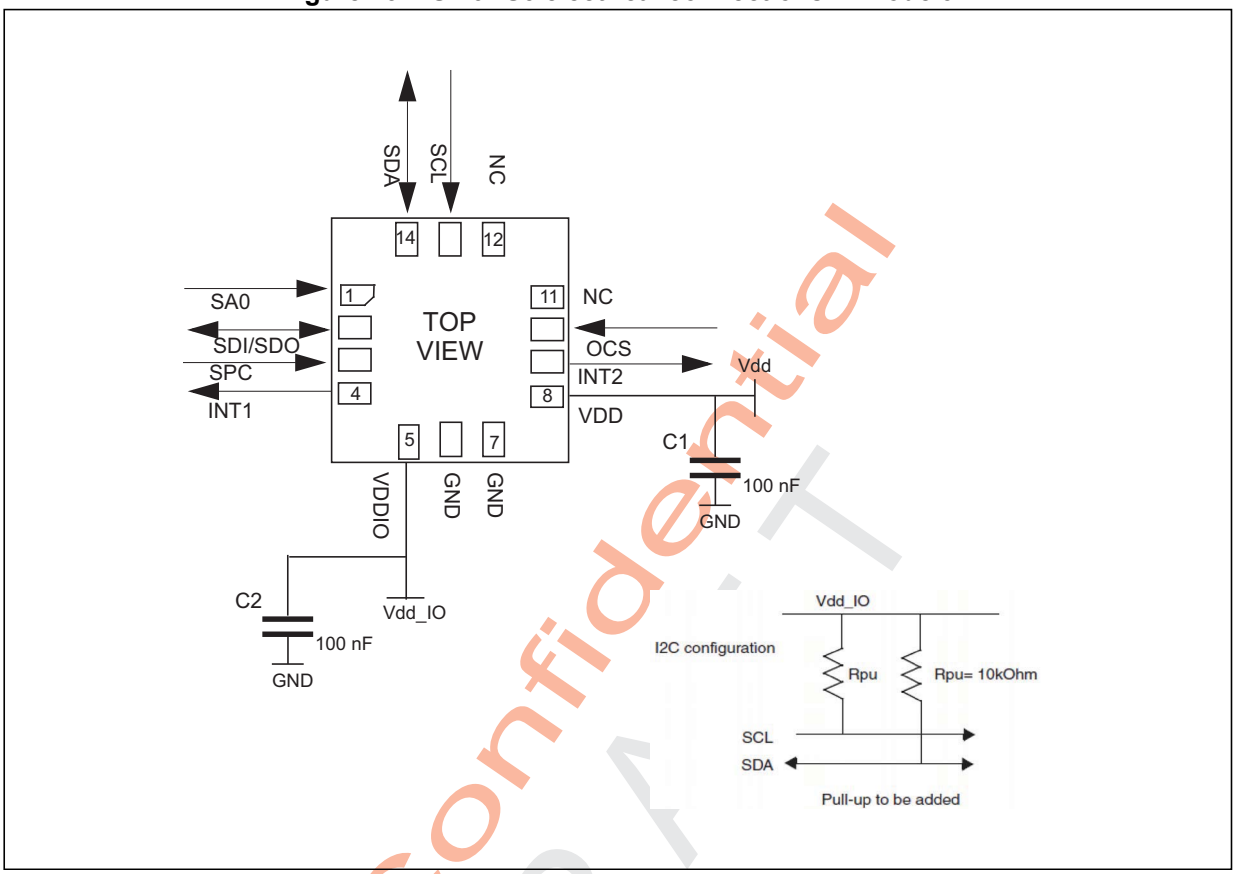

The device core is supplied through the Vdd line. Power supply decoupling capacitors (C1, C2 = 100 *nF* ceramic) should be placed as near as possible to the supply pin of the device (common design practice).

The functionality of the device and the measured acceleration/angular rate data is selectable and accessible through the SPI/I^{2}C interface.

The functions, the threshold and the timing of the two interrupt pins for each sensor can be completely programmed by the user through the SPI/I^{2}C interface.

ST Confidential
DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

8 Register mapping

The table given below provides a list of the 8/16 bit registers embedded in the device and the corresponding addresses.

Table 15. Registers address map

Name	Type	Register address		Default	Comment
		Hex	Binary		
RESERVED	r/w	00	00000000	00000000	Reserved
FUNC_CFG_ACCESS	r/w	01	00000001	00000000	Embedded functions configuration register
RESERVED	r/w	02	00000010	-	Reserved
RESERVED	r/w	03	00000011	-	Reserved
SENSOR_SYNC_TIME_ FRAME	r/w	04	00000100	00000000	Sensor sync configuration register
SENSOR_SYNC_ENABLE	r/w	05	00000101	00000000	Sensor sync configuration register
FIFO_CTRL1	r/w	06	00000110	00000000	FIFO configuration registers
FIFO_CTRL2	r/w	07	00000111	00000000	
FIFO_CTRL3	r/w	08	00001000	00000000	
FIFO_CTRL4	r/w	09	00001001	00000000	
FIFO_CTRL5	r/w	0A	00001010	00000000	
ORIENT_CFG_G	r/w	0B	00001011	00000000	
RESERVED	r/w	0C	00001100	-	Reserved
INT1_CTRL	r/w	0D	00001101	00000000	INT1 pin control
INT2_CTRL	r/w	0E	00001110	00000000	INT2 pin control
WHO_AM_I	r	0F	00001111	01101001	Who I am ID

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

Table 15. Registers address map (continued)

Name	Type	Register address		Default	Comment
		Hex	Binary		
CTRL1_XL	r/w	10	00010000	00000000	Accelerometer and gyroscope control registers
CTRL2_G	r/w	11	00010001	00000000	
CTRL3_C	r/w	12	00010010	00000100	
CTRL4_C	r/w	13	00010011	00000000	
CTRL5_C	r/w	14	00010100	00000000	
CTRL6_G	r/w	15	00010101	00000000	
CTRL7_G	r/w	16	00010110	00000000	
CTRL9_XL	r/w	18	00011000	00111000	
CTRL10_C	r/w	19	00011001	00111000	
MASTER_CONFIG	r/w	1A	00011010	00000000	I^2C master configuration register
WAKE_UP_SRC	r	1B	00011011	output	Interrupts registers
TAP_SRC	r	1C	00011100	output	
D6D_SRC	r	1D	00011101	output	
STATUS_REG	r	1E	00011110	output	Status data register
RESERVED	r	1F	00011111	-	Reserved
RESERVED	r	20	00100000	-	Reserved
RESERVED	r	21	00100001	-	Reserved
OUTX_L_G	r	22	00100010	output	Gyroscope output register
OUTX_H_G	r	23	00100011	output	
OUTY_L_G	r	24	00100100	output	
OUTY_H_G	r	25	00100101	output	
OUTZ_L_G	r	26	00100110	output	
OUTZ_H_G	r	27	00100111	output	
OUTX_L_XL	r	28	00101000	output	Accelerometer output register
OUTX_H_XL	r	29	00101001	output	
OUTY_L_XL	r	2A	00101010	output	
OUTY_H_XL	r	2B	00101011	output	
OUTZ_L_XL	r	2C	00101100	output	
OUTZ_H_XL	r	2D	00101101	output	

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

Table 15. Registers address map (continued)

Name	Type	Register address		Default	Comment
		Hex	Binary		
SENSORHUB1_REG	r	2E	00101110	output	Sensor hub output registers
SENSORHUB2_REG	r	2F	00101111	output	
SENSORHUB3_REG	r	30	00110000	output	
SENSORHUB4_REG	r	31	00110001	output	
SENSORHUB5_REG	r	32	00110010	output	
SENSORHUB6_REG	r	33	00110011	output	
SENSORHUB7_REG	r	34	00110100	output	
SENSORHUB8_REG	r	35	00110101	output	
SENSORHUB9_REG	r	36	00110110	output	
SENSORHUB10_REG	r	37	00110111	output	
SENSORHUB11_REG	r	38	00111000	output	
SENSORHUB12_REG	r	39	00111001	output	
FIFO_STATUS1	r	3A	00111010	output	FIFO status registers
FIFO_STATUS2	r	3B	00111011	output	
FIFO_STATUS3	r	3C	00111100	output	
FIFO_STATUS4	r	3D	00111101	output	
FIFO_DATA_OUT_L	r	3E	00111110	output	FIFO data output registers
FIFO_DATA_OUT_H	r	3F	00111111	output	
TIMESTAMP0_REG	r	40	01000000	output	Time stamp output registers
TIMESTAMP1_REG	r	41	01000001	output	
TIMESTAMP2_REG	r	42	01000010	output	
RESERVED		43-4A		--	Reserved
STEP_COUNTER_L	r	4B	01001011	output	Step counter output registers
STEP_COUNTER_H	r	4C	01001100	output	
SENSORHUB13_REG	r	4D	01001101	output	Sensor hub output registers
SENSORHUB14_REG	r	4E	01001110	output	
SENSORHUB15_REG	r	4F	01001111	output	
SENSORHUB16_REG	r	50	01010000	output	
SENSORHUB17_REG	r	51	01010001	output	
SENSORHUB18_REG	r	52	01010010	output	
FUNC_SRC	r	53	01010011	output	Interrupt register
RESERVED		54-57		--	Reserved

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

Table 15. Registers address map (continued)

Name	Type	Register address		Default	Comment
		Hex	Binary		
TAP_CFG	r/w	58	01011000	00000000	Interrupt registers
TAP_THS_6D	r/w	59	01011001	00000000	
INT_DUR2	r/w	5A	01011010	00000000	
WAKE_UP_THS	r/w	5B	01011011	00000000	
WAKE_UP_DUR	r/w	5C	01011100	00000000	
FREE_FALL	r/w	5D	01011101	00000000	
MD1_CFG	r/w	5E	01011110	00000000	
MD2_CFG	r/w	5F	01011111	00000000	
RESERVED		60-61		-	Reserved

Registers marked as *Reserved* must not be changed. Writing to those registers may cause permanent damage to the device.

The content of the registers that are loaded at boot should not be changed. They contain the factory calibration values. Their content is automatically restored when the device is powered up.

ST confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

9 Register description

The device contains a set of registers which are used to control its behavior and to retrieve linear acceleration, angular rate and temperature data. The register addresses, made up of 7 bits, are used to identify them and to write the data through the serial interface.

9.1 FUNC_CFG_ACCESS (01h)

Enable embedded functions register (r/w).

Table 16. FUNC_CFG_ACCESS register

FUNC_CFG_EN	0(1)	0(1)	0(1)	0(1)	0(1)	0(1)	0(1)

1. This bit must be set to '0' for the correct operation of the device.

Table 17. FUNC_CFG_ACCESS register description

FUNC_CFG_EN	Enable access to the embedded functions configuration registers (1) from address 02h to 32h. Default value: 0. (0: disable access to embedded functions configuration registers; 1: enable access to embedded functions configuration registers)

1. The embedded functions configuration registers details are available in *10: Embedded functions register mapping* and *11: Embedded functions registers description*.

9.2 SENSOR_SYNC_TIME_FRAME (04h)

Sensor synchronization time frame register (r/w).

Table 18. SENSOR_SYNC_TIME_FRAME register

TPH_7	TPH_6	TPH_5	TPH_4	TPH_3	TPH_2	TPH_1	TPH_0

Table 19. ISENSOR_SYNC_TIME_FRAME register description

TPH_ [7:0]	Sensor synchronization time frame with the step of 500 ms and full range of 5 s. Unsigned 8-bit. Default value: 0000 0000

9.3 SENSOR_SYNC_ENABLE (05h)

Sensor synchronization enable register (r/w).

Table 20. SENSOR_SYNC_ENABLE register

0(1)	0(1)	0(1)	0(1)	0(1)	0(1)	HP_RST	SENSOR_SYNC_EN

1. This bit must be set to '0' for the correct operation of the device.

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

Table 21. SENSOR_SYNC_ENABLE register description

HP_RST	Gyro digital HP filter reset. Default: 0 (0:Gyro digital HP filter reset OFF; 1: Gyro digital HP filter reset ON*) *Needs to be set to '1' for at least the time of 1 ODR cycle to be effective.
SENSOR_SYNC_EN	Enable sensor synchronization feature. Default value: 0 (0: sensor sync feature disabled; 1: sensor sync feature enabled with external imposed ODR timing)

9.4 FIFO_CTRL1 (06h)

FIFO control register (r/w).

Table 22. FIFO_CTRL1 register

FTH_7	FTH_6	FTH_5	FTH_4	FTH_3	FTH_2	FTH_1	FTH_0

Table 23. FIFO_CTRL1 register description

FTH_[7:0]	FIFO threshold level setting(1). Default value: 0000 0000. Watermark flag rises when the number of bytes written to FIFO is greater than or equal to threshold level. Minimum resolution for the FIFO is 1 LSB = 2 bytes (1 word) in FIFO

1. For a complete watermark threshold configuration, consider FTH_[11:8] in *FIFO_CTRL2 (07h)*.

9.5 FIFO_CTRL2 (07h)

FIFO control register (r/w).

Table 24. FIFO_CTRL2 register

TIMER_PEDO_FIFO_EN	TIMER_PEDO_FIFO_DRDY	0(1)	0(1)	FTH_11	FTH10	FTH_9	FTH_8

1. This bit must be set to '0' for the correct operation of the device.

Table 25. FIFO_CTRL2 register description

TIMER_PEDO_FIFO_EN	Enable pedometer step counter and time stamp as 4th sensor FIFO data. Default: 0 (0: disable step counter and time stamp data as 4th sensor FIFO; 1: enable step counter and time stamp data as 4th sensor FIFO)
TIMER_PEDO_FIFO_DRDY	Pedometer FIFO write mode. Default: 0 (0: disable write in FIFO at every step detected; 1: enable write in FIFO at every step detected by step counter.)
FTH_[11:8]	FIFO threshold level setting(1). Default value: 0000 Watermark flag rises when the number of bytes written to FIFO is greater than or equal to threshold level. Minimum resolution for the FIFO is 1LSB = 2 bytes (1 word) in FIFO

1. For a complete watermark threshold configuration, consider FTH_[11:8] in *FIFO_CTRL1 (06h)*

ST confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

9.6 FIFO_CTRL3 (08h)

FIFO control register (r/w).

Table 26. FIFO_CTRL3 register

0(1)	0(1)	DEC_FIFO _GYRO2	DEC_FIFO _GYRO1	DEC_FIFO _GYRO0	DEC_FIFO _XL2	DEC_FIFO _XL1	DEC_FIFO _XL0

1. This bit must be set to '0' for the correct operation of the device.

Table 27. FIFO_CTRL3 register description

DEC_FIFO_GYRO [2:0]	Gyro FIFO decimation setting. Default: 000 For the configuration setting, refer to *Table 28*
DEC_FIFO_XL [2:0]	Accelerometer FIFO decimation setting. Default: 000 For the configuration setting, refer to

Table 28. Gyro FIFO decimation setting

DEC_FIFO_GYRO [2:0]	Configuration
000	Gyro sensor not in FIFO
001	No decimation
010	Decimation with factor 2
011	Decimation with factor 3
100	Decimation with factor 4
101	Decimation with factor 8
110	Decimation with factor 16
111	Decimation with factor 32

Table 29. Accelerometer FIFO decimation setting

DEC_FIFO_XL [2:0]	Configuration
000	Accelerometer sensor not in FIFO
001	No decimation
010	Decimation with factor 2
011	Decimation with factor 3
100	Decimation with factor 4
101	Decimation with factor 8
110	Decimation with factor 16
111	Decimation with factor 32

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

9.7 FIFO_CTRL4 (09h)

FIFO control register (r/w).

Table 30. FIFO_CTRL4 register

0(1)	ONLY_HIGH_DATA	DEC_SLV1_FIFO2	DEC_SLV1_FIFO1	DEC_SLV1_FIFO0	DEC_SLV0_FIFO2	DEC_SLV0_FIFO1	DEC_SLV0_FIFO0

1. This bit must be set to '0' for the correct operation of the device.

Table 31. FIFO_CTRL4 register description

ONLY_HIGH_DATA	8-bit data storage in FIFO. Default: 0 (0: disable MSByte only memorization in FIFO for XL and Gyro; 1: enable MSByte only memorization in FIFO for XL and Gyro in FIFO)
DEC_SLV1_FIFO[2:0]	Second external sensor FIFO decimation setting. Default: 000 For the configuration setting, refer to *Table 32*.
DEC_SLV0_FIFO[2:0]	First external sensor FIFO decimation setting. Default: 000 For the configuration setting, refer to *Table 33*.

Table 32. Second external sensor FIFO decimation setting

DEC_SLV1_FIFO [2:0]	Configuration
000	Second external sensor not in FIFO
001	No decimation
010	Decimation with factor 2
011	Decimation with factor 3
100	Decimation with factor 4
101	Decimation with factor 8
110	Decimation with factor 16
111	Decimation with factor 32

Table 33. First external sensor in FIFO decimation setting

DEC_SLV0_FIFO [2:0]	Configuration
000	First external sensor not in FIFO
001	No decimation
010	Decimation with factor 2
011	Decimation with factor 3
100	Decimation with factor 4
101	Decimation with factor 8
110	Decimation with factor 16
111	Decimation with factor 32

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

9.8 FIFO_CTRL5 (0Ah)

FIFO control register (r/w).

Table 34. FIFO_CTRL5 register

0(1)	ODR_ FIFO_3	ODR_ FIFO_2	ODR_ FIFO_1	ODR_ FIFO_0	FIFO_ MODE_2	FIFO_ MODE_1	FIFO_ MODE_0

1. This bit must be set to '0' for the correct operation of the device.

Table 35. FIFO_CTRL5 register description

ODR_FIFO_[3:0]	FIFO ODR selection. Default: 0000 For the configuration setting, refer to *Table 36*
FIFO_MODE_[2:0]	FIFO mode selection bits. Default value: 000 For the configuration setting, refer to *Table 37*

Table 36. FIFO ODR selection

ODR_FIFO_[3:0]	Configuration(1)
0001	FIFO ODR is set to 13 Hz
0010	FIFO ODR is set to 26 Hz
0011	FIFO ODR is set to 52 Hz
0100	FIFO ODR is set to 104 Hz
0101	FIFO ODR is set to 208 Hz
0110	FIFO ODR is set to 416 Hz
0111	FIFO ODR is set to 833 Hz
1000	FIFO ODR is set to 1.66 kHz
1001	FIFO ODR is set to 3.33 kHz
1010	FIFO ODR is set to 6.66 kHz

1. If the device is working at an ODR slower than the one selected, FIFO ODR is limited to that ODR value.

Table 37. FIFO mode selection

FIFO_MODE_[2:0]	Configuration mode
000	Bypass mode. FIFO turned off
001	FIFO mode. Stops collecting data when FIFO is full.
010	Reserved
011	Continuous mode until trigger is deasserted, then FIFO mode.
100	Bypass mode until trigger is deasserted, then Continuous mode.
101	Continuous mode. If the FIFO is full, the new sample overwrites the older one.
110	Continuous mode. If the FIFO is full, the new sample overwrites the older one.
111	Reserved

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

9.9 ORIENT_CFG_G (0Bh)

Angular rate sensor sign and orientation register (r/w).

Table 38. ORIENT_CFG_G register

0(1)	0(1)	SignX_G	SignY_G	SignZ_G	Orient_2	Orient_1	Orient_0

1. This bit must be set to '0' for the correct operation of the device.

Table 39. ORIENT_CFG_G register description

SignX_G	Pitch axis (X) angular rate sign. Default value: 0 (0: positive sign; 1: negative sign)
SignY_G	Roll axis (Y) angular rate sign. Default value: 0 (0: positive sign; 1: negative sign)
SignZ_G	Yaw axis (Z) angular rate sign. Default value: 0 (0: positive sign; 1: negative sign)
Orient [2:0]	Directional user-orientation selection. Default value: 000 For the configuration setting, refer to *Table 40*.

Table 40. Settings for orientation of axes

Orient [2:0]	000	001	010	011	100	101
Pitch	X	X	Y	Y	Z	Z
Roll	Y	Z	X	Z	X	Y
Yaw	Z	Y	Z	X	Y	X

9.10 INT1_CTRL (0Dh)

INT1 pad control register (r/w).

Each bit in this register enables a signal to be carried through INT1. The pad's output will supply the OR combination of the selected signals.

Table 41. INT1_CTRL register

INT1_ PEDO	INT1_ SIGN_MOT	INT1_ FULL_FLAG	INT1_ FIFO_OVR	INT1_ FTH	INT1_ BOOT	INT1_ DRDY_G	INT1_ DRDY_XL

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

Table 42. INT1_CTRL register description

INT1_PEDO	Pedometer step recognition interrupt enable on INT1 pad. Default value: 0 (0: disabled; 1: enabled)
INT1_SIGN_MOT	Significant motion interrupt enable on INT1 pad. Default value: 0 (0: disabled; 1: enabled)
INT1_FULL_FLAG	FIFO full flag interrupt enable on INT1 pad. Default value: 0 (0: disabled; 1: enabled)
INT1_FIFO_OVR	FIFO overrun interrupt on INT1 pad. Default value: 0 (0: disabled; 1: enabled)
INT1_FTH	FIFO threshold interrupt on INT1 pad. Default value: 0 (0: disabled; 1: enabled)
INT1_ BOOT	Boot status available on INT1 pad. Default value: 0 (0: disabled; 1: enabled)
INT1_DRDY_G	Gyroscope Data Ready on INT1 pad. Default value: 0 (0: disabled; 1: enabled)
INT1_DRDY_XL	Accelerometer Data Ready on INT1 pad. Default value: 0 (0: disabled; 1: enabled)

9.11 INT2_CTRL (0Eh)

INT2 pad control register (r/w).

Each bit in this register enables a signal to be carried through INT2. The pad's output will supply the OR combination of the selected signals.

Table 43. INT2_CTRL register

INT2_ PEDO	INT2_ SIGN_MOT	INT2_ FULL_FLAG	INT2_ FIFO_OVR	INT2_ FTH	0(1)	INT2_ DRDY_G	INT2_ DRDY_XL

1. This bit must be set to '0' for the correct operation of the device.

Table 44. INT2_CTRL register description

INT2_ PEDO	Pedometer step recognition interrupt enable on INT2 pad. Default value: 0 (0: enabled; 1: disabled)
INT2_SIGN_MOT	Significant motion interrupt enable on INT2 pad. Default value: 0 (0: disabled; 1: enabled)
INT2_ FULL_FLAG	FIFO full flag interrupt enable on INT2 pad. Default value: 0 (0: disabled; 1: enabled)
INT2_FIFO_OVR	FIFO overrun interrupt on INT2 pad. Default value: 0 (0: disabled; 1: enabled)
INT2_FTH	FIFO threshold interrupt on INT2 pad. Default value: 0 (0: disabled; 1: enabled)
INT2_DRDY_G	Gyroscope Data Ready on INT2 pad. Default value: 0 (0: disabled; 1: enabled)
INT2_DRDY_XL	Accelerometer Data Ready on INT2 pad. Default value: 0 (0: disabled; 1: enabled)

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

9.12 WHO_AM_I (0Fh)

Who_AM_I register (r). This register is a read-only register. Its value is fixed at 69h.

Table 45. WHO_AM_I register

0	1	1	0	1	0	0	1

9.13 CTRL1_XL (10h)

Linear acceleration sensor control register 1 (r/w).

Table 46. CTRL1_XL register

ODR_XL3	ODR_XL2	ODR_XL1	ODR_XL0	FS_XL1	FS_XL0	BW_XL1	BW_XL0

Table 47. CTRL1_XL register description

ODR_XL [3:0]	Output data rate and power mode selection. Default value: 0000 (see *Table 48*).
FS_XL [1:0]	Accelerometer full-scale selection. Default value: 00. (00: ±2 *g*; 01: ±16 *g*; 10: ±4 *g*; 11: ±8 *g*)
BW_XL [1:0]	Anti-aliasing filter bandwidth selection. Default value: 00 (00: 400 Hz; 01: 200 Hz; 10: 100 Hz; 11: 50 Hz)

Table 48. Accelerometer ODR register setting

ODR_XL3	ODR_XL2	ODR_XL1	ODR_XL0	ODR selection [Hz] when XL_HM_MODE = 1	ODR selection [Hz] when XL_HM_MODE = 0
0	0	0	0	Power-down	Power-down
0	0	0	1	13 Hz (low power)	13 Hz (high performance)
0	0	1	0	26 Hz (low power)	26 Hz (high performance)
0	0	1	1	52 Hz (low power)	52 Hz (high performance)
0	1	0	0	104 Hz (normal mode)	104 Hz (high performance)
0	1	0	1	208 Hz (normal mode)	208 Hz (high performance)
0	1	1	0	416 Hz (high performance)	416 Hz (high performance)
0	1	1	1	833 Hz (high performance)	833 Hz (high performance)
1	0	0	0	1.66 kHz (high performance)	1.66 kHz (high performance)
1	0	0	1	3.33 kHz (high performance)	3.33 kHz (high performance)
1	0	1	0	6.66 kHz (high performance)	6.66 kHz (high performance)

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

Table 49. BW and ODR (high-performance mode)

ODR[1]	Analog filter BW (XL_HM_MODE = 0)	
	BW_SCAL_ODR = 0	BW_SCAL_ODR = 1
6.66 - 3.33 kHz	N/A	Bandwidth is determined by setting BW_XL[1:0] in *CTRL1_XL (10h)*
1.66 kHz	400 Hz	
833 Hz	400 Hz	
416 Hz	200 Hz	
208 Hz	100 Hz	
104 - 13 Hz	50 Hz	

1. Filter not used when accelerometer is in low-power mode or ODR less than 3.33 kHz.

9.14 CTRL2_G (11h)

Angular rate sensor control register 2 (r/w).

Table 50. CTRL2_G register

ODR_G3	ODR_G2	ODR_G1	ODR_G0	FS_G1	FS_G0	FS_125	0[1]

1. This bit must be set to '0' for the correct operation of the device.

Table 51. CTRL2_G register description

ODR_G [3:0]	Gyroscope output data rate selection. Default value: 0000 (Refer to *Table 50*)
FS_G [1:0]	Gyroscope full-scale selection. Default value: 00 (00: 245 dps; 01: 500 dps; 10: 1000 dps; 11: 2000 dps)
FS_125	Gyroscope full-scale at 125 dps. Default value: 0 (0: disabled; 1: enabled)

Table 52. Gyroscope ODR configuration setting

ODR_G3	ODR_G2	ODR_G1	ODR_G0	ODR [Hz] when G_HM_MODE = 1	ODR [Hz] when G_HM_MODE = 0
0	0	0	0	Power down	Power down
0	0	0	1	13 Hz (low power)	13 Hz (high performance)
0	0	1	0	26 Hz (low power)	26 Hz (high performance)
0	0	1	1	52 Hz (low power)	52 Hz (high performance)
0	1	0	0	104 Hz (normal mode)	104 Hz (high performance)
0	1	0	1	208 Hz (normal mode)	208 Hz (high performance)
0	1	1	0	416 Hz (high performance)	416 Hz (high performance)
0	1	1	1	833 Hz (high performance)	833 Hz (high performance)
1	0	0	0	1.66 kHz (high performance)	1.66 kHz (high performance)

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

9.15 CTRL3_C (12h)

Control register 3 (r/w).

Table 53. CTRL3_C register

BOOT	BDU	H_LACTIVE	PP_OD	SIM	IF_INC	BLE	SW_RESET

Table 54. CTRL3_C register description

BOOT	Reboot memory content. Default value: 0 (0: normal mode; 1: reboot memory content(1))
BDU	Block Data Update. Default value: 0 (0: continuous update; 1: output registers not updated until MSB and LSB have been read)
H_LACTIVE	Interrupt activation level. Default value: 0 (0: interrupt output pads active high; 1: interrupt output pads active low)
PP_OD	Push-pull/Open-Drain selection on INT1 and INT2 pads. Default value: 0 (0: push-pull mode; 1: open-drain mode)
SIM	SPI Serial Interface Mode selection. Default value: 0 (0: 4-wire interface; 1: 3-wire interface).
IF_INC	Register address automatically incremented during a multiple byte access with a serial interface (I^2C or SPI). Default value: 1 (0: disabled; 1: enabled)
BLE	Big/Little Endian Data selection. Default value 0 (0: data LSB @ lower address; 1: data MSB @ lower address)
SW_RESET	Software reset. Default value: 0 (0: normal mode; 1: reset device) This bit is cleared by hardware after next flash boot.

1. Boot request is executed as soon as internal oscillator is turned on. It is possible to set bit while in power-down mode, in this case it will be served at the next normal mode or sleep mode.

9.16 CTRL4_C (13h)

Control register 4 (r/w).

Table 55. CTRL4_C register

BW_SCAL_ODR	SLEEP_G	INT2_on_INT1	0(1)	DRDY_MASK	I2C_disable	MODE3_EN	STOP_ON_FTH

1. This bit must be set to ‘0’ for the correct operation of the device.

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

Table 56. CTRL4_C register description

BW_SCAL_ODR	Accelerometer bandwidth selection. Default value: 0 (0(1): bandwidth determined by ODR selection, refer to *Table 49*; 1(2): bandwidth determined by setting BW_XL[1:0] in *CTRL1_XL (10h)* register.)
SLEEP_G	Gyroscope sleep mode enable. Default value: 0 (0: disabled; 1: enabled)
INT2_on_INT1	All interrupt signals available on INT1 pad enable. Default value: 0 (0: interrupt signals divided between INT1 and INT2 pads; 1: all interrupt signals in logic or on INT1 pad)
DRDY_MASK	Configuration 1(3) data available enable bit. Default value: 0 (0: DA timer disabled; 1: DA timer enabled)
I2C_disable	Disable I^2C interface. Default value: 0 (0: both I^2C and SPI enabled; 1: I^2C disabled, SPI only)
MODE3_EN	Enable auxiliary SPI interface (Mode 3, refer to *Table 2*). Default value: 0 (0: auxiliary SPI disabled; 1: auxiliary SPI enabled(4))
STOP_ON_FTH	Enable FIFO threshold level use. Default value: 0. (0: FIFO depth is not limited; 1: FIFO depth is limited to threshold level)

1. Filter used in high-performance mode only with ODR less than 3.33 kHz.
2. Filter used in high-performance mode only.
3. In configuration 1, switching to combo mode, data are collected in FIFO only when both accelerometer and gyroscope are set. Switching to accelerometer only, data are collected in FIFO after filter setting.
4. Conditioned pads are: SDx, SCx, OCS

9.17 CTRL5_C (14h)

Control register 5 (r/w).

Table 57. CTRL5_C register

0(1)	0(2)	0(3)	0(4)	ST1_G	ST0_G	ST1_XL	ST0_XL

1. This bit must be set to ‘0’ for the correct operation of the device
2. This bit must be set to ‘0’ for the correct operation of the device
3. This bit must be set to ‘0’ for the correct operation of the device
4. This bit must be set to ‘0’ for the correct operation of the device

Table 58. CTRL5_C register description

ST_G [1:0]	Angular rate sensor self-test enable. Default value: 00 (00: Self-test disabled; Other: refer to *Table 59*)
ST_XL [1:0]	Linear acceleration sensor self-test enable. Default value: 00 (00: Self-test disabled; Other: refer to *Table 60*)

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

Table 59. Angular rate sensor self-test mode selection

ST1_G	ST0_G	Self-test mode
0	0	Normal mode
0	1	Positive sign self-test
1	0	Not allowed
1	1	Negative sign self-test

Table 60. Linear acceleration sensor self-test mode selection

ST1_XL	ST0_XL	Self-test mode
0	0	Normal mode
0	1	Positive sign self-test
1	0	Negative sign self-test
1	1	Not allowed

9.18 CTRL6_G (15h)

Angular rate sensor control register 6 (r/w).

Table 61. CTRL6_G register

TRIG_EN	LVLen	LVL2_EN	XL_HM_MODE	0(1)	0(1)	0(1)	0(1)

1. This bit must be set to '0' for the correct operation of the device.

Table 62. CTRL6_G register description

TRIG_EN	Gyroscope data edge-sensitive trigger enable. Default value: 0 (0: external trigger disabled; 1: external trigger enabled)
LVLen	Gyroscope data level-sensitive trigger enable. Default value: 0 (0: level-sensitive trigger disabled; 1: level sensitive trigger enabled)
LVL2_EN	Gyroscope level-sensitive latched enable. Default value: 0 (0: level-sensitive latched disabled; 1: level sensitive latched enabled)
XL_HM_MODE	High-performance operating mode disable for accelerometer(1). Default value: 0 (0: high-performance operating mode enabled; 1: high-performance operating mode disabled)

1. Normal and low-power mode depends on the ODR setting, for details refer to *Table 52*.

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

9.19 CTRL7_G (16h)

Angular rate sensor control register 7 (r/w).

Table 63. CTRL7_G register

G_HM_MODE	HP_EN	HPCF_G1	HPCF_G0	0(1)	0(1)	0(1)	0(1)

1. This bit must be set to '0' for the correct operation of the device.

Table 64. CTRL7_G register description

G_HM_MODE	High-performance operating mode disable for gyroscope(1). Default: 0 (0: high-performance operating mode enabled; 1: high-performance operating mode disabled)
HP_EN	High-pass filter enable. Default value: 0 (0: HPF disabled; 1: HPF enabled)
HPCF_G[1:0]	Gyroscope high-pass filter cutoff frequency selection. Default value: 00. Refer to *Table 65*.

1. Normal and low-power mode depends on the ODR setting, for details refer to *Table 52*.

Table 65. Gyroscope high-pass filter mode configuration

HPCF_G1	HPCF_G0	High-pass filter cutoff frequency
0	0	0.0081 Hz
0	1	0.0032 Hz
1	0	2.07 Hz
1	1	16.32 Hz

9.20 CTRL9_XL (18h)

Linear acceleration sensor control register 9 (r/w).

Table 66. CTRL9_XL register

0(1)	0(1	Zen_XL	Yen_XL	Xen_XL	0(1	0(1)	0(1)

1. This bit must be set to '0' for the correct operation of the device.

Table 67. CTRL9_XL register description

Zen_XL	Accelerometer Z-axis output enable. Default value: 1 (0: Z-axis output disabled; 1: Z-axis output enabled)
Yen_XL	Accelerometer Y-axis output enable. Default value: 1 (0: Y-axis output disabled; 1: Y-axis output enabled)
Xen_XL	Accelerometer X-axis output enable. Default value: 1 (0: X-axis output disabled; 1: X-axis output enabled)

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

9.21 CTRL10_C (19h)

Control register 10 (r/w).

Table 68. CTRL10_C register

0(1)	0(1)	Zen_G	Yen_G	Xen_G	FUNC_EN	PEDO_RST_STEP	SIGN_MOTION_EN

1. This bit must be set to '0' for the correct operation of the device.

Table 69. CTRL10_C register description

Zen_G	Gyroscope yaw axis (Z) output enable. Default value: 1 (0: Z-axis output disabled; 1: Z-axis output enabled)
Yen_G	Gyroscope roll axis (Y) output enable. Default value: 1 (0: Y-axis output disabled; 1: Y axis output enabled)
Xen_G	Gyroscope pitch axis (X) output enable. Default value: 1 (0: X-axis output disabled; 1: X-axis output enabled)
FUNC_EN	Enable embedded functionalities (pedometer, tilt, significant motion, sensor hub and ironing). Default value: 0 (0: disable functionalities of embedded functions; 1: enable functionalities of embedded functions)
PEDO_RST_STEP	Reset pedometer step counter. Default value: 0 (0: disabled; 1: enabled)
SIGN_MOTION_EN	Enable significant motion function(1). Default value: 0 (0: disabled; 1: enabled)

1. For correct functionality of significant motion function, the TILT_EN bit and PEDO_EN bit in *TAP_CFG (58h)* register must be set to 1. Significant motion function available with full scale at ±2 *g* only.

9.22 MASTER_CONFIG (1Ah)

Master configuration register (r/w).

Table 70. MASTER_CONFIG register

DRDY_ON_INT1	DATA_VALID_SEL_FIFO	0(1)	START_CONFIG	PULL_UP_EN	PASS_THROUGH_MODE	IRON_EN	MASTER_ON(2)

1. This bit must be set to '0' for the correct operation of the device.
2. For correct functionality, the accelerometer has to be on.

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

Table 71. MASTER_CONFIG register description

DRDY_ON_ INT1	Manage the Master DRDY signal on INT1 pad. Default: 0 (0: disable Master DRDY on INT1; 1: enable Master DRDY on INT1)
DATA_VALID_SE L_FIFO	Selection of FIFO data-valid signal. Default value: 0 (0: data-valid signal used to write data in FIFO is the XL/Gyro data-ready; 1: data-valid signal used to write data in FIFO is the sensor hub data-ready)
START_ CONFIG	Sensor Hub trigger signal selection. Default value: 0 (0: Sensor hub signal is the XL/Gyro data-ready; 1: Sensor hub signal external from INT2 pad.)
PULL_UP_EN	Auxiliary I^2C pull-up. Default value: 0 (0: internal pull-up on auxiliary I^2C line disabled; 1: internal pull-up on auxiliary I^2C line enabled)
PASS_THROUGH _MODE	I^2C interface pass-through. Default value: 0 (0: through disabled; 1: through enabled)
IRON_EN	Enable soft iron correction algorithm for magnetometer. Default value: 0 (0:soft-iron correction algorithm disabled; 1: soft-iron correction algorithm enabled)
MASTER_ON	Sensor hub I^2C master enable. Default: 0 (0: master I^2C of sensor hub disabled; 1: master I^2C of sensor hub enabled)

9.23 WAKE_UP_SRC (1Bh)

Wake up interrupt source register (r).

Table 72. WAKE_UP_SRC register

0(1)	0(1)	FF_IA	SLEEP_ STATE_IA	WU_IA	X_WU	Y_WU	Z_WU

1. This bit must be set to '0' for the correct operation of the device.

Table 73. WAKE_UP_SRC register description

FF_IA	Free-fall event detection status. Default: 0 (0: free-fall event not detected; 1: free-fall event detected)
SLEEP_ STATE_IA	Sleep event status. Default value: 0 (0: sleep event not detected; 1: sleep event detected)
WU_IA	Wakeup event detection status. Default value: 0 (0: wakeup event not detected; 1: wakeup event detected.)
X_WU	Wakeup event detection status on X-axis. Default value: 0 (0: wakeup event on X-axis not detected; 1: wakeup event on X-axis detected)
Y_WU	Wakeup event detection status on Y-axis. Default value: 0 (0: wakeup event on Y-axis not detected; 1: wakeup event on Y-axis detected)
Z_WU	Wakeup event detection status on Z-axis. Default value: 0 (0: wakeup event on Z-axis not detected; 1: wakeup event on Z-axis detected)

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

9.24 TAP_SRC (1Ch)

Tap source register (r).

Table 74. TAP_SRC register

0(1)	TAP_IA	SINGLE_TAP	DOUBLE_TAP	TAP_SIGN	X_TAP	Y_TAP	Z_TAP

1. This bit must be set to '0' for the correct operation of the device.

Table 75. TAP_SRC register description

TAP_IA	Tap event detection status. Default: 0 (0: tap event not detected; 1: tap event detected)
SINGLE_TAP	Single-tap event status. Default value: 0 (0: single tap event not detected; 1: single tap event detected)
DOUBLE_TAP	Double-tap event detection status. Default value: 0 (0: double-tap event not detected; 1: double-tap event detected.)
TAP_SIGN	Sign of acceleration detected by tap event. Default: 0 (0: positive sign of acceleration detected by tap event; 1: negative sign of acceleration detected by tap event)
X_TAP	Tap event detection status on X-axis. Default value: 0 (0: tap event on X-axis not detected; 1: tap event on X-axis detected)
Y_TAP	Tap event detection status on Y-axis. Default value: 0 (0: tap event on Y-axis not detected; 1: tap event on Y-axis detected)
Z_TAP	Tap event detection status on Z-axis. Default value: 0 (0: tap event on Z-axis not detected; 1: tap event on Z-axis detected)

9.25 D6D_SRC (1Dh)

Portrait, landscape, face-up and face-down source register (r)

Table 76. D6D_SRC register

0(1)	D6D_IA	ZH	ZL	YH	YL	XH	XL

1. This bit must be set to '0' for the correct operation of the device.

ST confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

Table 77. D6D_SRC register description

D6D_IA	Interrupt active for change position portrait, landscape, face-up, face-down. Default value: 0 (0: change position not detected; 1: change position detected)
ZH	Z-axis high event (over threshold). Default value: 0 (0: event not detected; 1: event (over threshold) detected)
ZL	Z-axis low event (under threshold). Default value: 0 (0: event not detected; 1: event (under threshold) detected)
YH	Y-axis high event (over threshold). Default value: 0 (0: event not detected; 1: event (over-threshold) detected)
YL	Y-axis low event (under threshold). Default value: 0 (0: event not detected; 1: event (under threshold) detected)
X_H	X-axis high event (over threshold). Default value: 0 (0: event not detected; 1: event (over threshold) detected)
X_L	X-axis low event (under threshold). Default value: 0 (0: event not detected; 1: event (under threshold) detected)

9.26 STATUS_REG (1Eh)

Table 78. STATUS_REG register

-	-	-	-	EV_BOOT	-	GDA	XLDA

Table 79. STATUS_REG register description

EV_BOOT	Boot running flag signal. Default value: 0 (0: no boot running; 1: boot running)
GDA	Gyroscope new data available. Default value: 0 (0: no set of data available at gyroscope output; 1: a new set of data is available at gyroscope output)
XLDA	Accelerometer new data available. Default value: 0 (0: no set of data available at accelerometer output; 1: a new set of data is available at accelerometer output)

9.27 OUTX_L_G (22h)

Angular rate sensor pitch axis (X) angular rate output register (r). The value is expressed as a 16-bit word in two's complement. (r)

Table 80. OUTX_L_G register

D7	D6	D5	D4	D3	D2	D1	D0

Table 81. OUTX_L_G register description

D[7:0]	Pitch axis (X) angular rate value (LSbyte)

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

9.28 OUTX_H_G (23h)

Angular rate sensor pitch axis (X) angular rate output register (r). The value is expressed as a 16-bit word in two's complement. (r)

Table 82. OUTX_H_G register

D15	D14	D13	D12	D11	D10	D9	D8

Table 83. OUTX_H_G register description

D[15:8]	Pitch axis (X) angular rate value (MSbyte)

9.29 OUTY_L_G (24h)

Angular rate sensor roll axis (Y) angular rate output register (r). The value is expressed as a 16-bit word in two's complement. (r).

Table 84. OUTY_L_G register

D7	D6	D5	D4	D3	D2	D1	D0

Table 85. OUTY_L_G register description

D[7:0]	Roll axis (Y) angular rate value (LSbyte)

9.30 OUTY_H_G (25h)

Angular rate sensor roll axis (Y) angular rate output register (r). The value is expressed as a 16-bit word in two's complement. (r).

Table 86. OUTY_H_G register

D15	D14	D13	D12	D11	D10	D9	D8

Table 87. OUTY_H_G register description

D[15:8]	Roll axis (Y) angular rate value (MSbyte)

9.31 OUTZ_L_G (26h)

Angular rate sensor yaw axis (Z) angular rate output register (r). The value is expressed as a 16-bit word in two's complement. (r).

Table 88. OUTZ_L_G register

D7	D6	D5	D4	D3	D2	D1	D0

Table 89. OUTZ_L_G register description

D[7:0]	Yaw axis (Z) angular rate value (LSbyte)

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

9.32 OUTZ_H_G (27h)

Angular rate sensor Yaw axis (Z) angular rate output register (r). The value is expressed as a 16-bit word in two's complement.

Table 90. OUTZ_H_G register

D15	D14	D13	D12	D11	D10	D9	D8

Table 91. OUTZ_H_G register description

D[15:8]	Yaw axis (Z) angular rate value (MSbyte)

9.33 OUTX_L_XL(28h)

Linear acceleration sensor X-axis output register (r). The value is expressed as a 16-bit word in two's complement.

Table 92. OUTX_L_XL register

D7	D6	D5	D4	D3	D2	D1	D0

Table 93. OUTX_L_XL register description

D[7:0]	X-axis linear acceleration value (LSbyte)

9.34 OUTX_H_XL (29h)

Linear acceleration sensor X-axis output register (r). The value is expressed as a 16-bit word in two's complement.

Table 94. OUTX_H_XL register

D15	D14	D13	D12	D11	D10	D9	D8

Table 95. OUTX_H_XL register description

D[15:8]	X-axis linear acceleration value (MSbyte)

9.35 OUTY_L_XL (2Ah)

Linear acceleration sensor Y-axis output register (r). The value is expressed as a 16-bit word in two's complement.

Table 96. OUTY_L_XL register

D7	D6	D5	D4	D3	D2	D1	D0

Table 97. OUTY_L_XL register description

D[7:0]	Y-axis linear acceleration value (LSbyte)

ST confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

9.36 OUTY_H_XL (2Bh)

Linear acceleration sensor Y-axis output register (r). The value is expressed as a 16-bit word in two's complement.

Table 98. OUTY_H_G register

D15	D14	D13	D12	D11	D10	D9	D8

Table 99. OUTY_H_G register description

D[15:8]	Y-axis linear acceleration value (MSbyte)

9.37 OUTZ_L_XL (2Ch)

Linear acceleration sensor Z-axis output register (r). The value is expressed as a 16-bit word in two's complement.

Table 100. OUTZ_L_XL register

D7	D6	D5	D4	D3	D2	D1	D0

Table 101. OUTZ_L_XL register description

D[7:0]	Z-axis linear acceleration value (LSbyte)

9.38 OUTZ_H_XL (2Dh)

Linear acceleration sensor Z-axis output register (r). The value is expressed as a 16-bit word in two's complement.

Table 102. OUTZ_H_XL register

D15	D14	D13	D12	D11	D10	D9	D8

Table 103. OUTZ_H_XL register description

D[15:8]	Z-axis linear acceleration value (MSbyte)

9.39 SENSORHUB1_REG (2Eh)

First byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 104. SENSORHUB1_REG register

SHub1_7	SHub1_6	SHub1_5	SHub1_4	SHub1_3	SHub1_2	SHub1_1	SHub1_0

Table 105. SENSORHUB1_REG register description

SHub1_[7:0]	First byte associated to external sensors

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

9.40 SENSORHUB2_REG (2Fh)

Second byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operations configurations (for external sensors from x = 0 to x = 3).

Table 106. SENSORHUB2_REG register

SHub2_7	SHub2_6	SHub2_5	SHub2_4	SHub2_3	SHub2_2	SHub2_1	SHub2_0

Table 107. SENSORHUB2_REG register description

SHub2_[7:0]	Second byte associated to external sensors

9.41 SENSORHUB3_REG (30h)

Third byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operations configurations (for external sensors from x = 0 to x = 3).

Table 108. SENSORHUB3_REG register

SHub3_7	SHub3_6	SHub3_5	SHub3_4	SHub3_3	SHub3_2	SHub3_1	SHub3_0

Table 109. SENSORHUB3_REG register description

SHub3_[7:0]	Third byte associated to external sensors

9.42 SENSORHUB4_REG (31h)

Fourth byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 110. SENSORHUB4_REG register

SHub4_7	SHub4_6	SHub4_5	SHub4_4	SHub4_3	SHub4_2	SHub4_1	SHub4_0

Table 111. SENSORHUB4_REG register description

SHub4_[7:0]	Fourth byte associated to external sensors

9.43 SENSORHUB5_REG (32h)

Fifth byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 112. SENSORHUB5_REG register

SHub5_7	SHub5_6	SHub5_5	SHub5_4	SHub5_3	SHub5_2	SHub5_1	SHub5_0

Table 113. SENSORHUB5_REG register description

SHub5_[7:0]	Fifth byte associated to external sensors

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

9.44 SENSORHUB6_REG (33h)

Sixth byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 114. SENSORHUB6_REG register

SHub6_7	SHub6_6	SHub6_5	SHub6_4	SHub6_3	SHub6_2	SHub6_1	SHub6_0

Table 115. SENSORHUB6_REG register description

SHub6_[7:0]	Sixth byte associated to external sensors

9.45 SENSORHUB7_REG (34h)

Seventh byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 116. SENSORHUB7_REG register

SHub7_7	SHub7_6	SHub7_5	SHub7_4	SHub7_3	SHub7_2	SHub7_1	SHub7_0

Table 117. SENSORHUB7_REG register description

SHub7_[7:0]	Seventh byte associated to external sensors

9.46 SENSORHUB8_REG(35h)

Eighth byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 118. SENSORHUB8_REG register

SHub8_7	SHub8_6	SHub8_5	SHub8_4	SHub8_3	SHub8_2	SHub8_1	SHub8_0

Table 119. SENSORHUB8_REG register description

SHub8_[7:0]	Eighth byte associated to external sensors

9.47 SENSORHUB9_REG (36h)

Ninth byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 120. SENSORHUB9_REG register

SHub9_7	SHub9_6	SHub9_5	SHub9_4	SHub9_3	SHub9_2	SHub9_1	SHub9_0

Table 121. SENSORHUB9_REG register description

SHub9_[7:0]	Ninth byte associated to external sensors

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

9.48 SENSORHUB10_REG (37h)

Tenth byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 122. SENSORHUB10_REG register

SHub10_7	SHub10_6	SHub10_5	SHub10_4	SHub10_3	SHub10_2	SHub10_1	SHub10_0

Table 123. SENSORHUB10_REG register description

SHub10_[7:0]	Tenth byte associated to external sensors

9.49 SENSORHUB11_REG (38h)

Eleventh byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 124. SENSORHUB11_REG register

SHub11_7	SHub11_6	SHub11_5	SHub11_4	SHub11_3	SHub11_2	SHub11_1	SHub11_0

Table 125. SENSORHUB11_REG register description

SHub11_[7:0]	Eleventh byte associated to external sensors

9.50 SENSORHUB12_REG(39h)

Twelfth byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 126. SENSORHUB12_REG register

SHub12_7	SHub12_6	SHub12_5	SHub12_4	SHub12_3	SHub12_2	SHub12_1	SHub12_0

Table 127. SENSORHUB12_REG register description

SHub12[7:0]	Twelfth byte associated to external sensors

9.51 FIFO_STATUS1 (3Ah)

FIFO status control register (r). For a proper reading of the register it is suggested to set BDU bit in *CTRL3_C (12h)* to 0.

Table 128. FIFO_STATUS1 register

DIFF_ FIFO_7	DIFF_ FIFO_6	DIFF_ FIFO_5	DIFF_ FIFO_4	DIFF_ FIFO_3	DIFF_ FIFO_2	DIFF_ FIFO_1	DIFF_ FIFO_0

Table 129. FIFO_STATUS1 register description

DIFF_FIFO_[7:0]	Number of unread words (16-bit axes) stored in FIFO(1).

1. For a complete number of unread samples, consider DIFF_FIFO [11:8] in *FIFO_STATUS2 (3Bh)*

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

9.52 FIFO_STATUS2 (3Bh)

FIFO status control register (r). For a proper reading of the register it is recommended to set the BDU bit in *CTRL3_C (12h)* to 0.

Table 130. FIFO_STATUS2 register

FTH	OVER_ RUN	FIFO_ FULL	FIFO_ EMPTY	DIFF_ FIFO_11	DIFF_ FIFO_10	DIFF_ FIFO_9	DIFF_ FIFO_8

Table 131. FIFO_STATUS2 register description

FTH	FIFO watermark status. Default value: 0 (0: FIFO filling is lower than watermark level(1); 1: FIFO filling is equal to or higher than the watermark level)
OVER_RUN	FIFO overrun status. Default value: 0 (0: FIFO is not completely filled; 1: FIFO is completely filled)
FIFO_FULL	FIFO full status. Default value: 0 (0: FIFO is not full; 1: FIFO will be full at the next ODR)
FIFO_EMPTY	FIFO empty bit. Default value: 0 (0: FIFO contains data; 1: FIFO is empty)
DIFF_FIFO_[7:0]	Number of unread words (16-bit axes) stored in FIFO(2).

1. FIFO watermark level is set in FTH_[11:0] in *FIFO_CTRL1 (06h)* and *FIFO_CTRL2 (07h)*
2. For a complete number of unread samples, consider DIFF_FIFO [11:8] in *FIFO_STATUS1 (3Ah)*

9.53 FIFO_STATUS3 (3Ch)

FIFO status control register (r). For a proper reading of the register it is recommended to set the BDU bit in *CTRL3_C (12h)* to 0.

Table 132. FIFO_STATUS3 register

FIFO_ PATTERN _7	FIFO_ PATTERN _6	FIFO_ PATTERN _5	FIFO_ PATTERN _4	FIFO_ PATTERN _3	FIFO_ PATTERN _2	FIFO_ PATTERN _1	FIFO_ PATTERN _0

Table 133. FIFO_STATUS3 register description

FIFO_ PATTERN_[7:0]	Word of recursive pattern read at the next reading.

9.54 FIFO_STATUS4 (3Dh)

FIFO status control register (r). For a proper reading of the register it is recommended to set the BDU bit in *CTRL3_C (12h)* to 0.

Table 134. FIFO_STATUS4 register

0(1)	0(1)	0(1)	0(1)	0(1)	0(1)	FIFO_ PATTERN_9	FIFO_ PATTERN_8

1. This bit must be set to '0' for the correct operation of the device.

ST confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

Table 135. FIFO_STATUS4 register description

FIFO_ PATTERN_[9:8]	Word of recursive pattern read at the next reading.

9.55 FIFO_DATA_OUT_L (3Eh)

FIFO data output register (r). For a proper reading of the register it is recommended to set the BDU bit in *CTRL3_C (12h)* to 0.

Table 136. FIFO_DATA_OUT_L register

DATA_ OUT_ FIFO_L_7	DATA_ OUT_ FIFO_L_6	DATA_ OUT_ FIFO_L_5	DATA_ OUT_ FIFO_L_4	DATA_ OUT_ FIFO_L_3	DATA_ OUT_ FIFO_L_2	DATA_ OUT_ FIFO_L_1	DATA_ OUT_ FIFO_L_0

Table 137. FIFO_DATA_OUT_L register description

DATA_OUT_FIFO_L_[7:0]	FIFO data output (first byte)

9.56 FIFO_DATA_OUT_H (3Fh)

FIFO data output register (r). For a proper reading of the register it is suggested to set BDU bit in *CTRL3_C (12h)* to 0.

Table 138. FIFO_DATA_OUT_H register

DATA_ OUT_ FIFO_H_7	DATA_ OUT_ FIFO_H_6	DATA_ OUT_ FIFO_H_5	DATA_ OUT_ FIFO_H_4	DATA_ OUT_ FIFO_H_3	DATA_ OUT_ FIFO_H_2	DATA_ OUT_ FIFO_H_1	DATA_ OUT_ FIFO_H_0

Table 139. FIFO_DATA_OUT_H register description

DATA_OUT_FIFO_H_[7:0]	FIFO data output (second byte)

9.57 TIMESTAMP0_REG (40h)

Time stamp first byte data output register (r). The value is expressed as a 24-bit word and the bit resolution is defined by setting the value in *WAKE_UP_DUR (5Ch)*.

Table 140. TIMESTAMP0_REG register

TIMESTA MP0_7	TIMESTA MP0_6	TIMESTA MP0_5	TIMESTA MP0_4	TIMESTA MP0_3	TIMESTA MP0_2	TIMESTA MP0_1	TIMESTA MP0_0

Table 141. TIMESTAMP0_REG register description

TIMESTAMP0_[7:0]	TIMESTAMP first byte data output

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

9.58 TIMESTAMP1_REG (41h)

Time stamp second byte data output register (r). The value is expressed as a 24-bit word and the bit resolution is defined by setting value in *WAKE_UP_DUR (5Ch)*.

Table 142. TIMESTAMP1_REG register

TIMESTAMP1_7	TIMESTAMP1_6	TIMESTAMP1_5	TIMESTAMP1_4	TIMESTAMP1_3	TIMESTAMP1_2	TIMESTAMP1_1	TIMESTAMP1_0

Table 143. TIMESTAMP1_REG register description

TIMESTAMP1_[7:0]	TIMESTAMP second byte data output

9.59 TIMESTAMP2_REG (42h)

Time stamp third byte data output register (r). The value is expressed as a 24-bit word and the bit resolution is defined by setting the value in *WAKE_UP_DUR (5Ch)*.

Table 144. TIMESTAMP2_REG register

TIMESTAMP2_7	TIMESTAMP2_6	TIMESTAMP2_5	TIMESTAMP2_4	TIMESTAMP2_3	TIMESTAMP2_2	TIMESTAMP2_1	TIMESTAMP2_0

Table 145. TIMESTAMP2_REG register description

TIMESTAMP2_[7:0]	TIMESTAMP third byte data output

9.60 STEP_COUNTER_L (4Bh)

Step counter output register (r).

Table 146. STEP_COUNTER_L register

STEP_COUNTER_L_7	STEP_COUNTER_L_6	STEP_COUNTER_L_5	STEP_COUNTER_L_4	STEP_COUNTER_L_3	STEP_COUNTER_L_2	STEP_COUNTER_L_1	STEP_COUNTER_L_0

Table 147. STEP_COUNTER_L register description

STEP_COUNTER_L_[7:0]	Step counter output (LSbyte)

9.61 STEP_COUNTER_H (4Ch)

Step counter output register (r).

Table 148. STEP_COUNTER_H register

STEP_COUNTER_H_7	STEP_COUNTER_H_6	STEP_COUNTER_H_5	STEP_COUNTER_H_4	STEP_COUNTER_H_3	STEP_COUNTER_H_2	STEP_COUNTER_H_1	STEP_COUNTER_H_0

Table 149. STEP_COUNTER_H register description

STEP_COUNTER_H_[7:0]	Step counter output (MSbyte)

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

9.62 SENSORHUB13_REG (4Dh)

Thirteenth byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 150. SENSORHUB13_REG register

SHub13_7	SHub13_6	SHub13_5	SHub13_4	SHub13_3	SHub13_2	SHub13_1	SHub13_0

Table 151. SENSORHUB13_REG register description

SHub13_[7:0]	Thirteenth byte associated to external sensors

9.63 SENSORHUB14_REG (4Eh)

Fourteenth byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 152. SENSORHUB14_REG register

SHub14_7	SHub14_6	SHub14_5	SHub14_4	SHub14_3	SHub14_2	SHub14_1	SHub14_0

Table 153. SENSORHUB14_REG register description

SHub14_[7:0]	Fourteenth byte associated to external sensors

9.64 SENSORHUB15_REG (4Fh)

Fifteenth byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 154. SENSORHUB15_REG register

SHub15_7	SHub15_6	SHub15_5	SHub15_4	SHub15_3	SHub15_2	SHub15_1	SHub15_0

Table 155. SENSORHUB15_REG register description

SHub15_[7:0]	Fifteenth byte associated to external sensors

9.65 SENSORHUB16_REG (50h)

Sixteenth byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 156. SENSORHUB16_REG register

SHub16_7	SHub16_6	SHub16_5	SHub16_4	SHub16_3	SHub16_2	SHub16_1	SHub16_0

Table 157. SENSORHUB16_REG register description

SHub16_[7:0]	Sixteenth byte associated to external sensors

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

9.66 SENSORHUB17_REG (51h)

Seventeenth byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 158. SENSORHUB17_REG register

SHub17_7	SHub17_6	SHub17_5	SHub17_4	SHub17_3	SHub17_2	SHub17_1	SHub17_0

Table 159. SENSORHUB17_REG register description

SHub17_[7:0]	Seventeenth byte associated to external sensors

9.67 SENSORHUB18_REG (52h)

Eighteenth byte associated to external sensors. The content of the register is consistent with the SLAVEx_CONFIG number of read operation configurations (for external sensors from x = 0 to x = 3).

Table 160. SENSORHUB18_REG register

SHub18_7	SHub18_6	SHub18_5	SHub18_4	SHub18_3	SHub18_2	SHub18_1	SHub18_0

Table 161. SENSORHUB18_REG register description

SHub18_[7:0]	Eighteenth byte associated to external sensors

9.68 FUNC_SRC (53h)

Significant motion, tilt, step detector, soft iron and sensor hub interrupt source register (r).

Table 162. FUNC_SRC register

0(1)	SIGN_ MOTION_IA	TILT_IA	STEP_ DETECTED	0(1)	0(1)	SI_END_ OP	SENSOR HUB_ END_OP

1. This bit must be set to '0' for the correct operation of the device.

Table 163. FUNC_SRC register description

SIGN_ MOTION_IA	Significant motion event detection status. Default value: 0 (0: significant motion event not detected; 1: significant motion event detected)
TILT_IA	Tilt event detection status. Default value: 0 (0: tilt event not detected; 1: tilt event detected)
STEP_ DETECTED	Step detector event detection status. Default value: 0 (0: step detector event not detected; 1: step detector event detected)
SI_END_OP	Soft iron calculation status. Default value: 0 (0: Soft iron calculation not concluded; 1: Soft iron calculation concluded)
SENSORHUB _END_OP	Sensor hub communication status. Default value: 0 (0: sensor hub communication not concluded; 1: sensor hub communication concluded)

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

9.69 TAP_CFG (58h)

Time stamp, pedometer, tilt, filtering, and tap recognition functions configuration register (r/w).

Table 164. TAP_CFG register

TIMER_EN	PEDO_EN	TILT_EN	0(1)	TAP_X_EN	TAP_Y_EN	TAP_Z_EN	LIR

1. This bit must be set to '0' for the correct operation of the device.

Table 165. TAP_CFG register description

TIMER_EN	Time stamp count enable, output data are collected in *TIMESTAMP0_REG (40h)*, *TIMESTAMP1_REG (41h)*, *TIMESTAMP2_REG (42h)* register. Default: 0 (0: time stamp count disabled; 1: time stamp count enabled)
PEDO_EN	Pedometer algorithm enable(1). Default value: 0 (0: pedometer algorithm disabled; 1: pedometer algorithm enabled)
TILT_EN	Tilt calculation enable.(2) Default value: 0 (0: tilt calculation disabled; 1: tilt calculation enabled.)
TAP_X_EN	Enable X direction in tap recognition. Default value: 0 (0: X direction disabled; 1:X direction enabled)
TAP_Y_EN	Enable Y direction in tap recognition. Default value: 0 (0: Y direction disabled; 1:Y direction enabled)
TAP_Z_EN	Enable Z direction in tap recognition. Default value: 0 (0: Z direction disabled; 1:Z direction enabled)
LIR	Relatch of the time stamp, pedometer, tilt, filtering, and tap recognition functions routed to PINs.

1. For correct functionality of the pedometer function, the TILT_EN bit in this register must be set to 1. Pedometer function available with full scale at ±2 *g* only.
2. For correct functionality of the tilt function, the PEDO_EN bit in this register must be set to 0. Tilt function available with full scale at ±2 *g* only.

9.70 TAP_THS_6D (59h)

Portrait/landscape position and tap function threshold register (r/w).

Table 166. TAP_THS_6D register

0(1)	SIXD_THS 1	SIXD_THS 0	TAP_THS 4	TAP_THS 3	TAP_THS 2	TAP_THS 1	TAP_THS 0

1. This bit must be set to '0' for the correct operation of the device.

Table 167. TAP_THS_6D register description

SIXD_THS[1:0]	Threshold for D6D function. Default value: 00 For details, refer to *Table 168*.
TAP_THS[4:0]	Threshold for tap recognition. Default value: 00000

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

Table 168. Threshold for D4D/D6D function

SIXD_THS[1:0]	Threshold value(1)
00	6 (80 degrees)
01	11 (70 degrees)
10	16 (60 degrees)
11	21 (50 degrees)

1. Threshold value is related to FS = ±2 g.

9.71 INT_DUR2 (5Ah)

Tap recognition function setting register (r/w).

Table 169. INT_DUR2 register

DUR3	DUR2	DUR1	DUR0	QUIET1	QUIET0	SHOCK1	SHOCK0

Table 170. INT_DUR2 register description

DUR[3:0]	Duration of maximum time gap for double tap recognition. Default: 0000 When double tap recognition is enabled, this register expresses the maximum time between two consecutive detected taps to determine a double tap event. 1LSB = 32 ODR_time.
QUIET[1:0]	Expected quiet time after a tap detection. Default value: 00 Quiet time is the time after the first detected tap in which there must not be any overthreshold event. 1LSB = 8 ODR_time.
SHOCK[1:0]	Maximum duration of overthreshold event. Default value: 00 Maximum duration is the maximum time of an overthreshold signal detection to be recognized as a tap event. 1LSB = 8 ODR_time.

9.72 WAKE_UP_THS (5Bh)

Single and double-tap function threshold register (r/w).

Table 171. WAKE_UP_THS register

SINGLE_DOUBLE_TAP	INACTIVITY	WK_THS5	WK_THS4	WK_THS3	WK_THS2	WK_THS1	WK_THS0

Table 172. WAKE_UP_THS register description

SINGLE_DOUBLE_TAP	Single/double tap event detection. Default: 0 (0: single-tap event detection; 1: double-tap event detection)
INACTIVITY	Inactivity event enable. Default value: 0 (0: sleep disabled; 1: sleep enabled)
WK_THS[5:0]	Threshold for wakeup. Default value: 000000

ST confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

9.73 WAKE_UP_DUR (5Ch)

Free-fall, wakeup, time stamp and sleep mode functions duration setting register (r/w).

Table 173. WAKE_UP_DUR register

FF_DUR5	WAKE_ DUR1	WAKE_ DUR0	TIMER_ HR	SLEEP_ DUR3	SLEEP_ DUR2	SLEEP_ DUR1	SLEEP_ DUR0

Table 174. WAKE_UP_DUR register description

FF_DUR5	Free fall duration event. Default: 0 For the complete configuration of the free-fall duration, refer to FF_DUR[4:0] in *FREE_FALL (5Dh)* configuration.
WAKE_DUR[1:0]	Wake up duration event. Default: 00 1LSB = 1 ODR_time
TIMER_HR	Time stamp register resolution setting(1). Default value: 0 (0: 1LSB = 6.4 ms; 1: 1LSB = 25 µs)
SLEEP_DUR[3:0]	Duration to go in sleep mode. Default value: 0000 1 LSB = 512 ODR

1. Configuration of this bit affects *TIMESTAMP0_REG (40h)*, *TIMESTAMP1_REG (41h)* and *TIMESTAMP2_REG (42h)* register.

9.74 FREE_FALL (5Dh)

Free-fall function duration setting register (r/w).

Table 175. FREE_FALL register

FF_DUR4	FF_DUR3	FF_DUR2	FF_DUR1	FF_DUR0	FF_THS2	FF_THS1	FF_THS0

Table 176. FREE_FALL register description

FF_DUR[4:0]	Free-fall duration event. Default: 0 For the complete configuration of the free fall duration, refer to FF_DUR5 in *WAKE_UP_DUR (5Ch)* configuration
FF_THS[2:0]	Free fall threshold setting. Default: 000 For details refer to *Table 177*.

Table 177. Threshold for free fall function

FF_THS[2:0]	Threshold value(1)
000	5
001	7
010	8
011	10
100	11
101	13
110	15
111	16

1. Threshold value is related to FS = ±2 *g*.

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

9.75 MD1_CFG (5Eh)

Functions routing on INT1 register (r/w).

Table 178. MD1_CFG register

INT1_ INACT_ STATE	INT1_ SINGLE_ TAP	INT1_WU	INT1_FF	INT1_ DOUBLE_ TAP	INT1_6D	INT1_TILT	INT1_ TIMER

Table 179. MD1_CFG register description

INT1_INACT_ STATE	Routing on INT1 of inactivity mode. Default: 0 (0: routing on INT1 of inactivity disabled; 1: routing on INT1 of inactivity enabled)
INT1_SINGLE_ TAP	Single-tap recognition routing on INT1. Default: 0 (0: routing of single-tap event on INT1 disabled; 1: routing of single-tap event on INT1 enabled)
INT1_WU	Routing of wakeup event on INT1. Default value: 0 (0: routing of wakeup event on INT1 disabled; 1: routing of wakeup event on INT1 enabled)
INT1_FF	Routing of free-fall event on INT1. Default value: 0 (0: routing of free-fall event on INT1 disabled; 1: routing of free-fall event on INT1 enabled)
INT1_DOUBLE _TAP	Routing of tap event on INT1. Default value: 0 (0: routing of double-tap event on INT1 disabled; 1: routing of double-tap event on INT1 enabled)
INT1_6D	Routing of 6D event on INT1. Default value: 0 (0: routing of 6D event on INT1 disabled; 1: routing of 6D event on INT1 enabled)
INT1_TILT	Routing of tilt event on INT1. Default value: 0 (0: routing of tilt event on INT1 disabled; 1: routing of tilt event on INT1 enabled)
INT1_TIMER	Routing of end counter event of timer on INT1. Default value: 0 (0: routing of end counter event of timer on INT1 disabled; 1: routing of end counter event of timer event on INT1 enabled)

9.76 MD2_CFG (5Fh)

Functions routing on INT2 register (r/w).

Table 180. MD2_CFG register

INT2_ INACT_ STATE	INT2_ SINGLE_ TAP	INT2_WU	INT2_FF	INT2_ DOUBLE_ TAP	INT2_6D	INT2_TILT	INT2_ TIMER

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

Table 181. MD2_CFG register description

INT2_INACT_STATE	Routing on INT2 of inactivity mode. Default: 0 (0: routing on INT2 of inactivity disabled; 1: routing on INT2 of inactivity enabled)
INT2_SINGLE_TAP	Single-tap recognition routing on INT2. Default: 0 (0: routing of single-tap event on INT2 disabled; 1: routing of single-tap event on INT2 enabled)
INT2_WU	Routing of wakeup event on INT2. Default value: 0 (0: routing of wakeup event on INT2 disabled; 1: routing of wake-up event on INT2 enabled)
INT2_FF	Routing of free-fall event on INT2. Default value: 0 (0: routing of free-fall event on INT2 disabled; 1: routing of free-fall event on INT2 enabled)
INT2_DOUBLE_TAP	Routing of tap event on INT2. Default value: 0 (0: routing of double-tap event on INT2 disabled; 1: routing of double-tap event on INT2 enabled)
INT2_6D	Routing of 6D event on INT2. Default value: 0 (0: routing of 6D event on INT2 disabled; 1: routing of 6D event on INT2 enabled)
INT2_TILT	Routing of tilt event on INT2. Default value: 0 (0: routing of tilt event on INT2 disabled; 1: routing of tilt event on INT2 enabled)
INT2_TIMER	Routing of end counter event of timer on INT2. Default value: 0 (0: routing of end counter event of timer on INT2 disabled; 1: routing of end counter event of timer event on INT2 enabled)

ST confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

10 Embedded functions register mapping

The table given below provides a list of the registers for the embedded functions avaialble in the device and the corresponding addresses. Embedded functions registers are accessible when FUNC_CFG_EN is set to '1' in *FUNC_CFG_ACCESS (01h)*.

Table 182. Registers address map - embedded functions

Name	Type	Register address		Default	Comment
		Hex	Binary		
SLV0_ADD	r/w	02	00000010	00000000	
SLV0_SUBADD	r/w	03	00000011	00000000	
SLAVE0_CONFIG	r/w	04	00000100	00000000	
SLV1_ADD	r/w	05	00000101	00000000	
SLV1_SUBADD	r/w	06	00000110	00000000	
SLAVE1_CONFIG	r/w	07	00000111	00000000	
SLV2_ADD	r/w	08	00001000	00000000	
SLV2_SUBADD	r/w	09	00001001	00000000	
SLAVE2_CONFIG	r/w	0A	00001010	00000000	
SLV3_ADD	r/w	0B	00001011	00000000	
SLV3_SUBADD	r/w	0C	00001100	00000000	
SLAVE3_CONFIG	r/w	0D	00001101	00000000	
DATAWRITE_SRC_ MODE_SUB_SLV0	r/w	0E	00001110	00000000	
CONFIG_PEDO_THS_MIN	r/w	0F	00001111	00000111	
CONFIG_TILT_IIR	r/w	10	00010000	01111010	
CONFIG_TILT_ACOS	r/w	11	00010001	0 1101001	
CONFIG_TILT_WTIME	r/w	12	00010010	01100010	
SM_STEP_THS	r/w	13	00010011	00000110	
RESERVED	r/w	14-23		-	Reserved
MAG_SI_XX	r/w	24	00100100	00000000	
MAG_SI_XY	r/w	25	00100101	00000000	
MAG_SI_XZ	r/w	26	00100110	00000000	
MAG_SI_YX	r/w	27	00100111	00000000	

ST confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

Table 182. Registers address map - embedded functions

Name	Type	Register address		Default	Comment
		Hex	Binary		
MAG_SI_YY	r/w	28	00101000	00000000	
MAG_SI_YZ	r/w	29	00101001	00000000	
MAG_SI_ZX	r/w	2A	00101010	00000000	
MAG_SI_ZY	r/w	2B	00101011	00000000	
MAG_SI_ZZ	r/w	2C	00101100	00000000	
MAG_OFFX_L	r/w	2D	00101101	00000000	
MAG_OFFX_H	r/w	2E	00101110	00000000	
MAG_OFFY_L	r/w	2F	00101111	00000000	
MAG_OFFY_H	r/w	30	00110000	00000000	
MAG_OFFZ_L	r/w	31	00110001	00000000	
MAG_OFFZ_H	r/w	32	00110010	00000000	

Registers marked as *Reserved* must not be changed. Writing to those registers may cause permanent damage to the device.

The content of the registers that are loaded at boot should not be changed. They contain the factory calibration values. Their content is automatically restored when the device is powered up.

ST confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

11 Embedded functions registers description

11.1 SLV0_ADD (02h)

I^{2}C slave address of the first external sensor (Sensor1) register (r/w).

Table 183. SLV0_ADD register

Slave0_ add6	Slave0_ add5	Slave0_ add4	Slave0_ add3	Slave0_ add2	Slave0_ add1	Slave0_ add0	rw_0

Table 184. SLV0_ADD register description

Slave0_add[6:0]	I^{2}C slave address of Sensor1 that can be read by sensor hub. Default value: 0000000
rw_0	Read/write operation on Sensor1. Default value: 0 (0: write operation; 1: read operation)

11.2 SLV0_SUBADD (03h)

Address of register on the first external sensor (Sensor1) register (r/w).

Table 185. SLV0_SUBADD register

Slave0_ reg7	Slave0_ reg6	Slave0_ reg5	Slave0_ reg4	Slave0_ reg3	Slave0_ reg2	Slave0_ reg1	Slave0_ reg0

Table 186. SLV0_SUBADD register description

Slave0_reg[7:0]	Address of register on Sensor1 that has to be read/write according to the rw_0 bit value in *SLV0_ADD (02h)*. Default value: 00000000

11.3 SLAVE0_CONFIG (04h)

First external sensor (Sensor1) configuration and sensor hub settings register (r/w).

Table 187. SLAVE0_CONFIG register

Slave0_ rate1	Slave0_ rate0	Aux_sens _on1	Aux_sens _on0	Src_mode	Slave0_ numop2	Slave0_ numop1	Slave0_ numop0

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

Table 188. SLAVE0_CONFIG register description

Slave0_rate[1:0]	Decimation of read operation on Sensor1 starting from the sensor hub trigger. Default value: 00 (00: no decimation 01: update every 2 samples 10: update every 4 samples 11: update every 8 samples)
Aux_sens_on[1:0]	Number of external sensors to be read by sensor hub. Default value: 00 (00: one sensor 01: two sensors 10: three sensors 11: four sensors)
Src_mode	Source mode conditioned read(1). Default value: 0 (0: source mode read disabled; 1: source mode read enabled)
Slave0_numop[2:0]	Number of read operations on Sensor1.

1. Read conditioned by the content of the register at address specified in *DATAWRITE_SRC_MODE_SUB_SLV0 (0Eh)* register. If the content is non-zero the operation continues with the reading of the address specified in teh *SLV0_SUBADD (03h)* register, else the operation is interrupted.

11.4 SLV1_ADD (05h)

I^2C slave address of the second external sensor (Sensor2) register (r/w).

Table 189. SLV1_ADD register

Slave1_ add6	Slave1_ add5	Slave1_ add4	Slave1_ add3	Slave1_ add2	Slave1_ add1	Slave1_ add0	r_1

Table 190. SLV1_ADD register description

Slave1_add[6:0]	I^2C slave address of Sensor2 that can be read by sensor hub. Default value: 0000000
r_1	Read operation on Sensor2 enable. Default value: 0 (0: read operation disabled; 1: read operation enabled)

11.5 SLV1_SUBADD (06h)

Address of register on the second external sensor (Sensor2) register (r/w).

Table 191. SLV1_SUBADD register

Slave1_ reg7	Slave1_ reg6	Slave1_ reg5	Slave1_ reg4	Slave1_ reg3	Slave1_ reg2	Slave1_ reg1	Slave1_ reg0

Table 192. SLV1_SUBADD register description

Slave1_reg[7:0]	Address of register on Sensor2 that has to be read according to the r_1 bit value in *SLV1_ADD (05h)*. Default value: 00000000

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

11.6 SLAVE1_CONFIG (07h)

Second external sensor (Sensor2) configuration register (r/w).

Table 193. SLAVE1_CONFIG register

Slave1_ rate1	Slave1_ rate0	0(1)	0(1)	0(1)	Slave1_ numop2	Slave1_ numop1	Slave1_ numop0

1. This bit must be set to '0' for the correct operation of the device.

Table 194. SLAVE1_CONFIG register description

Slave1_rate[1:0]	Decimation of read operation on Sensor2 starting from the sensor hub trigger. Default value: 00 (00: no decimation 01: update every 2 samples 10: update every 4 samples 11: update every 8 samples)
Slave1_numop[2:0]	Number of read operations on Sensor2.

11.7 SLV2_ADD (08h)

I^2C slave address of the third external sensor (Sensor3) register (r/w).

Table 195. SLV2_ADD register

Slave2_ add6	Slave2_ add5	Slave2_ add4	Slave2_ add3	Slave2_ add2	Slave2_ add1	Slave2_ add0	r_2

Table 196. SLV2_ADD register description

Slave2_add[6:0]	I^2C slave address of Sensor3 that can be read by sensor hub. Default value: 0000000
r_2	Read operation on Sensor3 enable. Default value: 0 (0: read operation disabled; 1: read operation enabled)

11.8 SLV2_SUBADD (09h)

Address of register on the third external sensor (Sensor3) register (r/w).

Table 197. SLV2_SUBADD register

Slave2_ reg7	Slave2_ reg6	Slave2_ reg5	Slave2_ reg4	Slave2_ reg3	Slave2_ reg2	Slave2_ reg1	Slave2_ reg0

Table 198. SLV2_SUBADD register description

Slave2_reg[7:0]	Address of register on Sensor3 that has to be read according to the r_2 bit value in *SLV2_ADD (08h)*. Default value: 00000000

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

11.9 SLAVE2_CONFIG (0Ah)

Third external sensor (Sensor3) configuration register (r/w).

Table 199. SLAVE2_CONFIG register

Slave2_ rate1	Slave2_ rate0	0(1)	0(1)	0(1)	Slave2_ numop2	Slave2_ numop1	Slave2_ numop0

1. This bit must be set to '0' for the correct operation of the device.

Table 200. SLAVE2_CONFIG register description

Slave2_rate[1:0]	Decimation of read operation on Sensor3 starting from the sensor hub trigger. Default value: 00 (00: no decimation 01: update every 2 samples 10: update every 4 samples 11: update every 8 samples)
Slave2_numop[2:0]	Number of read operations on Sensor3.

11.10 SLV3_ADD (0Bh)

I^2C slave address of the fourth external sensor (Sensor4) register (r/w).

Table 201. SLV3_ADD register

Slave3_ add6	Slave3_ add5	Slave3_ add4	Slave3_ add3	Slave3_ add2	Slave3_ add1	Slave3_ add0	r_3

Table 202. SLV3_ADD register description

Slave3_add[6:0]	I^2C slave address of Sensor4 that can be read by the sensor hub. Default value: 0000000
r_3	Read operation on Sensor4 enable. Default value: 0 (0: read operation disabled; 1: read operation enabled)

11.11 SLV3_SUBADD (0Ch)

Address of register on the fourth external sensor (Sensor4) register (r/w).

Table 203. SLV3_SUBADD register

Slave3_ reg7	Slave3_ reg6	Slave3_ reg5	Slave3_ reg4	Slave3_ reg3	Slave3_ reg2	Slave3_ reg1	Slave3_ reg0

Table 204. SLV3_SUBADD register description

Slave3_reg[7:0]	Address of register on Sensor4 that has to be read according to the r_3 bit value in *SLV3_ADD (0Bh)*. Default value: 00000000

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

11.12 SLAVE3_CONFIG (0Dh)

Fourth external sensor (Sensor4) configuration register (r/w).

Table 205. SLAVE3_CONFIG register

Slave3_ rate1	Slave3_ rate0	0(1)	0(1)	0(1)	Slave3_ numop2	Slave3_ numop1	Slave3_ numop0

1. This bit must be set to '0' for the correct operation of the device.

Table 206. SLAVE3_CONFIG register description

Slave3_rate[1:0]	Decimation of read operation on Sensor4 starting from the sensor hub trigger. Default value: 00 (00: no decimation 01: update every 2 samples 10: update every 4 samples 11: update every 8 samples)
Slave3_numop[2:0]	Number of read operations on Sensor4.

11.13 DATAWRITE_SRC_MODE_SUB_SLV0 (0Eh)

Data to be written into the slave device register (r/w).

Table 207. DATAWRITE_SRC_MODE_SUB_SLV0 register

Slave_ dataw7	Slave_ dataw6	Slave_ dataw5	Slave_ dataw4	Slave_ dataw3	Slave_ dataw2	Slave_ dataw1	Slave_ dataw0

Table 208. DATAWRITE_SRC_MODE_SUB_SLV0 register description

Slave_dataw[7:0]	Data to be written into the slave device according to the rw_0 bit in *SLV0_ADD (02h)* register or address to be read in source mode. Default value: 00000000

11.14 CONFIG_PEDO_THS_MIN (0Fh)

Data to be written into slave device register (r/w).

Table 209. CONFIG_PEDO_THS_MIN register

FS4G	0(1)	0(1)	THS_MIN _4	THS_MIN _3	THS_MIN _2	THS_MIN _1	THS_MIN _0

1. This bit must be set to '0' for the correct operation of the device.

Table 210. CONFIG_PEDO_THS_MIN register description

FS4G	Pedometer data elaboration at different full scales. Default value: 0 (0: elaboration of 2 *g* data; 1: n.a.)
THS_MIN_[4:0]	Minimum threshold to detect a peak. Default value: 00111

ST confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

11.15 CONFIG_TILT_IIR (10h)

IIR low-pass filter for tilt function register (r/w).

Table 211. CONFIG_TILT_IIR register

0(1)	TILT_IIR_ COEFF_6	TILT_IIR_ COEFF_5	TILT_IIR_ COEFF_4	TILT_IIR_ COEFF_3	TILT_IIR_ COEFF_	TILT_IIR_ COEFF_1	TILT_IIR_ COEFF_0

1. This bit must be set to '0' for the correct operation of the device.

Table 212. CONFIG_TILT_IIR register description

TILT_IIR_COEFF_[6:0]	Coefficent of the first order IIR low-pass filter unsigned for the tilt function. Default value: 1111010 (corresponding to a coefficient of 0.95)

11.16 CONFIG_TILT_ACOS (11h)

Threshold tilt angle register (r/w).

Table 213. CONFIG_TILT_ACOS register

0(1)	TILT_ ACOS_6	TILT_ ACOS_5	TILT_ ACOS_4	TILT_ ACOS_3	TILT_ ACOS_	TILT_ ACOS_1	TILT_ ACOS_0

1. This bit must be set to '0' for the correct operation of the device

Table 214. CONFIG_TILT_ACOS register description

TILT_ACOS_[6:0]	Cosine of threshold tilt angle(1). Default value: 1101001 (corresponding to an angle of 35 deg).

1. This value is expressed as unsigned value: TILT_COS = cos (TILT_ANGLE_TH)*128.

11.17 CONFIG_TILT_WTIME (12h)

WIndow time for tilt register (r/w).

Table 215. CONFIG_TILT_WTIME register

TILT_ WTIME_7	TILT_ WTIME_6	TILT_ WTIME_5	TILT_ WTIME_4	TILT_ WTIME_3	TILT_ WTIME_2	TILT_ WTIME_1	TILT_ WTIME_0

Table 216. CONFIG_TILT_WTIME register description

TILT_WTIME_[7:0]	Window time in which the delta angle must be greater than angle threshold(1). Default value: 1100010 (corresponding to a time of 2 seconds).

1. This value is expressed as an unsigned value at step of 40 ms.

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

11.18 SM_STEP_THS (13h)

Significant motion step configuration register (r/w).

Table 217. SM_STEP_THS register

SM_STEP_THS_7	SM_STEP_THS_6	SM_STEP_THS_5	SM_STEP_THS_4	SM_STEP_THS_3	SM_STEP_THS_2	SM_STEP_THS_1	SM_STEP_THS_0

Table 218. SM_STEP_THS register description

SM_STEP_THS_[7:0]	Significant motion step threshold. Default value: 00000110

11.19 MAG_SI_XX (24h)

Soft iron matrix correction register (r/w).

Table 219. MAG_SI_XX register

MAG_SI_XX_7	MAG_SI_XX_6	MAG_SI_XX_5	MAG_SI_XX_4	MAG_SI_XX_3	MAG_SI_XX_2	MAG_SI_XX_1	MAG_SI_XX_0

Table 220. MAG_SI_XX register description

MAG_SI_XX_[7:0]	Soft iron correction row1 col1 coefficient(1). Default value: 00000000

1. Value is expressed in sign-module format.

11.20 MAG_SI_XY (25h)

Soft iron matrix correction register (r/w).

Table 221. MAG_SI_XY register

MAG_SI_XY_7	MAG_SI_XY_6	MAG_SI_XY_5	MAG_SI_XY_4	MAG_SI_XY_3	MAG_SI_XY_2	MAG_SI_XY_1	MAG_SI_XY_0

Table 222. MAG_SI_XY register description

MAG_SI_XY_[7:0]	Soft iron correction row1 col2 coefficient(1). Default value: 00000000

1. Value is expressed in sign-module format.

11.21 MAG_SI_XZ (26h)

Soft iron matrix correction register (r/w).

Table 223. MAG_SI_XZ register

MAG_SI_XZ_7	MAG_SI_XZ_6	MAG_SI_XZ_5	MAG_SI_XZ_4	MAG_SI_XZ_3	MAG_SI_XZ_2	MAG_SI_XZ_1	MAG_SI_XZ_0

Table 224. MAG_SI_XZ register description

MAG_SI_XZ_[7:0]	Soft iron correction row1 col3 coefficient(1). Default value: 00000000

1. Value is expressed in sign-module format.

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

11.22 MAG_SI_YX (27h)

Soft iron matrix correction register (r/w).

Table 225. MAG_SI_YX register

MAG_SI_YX_7	MAG_SI_YX_6	MAG_SI_YX_5	MAG_SI_YX_4	MAG_SI_YX_3	MAG_SI_YX_2	MAG_SI_YX_1	MAG_SI_YX_0

Table 226. MAG_SI_YX register description

MAG_SI_YX_[7:0]	Soft iron correction row2 col1 coefficient(1). Default value: 00000000

1. Value is expressed in sign-module format.

11.23 MAG_SI_YY (28h)

Soft iron matrix correction register (r/w).

Table 227. MAG_SI_YY register

MAG_SI_YY_7	MAG_SI_YY_6	MAG_SI_YY_5	MAG_SI_YY_4	MAG_SI_YY_3	MAG_SI_YY_2	MAG_SI_YY_1	MAG_SI_YY_0

Table 228. MAG_SI_YY register description

MAG_SI_YY_[7:0]	Soft iron correction row2 col2 coefficient(1). Default value: 00000000

1. Value is expressed in sign-module format.

11.24 MAG_SI_YZ (29h)

Soft iron matrix correction register (r/w).

Table 229. MAG_SI_YZ register

MAG_SI_YZ_7	MAG_SI_YZ_6	MAG_SI_YZ_5	MAG_SI_YZ_4	MAG_SI_YZ_3	MAG_SI_YZ_2	MAG_SI_YZ_1	MAG_SI_YZ_0

Table 230. MAG_SI_YZ register description

MAG_SI_YZ_[7:0]	Soft iron correction row2 col3 coefficient(1). Default value: 00000000

1. Value is expressed in sign-module format.

11.25 MAG_SI_ZX (2Ah)

Soft iron matrix correction register (r/w).

Table 231. MAG_SI_ZX register

MAG_SI_ZX_7	MAG_SI_ZX_6	MAG_SI_ZX_5	MAG_SI_ZX_4	MAG_SI_ZX_3	MAG_SI_ZX_2	MAG_SI_ZX_1	MAG_SI_ZX_0

Table 232. MAG_SI_ZX register description

MAG_SI_ZX_[7:0]	Soft iron correction row3 col1 coefficient(1). Default value: 00000000

1. Value is expressed in sign-module format.

ST confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

11.26 MAG_SI_ZY (2Bh)

Soft iron matrix correction register (r/w).

Table 233. MAG_SI_ZY register

MAG_SI_ZY_7	MAG_SI_ZY_6	MAG_SI_ZY_5	MAG_SI_ZY_4	MAG_SI_ZY_3	MAG_SI_ZY_2	MAG_SI_ZY_1	MAG_SI_ZY_0

Table 234. MAG_SI_ZY register description

MAG_SI_ZY_[7:0]	Soft iron correction row3 col2 coefficient(1). Default value: 00000000

1. Value is expressed in sign-module format.

11.27 MAG_SI_ZZ (2Ch)

Soft iron matrix correction register (r/w).

Table 235. MAG_SI_ZZ register

MAG_SI_ZZ_7	MAG_SI_ZZ_6	MAG_SI_ZZ_5	MAG_SI_ZZ_4	MAG_SI_ZZ_3	MAG_SI_ZZ_2	MAG_SI_ZZ_1	MAG_SI_ZZ_0

Table 236. MAG_SI_ZZ register description

MAG_SI_ZZ_[7:0]	Soft iron correction row3 col3 coefficient(1). Default value: 00000000

1. Value is expressed in sign-module format.

11.28 MAG_OFFX_L (2Dh)

Offset for X-axis hard iron compensation register (r/w). The value is expressed as a 16-bit word in two's complement.

Table 237. MAG_OFFX_L register

MAG_OFFX_L_7	MAG_OFFX_L_6	MAG_OFFX_L_5	MAG_OFFX_L_4	MAG_OFFX_L_3	MAG_OFFX_L_2	MAG_OFFX_L_1	MAG_OFFX_L_0

Table 238. MAG_OFFX_L register description

MAG_OFFX_L_[7:0]	Offset for X-axis hard iron compensation. Default value: 00000000

11.29 MAG_OFFX_H (2Eh)

Offset for X-axis hard iron compensation register (r/w).The value is expressed as a 16-bit word in two's complement.

Table 239. MAG_OFFX_H register

MAG_OFFX_H_7	MAG_OFFX_H_6	MAG_OFFX_H_5	MAG_OFFX_H_4	MAG_OFFX_H_3	MAG_OFFX_H_2	MAG_OFFX_H_1	MAG_OFFX_H_0

Table 240. MAG_OFFX_L register description

MAG_OFFX_H_[7:0]	Offset for X-axis hard iron compensation. Default value: 00000000

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

11.30 MAG_OFFY_L (2Fh)

Offset for Y-axis hard iron compensation register (r/w). The value is expressed as a 16-bit word in two's complement.

Table 241. MAG_OFFY_L register

MAG_OFFY_L_7	MAG_OFFY_L_6	MAG_OFFY_L_5	MAG_OFFY_L_4	MAG_OFFY_L_3	MAG_OFFY_L_2	MAG_OFFY_L_1	MAG_OFFY_L_0

Table 242. MAG_OFFY_L register description

MAG_OFFY_L_[7:0]	Offset for Y-axis hard iron compensation. Default value: 00000000

11.31 MAG_OFFY_H (30h)

Offset for Y-axis hard iron compensation register (r/w). The value is expressed as a 16-bit word in two's complement.

Table 243. MAG_OFFY_H register

MAG_OFFY_H_7	MAG_OFFY_H_6	MAG_OFFY_H_5	MAG_OFFY_H_4	MAG_OFFY_H_3	MAG_OFFY_H_2	MAG_OFFY_H_1	MAG_OFFY_H_0

Table 244. MAG_OFFY_L register description

MAG_OFFY_H_[7:0]	Offset for Y-axis hard iron compensation. Default value: 00000000

11.32 MAG_OFFZ_L (31h)

Offset for Z-axis hard iron compensation register (r/w). The value is expressed as a 16-bit word in two's complement.

Table 245. MAG_OFFZ_L register

MAG_OFFZ_L_7	MAG_OFFZ_L_6	MAG_OFFZ_L_5	MAG_OFFZ_L_4	MAG_OFFZ_L_3	MAG_OFFZ_L_2	MAG_OFFZ_L_1	MAG_OFFZ_L_0

Table 246. MAG_OFFZ_L register description

MAG_OFFZ_L_[7:0]	Offset for Z-axis hard iron compensation. Default value: 00000000

11.33 MAG_OFFZ_H (32h)

Offset for Z-axis hard iron compensation register (r/w). The value is expressed as a 16-bit word in two's complement.

Table 247. MAG_OFFZ_H register

MAG_OFFZ_H_7	MAG_OFFZ_H_6	MAG_OFFZ_H_5	MAG_OFFZ_H_4	MAG_OFFZ_H_3	MAG_OFFZ_H_2	MAG_OFFZ_H_1	MAG_OFFZ_H_0

Table 248. MAG_OFFX_L register description

MAG_OFFZ_H_[7:0]	Offset for Z-axis hard iron compensation. Default value: 00000000

ST Confidential DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

12 Soldering information

The LGA package is compliant with the ECOPACK®, RoHS and "Green" standard.
It is qualified for soldering heat resistance according to JEDEC J-STD-020.

Leave "Pin 1 Indicator" unconnected during soldering.

Land pattern and soldering recommendations are available at www.st.com/mems.

ST confidential
DRAFT

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

13 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

Figure 14. LGA 2.5x3x0.86 14L package outline

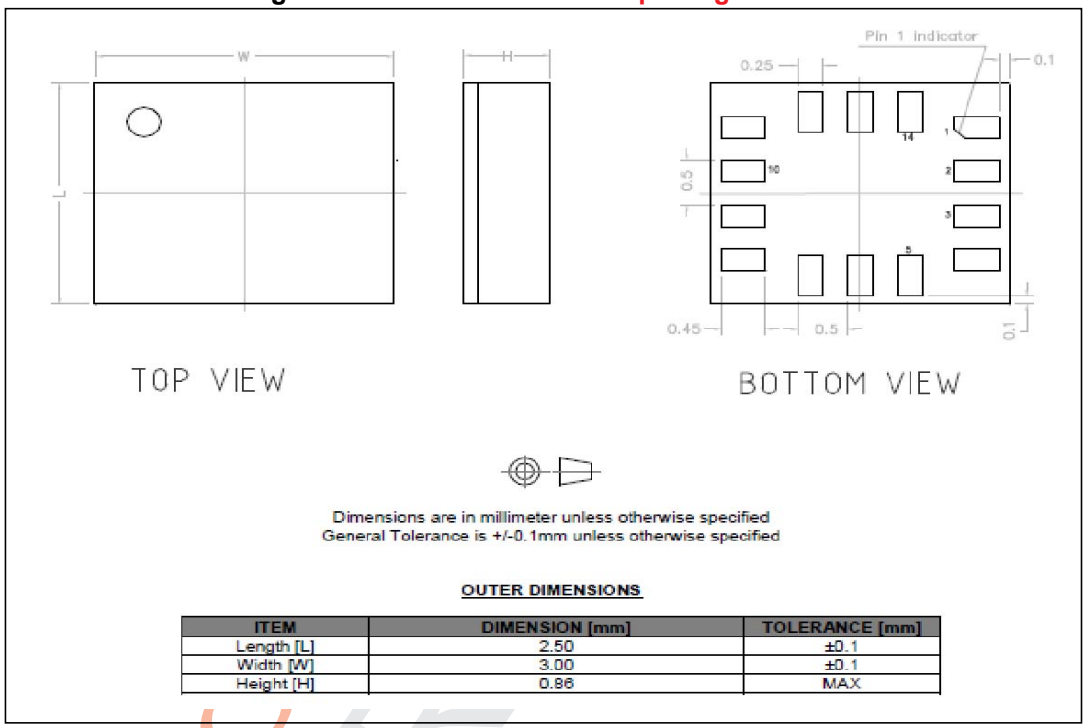

ITEM	DIMENSION [mm]	TOLERANCE [mm]
Length [L]	2.50	±0.1
Width [W]	3.00	±0.1
Height [H]	0.86	MAX

ST DR

ST CONFIDENTIAL – SUBJECT TO NON-DISCLOSURE AGREEMENT – DO NOT COPY

14 Revision history

Table 249. Document revision history

Date	Revision	Changes
19-Sep-2014	1	Initial release

ST Confidential
DRAFT

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2014 STMicroelectronics – All rights reserved