
L 1–2 / R 2–3

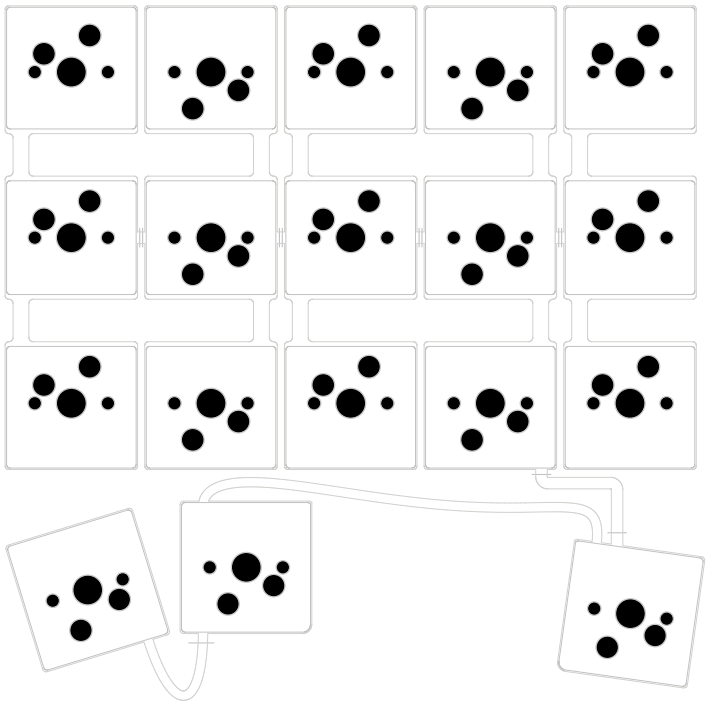

USER.1: SEPARATE F–SIDE BACKERS ONLY; NO FACTORY STIFFENERS

GYRE FPC V27 — SAME PCB / BOTH HANDS

JP1: LEFT 1–2, RIGHT 2–3. RIGHT: REMOVE T_SW1. KEEP ALL SIX FFCs.