EXP : 11a
DATE : 1/10/26

Simulate static routing configuration using CISCO Packet tracker.

AIM :

To simulate a static routing configuration using CISCO Packet tracker.


PROCEDURE :

* Open CISCO Packet Tracer and create the given network topology.
* Connect 3 routers and PC's using suitable cable.
* Configure IP address to routers and PC's.
* Enable all router interface using no shutdown.
* Configure static router on Router 0, router 1, router 2 using IP mobile.
* Set main and backup router using different administrative distance values.
* Test Connectivity.
* Use tracer to verify the routing path.
* Disconnect the main link and verify that the backup router works.

RESULT :

Thus a static routing is successfully configured and verified using CISCO Packet tracer.

EXP : 11 b Simulate RIP using CISCO
DATE : 11/10/26 Packet tracer.

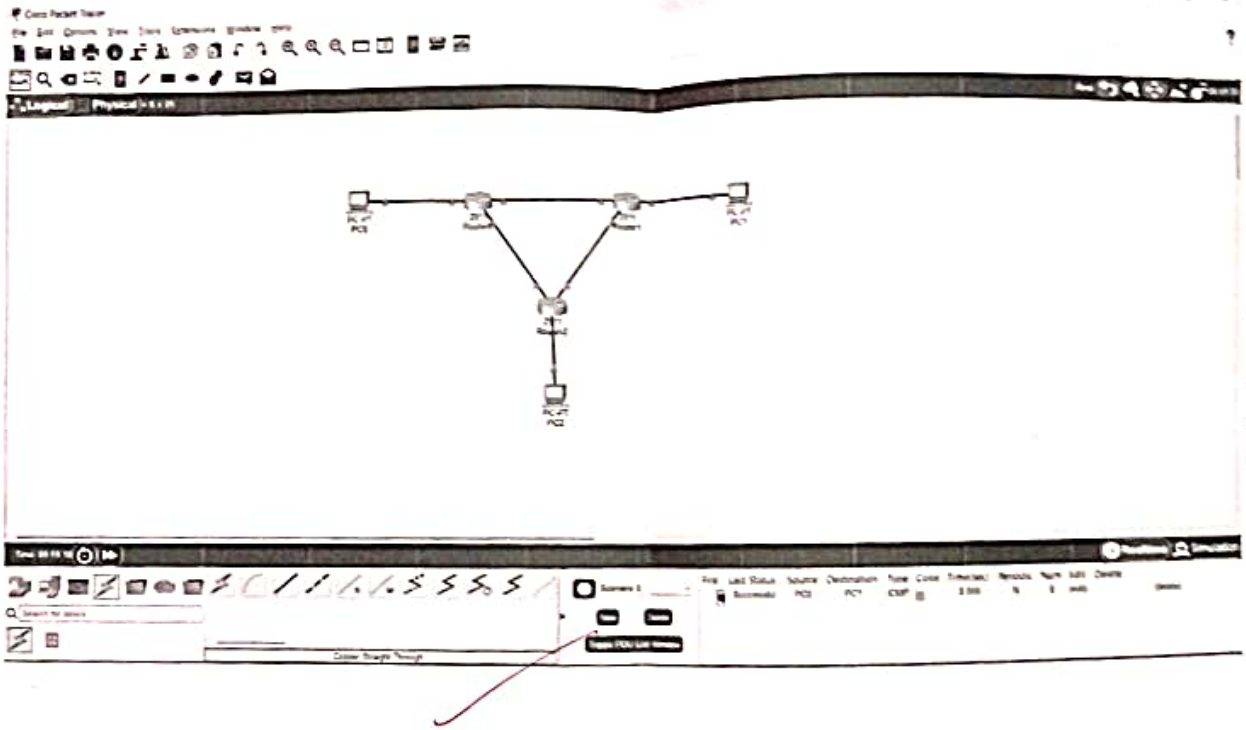

3 routers and

with 3 routers

using suitable

address to

et and serial

ng no shutdow
4000 and
nface.

routers

ted network

g ping

2.0.2 to

* Disconnect the direct router-0 - router 2 link and use ttracer again to verify RIP, select the alternate route.