EXP: 11b
DATE: 1/10/26

Simulate RIP using CISCO Packet tracer.

AIM:

To simulate RIP using (3 routers and 2 PC's) CISCO packet tracer.

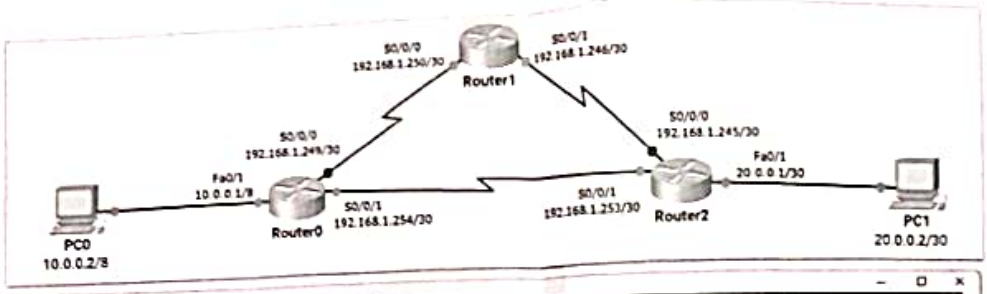
PROCEDURE:

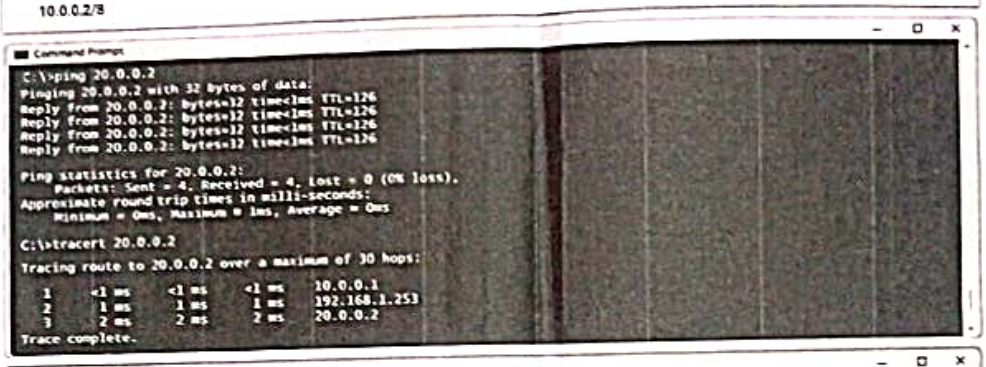
* Create a topology with 3 routers and 2 PC's.
* Connect the device using suitable cables.
* Assign the given IP address to both PCs.
* Configure fast ethernet and serial interface of all routers.
* Enable interface using no shutdown
* Set clock rate = 4000 and bandwidth on DE serial interface.
* Enable RIP on all routers using router RIP.
* Add directly connected network using the network command.
* Test Connectivity using ping 20.0.0.2
* Use tracer to 20.0.0.2 to verify the selected route.
* Disconnect the direct router-0 - router 2 link and use tracer again to verify RIP, select the alternate route

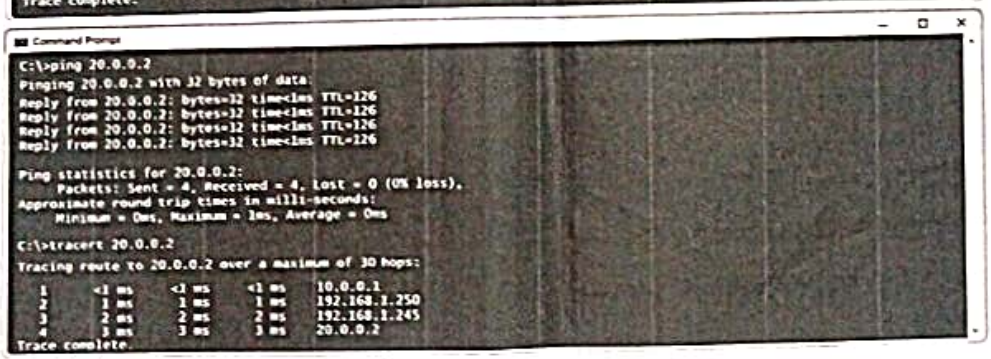
EXP : 12

DATE : 8/10/26

End-End Communication at Transport Layer.




RESULT :

Thus we simulated RIP using CISCO Packet tracer.

1 UDP echo
ion and a chat
rogramming.

:cp-echo.py

:(socket.AF_INET,

),1", 5000))

tening on

.ccept()
nected by", addr)

:v(1024).decode(
data.lower() ==

print ("[SERVER] Connection
closed by client.")
break
print ("[SERVER] Received:",data)
conn.send (("Server received :"+
data).encode())