EXP: 09
DATE: 30/9/26

Implementation of subnetting in CISCO packet tracer simulator.


AIM:

To implement the subnetting in CISCO packet tracer simulator.

PROCEDURE:

* Open CISCO packet tracer and create a new topology.
* Add the required routers, switches and PCs to workspace.
* Connect the device using appropriate copper cables.
* Use the network 192.168.1.0/24 and divide it into /27 network.
* Configure the router interface with the required IP address and subnet mask.
* Use enable and config terminal in the CLI.
* Enter the interface configuration terminal in the router CLI.
* Configure the required switch port in access mode.
* Assign each PC its IP address, subnet mask and default gateway.
* Repeat the configuration all required subnet.
* Use the ping command to test connectivity between PC's and the router.

EXP : 10a Internetworking with routers packet tracer

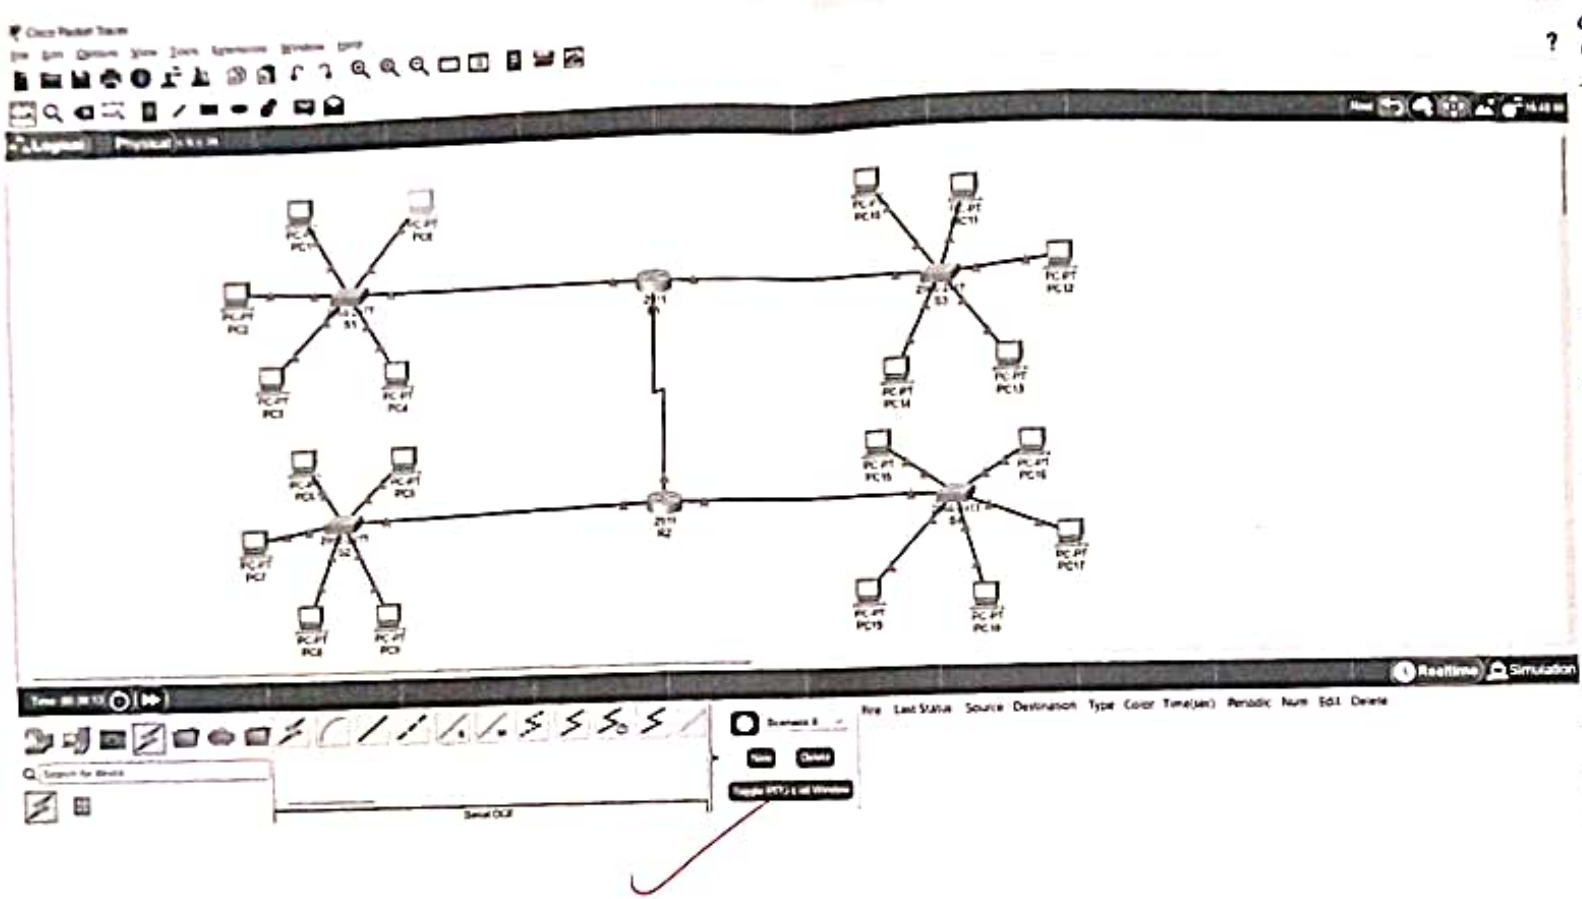

? gure a simple
ter in CISCO
Connectivity

uter 1
outer and
o start configuri
to activate the

ldress to every P
: , Go to
guration and
gateway ,
default gatewa

RESULT: The ping is successfully, the network is configured successfully.

of PC's 192.168.10.1

* Assign the default gateway of PC as 192.168.20.1

Step 3:

* Connect fastethernet 0 port of PC0 with fastethernet 0/0 port of router 1 using a copper straight through